SEE p. 79, 9


CO. TIES
10-3-72

"C" F. 1/2" Ø
IN STD BRASS DISC, IN CONC STAMPED 36 | 31
MOST ELY COR CONC. WING WALL of Bridge 1 | 6
NO 9504
N. end I-90 SIGN SE 29.42
IN NE QUAD of I-90 & 28TH ST. NE BRIDGE NO. 9504

G.
4' WSW to Face of Fc. P.
40.65 N to S¢W in Base of large old Willow tree
98.28 ESE to S¢W in Base of 24" burroak w/ Top Broken
101.7 S to S¢W in 24" twisted Burr Oak

H. 24.62 NE to Spk. in Base of Burr Oak
27.22 S to Angle iron in Base of 14" Maple
20.8 W to Spk in Base of 27" burr Oak
Cor. is Point of stone, Between pipes E¢W

TOWNSHIP AUSTIN
SEC. 1 TWP. 102 R. 18

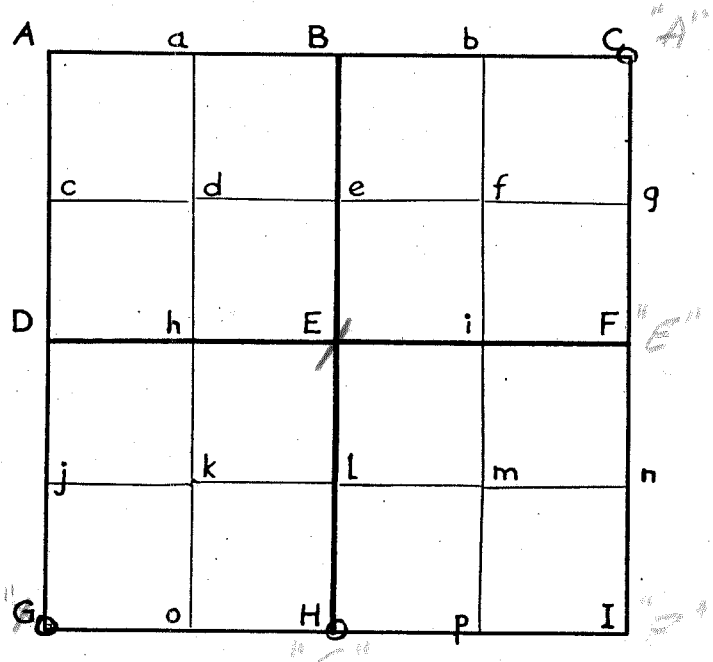

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 4, Township 102N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-15-91 (DATE) found a all monumentation destroyed by sewer and construction. (road)

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-15-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

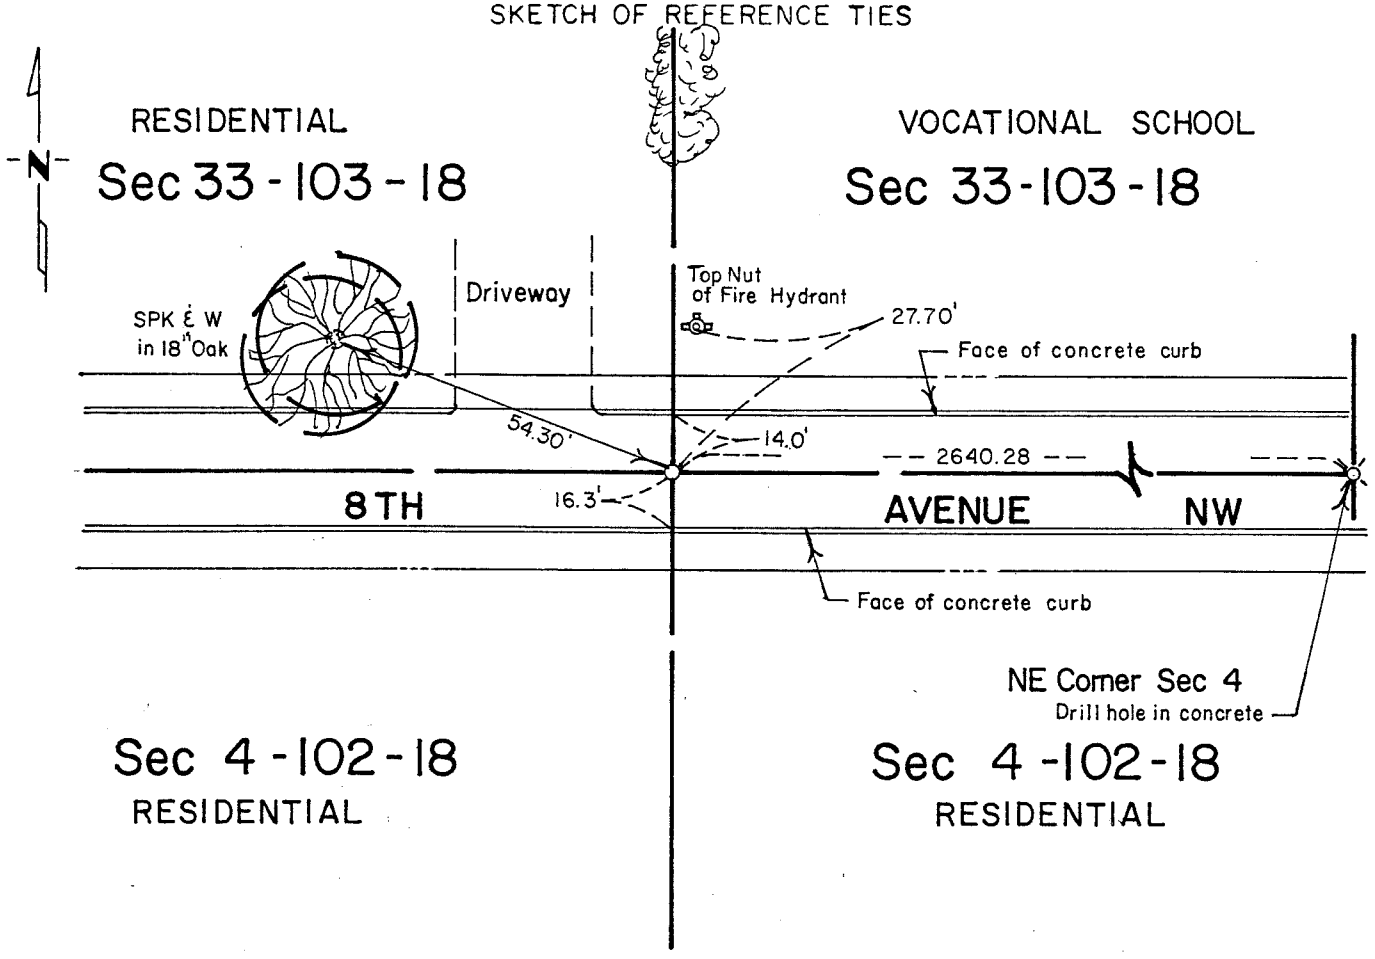

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-23-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 4-102-18

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set in a mound of earth and trench with a handful of small stones.

The following were contacted for section corner information:
Mower County Highway Dept Mower County Recorder
City of Austin (Engineering Department)

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1925 V.A. Nason uncovered a corner during Plat of Outlots in the E 1/2 NE 1/4 NW 1/4 & NW 1/4 NW 1/4 NE 1/4 Section 4-102-18.

1939 Everrett G. Carlson, RLS 1863, shows a 1/2" diameter iron inplace and ties were taken and recorded in Book "A" in the office of the County Engineer. The following ties were taken:
Centerline E-W road 12' E of fence N
34.9' NNW to top face CFP 35.6' SSW to face PP

1946 Charles Milner, RLS 1476, disputed the position of the corner set by Carlson and uncovered a stone monument in line with the fence north.

1950 Charles Milner accepted the corner set by Everrett Carlson in 1939 and used the monument for platting Norman Park Addition.

1955 Charles Milner, RLS 1476, uncovered a corner during a survey for the platting of Bel-Air Addition.

1958 Harold H. Haugh, RLS 5907, uncovered a 1/2" diameter iron pipe and checked ties taken in 1939 by Carlson during a survey for the platting of Bel-Air 2nd and 3rd Addition.

1964 Harold H. Haugh, RLS 5907, uncovered a 1/2" diameter pipe during a complete survey of Section 33-103-18 for the Austin Junior College. During the survey, a complete investigation was made of the position of this corner because of the 1946 records of Charles Milner who put the corner 12' west of 1/2" diameter pipe inplace. Therefore tied the position of the corners into the monumentation on Nelson's Addition, Outlot in NE 1/4 and NW 1/4 Section 4-102-18, Norman Park Addition and Bel-Air Addition. It was concluded that the 1/2" diameter pipe had been accepted and used by all area surveyors in the past and is the best evidence of a perpetuation of the original public land surveyors corner. New ties were taken.

1970 Jones, Haugh & Smith Inc crew uncovered a 1/2" diameter pipe and ties were taken.

1980 Jones, Haugh & Smith Inc crew uncovered a 1/2" diameter pipe during a survey on the south line SW 1/4 Section 33-103-18.

1986 Jones, Haugh & Smith Inc crew uncovered a 1/2" diameter pipe during a survey for the platting of Six Oaks Addition in the NE 1/4 NW 1/4 Section 4-102-18.

1988 The City of Austin's Engineering Department destroyed the corner during road construction and the installation of a sanitary sewer on the centerline of 8th Avenue NW.

1991 Jones, Haugh & Smith Inc crew, using past private records, set a cast iron monument on road surface and checked the position with monumentation in the Bel-Air Addition, Norman Park and Six Oaks Addition.

The monument set agrees with past records and fits occupation and road centerlines within the section. It also agrees with plats prepared by a number of area surveyors over the past 65 years and has been accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey, data and analysis, contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 5, Township T102N Range R18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 8-4-94 (DATE) found a 5/8" IRON

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

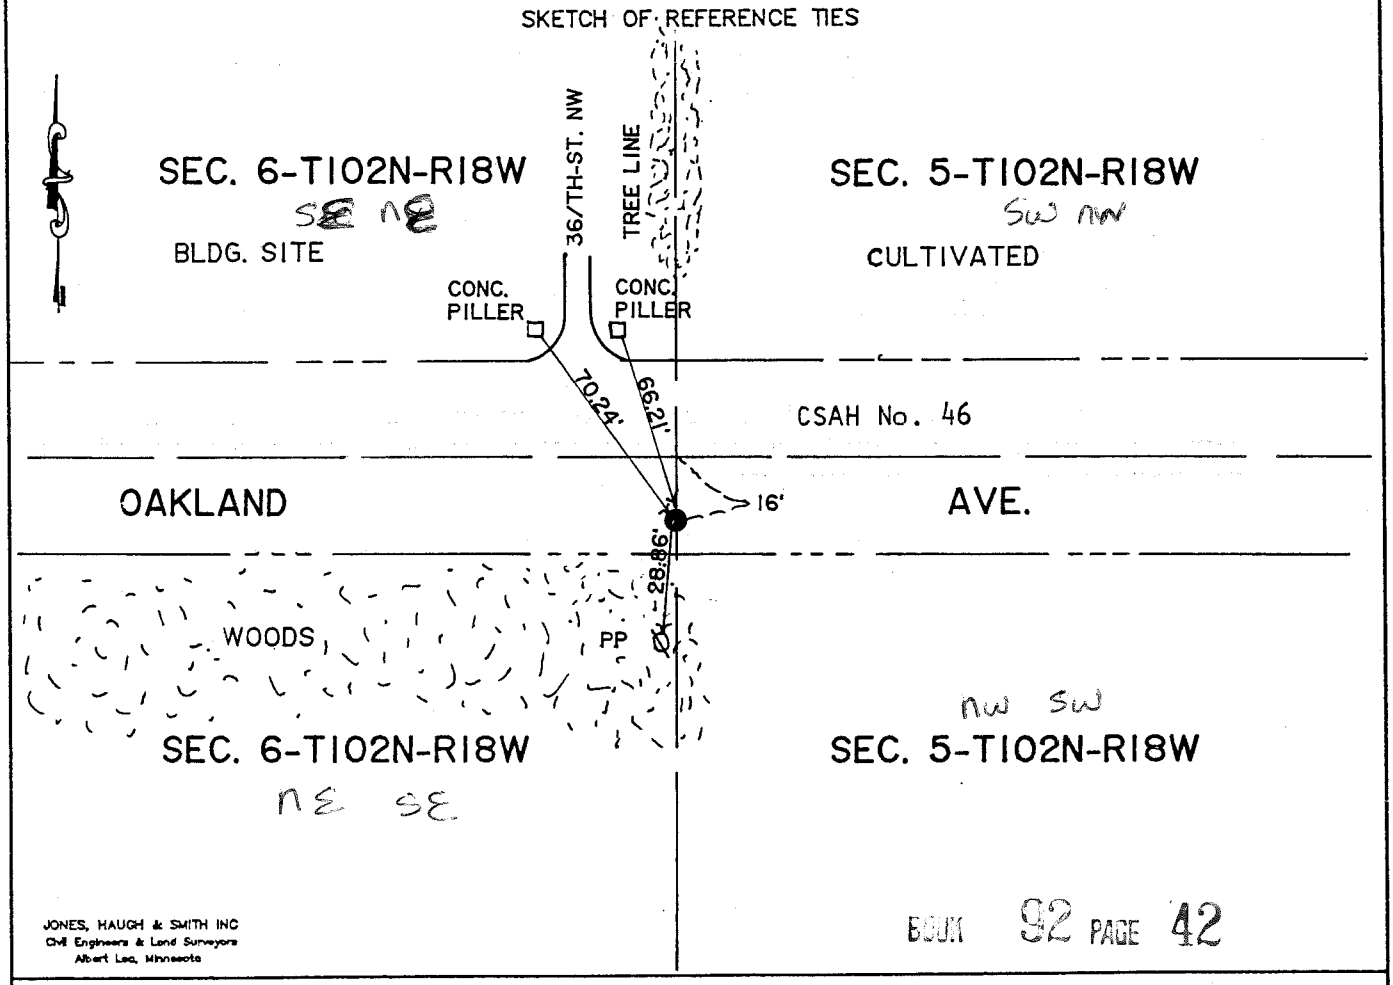

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 42

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 7-25-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

446683

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 A.M. on the 29th day of July A.D., 1996

COUNTY RECORDER Charles Enger

By _____, Deputy

DOCUMENT NO. 446683

M.H.D. FORM NO. 2105

Book 92 Page 42 Misc

W 1/4 Cor SEC 5-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807 found a 5/8" iron 16' south of the centerline of Oakland Avenue in line with a tree line to the north. The corner location is in agreement with TH #16 R/W maps and has been perpetuated for 40+ years and was therefore not excavated.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 8, Township 102 N, Range 18 W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-5-90 found A STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-9-90 placed A COUNTY CAP ON A 5/8" ROD

SKETCH OF REFERENCE TIES

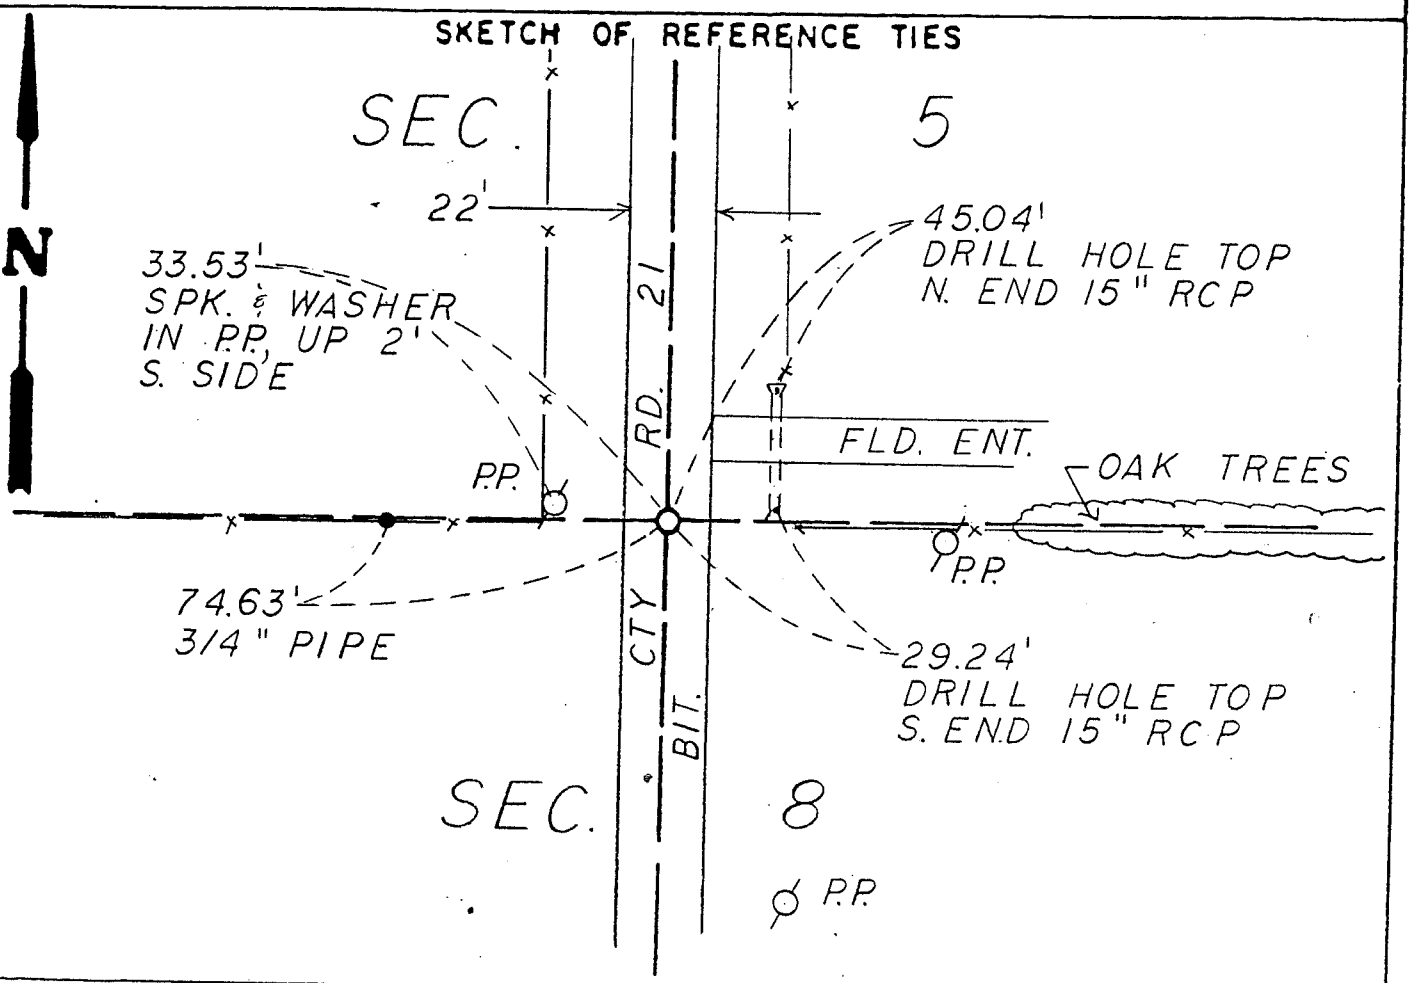

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at ____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTH QUARTER CORNER SECTION 8, TOWNSHIP 102 NORTH, RANGE 18 WEST, 5TH P.M.

Aug., 1854 — William J. Anderson, Deputy Surveyor, set a quarter section post, deposited charcoal, and raised mound of earth with trench and pits as per instructions, planted cherry to Northeast and Locust to Southwest.

1967 — County Engineer Road Plans shows a concrete monument inplace.

Feb. 1980 — Zenk Read Trygstad & Associates Survey Crew found a 3/4 inch pipe at the surface.

July 1990 — Zenk Read Trygstad & Associates excavated a trench 5.6 feet deep from centerline to 3.4 feet West and 2 feet North to 8 feet North of the fence line to the West. A stone 1'x0.6'x1.4' high and 3.6 feet below surface. A concrete monument beneath a 3/4"x2' pipe 1.6 below the surface, and above the stone. A 5/8"x2' Rerod at the surface was 0.5 feet Southeast of the stone.

An analysis of the record gives no indication of the origin of the stone. Other stones of similar size have been found at corners throughout the county. The stone is accepted as marking the location of the original Public Land Survey Corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER Corner of Section 8, Township 102N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-5-90 found A STONE WITH CONC. MONUMENT ABOVE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-9-90 placed A 3/4" PIPE OVER STONE

SKETCH OF REFERENCE TIES

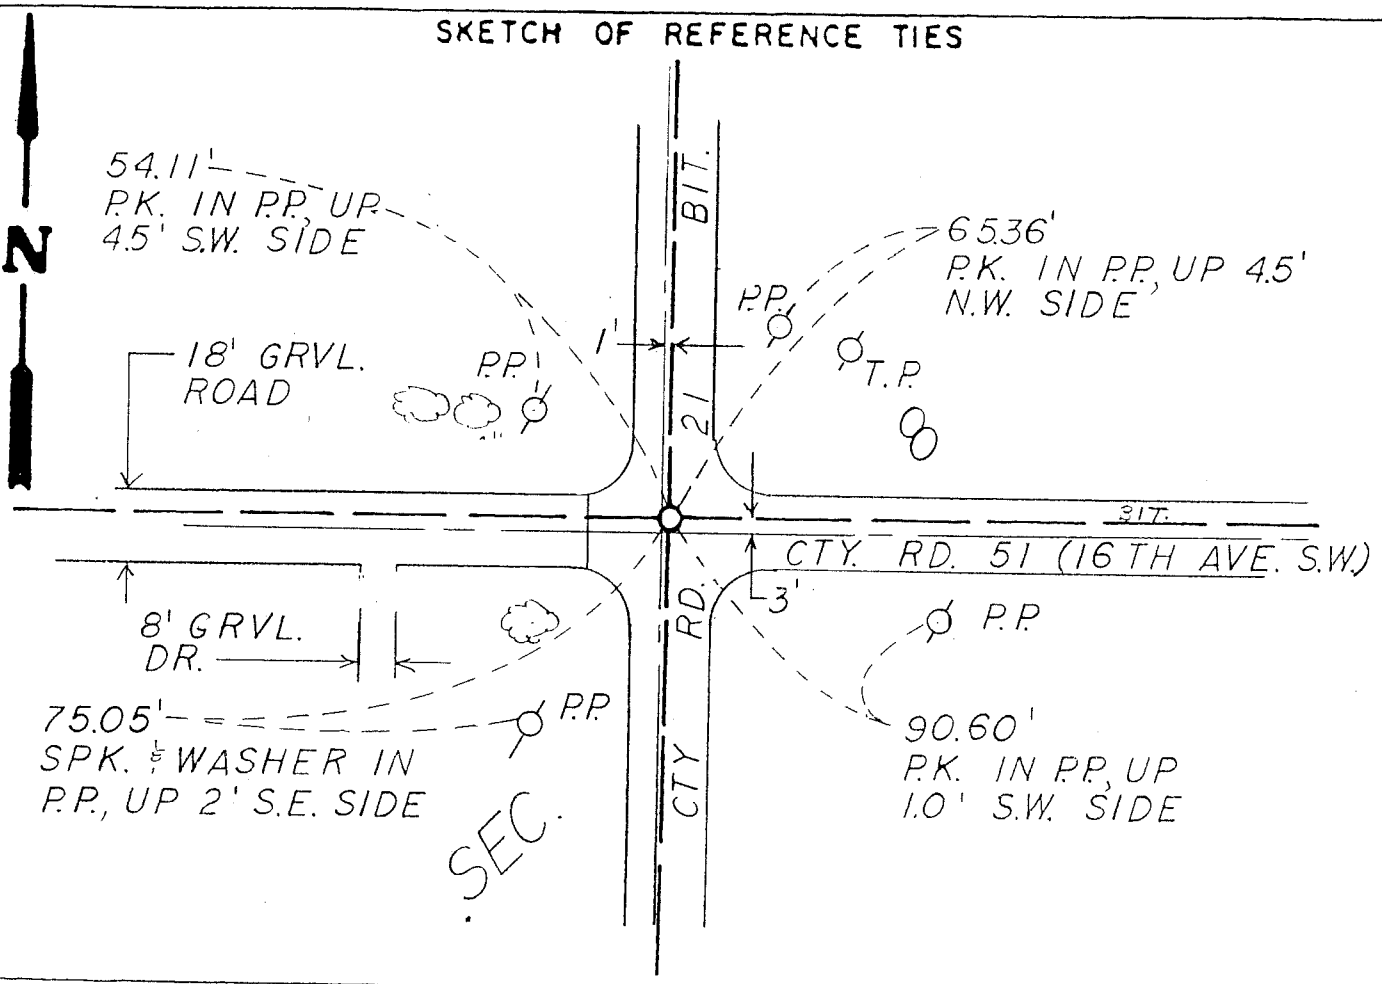

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature

7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

CENTER QUARTER CORNER SECTION 8, TOWNSHIP 102 NORTH, RANGE 18 WEST, 5TH P.M.

1967 — County Road Plans show a concrete monument inplace. See also page 119 of Surveyors Record.

July 9, 1990 — Steven J. Thompson of Zenk Read Trygstad & Associates, excavated with a backhoe a trench 5.3' below surface 2.3 East to 2.0 West of centerline of County Road 21 and from centerline to 8 feet North of County Road 51, and found a stone 1.0x0.5.x1.4 H and 3.5 feet below the surface. A concrete monument was found directly above the stone 1.6 feet below the surface and a 3/4 inch Rebar was found directly above that.

No evidence of the survey placing the stone was found and no survey was made to determine whether this monument agrees with the intersection of the Quarter Lines.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 8, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/22/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/22/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

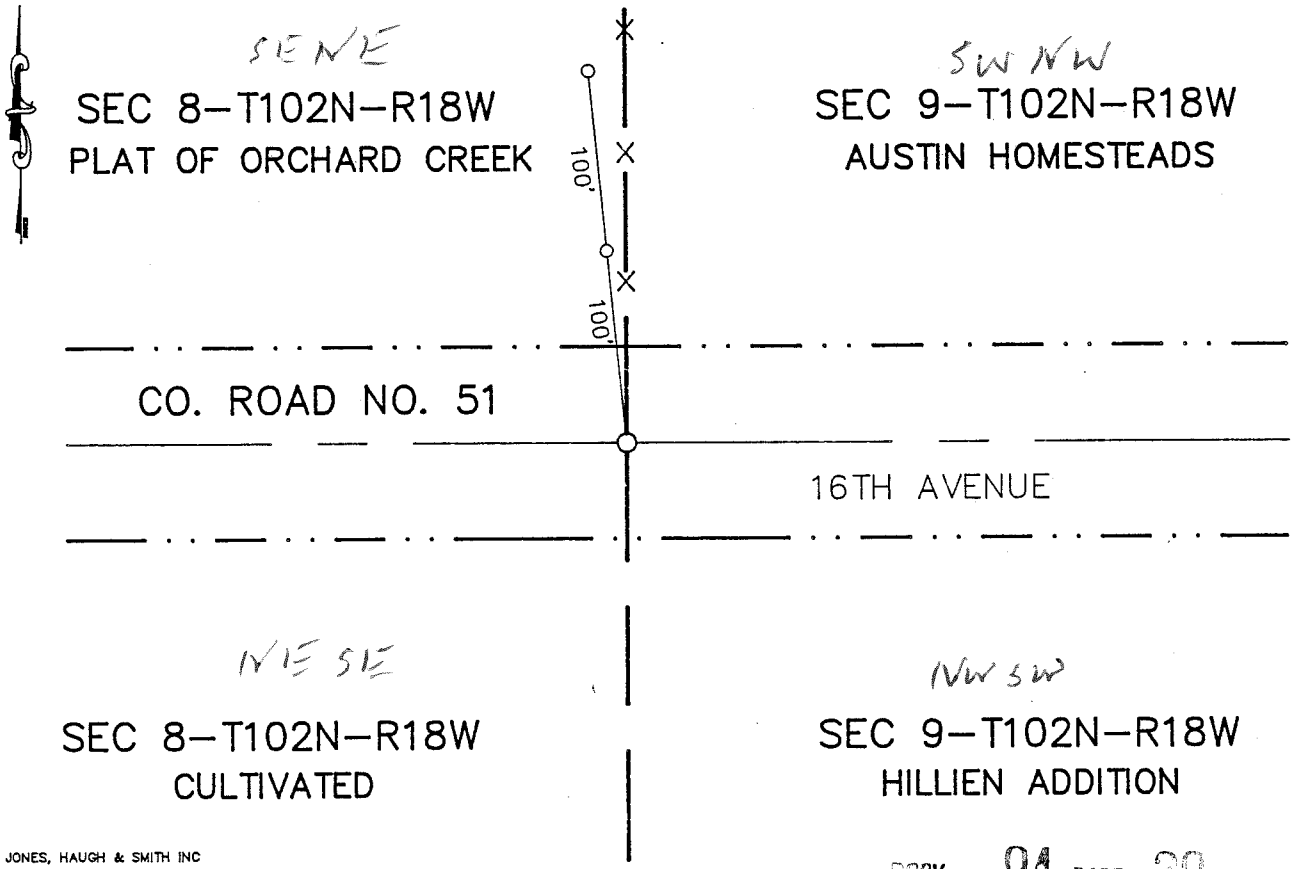

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 29

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-17-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 5 p .M. on the 23 day of Jan A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 450683

M.H.D. FORM NO. 2105

Book 94 Misc Page 29

E 1/4 Cor SEC 8-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1930 Mower County recorders office has a plat of Austin Homesteads which shows a concrete monument at this location.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, placed a cast iron monument over a brass cap in the concrete monument which agrees with the Austin Homesteads plat. The monument is at the CL of County Road No. 51 and in line with line fence north. Ties were taken.

1996 This corner was destroyed by road construction and Jones Haugh and Smith crew reset the corner using ties taken in 1995, checked the location in accordance with plat of Austin Homesteads.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 11, Township 102N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found a 1/2" square iron in concrete monument.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument over iron found.

SKETCH OF REFERENCE TIES

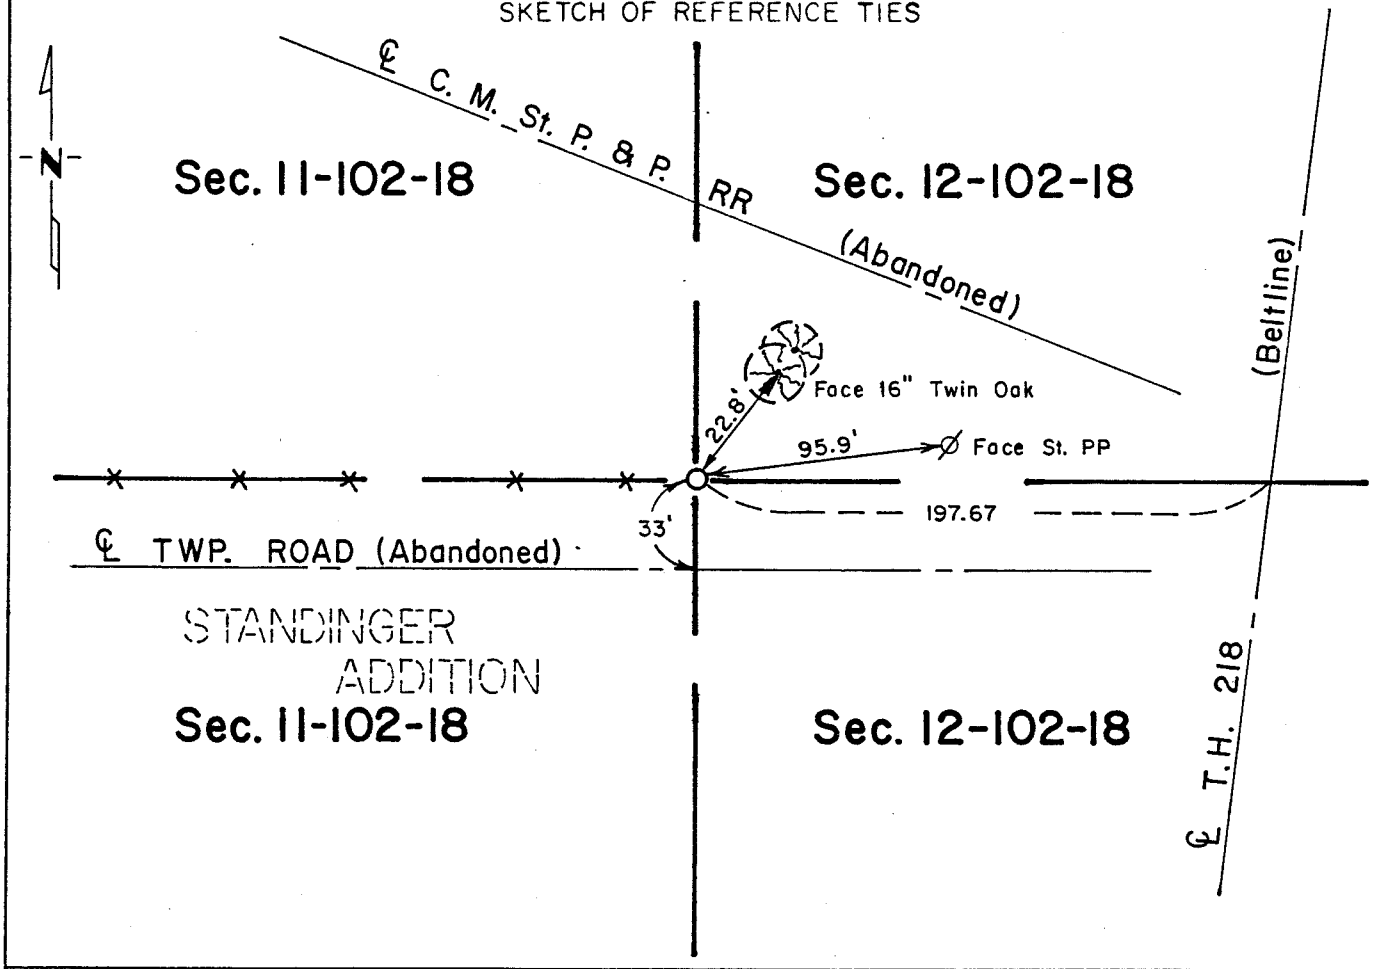

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-30-91

Registration No. 13907

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Sec. 11-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a post and the following ties were taken:

14" Burr Oak	N 24° W	125 links (82.50 feet)
12" Burr Oak	N 22 1/2° E	105 links (69.30 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1958 Book A in the County Engineer's Office shows the City Engineer uncovered inplace iron above a stone and the following ties were taken:

72.9' SW to PP
23.2' NE to nail in Twin Oak
33.05' W to FP

1973 Jones, Haugh & Smith crew found a 1/2" square pin 1.0 feet deep and the following ties were taken:

23.5' ENE spk & washer south side of Twin Oak
73.08' E spk & washer south side PP
33.37' W spk & washer south side CFP
97.40' NW double head spk & washer NE side TP

1987 Jones, Haugh & Smith crew found a 1/2" square iron in concrete monument. Placed a cast iron monument over iron found. New ties were taken.

Corner found fits occupation, fence line west and agrees with past records. Therefore accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CTR. Corner of Section 12, Township 102N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-22-91 (DATE) found a NO EVIDENCE OF PLS CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-22-91 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

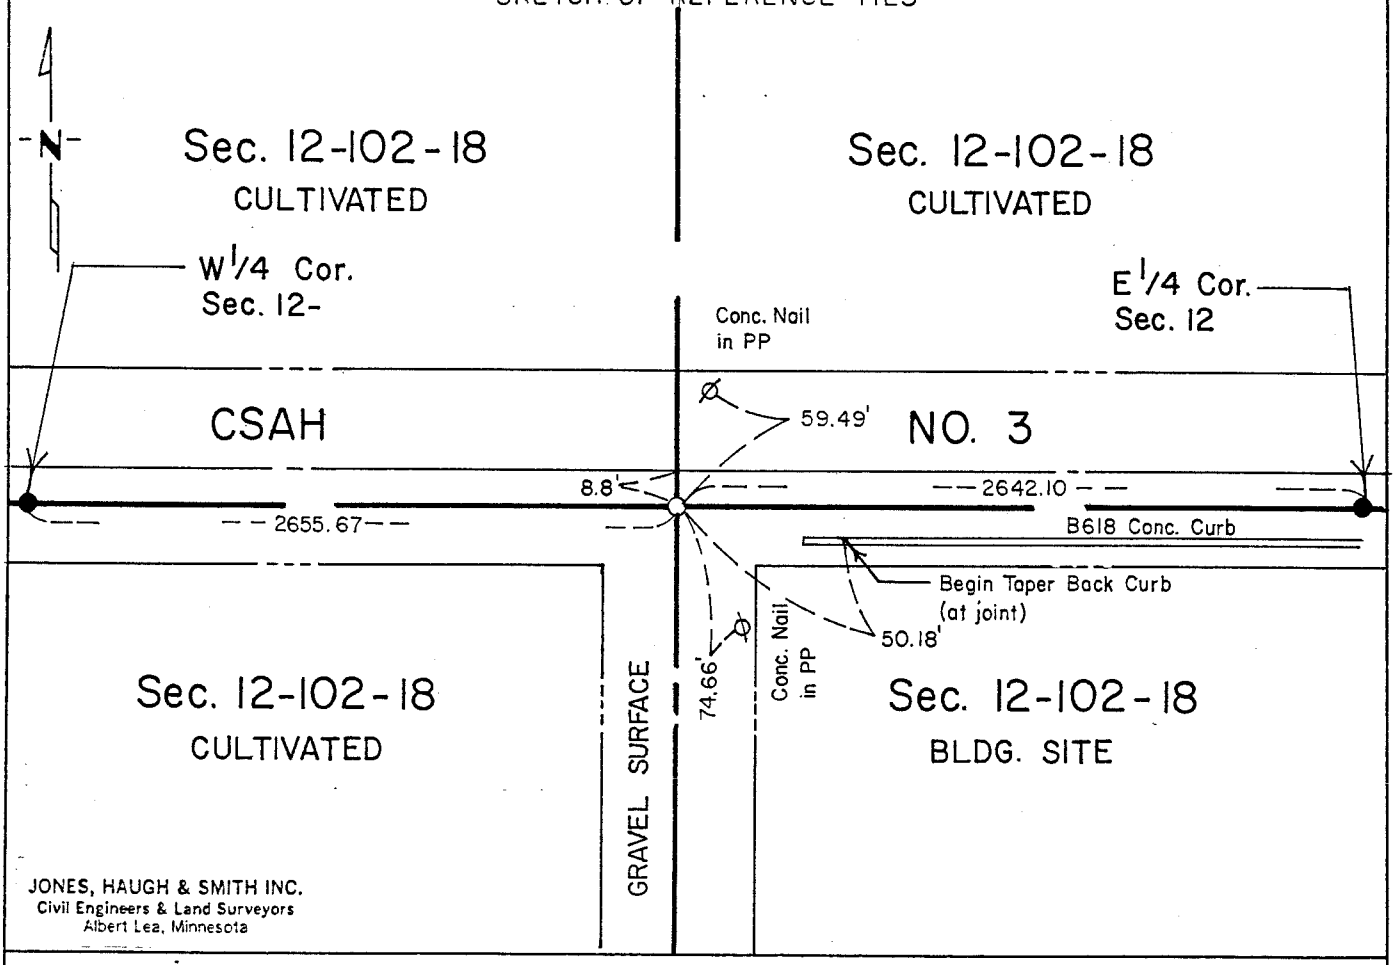

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 9-5-91
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

Ctr corner Sec 12-102-18

The following were contacted for section corner information:
Mower County Engineering Dept.
Mower County Recorder's Office

1960 C.V. Jones Engineering notes show center of section on centerline centerline of east-west-south roads.

1975 Jones & Haugh crew placed a 5/8" diameter iron at intersection of straight line between north-south and east-west quarter corners. Taped south to fence on south line of Burrwood Addition and found 654 feet versus plat 664.19 feet and taped east to E 1/4 corner and found a distance of 2641.85 feet versus plat 2645.0 feet. It appears that L.H. Edison used centerline of road intersection for center of section position.

1985 Jones, Haugh & Smith Inc crew uncovered and used a 5/8" diameter iron during a survey for the City of Austin.

1987 Jones, Haugh & Smith Inc crew located corner during a survey of the abandoned Milwaukee, St. Paul & Pacific Railroad.

1989 Jones, Haugh & Smith Inc crew found a 5/8" diameter iron capped 13807.

1989 Corner was destroyed during road construction.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, reset a cast iron monument at this location using measurements taken in past surveys.

The monument fits occupation and road centerlines within the section and existing subdivision plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

"F" p9, 79 TIE BOOK
Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 12, Township 102N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☑ On 2-27-85 (DATE) found a No Physical evidence of corner

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☑ On 2-28-85 (DATE) placed a 5/8"ϕ x 24" iron capped RLS 13807

SKETCH OF REFERENCE TIES

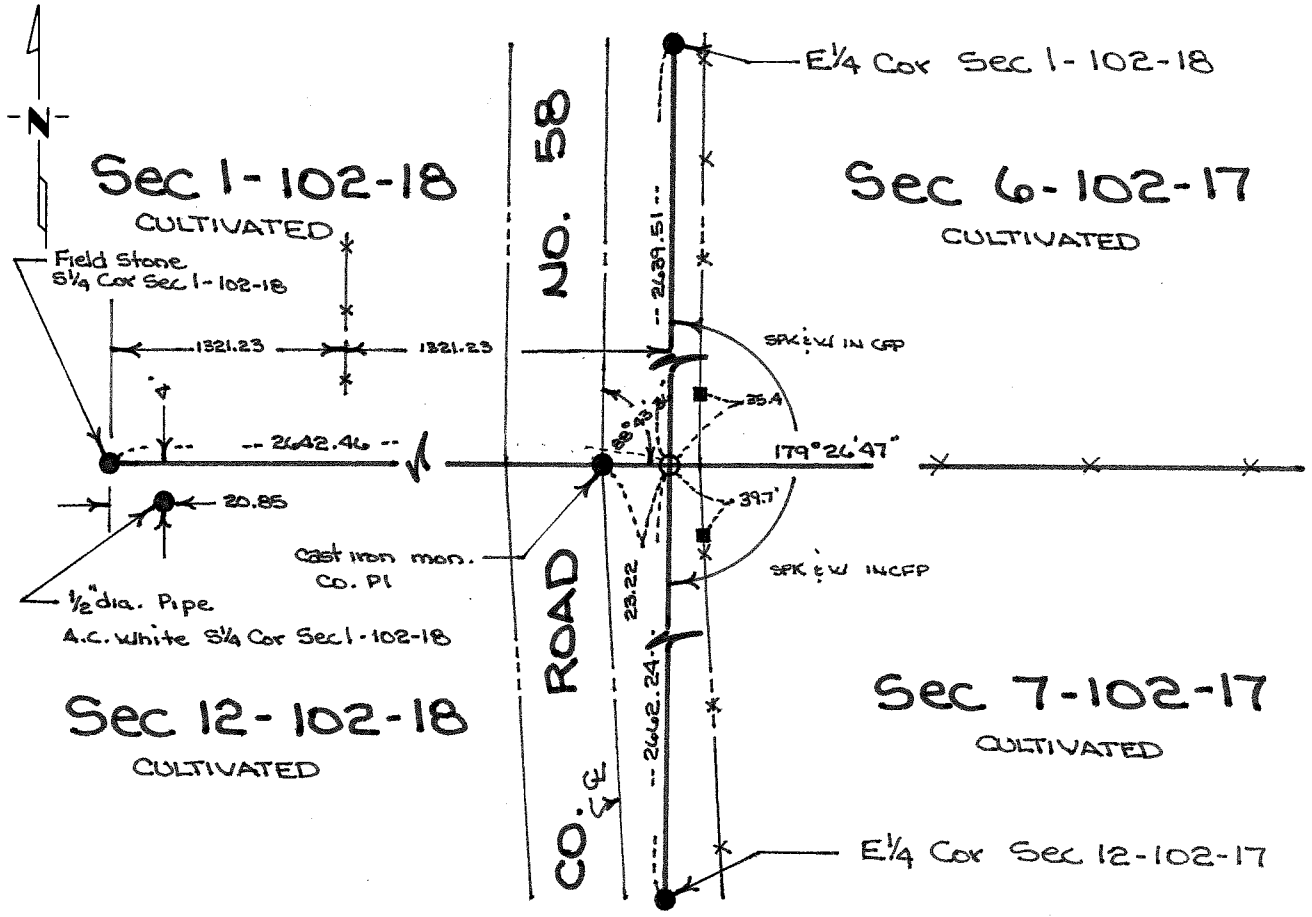

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John H. Doerr III — 3-8-85
SIGNATURE — DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 12-102-18

1854 John Ball, Deputy Surveyor, set wood post during public land survey.

1930± A partial section breakdown of the section was done for the boundaries of the airport and alignment of the airport runways.

1948± A partial section breakdown of Section 1-102-18 was done for the expansion of the Austin Municipal Airport and distances and angles measured. This survey indicates that the east line of Section 1 was found to be 5281.50 feet and the distance from the S¼ of Section 1 was 2642.45 feet.

County Engineering records show that in 1983 the township road along the east line of Sections 1 and 12 was upgraded to County State-Aid Highway No. 58, and extensive grading was done which would have destroyed the corner.

An iron monument was found in 1973 on the centerline of the existing township road grade and assumed as the section corner. This iron has been perpetuated and now is a cast iron 1 foot more or less, below road surface.

2/2/85 Jones, Haugh & Smith Inc crew searched for corner and found no physical evidence of original monument.

1985 Jones, Haugh & Smith Inc crew used the distances in the 1948 survey to reset the northeast corner of Section 12. The corner is located 23.22 feet east of the cast iron (Co PI) shown on the County State-Aid Highway No. 58 road grading plans. This location also fits the position of the existing fence line at the northwest corner of the NE¼ NE¼ Section 12 as shown on the Certificate.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 12, Township 102N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found ~~a~~ no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on road surface

SKETCH OF REFERENCE TIES

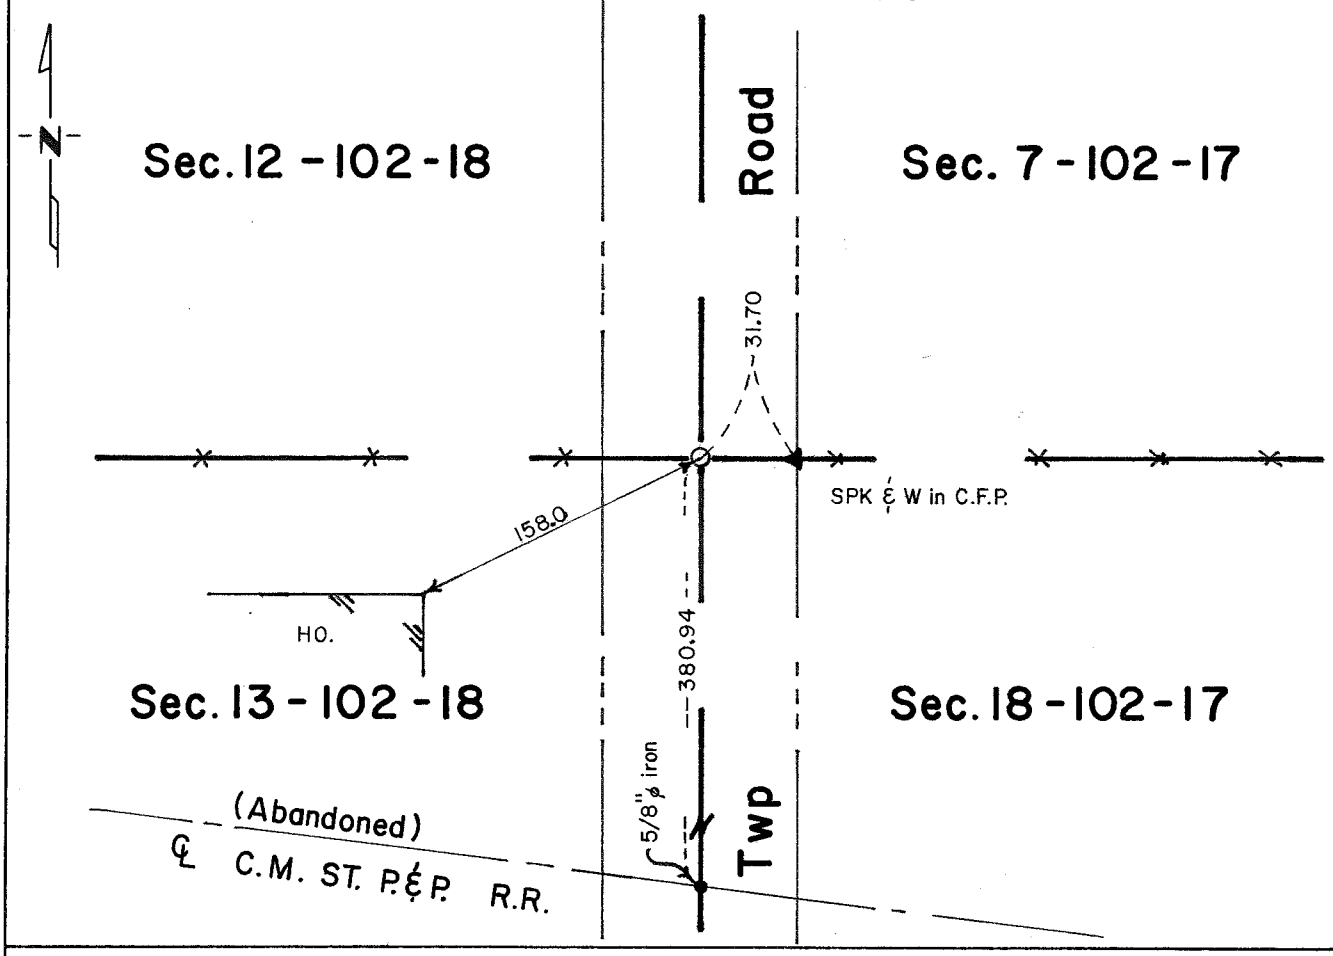

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] SIGNATURE 12-12-88 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
SE corner Section 12-102-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

12" Burr Oak	N 30° W	150 Links
18" Burr Oak	N 45° E	116 Links
15" Burr Oak	S 67° E	30 Links
11" Burr Oak	S 73° W	72 Links

The following were contacted for section corner information:

Mower County Engineering Department

The record book in the Mower County Engineers office indicates a corner was found and ties were taken.

1978 Jones, Haugh & Smith crew found no evidence of public land survey corner or a perpetuation of. Therefore set nail and washer using county ties.

1987 Jones, Haugh & Smith crew dug with the Mower County backhoe on the centerline of north-south road in line with fence east. Dug a 12'x7'x4.5' deep hole and found no evidence. Established position of corner using private records of Jones, Haugh & Smith Inc and set a cast iron monument.

The corner set fits occupation and road centerlines within the section and is accepted as best evidence of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

"E" p9, 79 TIE BOOK.
Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 1, Township 102N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☑ On 2-27-85 (DATE) found a No Physical evidence of corner

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☑ On 2-28-85 (DATE) placed a RR Spike

SKETCH OF REFERENCE TIES

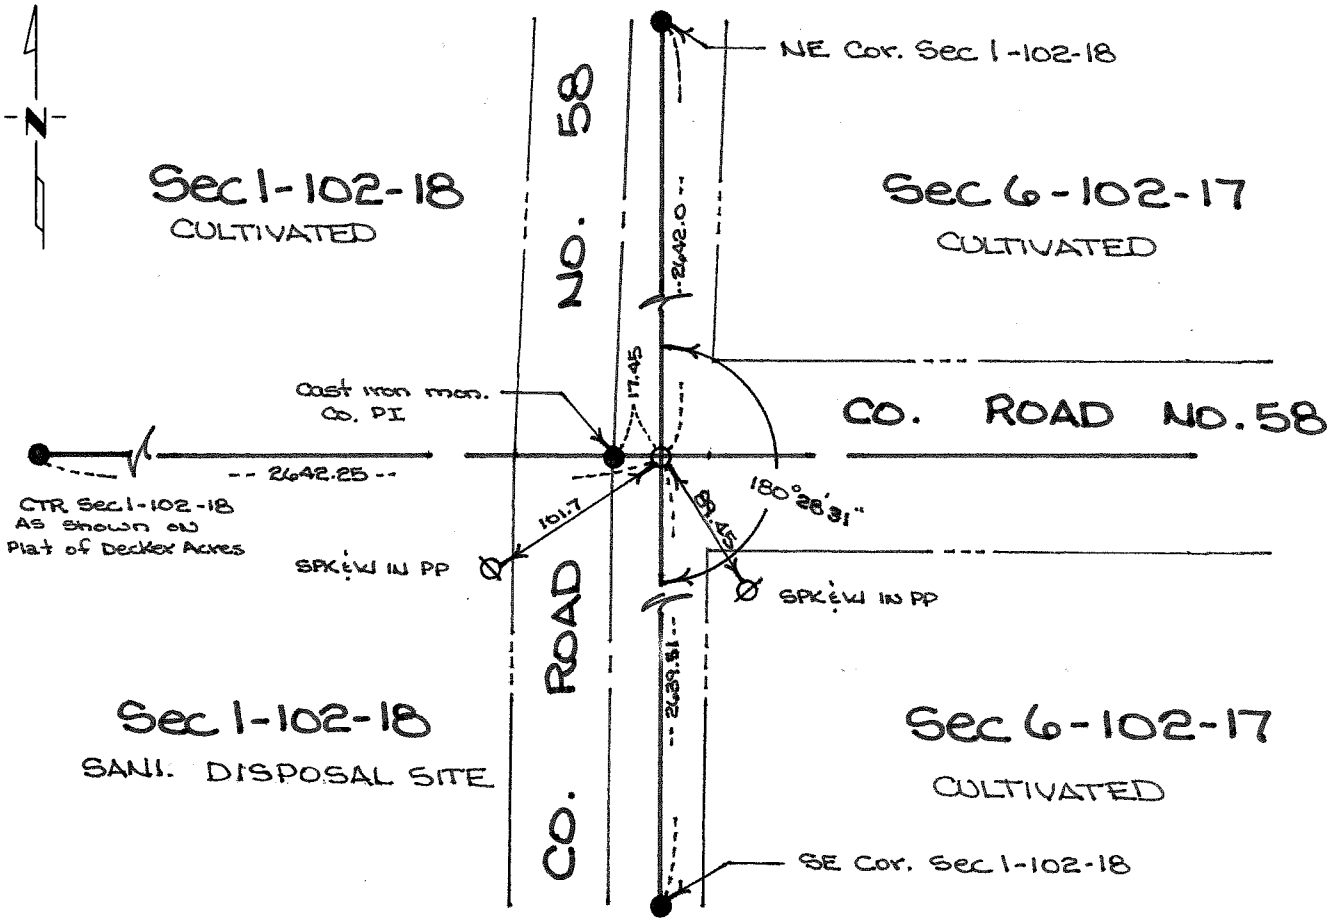

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 3-8-85
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

$E\frac{1}{4}$ corner Section 1-102-18

1854 John Ball, Deputy Surveyor, set wood post during public land survey.

1930 A partial section breakdown was done to determine the boundaries of the Airport and alignment of the runways. The distance and angles were measured on four sides of the $NE\frac{1}{4}$ Section 1.

1936 Plat of Decker Acres by A.C. White shows a distance and angle from the center of Section 1 to the $E\frac{1}{4}$ corner of Section 1.

1948 A partial section breakdown was done to determine the boundaries for the Airport expansion and alignment of the runways, distances and angles were measured on the four sides of the $SE\frac{1}{4}$ and $NE\frac{1}{4}$.

1973 County Engineering records show that in 1983 the township road along the east side of Section 1 and 12 was upgraded to County State-Aid Highway No. 58, and extensive grading was done which would have destroyed the corner.

An iron monument was found in 1983 on the centerline of the existing township road grade and assumed as the section corner. This iron has been perpetuated and now is a cast iron 1' more or less, below road surface.

2/2/85 Jones, Haugh & Smith Inc crew searched for corner and found no physical evidence of original public land survey monument.

1985 Jones, Haugh & Smith Inc crew used the survey data from the 1930, 1936 and 1948 surveys to reset the $E\frac{1}{4}$ corner of Section 1-102-18. The corner is located 17.45 feet east of the cast iron (Co PI) shown on the County State-Aid Highway No. 58 road grading plans.

For electronic survey data and analysis, contact Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 12, Township 102N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-22-91 (DATE) found a NO EVIDENCE OF PLS CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-22-91 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

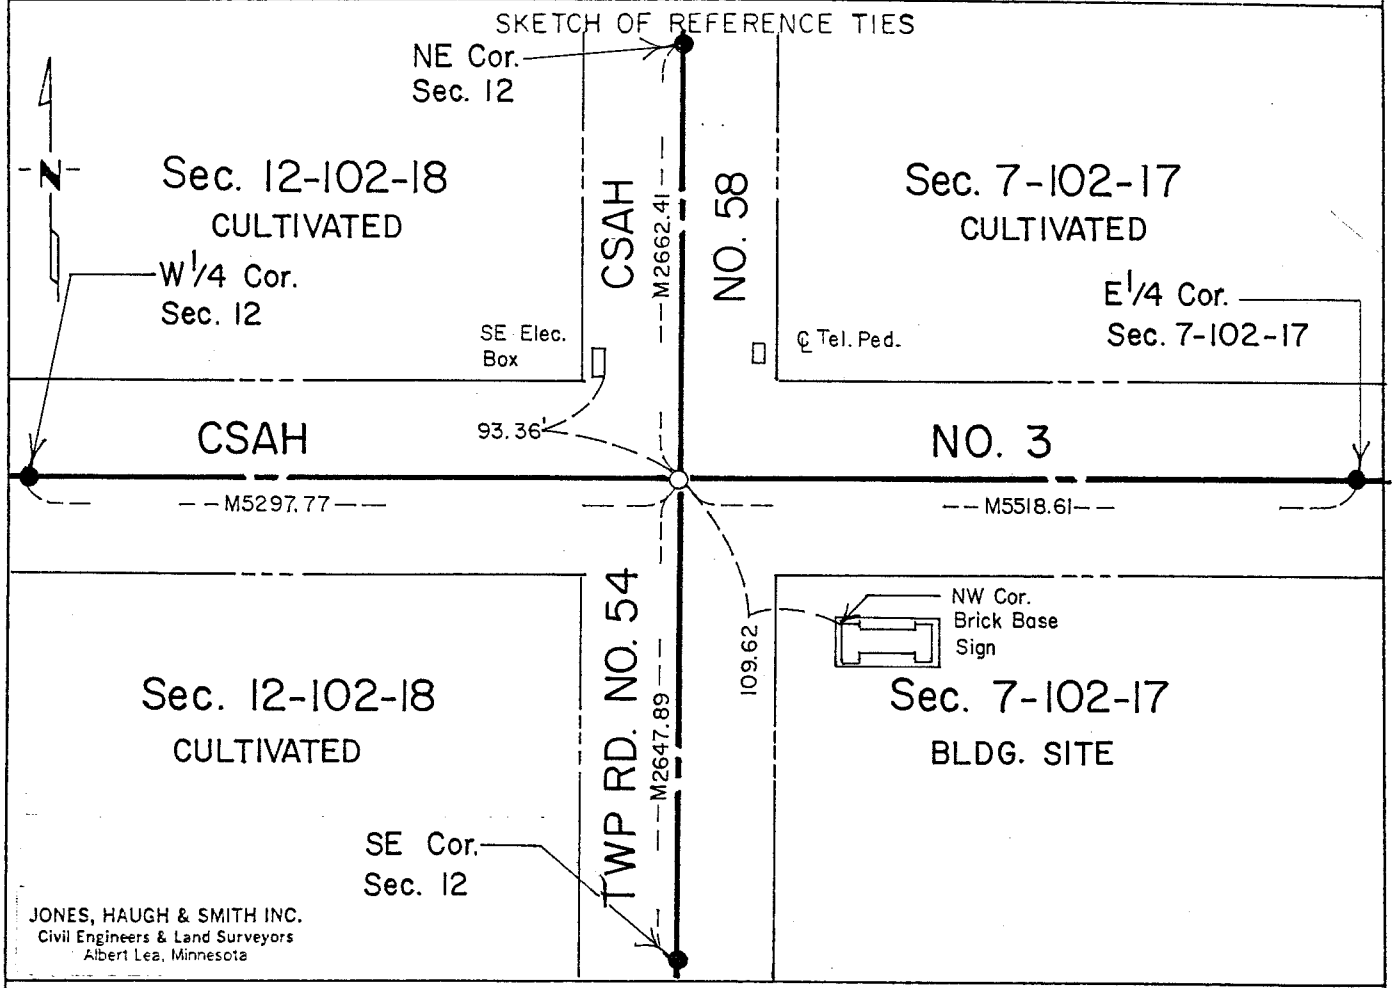

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-5-91

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Sec 12-102-18

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and a trench. The following ties were taken:

12" Burr Oak	N 65° E	50 links (33 ft)
12" Burr Oak	S 40° W	4 links (2.64 ft)

The following were contacted for section corner information:
Mower County Hwy Dept. Mower County Recorder's Office

1952 Book 'A' of the Mower County Engineers Office shows an iron over a stone and the following ties were taken:
59.2' NW PP
46.9' SW to cor st. post
59.4' SE to cor fence post

1948 Plat of Burrwood Addition (dated May 28, 1948) was recorded in Book 5 at page 58 and the east 1/4 corner was shown.

1960 C.V. Jones Engineering notes show corner found.

1961 C.F. Jones Engineering notes show an iron stake in asphalt just under surface. The following ties were taken:
53.45' SW nail & disc. in PP
60.2' SE nail & disc. in cor post
59.1' NW face PP
56.9' NE nail & disc in T.P.

1975 Jones & Haugh notes show a 1/2" diameter iron rebar in place and the following ties were taken:
Spk & W in CFP 60.5' SE Spk & W in PP 86.0' NW
Spk & W in PP 90.0' NE

1978 Jones, Haugh & Smith Inc crew uncovered and used a 1/2" diameter iron 0.2 feet below road surface.

1985 Jones, Haugh & Smith Inc crew uncovered a 5/8" diameter iron over a concrete monument on centerline centerline of north-south-east-west roads.

1989 Corner was destroyed during road construction.

1990 Jones, Haugh & Smith Inc crew notes show a PK nail over a cast iron monument.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, reset a cast iron monument at this location using measurements taken in past surveys.

The monument fits occupation and road centerlines within the section and existing subdivision plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 13, Township 102 N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-13-87 (DATE) found a 6" clay tile with a 1/2"ø iron cast in concrete 2' below road surface.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-13-87 (DATE) placed a cast iron monument on road surface over monuments found.

SKETCH OF REFERENCE TIES

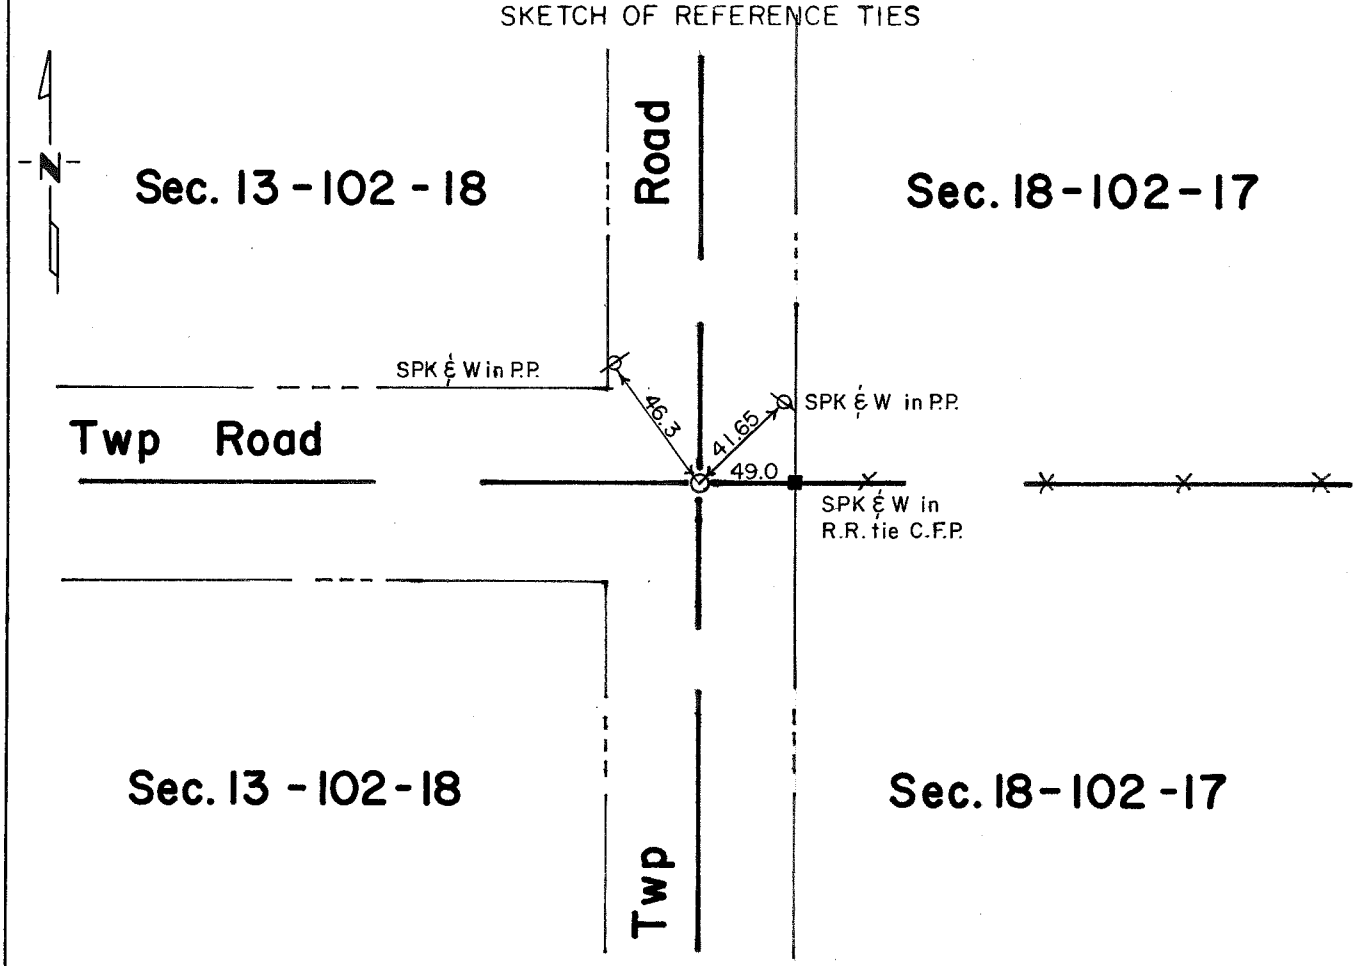

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 12-12-88
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
E¼ corner Section 13-102-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and the following bearing trees were marked:

8" Burr Oak	N 25° W	78 Links
12" Burr Oak	S 31° W	211 Links

The following were contacted for section corner information:

Mower County Engineering Department

Record book in the Mower County Engineers office shows a concrete monument was found and ties were taken.

Records from L.H. Edison shows a corner was found during private survey.

1972 Jones, Haugh & Smith crew found no evidence of corner set a 1" diameter pipe using (3) county ties.

1978 Jones, Haugh & Smith crew uncovered a 1" diameter pipe set in 1972 and took new ties.

1987 Jones, Haugh & Smith crew dug with the Mower County backhoe on centerline centerline of north-south-west roads at location of good signal with metal locator and uncovered a 1" diameter pipe. Continued digging and uncovered a 6" diameter clay tile with a ½" diameter iron in center of the tile cast in concrete. Concrete monument was 1.0 feet north and 1.0 feet west of 1" pipe found on road surface. Set cast iron monument over concrete monument.

The monument found agrees with records from County Engineering Department and fits occupation and road centerlines within the section and has been accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

...ON OF GOVERNMENT CORNER

Corner to Sec. 11, 12, 13, 14 T. 102 N. R. 18 W.

Page 8

State of Minnesota } ss.
County of Mower }

I hereby certify that on the 28th day of May 19 29

I found the Section Corner referred to above

which was evidenced by Steel rail with hole punched in center


and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of Left the above marker in place as it was deep enough not to be disturbed by grading operations

I further certify that I established

reference or witness monuments consisting of Cottonwood tree and hubs

which reference or witness monuments are located in the manner following:

Diagram of reference points shown below.

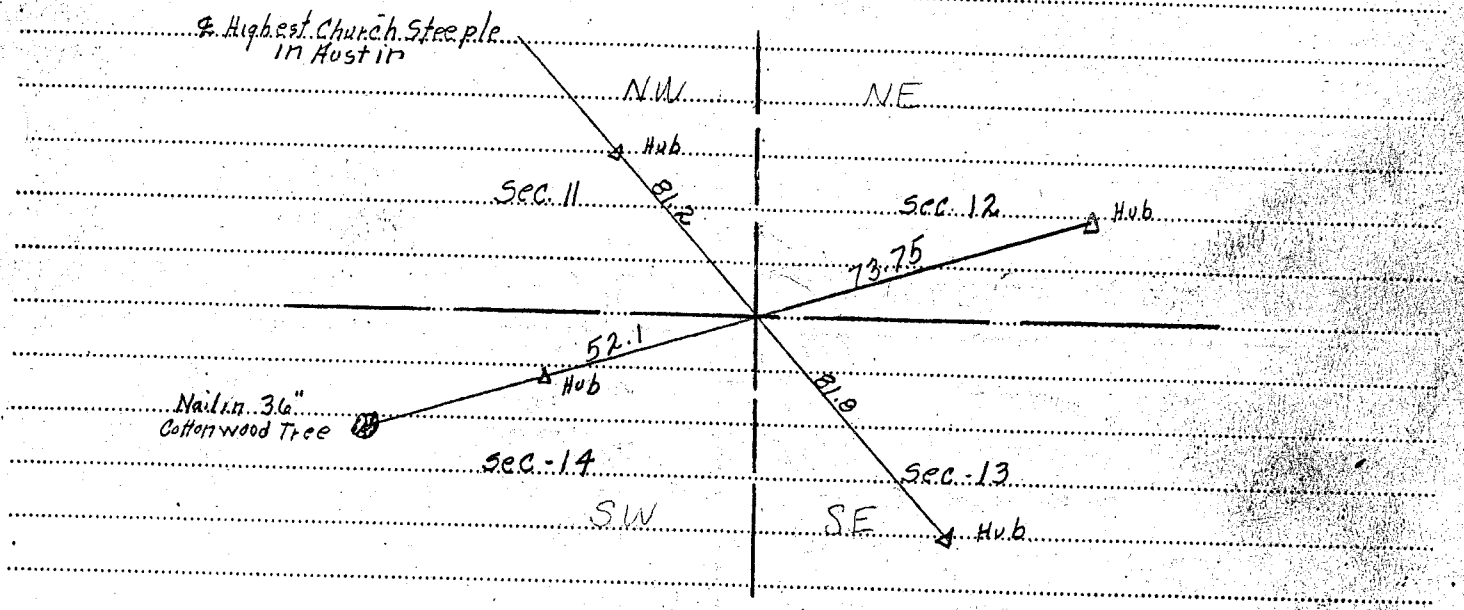

Dated at Austin Minn., this 21st day of December 19 29

Resident Engineer

OFFICE OF REGISTER OF DEEDS } ss.
County of

I hereby certify that the within instrument was filed in this office for record on the

of A. D. 19 at o'clock M.

Register of Deeds

By Deputy

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Corner to Sec. 13, 14, 23, 24 T. 102 N. R. 18 W. Twp.

Page 8

State of Minnesota
County of Mower } ss.

I hereby certify that on the 29th day of May 19 29

I found the Section Corner referred to above

which was evidenced by Steel rail with hole punched in center


and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of Concrete monument, 6 x 6 x 24 inches with steel rod in center.

I further certify that I established

reference or witness monuments consisting of reference hubs

which reference or witness monuments are located in the manner following:

Diagram of reference points shown below.

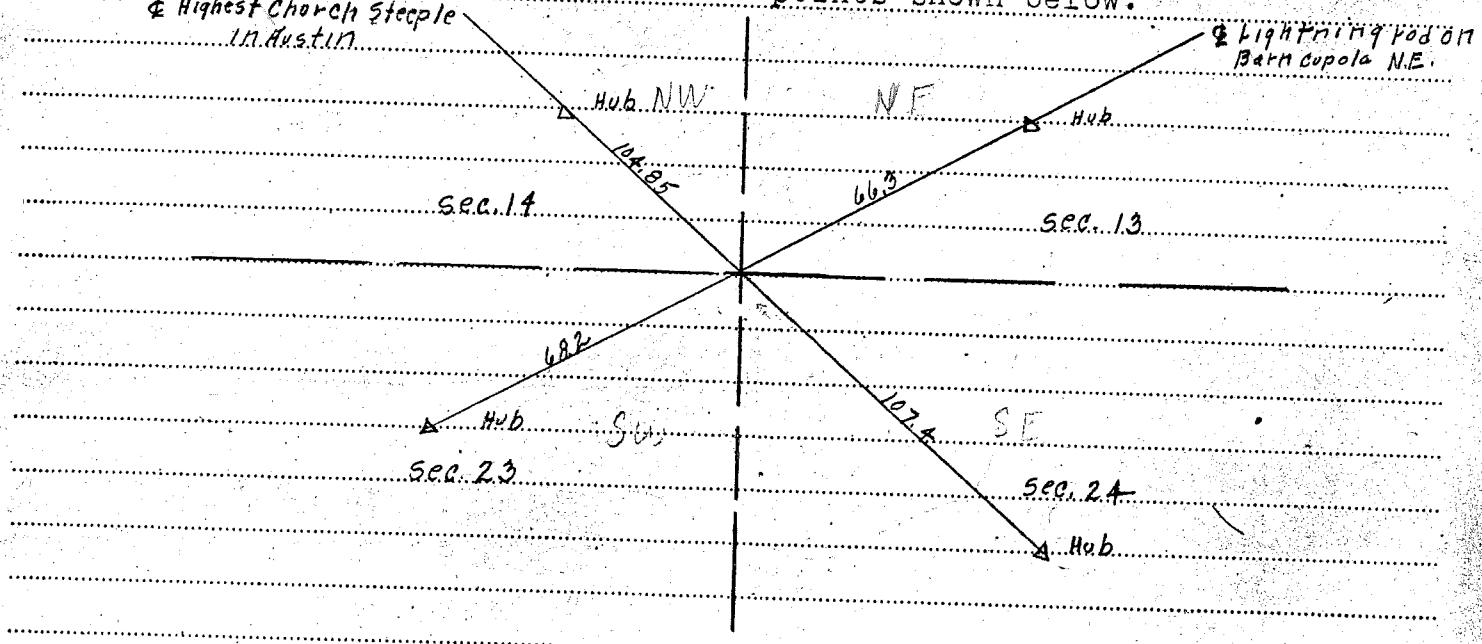

Dated at Austin Minn., this 29th day of December 19 29

Resident Engineer

OFFICE OF REGISTER OF DEEDS
County of } ss.

I hereby certify that the within instrument was filed in this office for record on the

day of A. D. 19 at o'clock M.

Register of Deeds

By Deputy

C

D

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 15, Township 102N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-6-90 found STONE 1.6 x 1 x 1 H.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed 3/4" REBAR AND COUNTY CAP OVER STONE

SKETCH OF REFERENCE TIES

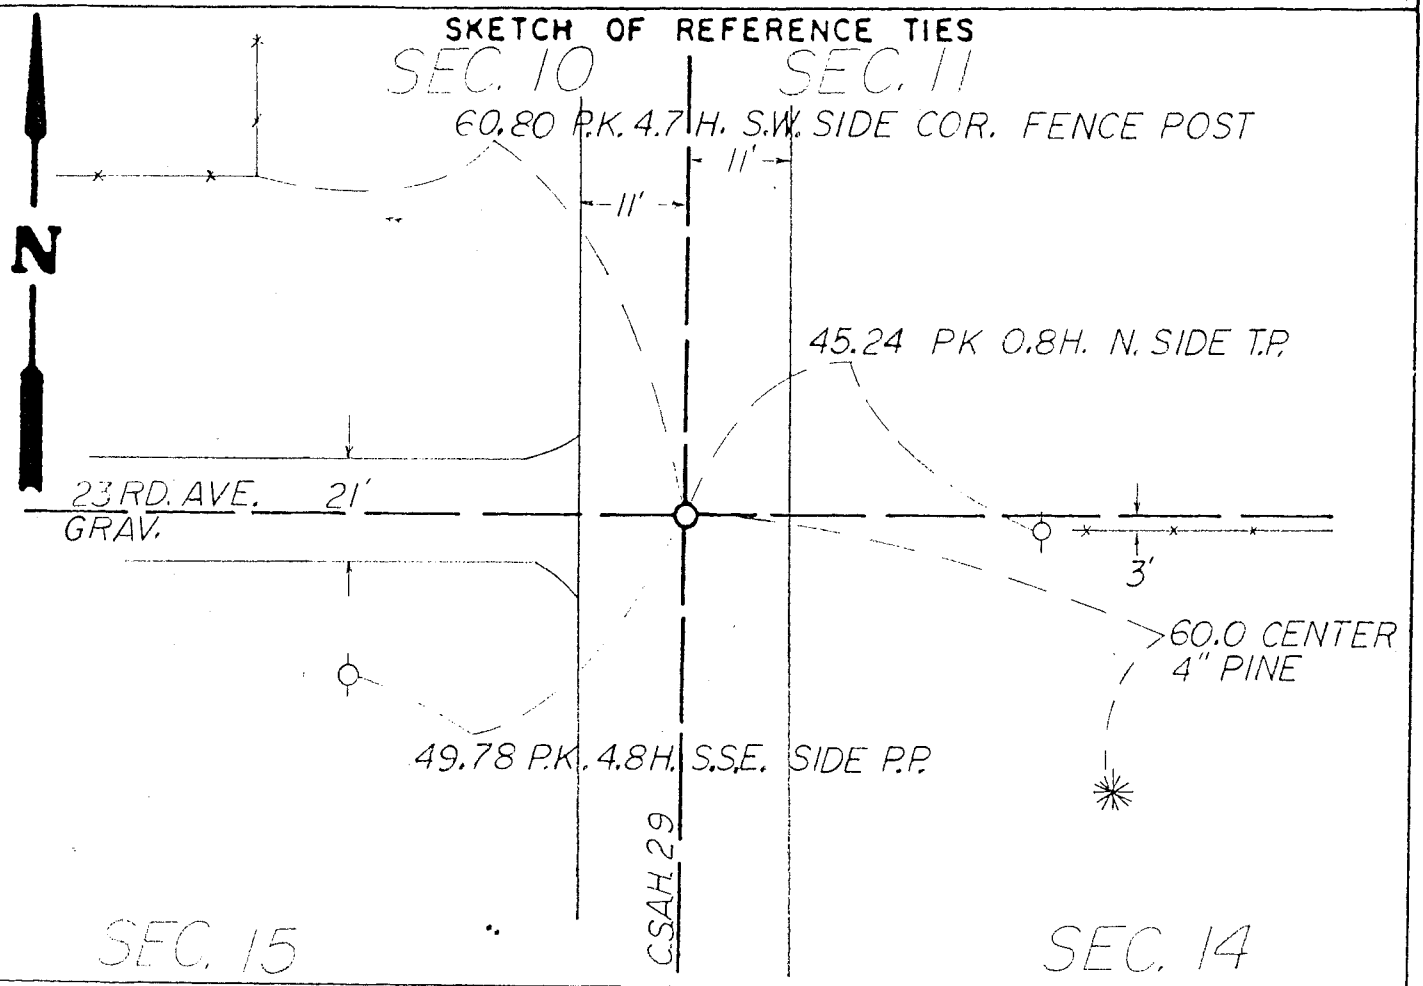

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature

7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at ____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHEAST CORNER SECTION 15, TOWNSHIP 102 NORTH, RANGE 18 WEST, 5TH P.M.

July, 1854 — William Anderson, Deputy Surveyor, set a section corner post during the original Public Land Survey.

1914 — Co. Rd. Cross section & profile sheet for State Rd. Number 5 show the corner was used for the road construction.

1969 — County Road Plans from the County Engineer's office show inplace Concrete monument at the corner.

1970 — Mower County Surveyors Record shows inplace Magnetic Monument after construction of the road.

July, 1990 — Zenk Read Trygstad and Associates excavated with a backhoe a trench 2.3 feet West to 3 feet East of centerline and South edge at fence line to the East to 7 feet North and 3.5 feet deep.

A stone 1.6x1x1 high was found 2.0 feet beneath the surface in mottled sandy clay and 3 feet North of fence to the East. Two cast Iron monuments were found at the intersection of centerlines of C.S.A.H. 28 and 23rd Avenue, about 1 foot West of the stone and 0.5 deep.

An analysis of the record shows no indication of the origin of the stone. Other stones of similar size have been located a corners throughout Mower County. The stone is accepted as marking the location of the original Public Land Survey corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 15, Township 102 N, Range 18 W, 4 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-10-90 found CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed REROD AND COUNTY CAP 3/4"

SKETCH OF REFERENCE TIES

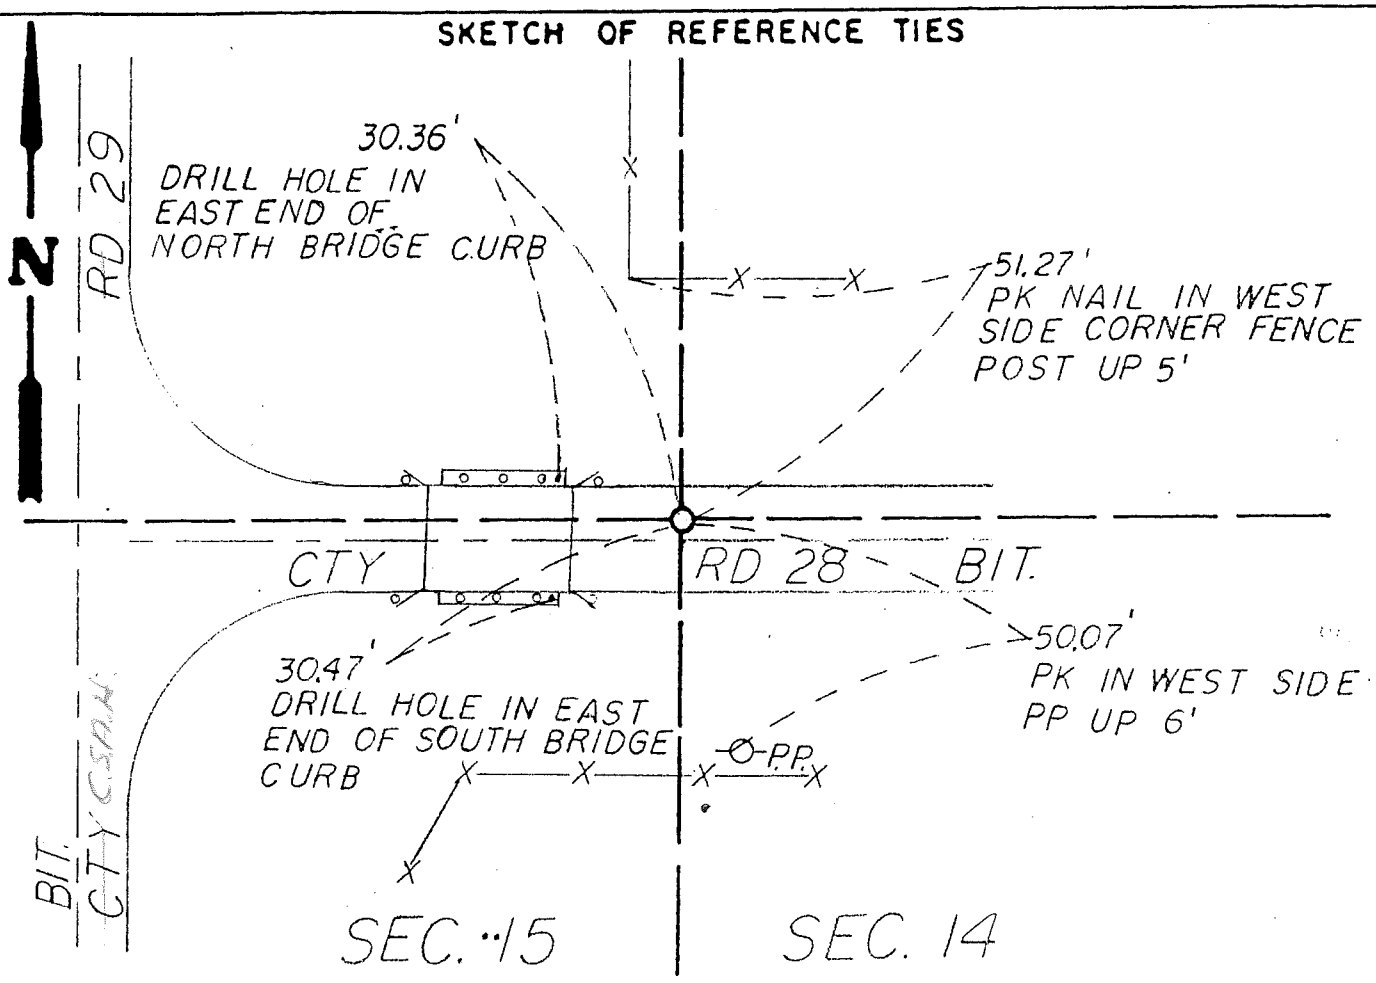

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 15, TOWNSHIP 102 NORTH, RANGE 18 WEST, 5TH P.M.

July, 1854 — William Anderson, Deputy Surveyor set a section post during the original public Land Survey.

1914 — Plan - Profile & Cross section sheet for State Road Number 5 shows a stone inplace.

1962 — County Engineer's plans for C.S.A.H. 28 shows a concrete monument inplace with ties to the existing bridge. The bridge was to be replaced by County forces.

1969 — County Engineers Plans showed section line crossing at station 186+41.1

1970± — Mower County Surveyors Record showed a stake inplace

July 1990 — Zenk Read Trygstad and Associates excavated with a backhoe 4.5 feet North to 3.5 feet south of centerline from 5 feet East to 14 feet East of fence to the North and 6 feet below the surface. A concrete monument was found 2 feet below the surface. A 5/8 inch by 1.4 foot Rebar and Cap # 13807 was found over a 1/2"x1.4' Rebar 2.1 feet West of the concrete monument.

An analysis of the record shows the concrete monument as being inplace, used and maintained by the County for some 28 years. Other concrete monuments have been found at corners throughout the county. The concrete monument is accepted as marking the location of the original Public Land Survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 15, Township 102N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-15-91 (DATE) found a 1¼"Ø pipe over another 1¼"Ø pipe.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-15-91 (DATE) placed a 5/8"Ø iron over one pipe found. (pulled top pipe) And a cast iron monument over at road surface.

SKETCH OF REFERENCE TIES

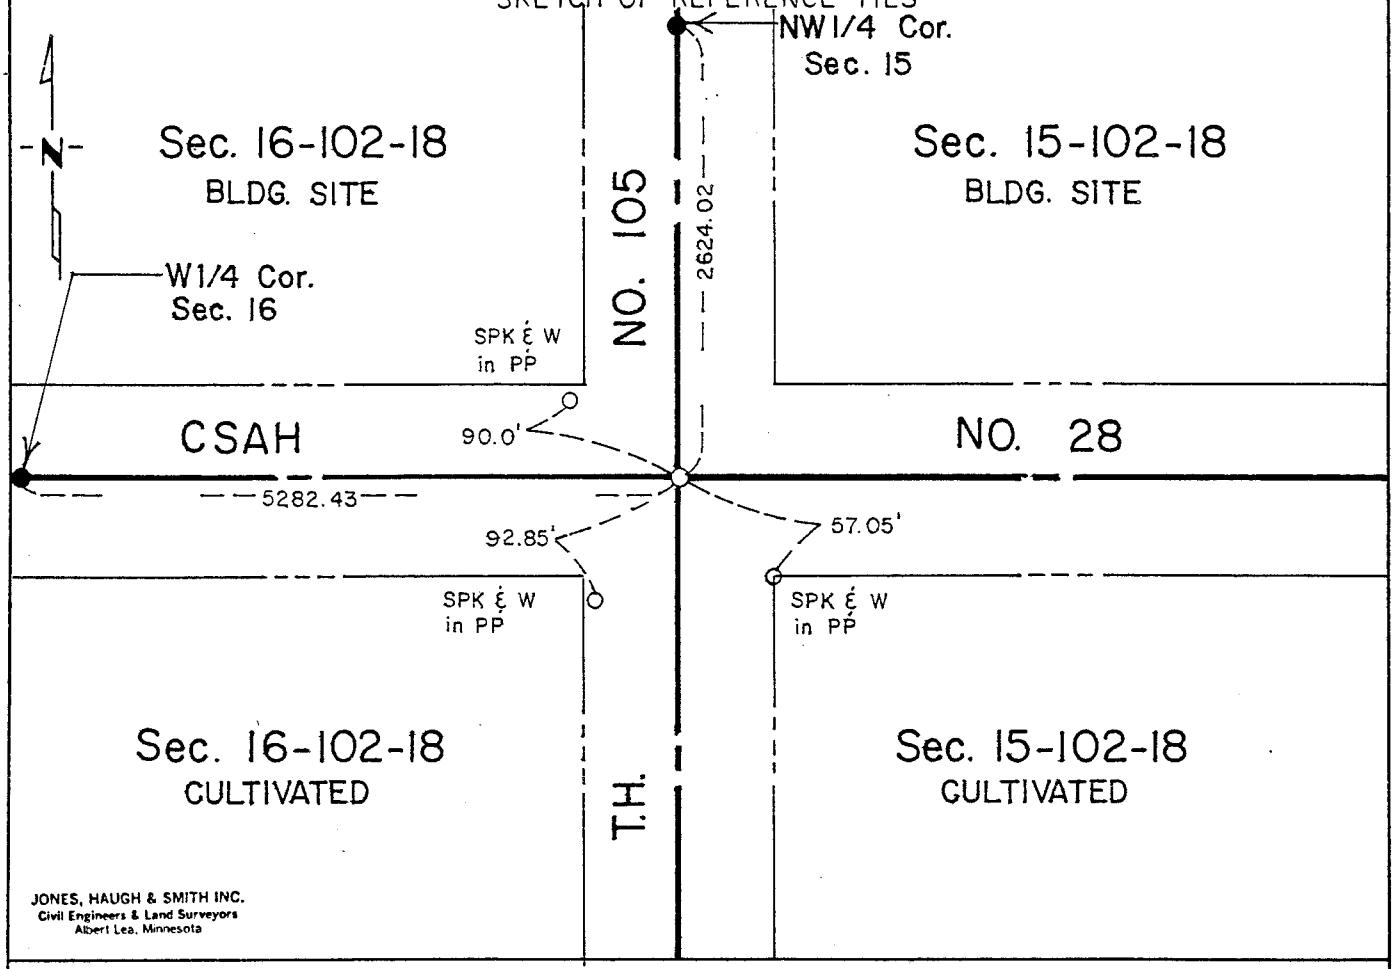

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-30-91

Registration No. 13607

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 15-102-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Hwy Dept. Mower County Recorder

1930 Book "A" in the Mower County Engineering Office indicates a stake inplace.

1959 Records from Mower County tie book show a 1" diameter pipe at the surface.

1964 Mower County notes show a pipe at this location.

1967 Mower County Engineering Department found a pipe inplace 2" below the surface. The following ties were taken:

MHD	disk	TP	SE	43.95'
MHD	disk	PP	SW	51.45'
2"	steel	CFP	NW	44.44'
2"	steel	CFP	NE	44.85'

1971 Jones, Haugh & Smith Inc crew found a 1" diameter pipe 0.5' deep on centerline of N-S-E-W roads. The following ties were taken:

Spk & W	NW side	PP	SW	92.30'
Spk & W	SW side	PP	SE	57.05'
Spk & W	NE side	PP	NW	90.0'
Spk & W	W side	2.0'		
PK nail & W	South	2.0'		

1978 Jones, Haugh & Smith Inc crew found a pipe on centerline of N-S-E-W roads. New ties were taken as follows:

Spk & W	PP	SW	92.85'
Spk & W	PP	SE	57.05'
Spk & W	PP	NW	90.0'

1982 Jones, Haugh & Smith Inc crew found a 1" diameter pipe during the survey in Dinsmour Addition.

1984 Jones, Haugh & Smith Inc crew located corner during the survey in Dinsmour Acres.

1991 Jones, Haugh & Smith Inc crew dug on centerline centerline of N-S-E-W roads and found a 1 1/4" diameter pipe over another 1 1/4" diameter pipe. Removed top pipe and placed a cast iron monument on the road surface over a 5/8" diameter iron.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 15, Township 102N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-16-91 (DATE) found a no evidence found, destroyed during road construction.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-16-91 (DATE) placed a 5/8"Ø iron capped RLS 13807 using electonic distances measured in 1979.

SKETCH OF REFERENCE TIES

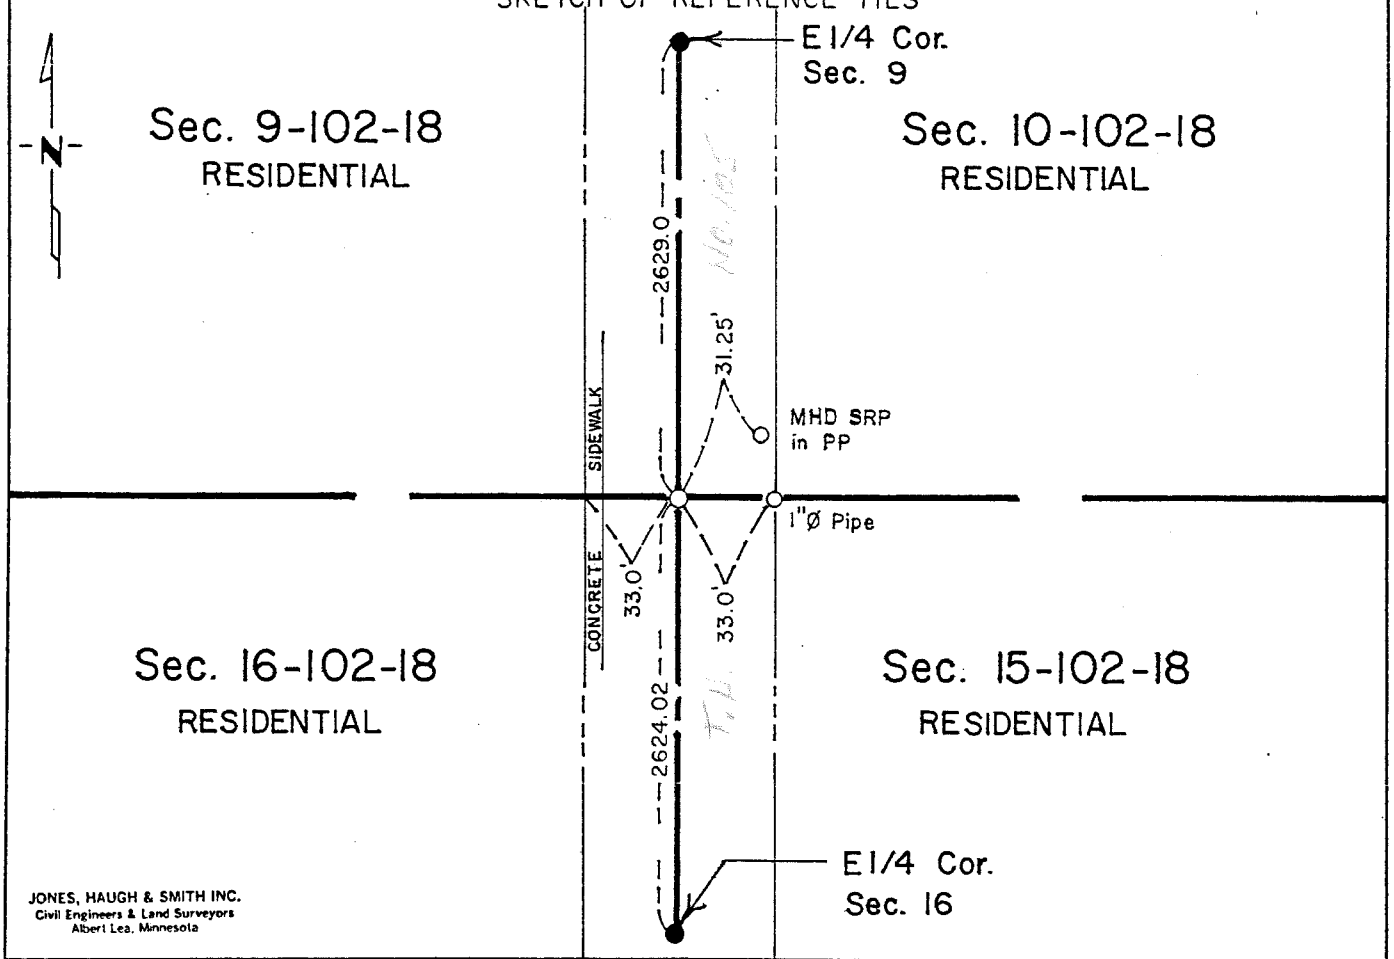

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-30-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 15-102-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

14" Burr Oak N 4° W 171 links (112.86 ft)
8" Burr Oak S 4 1/2° E 525 links (346.50 ft)

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Mower County Highway Department

1930 Book "A" of the Mower County Engineering Office show a stone at this location (Sta. 80+50.)

1939 Mower County Engineering records a stone at this location. Placed a 3" angle iron 4" below surface.

1959 Jones Engineering located a corner and a brass marker 90' East.

1965 Jones & Haugh uncovered a corner on centerline of N-S road.

1978 Jones, Haugh & Smith Inc uncovered corner and checked ties.

1979 Jones, Haugh & Smith Inc crew found a 1 1/4" diameter pipe and ties were checked and the corner was tied in during the survey to break down Section 9-102-18.

1979 Jones, Haugh & Smith Inc crew located corner during survey in NE 1/4 of Section 16-102-18.

1984 Corner was removed during road construction.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, reset corner using electronic distances measured in 1979 for breakdown of Sections 9 & 16-102-18.

The monument placed fits occupation and road centerlines and past surveyrrecords within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 15, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/04/1993 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/04/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

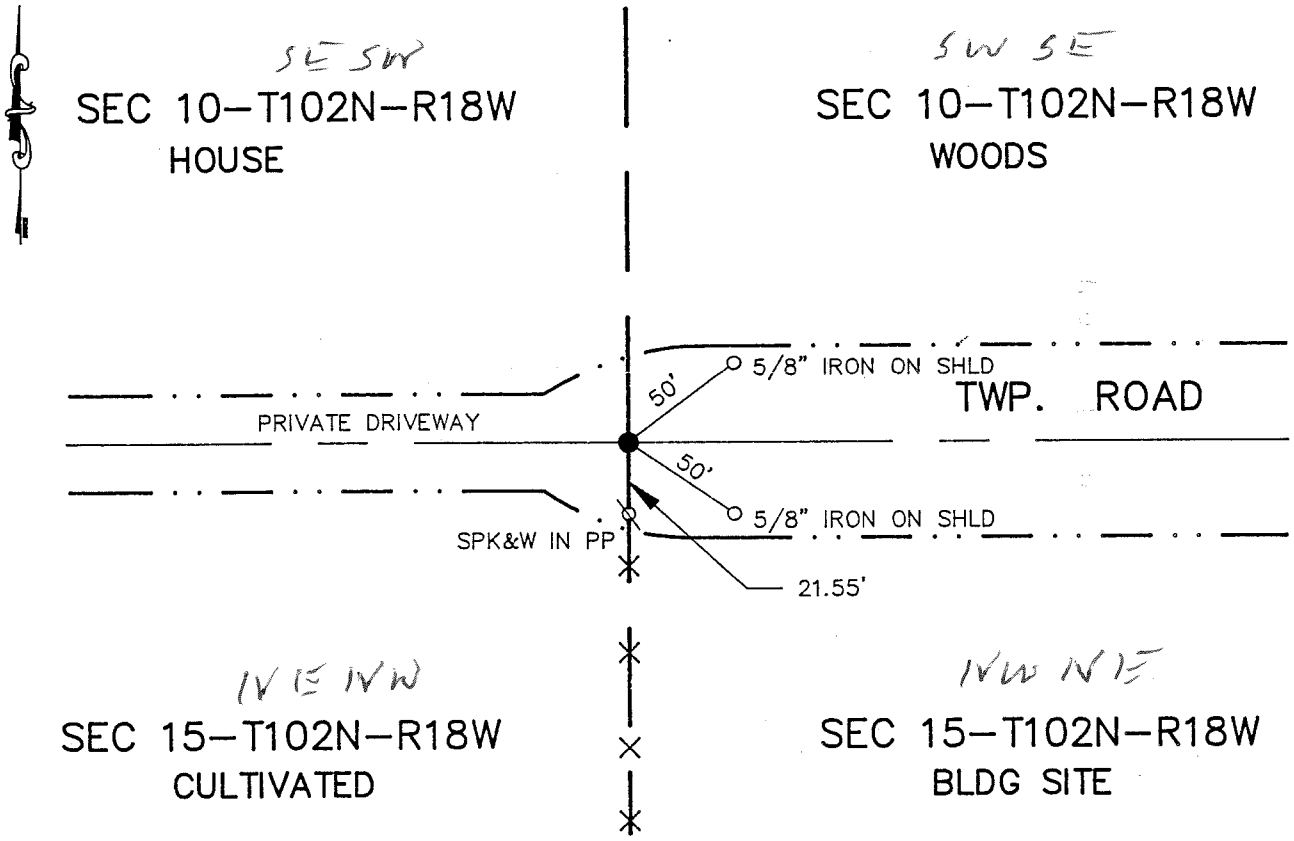

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 31

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-17-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 5 P .M. on the 23 day of Jan A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 450684

M.H.D. FORM NO. 2105

Book 94 Misc Page 31

N 1/4 Cor SEC 15-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found a 5/8" iron at this location. Dug with county backhoe at this location but found no other evidence of the original corner. 5/8" iron was accepted as best evidence of the original PLS corner and a CIM was set over the 5/8" iron.

The monument fits occupation and road centerlines within and is in agreement with past surveys in the area and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER Corner of Section 16, Township 102N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-2-90 found A 5/8" REBAR

☐ left monument as-found, ☐ lowered monument, ☑ removed monument (explain)

On 7-9-90 placed A 1/2" PIPE IN PLACE OF 5/8" REBAR

SKETCH OF REFERENCE TIES

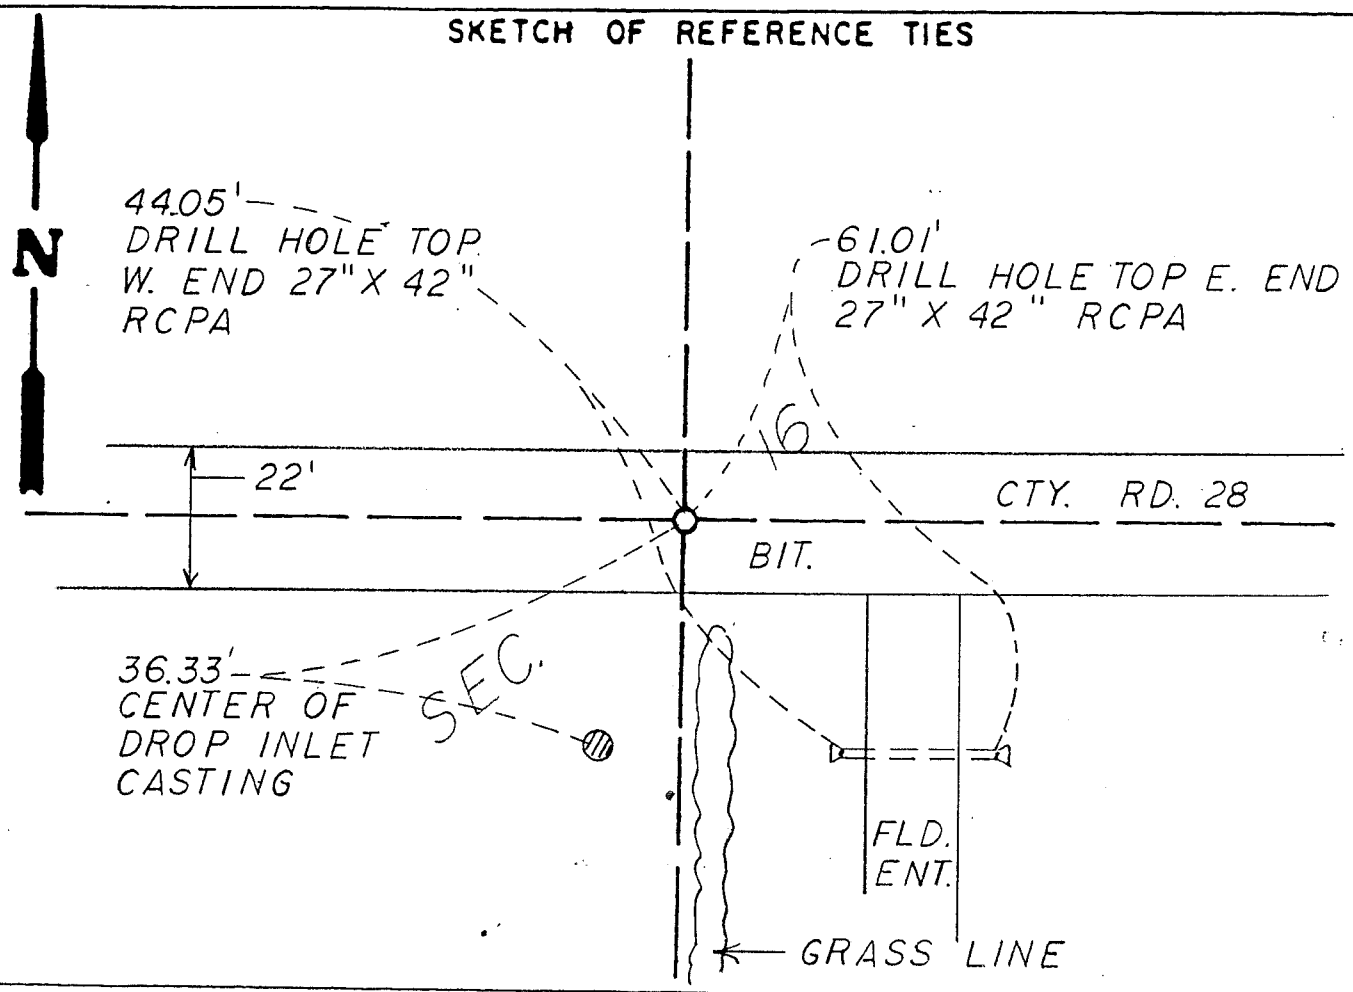

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

CENTER QUARTER CORNER SECTION 16, TOWNSHIP 102 NORTH, RANGE 18 WEST, 5TH P.M.

1933 — County Engineers Road Plans shows North South quarter line crossing at 132+00; 2654.5 feet from the East quarter corner of Section 17, but shows no monument inplace.

1967 — County Engineers Road Plans shows intersection of quarter lines at 2655.3 feet East of the East quarter corner of Section 17.

July 2, 1990 — Zenk Read Trygstad & Associates excavated with a backhoe 3 feet East to 7 feet West of the grass line South and from 1 foot North to 2 feet South of the road centerline by 5 feet deep being around the rebar. Nothing else was found.

Analysis of the record data gives no indication of the origin of the rebar and no survey was made to determine its agreement with the intersection of the Quarter lines. The pipe only replaces the rebar.

Index No. p 26 "B"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 16, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 3-24-93 (DATE) found a ¾"ø x 24" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 3-24-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

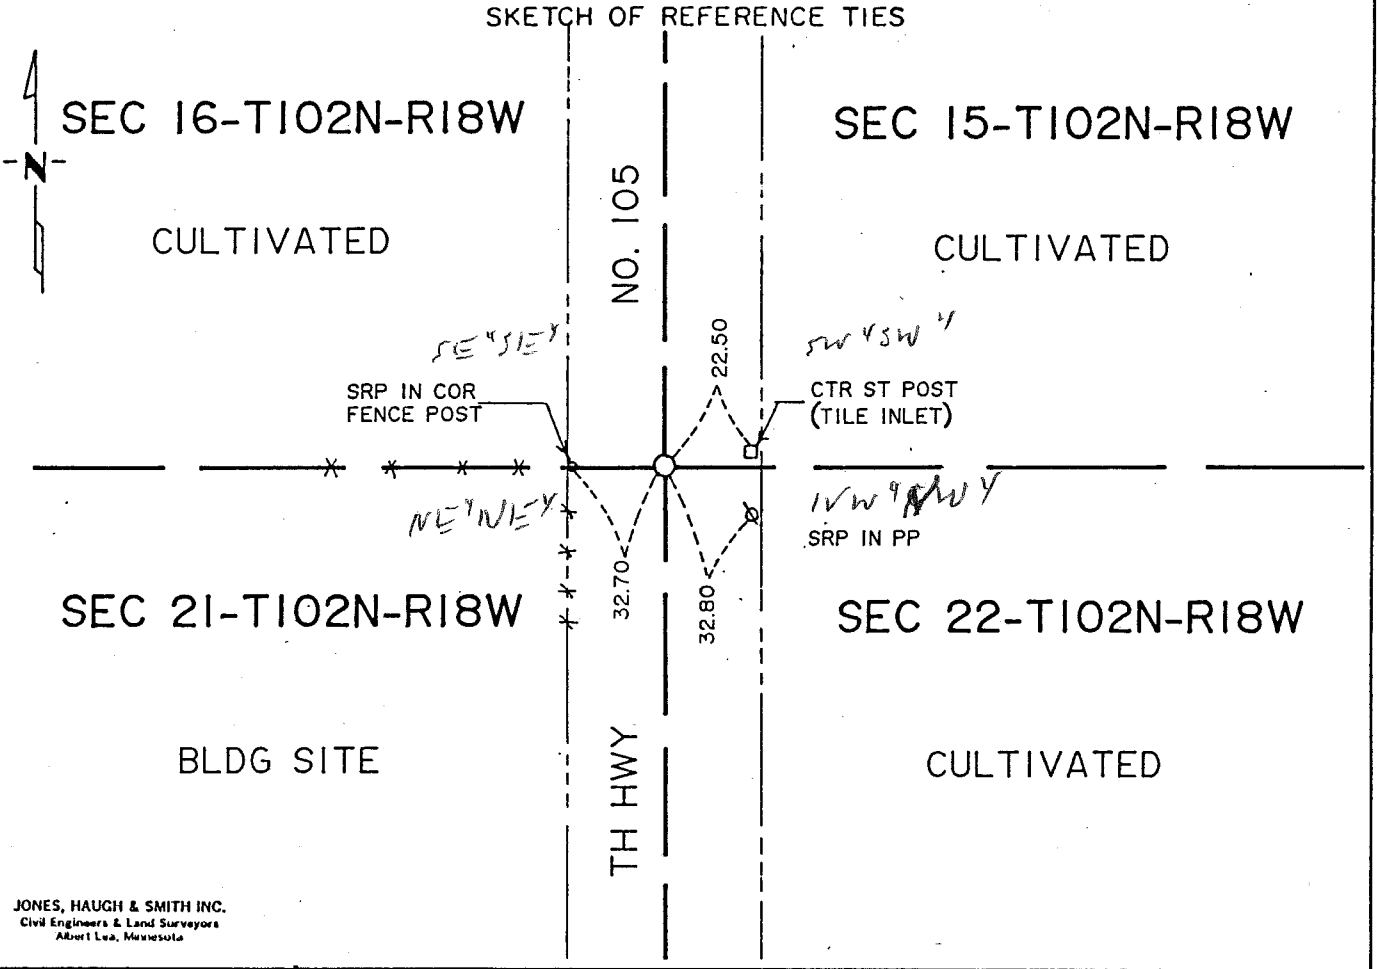

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-30-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 4 day of May A.D., 19 93

COUNTY RECORDER Amanda Enger

By Marlene Martin, Deputy

DOCUMENT NO. 420478

Bk 79 mtg Page 322

BOOK 79 PAGE 322

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec. 16-102-18

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Survey Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

Book 1 of the Mower County Highway Department notes indicate that a stone was found at the southeast corner Section 16 during a survey for SAR #21. The following ties were taken:
29.0' W to cor fence post
63.0' NE to tele pole
33.0' E to iron pin

1939 Trunk Highway No. 105 Road Plans indicate ties to the southeast corner Section 16. The following ties were taken:
29' W to cor fence post
87.6' SW to Elm tree
30.3' E to fence post
63.0' NE to tele pole

1993 Jones, Haugh & Smith crew under the direction of John H. Schulte IV, RLS #13807, found a 3/4" x 24" iron on centerline of Trunk Highway No. 105 in line with fence west. Dug 1.5 feet deep and found nothing. Probed area to 4 feet deep and found no evidence of stone noted in Mower County Highway survey of SAR #21. Removed 3/4" x 24" iron found and set cast iron monument near road surface at location of iron found.

This monument fits occupation and road centerlines within the section and is accepted as best evidence of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 79 PAGE 323

Jones, Haugh

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 17, Township 102N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


I the corner location shown on the sketch:

On 7-3-90 found A STONE UNDER CONC. MON., BOTH REMOVED DURING EXCAVATION

☐ left monument as found, ☐ lowered monument, ☑ removed monument (explain)

On 7-9-90 placed A COUNTY CAP ON A 5/8" ROD

SKETCH OF REFERENCE TIES

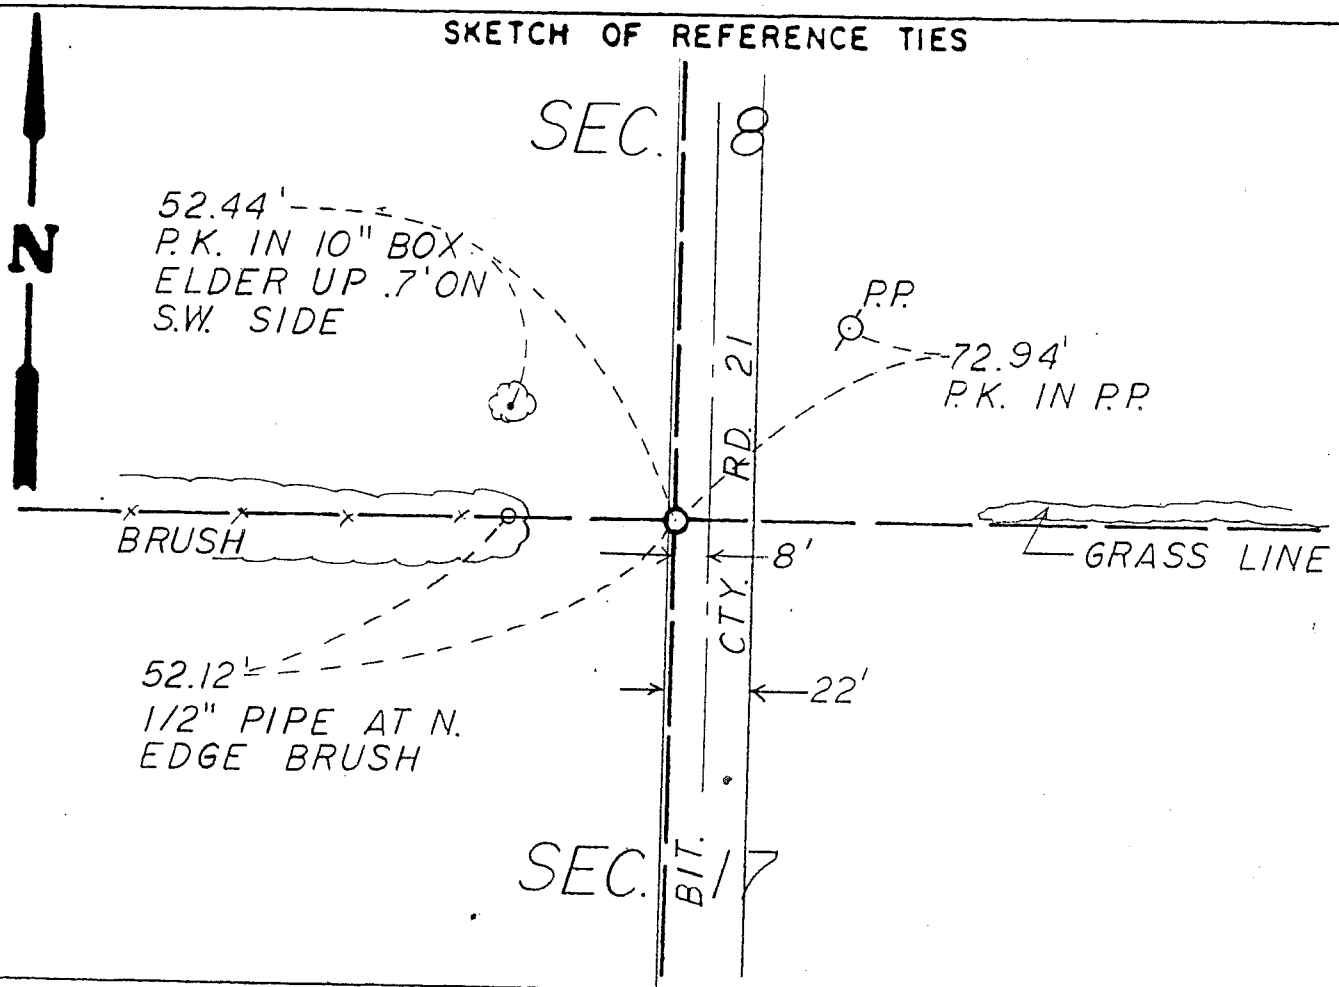

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTH QUARTER CORNER SECTION 17, TOWNSHIP 102 NORTH, RANGE 18 WEST, 5TH P.M.

July, 1854 — William J. Anderson, Deputy Surveyor, set a quarter section post, deposited charcoal, and raised mound of earth with trench and pits as per instructions, planted cherry to Northeast and Locust to Southwest.

1967 — County Engineers Road Plans show a concrete monument inplace, 7.8 feet East to New Road centerline. See Also Page 15 Surveyors Record.

July 3, 1990 — Steven J. Thompson, Zenk Read Trygstad & Associates, excavated with a backhoe 4.5 feet deep by 5 feet West to 9 feet West of Centerline and 5 feet South to 10 feet North of the fence line West. A stone was found under concrete monument was 2 feet below the surface. A wood stake was found 2 feet North of the stone 2.0 feet below the surface and on line with a grass line to the East.

An analysis of the record data gives no indication of the origin of the stone. The County placed a concrete monument over the stone which has been used and recognized for over 23 years. The stone is accepted as marking the location of the original Public Land Survey.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 17, Township 102N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-3-90 found A CONC. BLOCK

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-9-90 placed A COUNTY CAP ON A 5/8" ROD OVER BLOCK

SKETCH OF REFERENCE TIES

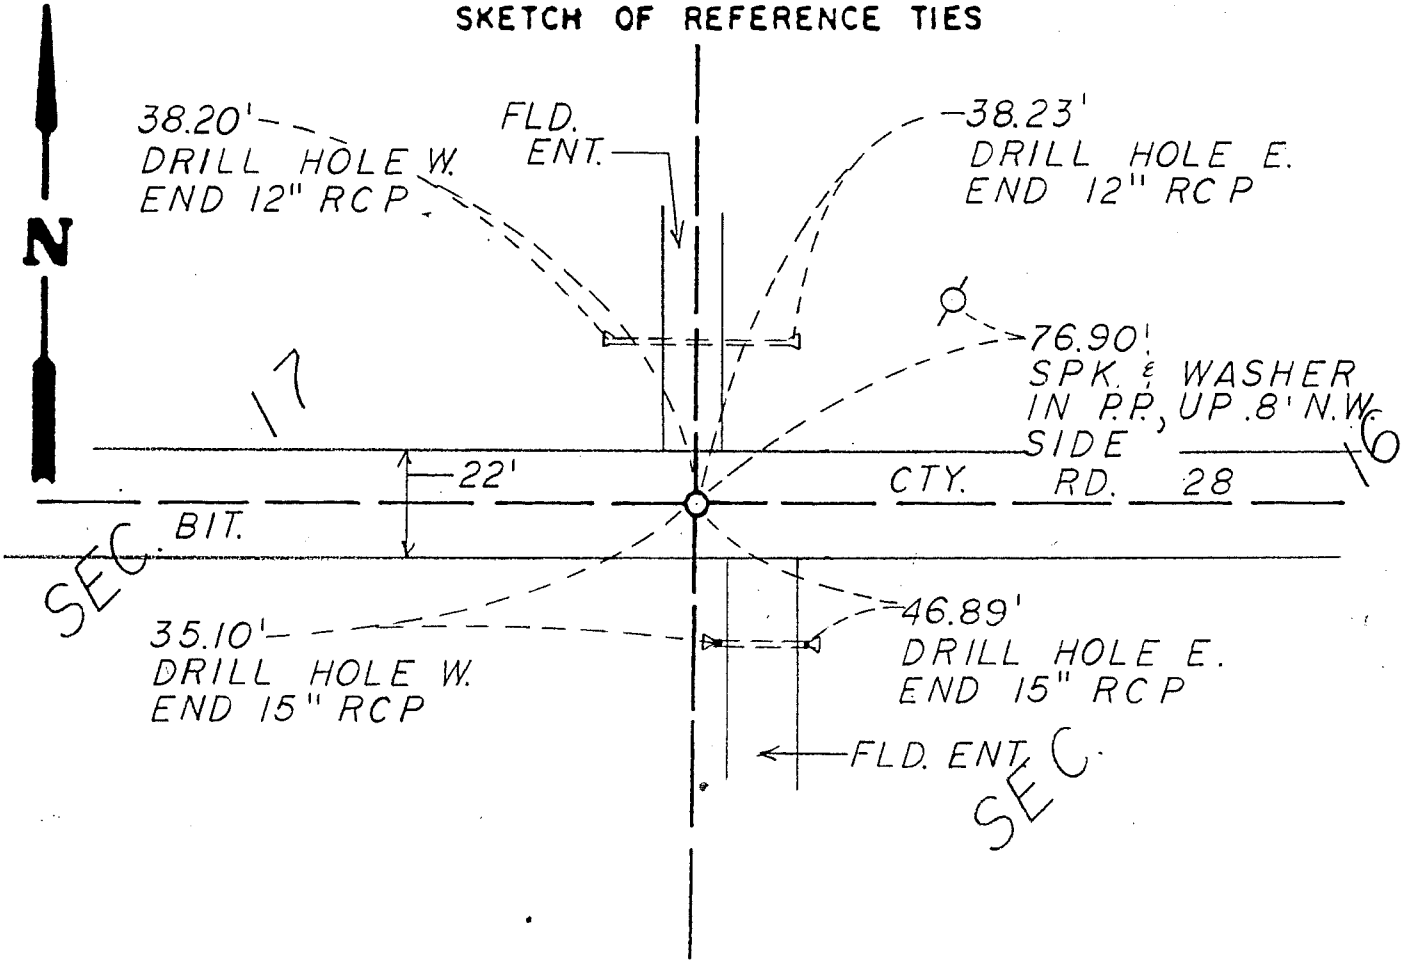

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature

7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 17, TOWNSHIP 102 NORTH, RANGE 18 WEST, 5TH P.M.

July 1854 — William J. Anderson, set a quarter section post, deposited charcoal, and raised mound of earth with trench and pits as per instructions. Planted cherry to Northeast and a Locust to the Southwest.

1933 — Page 26 of Mower County Surveyors Record shows a stone inplace. Ties match those of the 1933 County Engineers Road Plans.

1967 — Mower County Engineers Road Plans show a 3/4" iron inplace.

July 1990 — Zenk Read Trygstad & Associates excavated with a backhoe 3 feet North to 2 feet South of the centerline by 2.5 feet East to 7 feet West the grass line extended from the South by 5 feet deep and found two concrete block 2.7 feet below the surface. A 5/8 inch rebar was found 1.7 feet below the surface over the blocks. A cast iron monument was found 0.4 foot Southeast of the block.

An analysis of the record data gives no indication of the origin of the concrete block. Since the block has been maintained as evidence of the corner by Mower County for over 57 years it is accepted as marking the location of the original Public Land Survey Corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER Corner of Section 17 W, Township 102 N, Range 18 W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-3-90 found A STONE UNDER CONC. MONUMENT, REMOVED CONC. MONUMENT

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

On 7-9-90 placed A 1/2" PIPE

SKETCH OF REFERENCE TIES

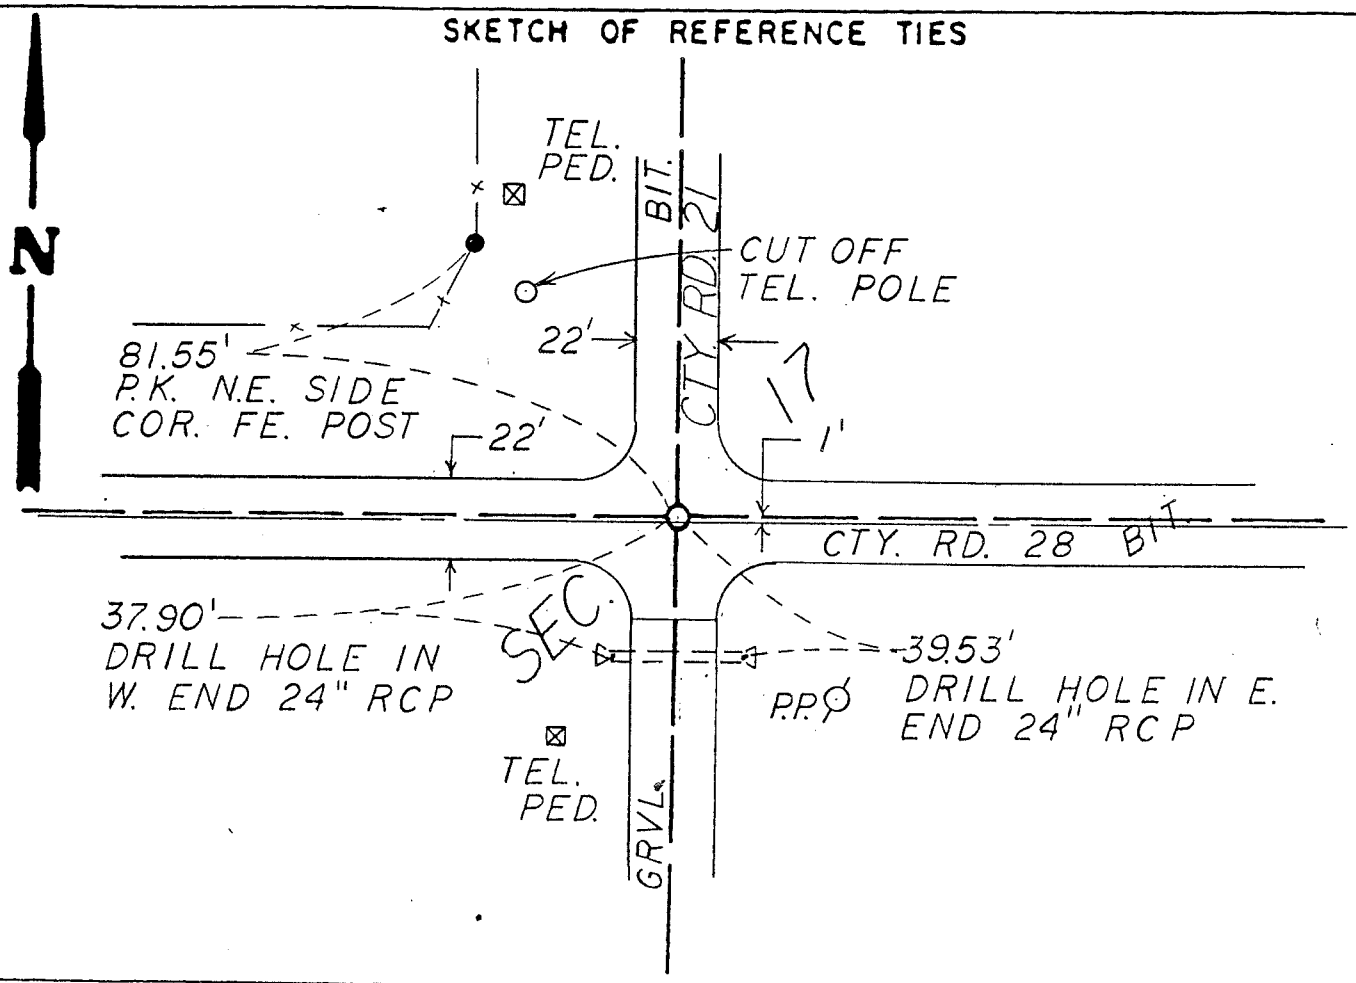

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19__.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

CENTER QUARTER CORNER SECTION 17, TOWNSHIP 102 NORTH, RANGE 18 WEST, 5TH P.M.

1967 — Page 15 of the Mower County Surveyors Record shows a Concrete Monument inplace. See also County Engineers Road Plans 1967.

July 2, 1990 — Zenk Read Trygstad & Associates excavated with a backhoe from centerline to 2 feet North by 2 feet East to 6 feet West of Centerline by 3.7 feet deep to natural ground and found a nail over a concrete monument over a stone 3.6 feet below the surface.

An analysis of the record data gives no indication of the origin of the stone. No survey was made to determine the agreement with the intersection of the Quarter Lines.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 17, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/24/1993 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/24/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

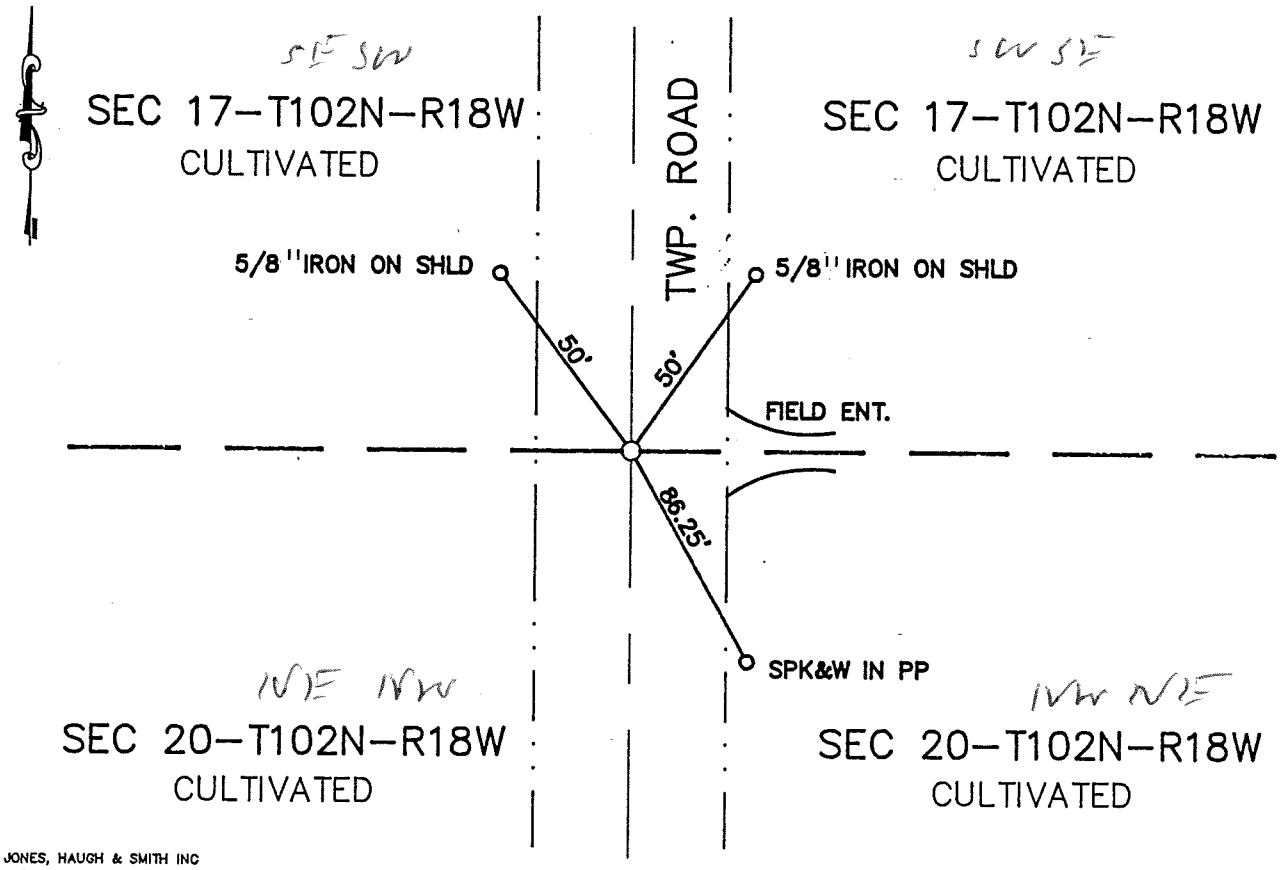

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-31-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 3 day of Jan A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450253

M.H.D. FORM NO. 2105 BOOK 93 PAGE 488 Book 93 Misc Page 488

S 1/4 Cor SEC 17-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and in line with field division east. Uncovered a 5/8" iron 0.5' deep. Continued digging and found no other evidence of original PLS corner. Placed a cast iron monument inplace of iron found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 18, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-24-93 (DATE) found a 5/8 IRON OVER A 3" X 5" WOOD POST OVER A LARGE POINTED STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-24-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

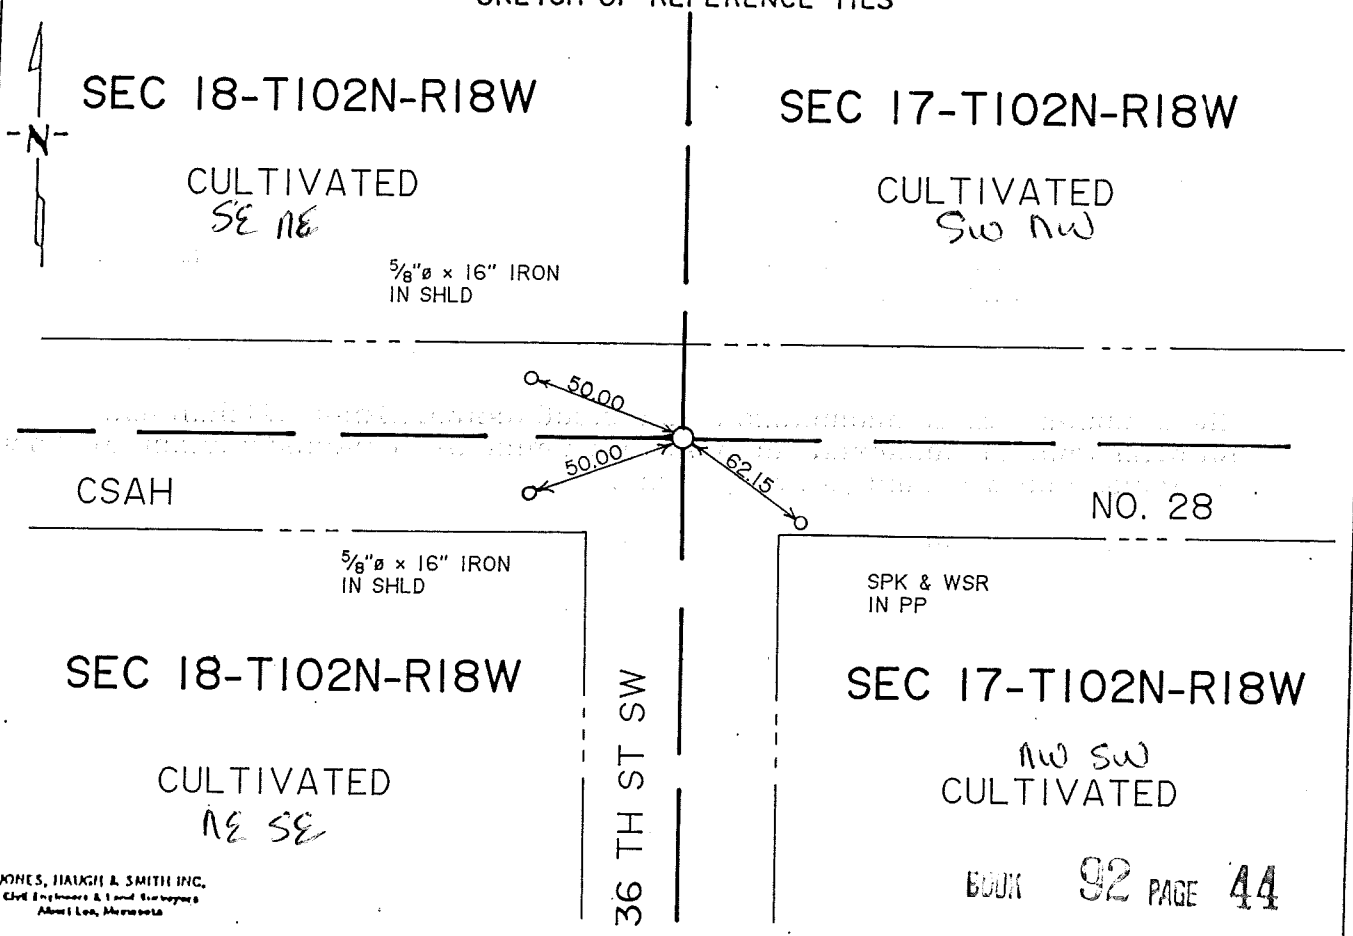

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 44

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-25-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

446684

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a .M. on the 29th day of July A.D., 19 96

COUNTY RECORDER Charles Ensign

By Sheryl A Dayton, Deputy

DOCUMENT NO. 446684

M.H.D. FORM NO. 2103

Book 92, Page 44 Misc

E 1/4 Cor SEC 18-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL E-W-S roads and uncovered a 5/8" iron 0.3' deep. Continued digging and uncovered a 3"x5' wood post on the west side of a large pointed stone. Stone was directly below 5/8" iron above. Set a 5/8" iron on the west side of the stone and set a cast iron monument at the road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 18, Township 102 N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 2-2-86 (DATE) found a NO EVIDENCE OF PLS CORNER.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 2-26-86 (DATE) placed a 5/8"ø iron on road surface.

SKETCH OF REFERENCE TIES

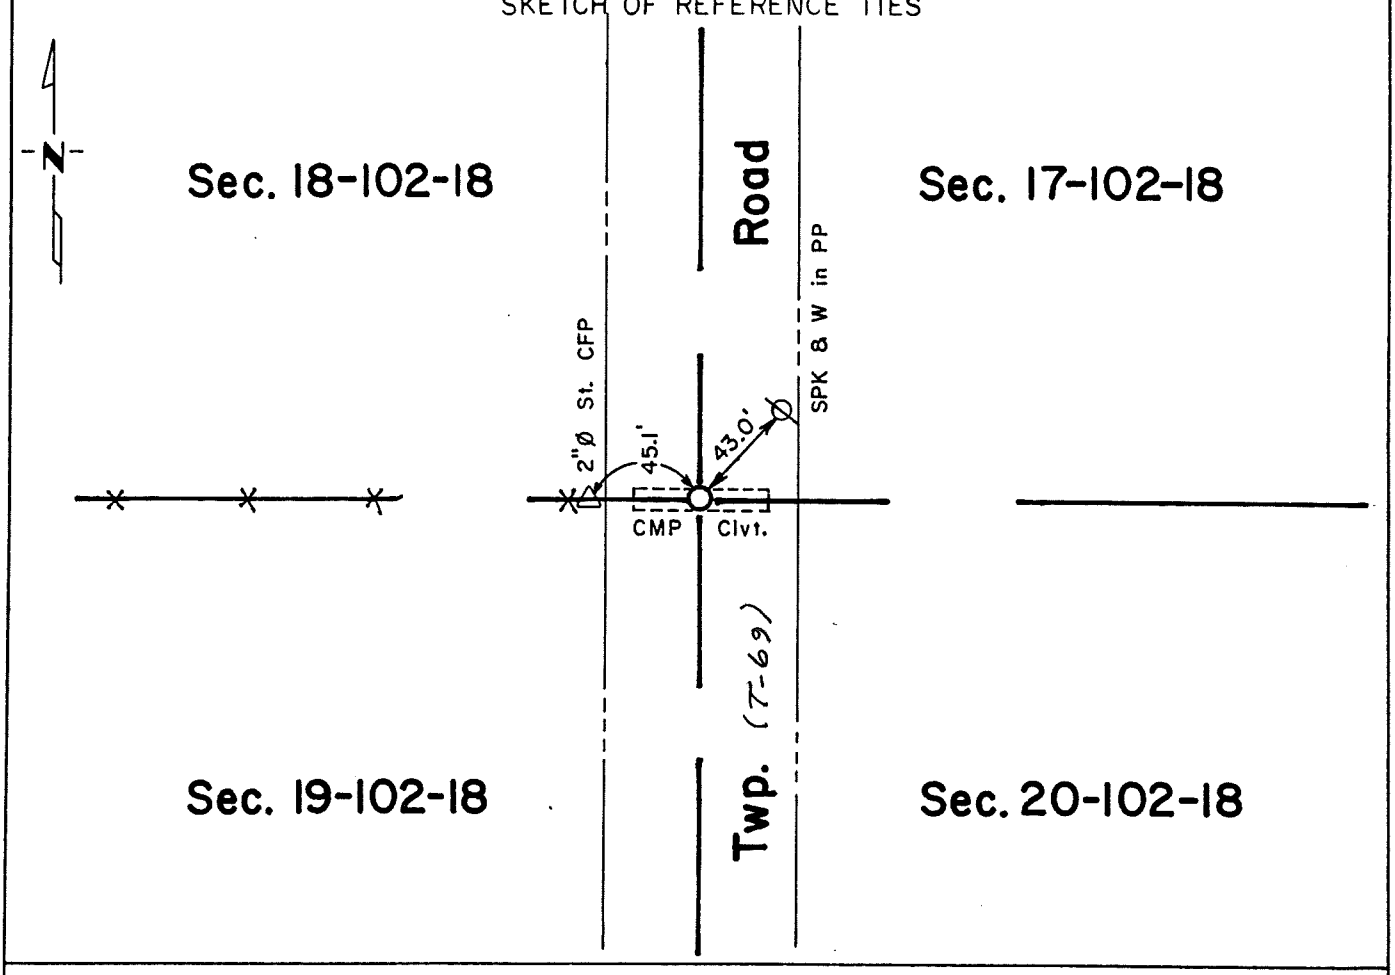

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 9-10-91 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec 18-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a post and a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

County Highway Department records indicate no record of this corner.

1986 Jones, Haugh & Smith crew found a large CMP culvert had been laid across north-south township road in line with fence west which would have destroyed original public land survey corner. Therefore the road grade was split and a 5/8" diameter iron was placed in line with fence west.

Corner placed fits existing occupation and road centerline and is accepted as best evidence of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

"A"

Form 349 CHAPTER 359 LAWS ON 1921

(Austin Twp.)

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Corner to Sec. 23, 24, 25, 26 T. 102 N. R. 18 W.

TIC BOOK P. 86

State of Minnesota }
County of Mower } ss.

I hereby certify that on the 25th day of May 19 29

I found the Section Corner referred to above

which was evidenced by Iron bolt


and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of Concrete monument 6 x 6 x 24 inches with steel rod in center.

I further certify that I established two

reference or witness monuments consisting of crosses chiseled in concrete bridge abutment

which reference or witness monuments are located in the manner following:

Diagram of reference points shown below.

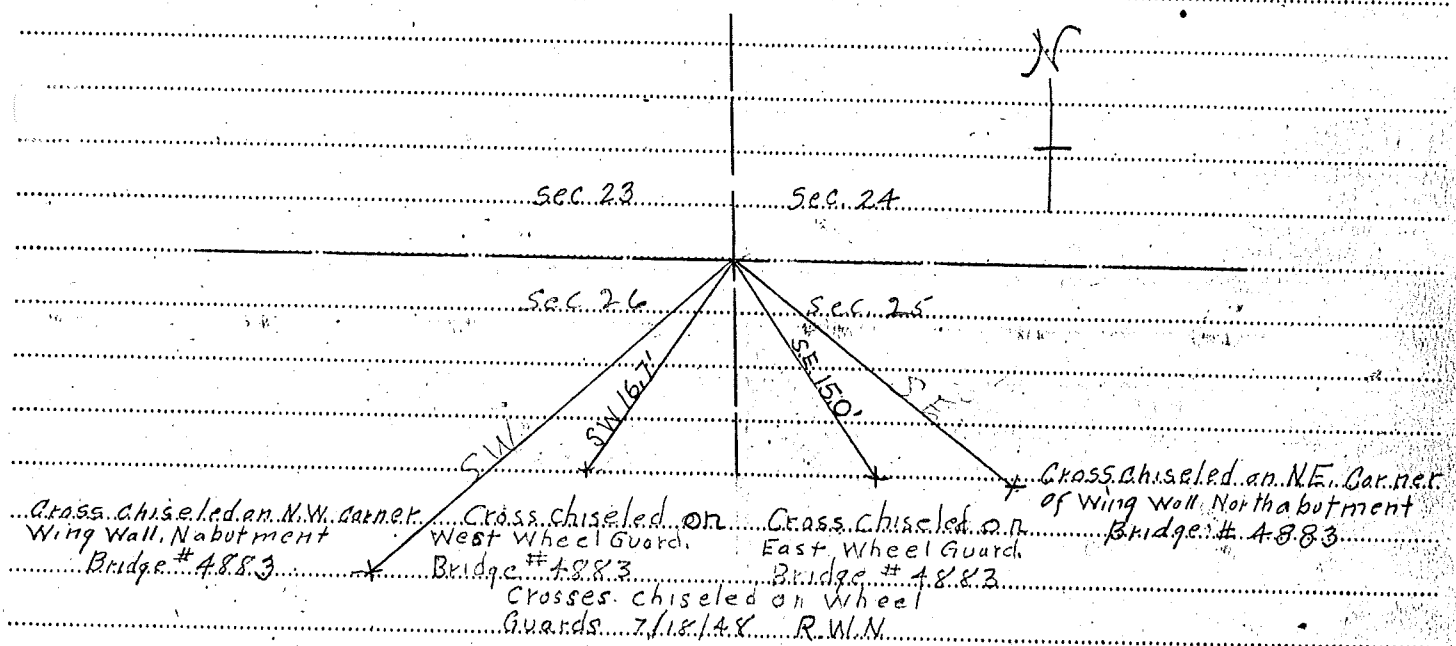

Dated at Austin Minn., this 29th day of December 19 29

Resident Engineer

OFFICE OF REGISTER OF DEEDS }
County of ..... } ss.

I hereby certify that the within instrument was filed in this office for record on the

day of ..... A. D. 19 ..... at ..... o'clock ..... M.

Register of Deeds

By ..... Deputy

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 19, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/27/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/27/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

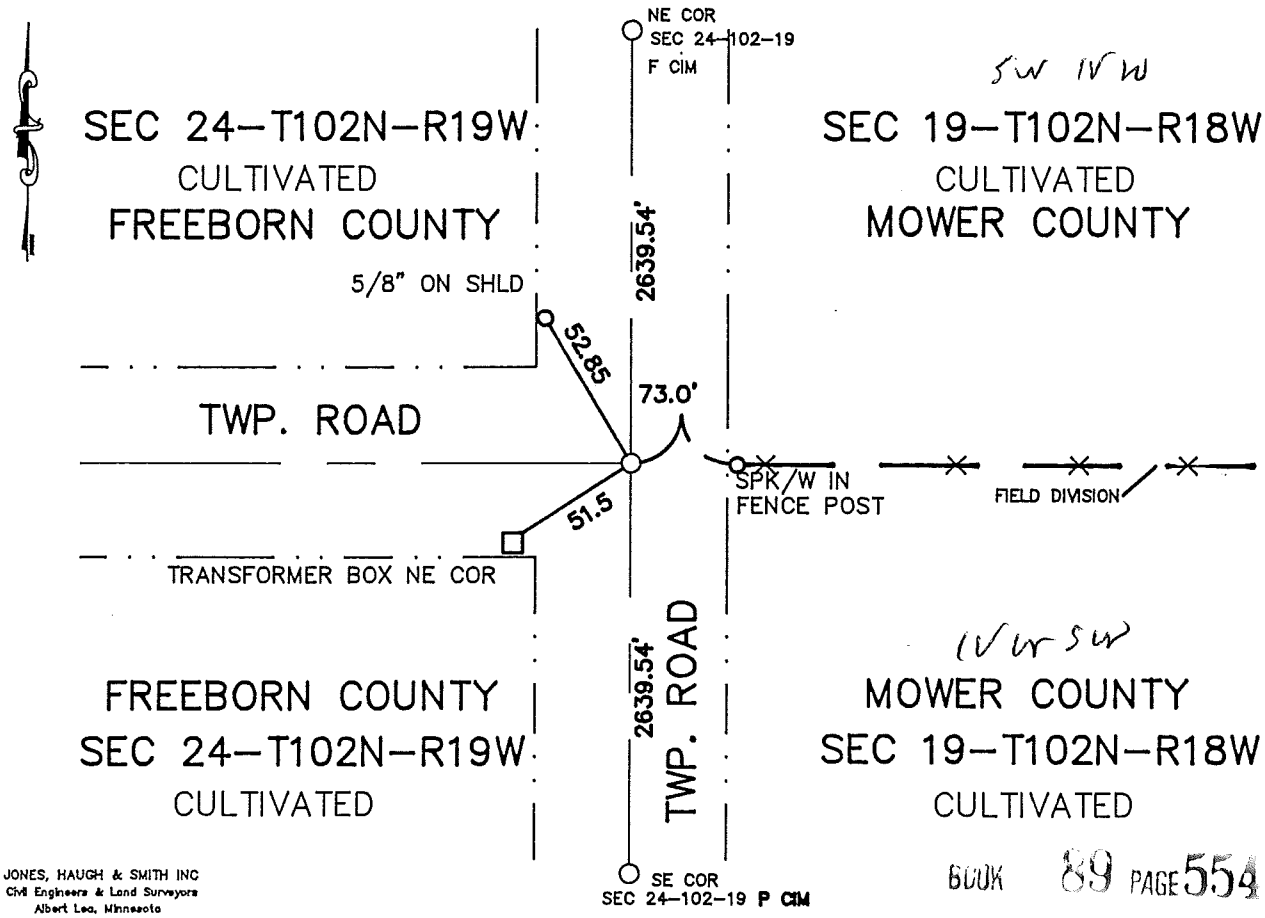

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 89 PAGE 554

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-27-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 2 day of Jan A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 441689

M.H.D. FORM NO. 2105

Book 89 Misc Page 554

W¼ cor Sec 19-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Freeborn County Highway Dept.
Freeborn County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Freeborn County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and W, in line with field division East. No evidence was found of the original PLS corner. Placed a cast iron monument at the CL of township road N-S and township road West on a straight line between the NE and SE corners of section 24. This position is also the midpoint of the east line of section 24.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

B

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Corner to Sec. 25, 26, 35, 36 T. 102 N. R. 18 W.


Page 86

State of Minnesota } ss.
County of Mower }

I hereby certify that on 30th day of May 19 29
I found the Section Corner referred to above
which was evidenced by Iron stake
and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of Concrete monument 6 x 6 x 24 inches with steel rod in center.

I further certify that I established two
reference or witness monuments consisting of 12 inch oak and 24 inch willow trees
which reference or witness monuments are located in the manner following:

Diagram of reference points shown below.

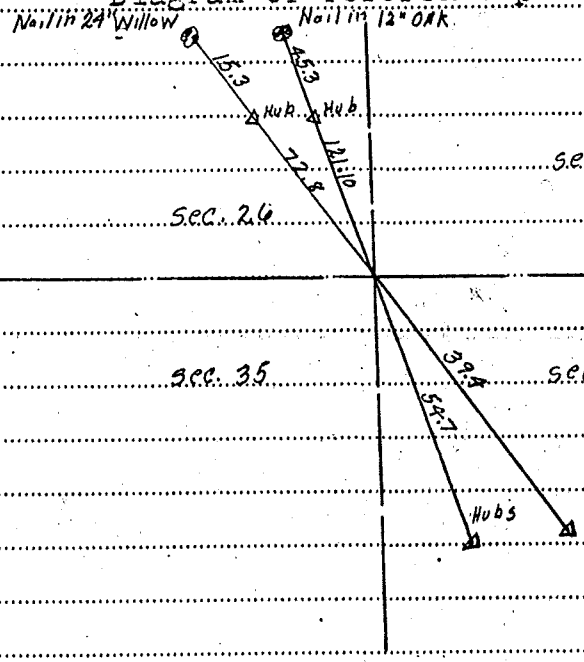

Dated at Austin Minn., this 29th day of December 19 29.

Resident Engineer

OFFICE OF REGISTER OF DEEDS } ss.
County of }

I hereby certify that the within instrument was filed in this office for record on the
A. D. 19 at o'clock M.

Register of Deeds

By Deputy

B

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 22, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/18/1997 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/18/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

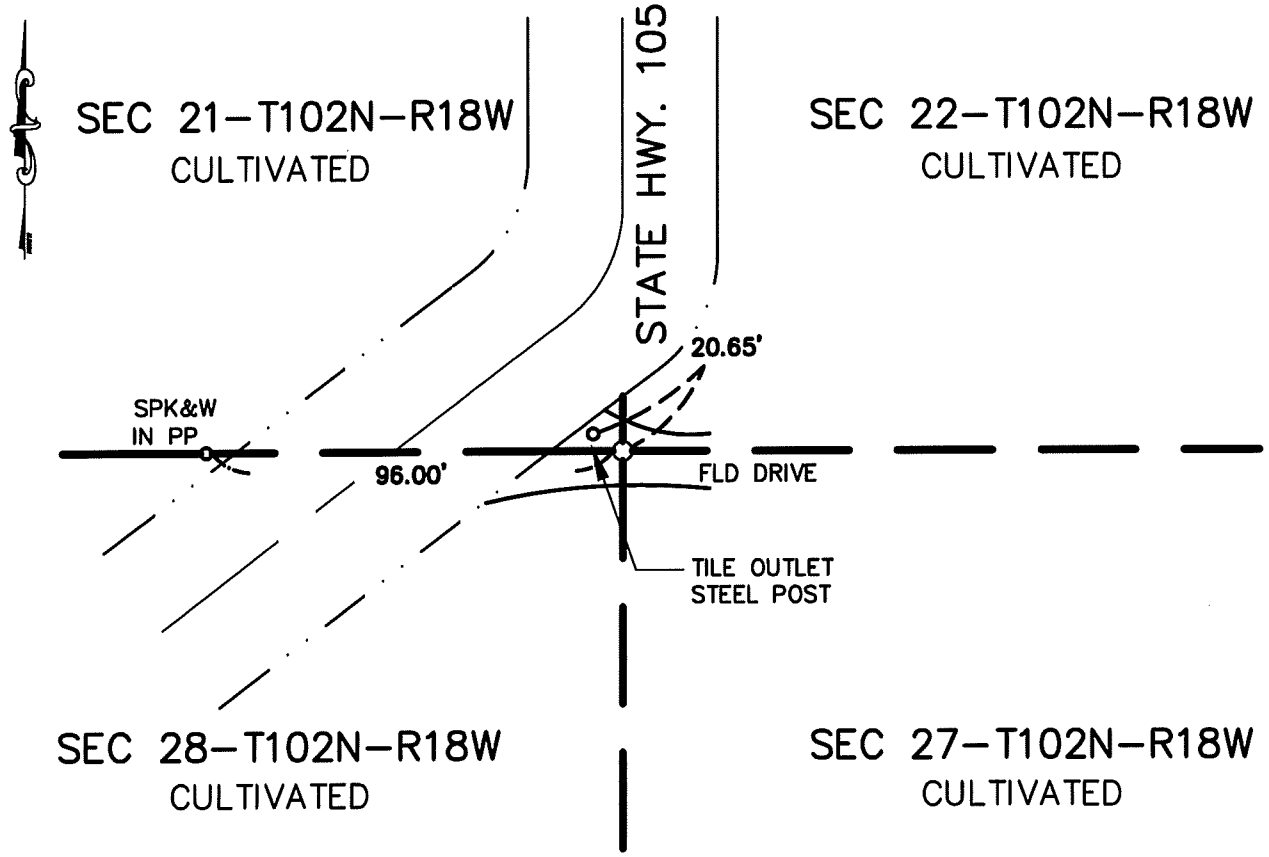

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-5-00

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SW Cor SEC 22-102-18

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County records show an iron pipe at a distance of 5282.10' from the NW corner to the SW corner of section 22.

1975 Jones Haugh and Smith crew located 3/4" pipe in line with the centerline of CSAH No. 105 north and in line with line fence E-W.

1986 Jones Haugh and Smith crew located a 1" pipe at the centerline of CSAH No. 105 north and in line with line fence E-W in center of field division.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a 1" pipe at the centerline of field entrance and centerline of CSAH No. 105 north. Replaced with 5/8" iron with cast iron monument over.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 22, Township 102N Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-11-90 found 5/8" REBAR AND CAP #13807 REMOVED DURING EXCAVATION

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed COUNTY CAP ON 3/4" REBAR

SKETCH OF REFERENCE TIES

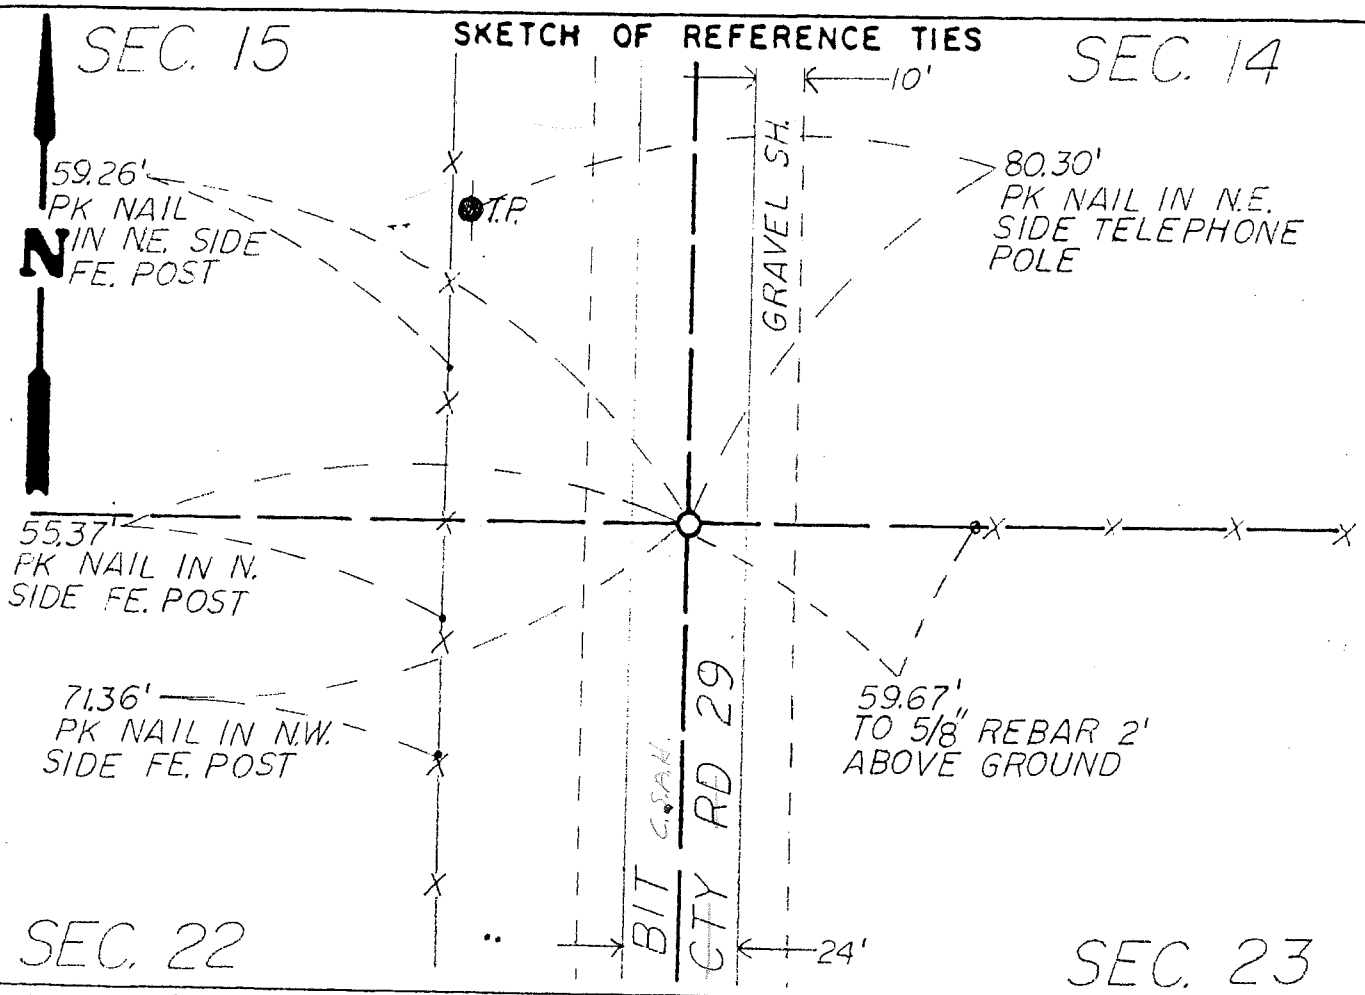

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the _____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHEAST CORNER SECTION 22, TOWNSHIP 102 NORTH, RANGE 18 WEST, 5TH P.M.

July, 1854 — William Anderson, Deputy Surveyor set post during the original Public Land Survey.

1914 — County Engineer's plan - Profile & Cross-Section sheet for State Road #5 shows a stone inplace.

1969 — County Engineers Plans show a concrete Monument inplace.

1989 — County Engineers Plans show that a 3/4" diameter iron Rod was set at the corner. This area was core cut during road construction and evidence of the corner was lost.

Nov., 1989 — County Engineers office set PK and recorded Post Construction Ties

1989 — Jones Haugh & Smith Inc. placed a rebar with cap at the corner location based on their survey records.

June, 1990 — Zenk Read Trygstad & Associates excavated with a backhoe a trench 7 feet below surface and 1 foot West to 5 feet East of centerline from 6 feet South to 6 feet North of centerline. A 3/4" Diameter rod was found at the surface and nothing more was recovered during the excavation.

An analysis of the record data indicates the corner was obliterated by road construction in 1989 and was replaced from survey records in 1989. The position of the rod is accepted as marking the location of the original Public Land Survey Corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 22, Township 102 N, Range 18 W, 3 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-11-90 found 5/8" REROD

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed 3/4" REROD AND COUNTY CAP

SKETCH OF REFERENCE TIES

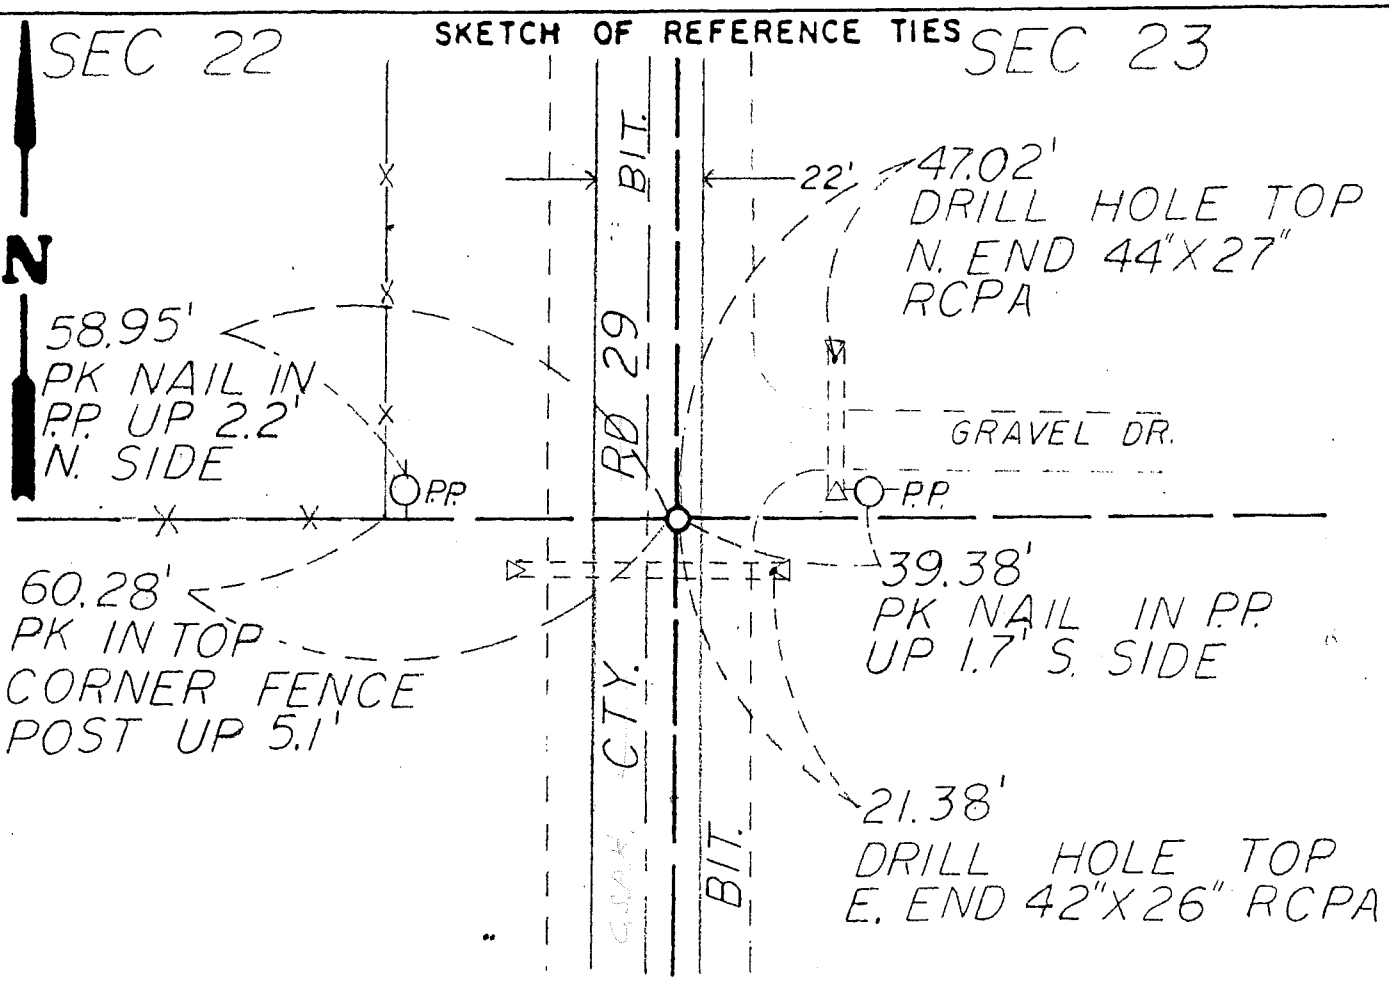

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 22, TOWNSHIP 102 NORTH, RANGE 18 WEST, 5TH P.M.

July, 1854 — William Anderson, Deputy Surveyor, set a post at the corner during the original Public Land Survey.

1962 — County Engineers Road Plans shows a 1/2" diameter iron rod inplace, and later set a PK on the new Road surface after construction.

Oct., 1983 — A survey crew for Hormel Inc. found a 5/8" rod in the Road during a survey for an Experimental Farm.

1989 — Mower County Engineer reconstructed the road and sub cut this area 2 feet. All evidence of the corner in this area was lost.

1989 — Jones Haugh & Smith Inc. placed a rebar and cap at the corner based on the information from their survey records.

June 1990 — Zenk Read Trygstad & Associates excavated with a backhoe 4.5 feet deep 2 feet East to 2 feet West of centerline by 4 feet South to 8 feet North of the fence line East. A stone was found 3.3 feet deep with pieces of a concrete monument on the Southwest side. A 1/2" pipe and cap #11009 was set on the Northwest side of the stone.

An analysis of the record data gives no indication of the origin of the stone. Similar stones have been found throughout the County at other Corner locations. The stone agrees with the occupation lines and is accepted as the location of the original Public Land Survey Corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 25, Township 102N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-14-91 (DATE) found a 5/8"Ø iron capped (13807)

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-14-91 (DATE) placed a cast iron monument over iron found.

SKETCH OF REFERENCE TIES

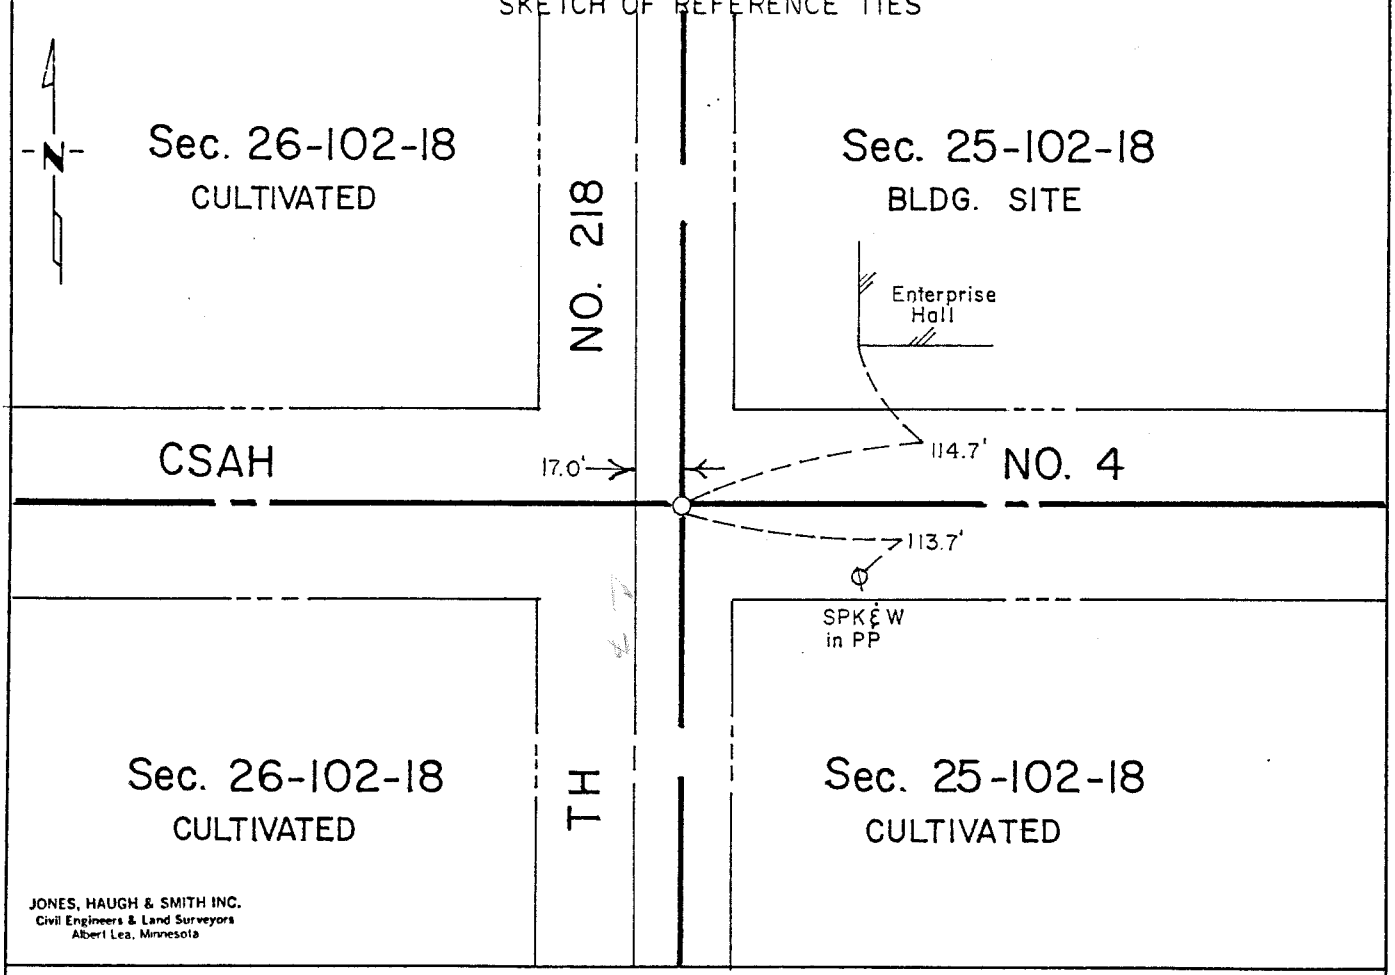

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE 5-16-91 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 25-102-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

12" Burr Oak S 73° E 130 links (85.80 ft)
6" Burr Oak S 82 1/2° W 150 links (99.0 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Survey

1972 Private notes from Jones, Haugh & Smith tie book shows the corner 17.1 feet east of the centerline of U.S. Highway 218. The following notes were taken:

MHD Sta. 281+99.9
Spike and W 36" Elm NE 63.85'
Spike and W TP NW 66.1'

1982 Jones, Haugh and Smith Inc crew located a corner and placed a capped 5/8" diameter iron 1.45' south of old corner and 17.1' east of the centerline of Highway 218 during the survey in SE 1/4 SE 1/4 Section 26-102-18 using monumentation and information from TH 218 R/W map.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, for bituminous overlay project SAP 50-604-18, placed a cast iron monument over 5/8" diameter iron capped 13807 placed in 1982 on centerline of E-W road and 17.1' east of the N-S road centerline.

The monument agrees with past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 27, Township 102N Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-11-90 found NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed 5/8" ROD AND COUNTY CAP

SKETCH OF REFERENCE TIES

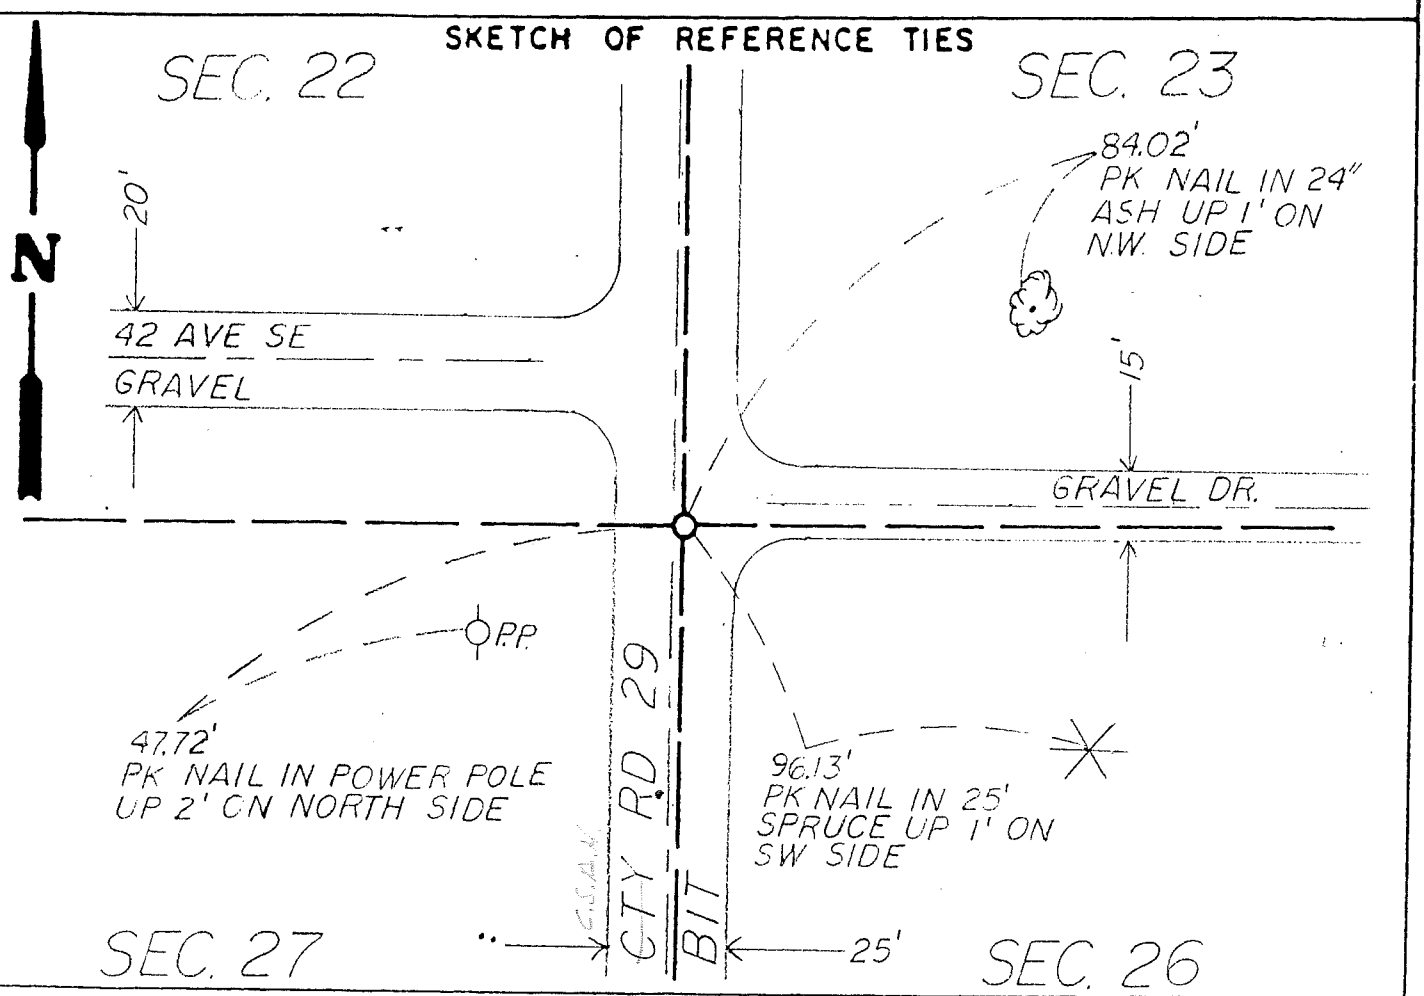

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
1-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHEAST CORNER SECTION 27, TOWNSHIP 102 NORTH, RANGE 18 WEST, 5TH P.M.

July, 1854 — William Anderson, Deputy Surveyor, set a post at the corner during the original Public Land Survey.

Oct., 1983 — Hormel Inc. Survey Crew found a 3/4" diameter rod during a survey for an Experimental Farm.

1989 — County Engineers Plans shows a PK nail inplace over the corner.

1989 — Mower County Engineer reconstructed the road in this area and subcut to 2 feet below the surface. Evidence of the corner at this depth was lost.

May 24, 1990 — A Zenk Read Trygstad & Associates crew searched the area with a magnetic locator and found nothing.

Analysis of the record data indicates the corner evidence was lost during road reconstruction. The corner was reestablished by survey from the Plats of Riverwood Estates and Riverwood Estates Second Subdivision.

The position is accepted as the location of the original Public Land Survey Corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 27, Township 102 N, Range 18 W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-2-90 found STONE 1.2 x 1.2 x 2.1 H.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed COUNTY CAP ON A 3/4" REBAR

SKETCH OF REFERENCE TIES

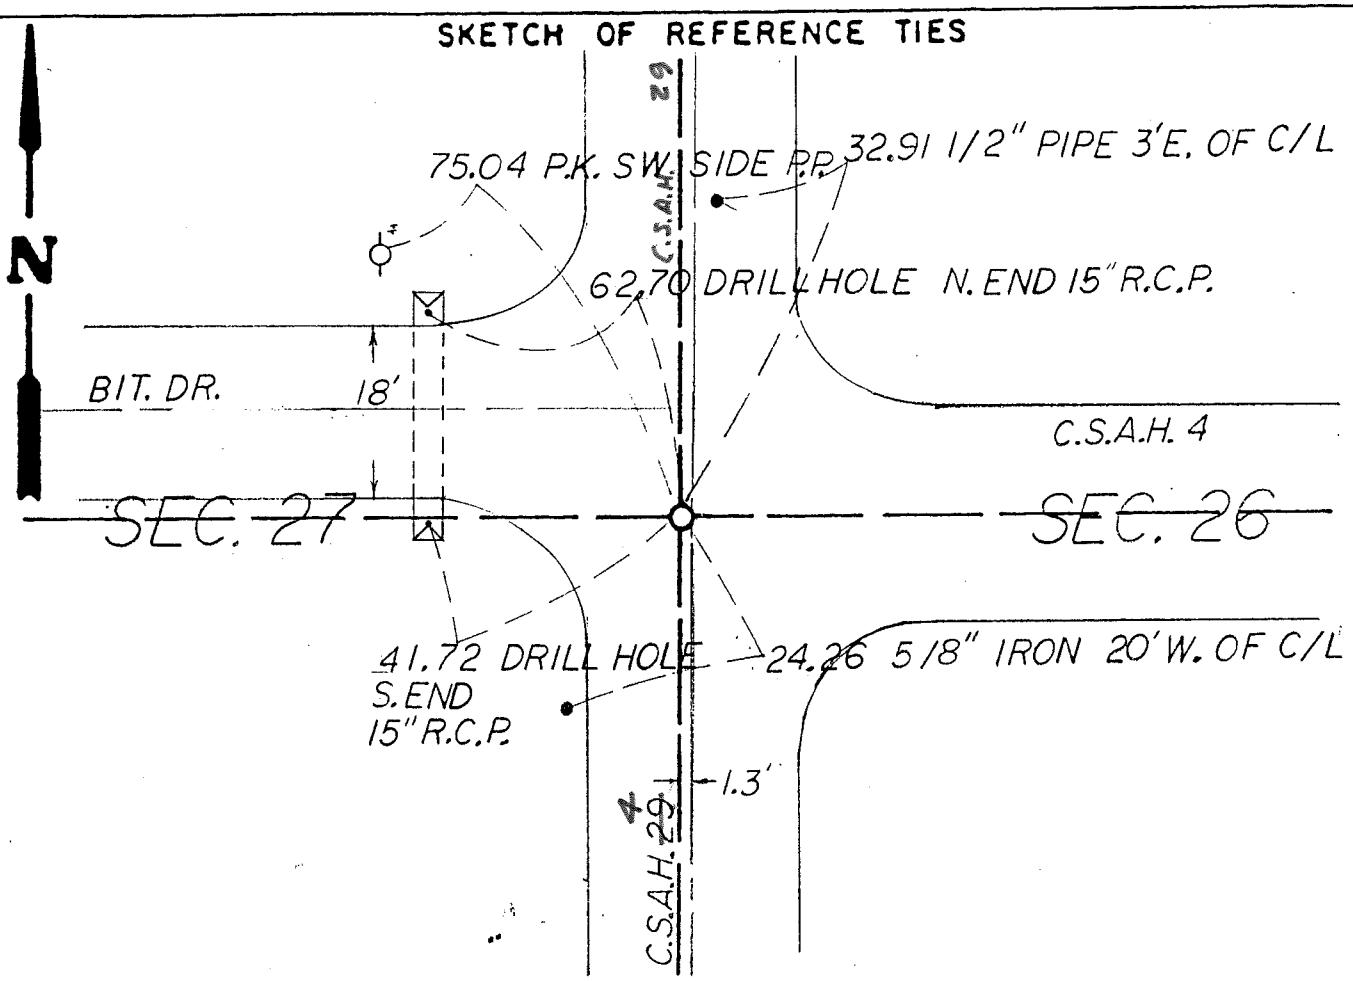

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature

7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer

☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.

Engineers / Architects / Land Surveyors / Planners

Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 27, TOWNSHIP 102 NORTH, RANGE 18 WEST, 5TH P.M.

July, 1854 — William Anderson, Deputy Surveyor, set a post at the corner during the original Public Land Survey.

1964 — Page 127 of the Mower County Surveyors Record shows a stone and 1" pipe inplace.

1989 — County Engineers Road Plans shows a PK nail inplace over the corner.

July 2, 1990 — Ronald J. Olson, RLS #11009, excavated with a backhoe a trench two feet North to three feet South of centerline of C.S.A.H. #4 and 2 feet East, four feet below surface, to three feet West, 4.5 feet below surface, of the centerline of C.S.A.H. 29 and found a 1.2'x1.2'x2.1' H stone 2.5 feet below surface and set in mottled soil. A 3/4 inch rebar was found two feet below surface driven into one inch pipe on North side of stone.

An analysis of the record data gives no indication of the origin of the stone. Stones of this size have been found and identified as replacements for many other corners throughout this county. The stone has been recognized as the corner by the County for the past 26 years and is accepted as marking the location of the original Public Land Survey Corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 27, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/16/1996 (DATE) found a 5/8" X 24" IRON OVER CONCRETE MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

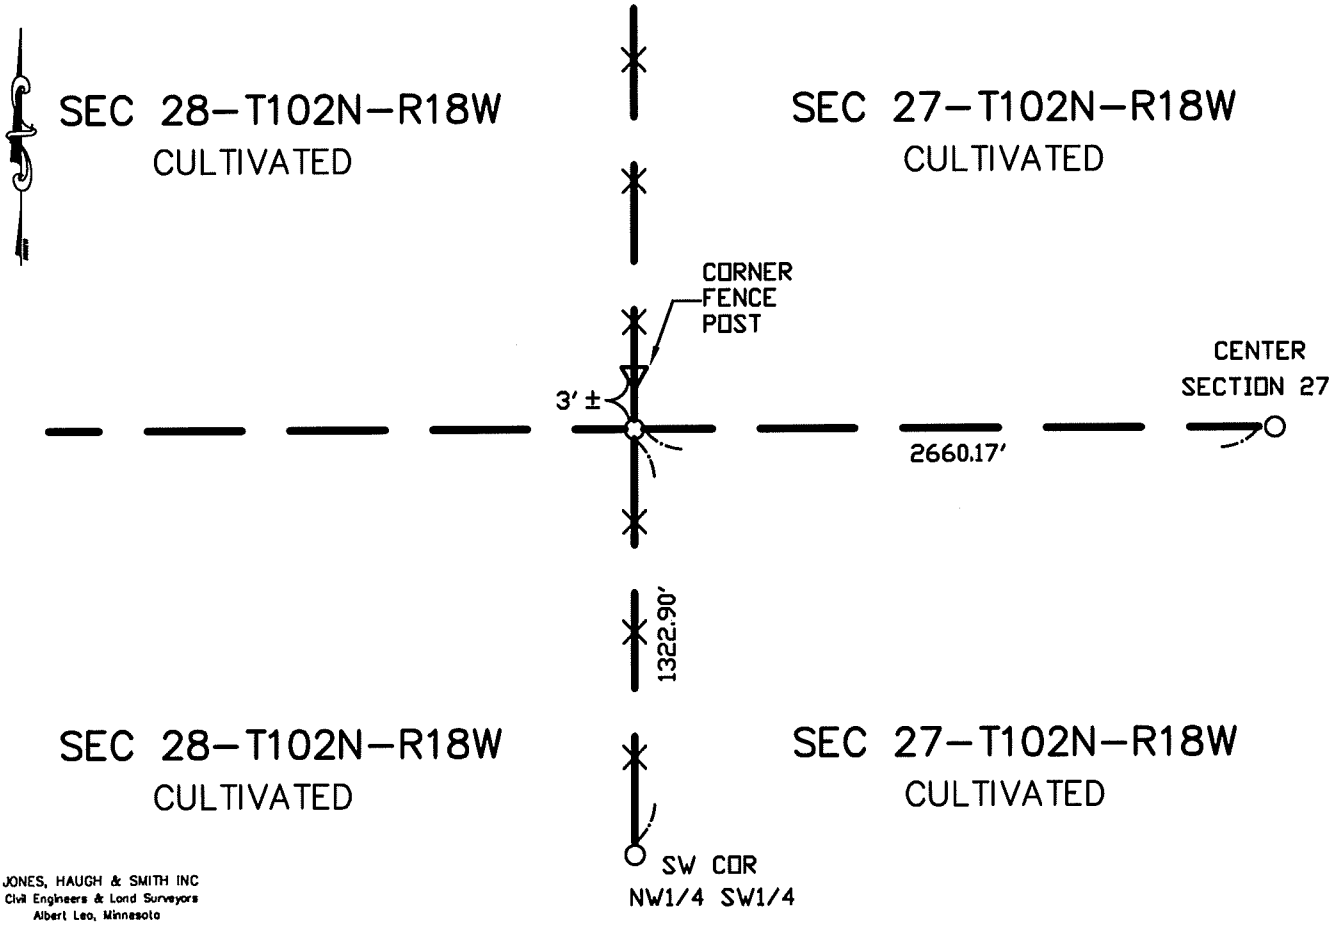

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-5-00

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Cor Sec 27-102-18

Deputy Surveyor William I. Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County records state that a concrete monument was in place, 3' south of corner fence post.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at Mower County records location and uncovered a 5/8" x 24" iron. Continued to dig and uncovered a concrete monument with an iron pin. Replaced 5/8" iron over monument as found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 28, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch 18

☐ On 12/16/1996 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

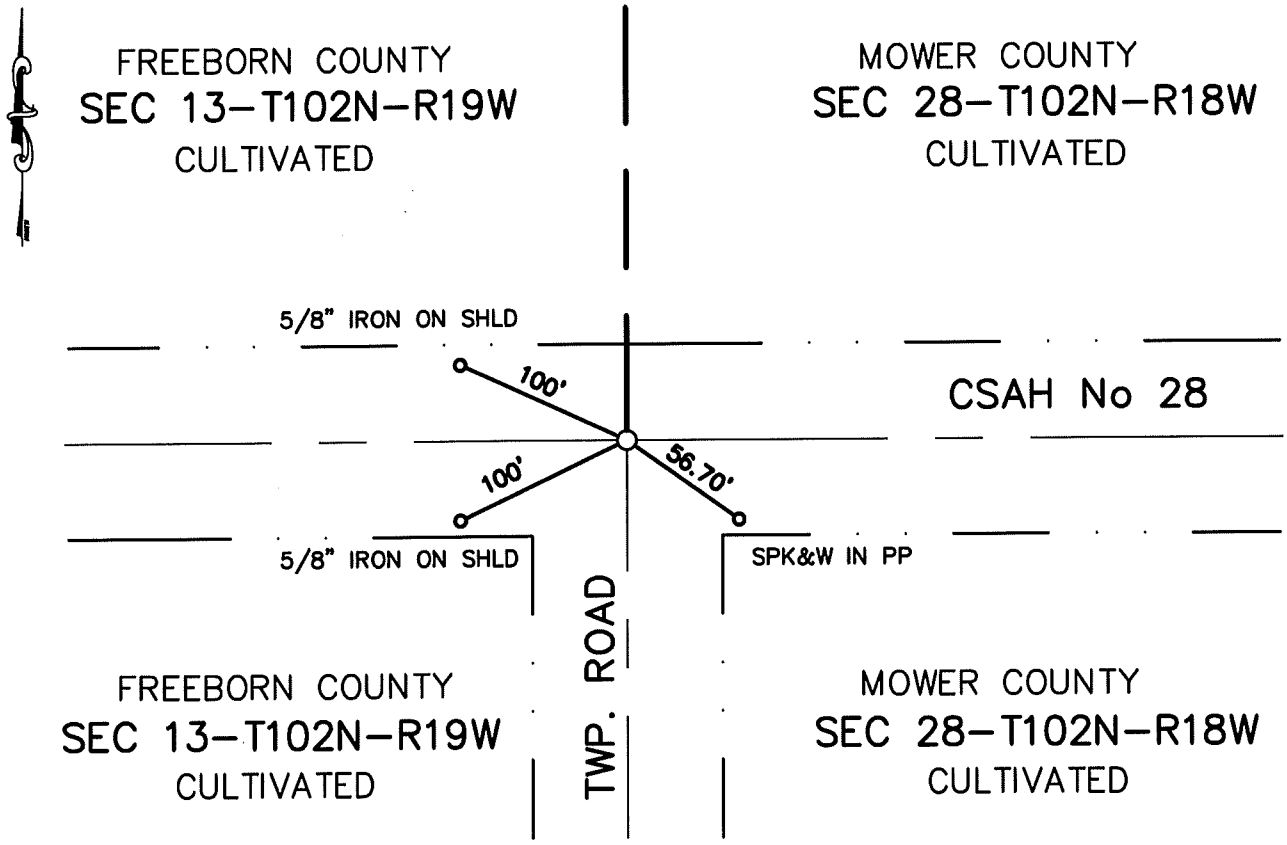

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 10-5-00
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Cor SEC 28-102-18

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the centerline of township road E-W and township road south. Uncovered a 5/8" iron. Continued digging to virgin soil and found no other evidence original PLS corner.

1997 Jones Haugh and Smith crew located 5/8" iron.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. P 49, "T"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 31, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 12-1-92 (DATE) found a 2" x 4" CIM NEXT TO A DECAYED WOOD POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12-1-92 (DATE) placed a 5/8"ø x16" IRON CAPPED RLS NO. 13807

SKETCH OF REFERENCE TIES

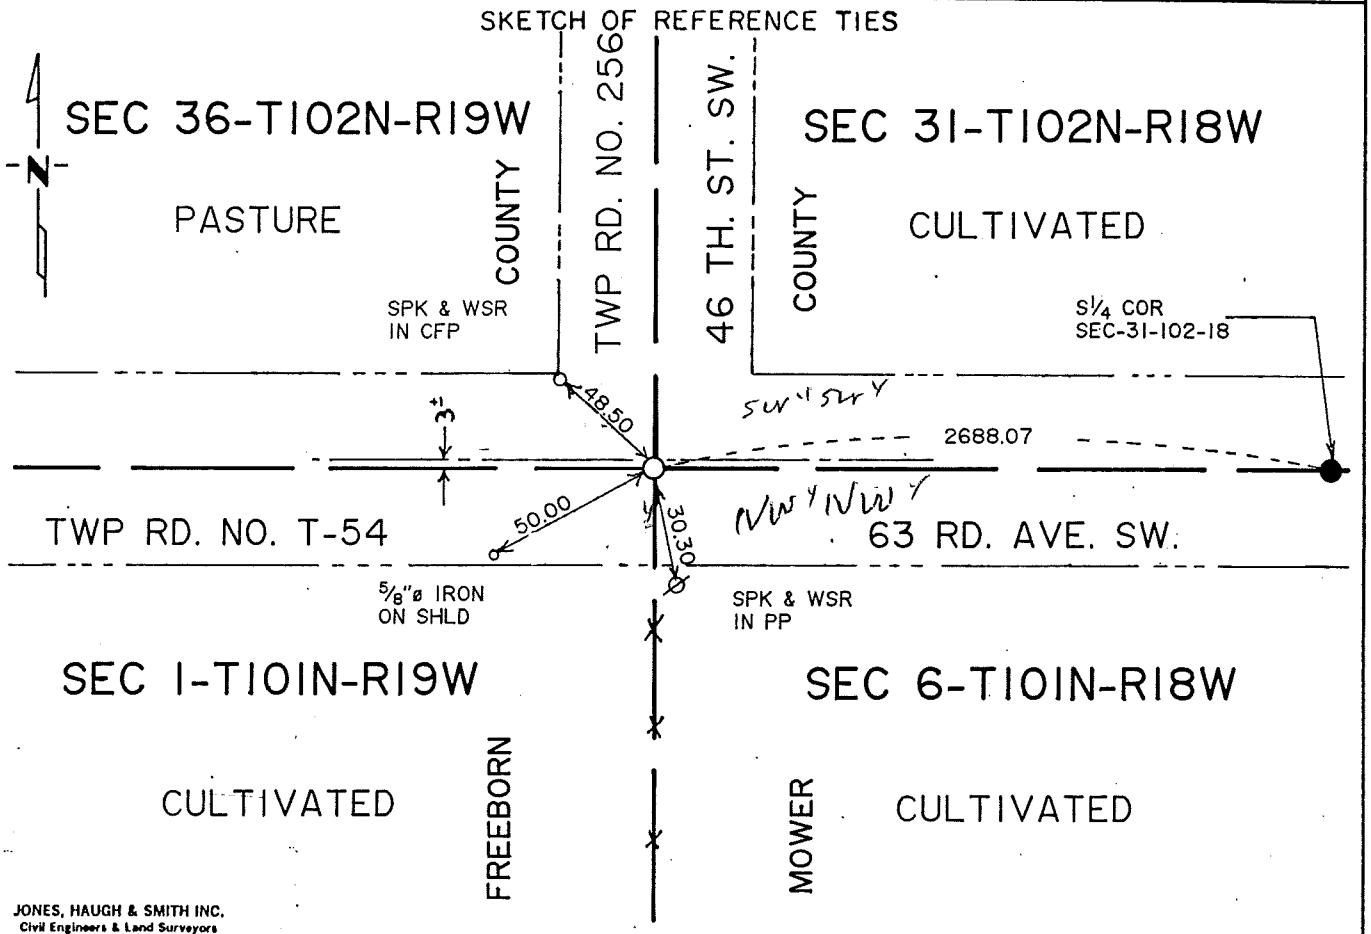

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-30-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 4 day of May A.D., 1993

COUNTY RECORDER Edwardo Enga

By Marlene Martin, Deputy

DOCUMENT NO. 420179

Bk 79 Mtg Pg. 324

BOOK 69 PAGE 324

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec. 31-102-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Survey Office in 1853. The government notes show charcoal was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

Book R indicates that F.H. Fisk, Freeborn County Surveyor, found an iron stake and popular tree at the southeast corner Section 1-101-19.

1940 Book 1 indicates that John Nielsen, Freeborn County Surveyor, dug and found a cast monument in south wheel track of east-west road and in line with fence south. The following ties were taken:
Face of power pole 29.6' S
Face of corner post 44.2' NE

1992 Jones, Haugh & Smith crew under the direction of John H. Schulte IV, RLS #13807, Freeborn County Surveyor, dug with a jackhammer at the centerline centerline intersection of township roads and found a 2"x4" cast iron monument 3.5 feet deep and at the north side of decayed wood post. Therefore we accepted 2"x4" cast iron monument as the perpetuation of the original public land survey corner and set a 5/8" diameter x 16" iron, capped RLS 13807, near road surface and above monuments found.

The monument set fits occupation and road centerlines within the section and is accepted as best evidence of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 79 PAGE 325

Jones & Haugh

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 31, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-15-91 (DATE) found a cast iron monument

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

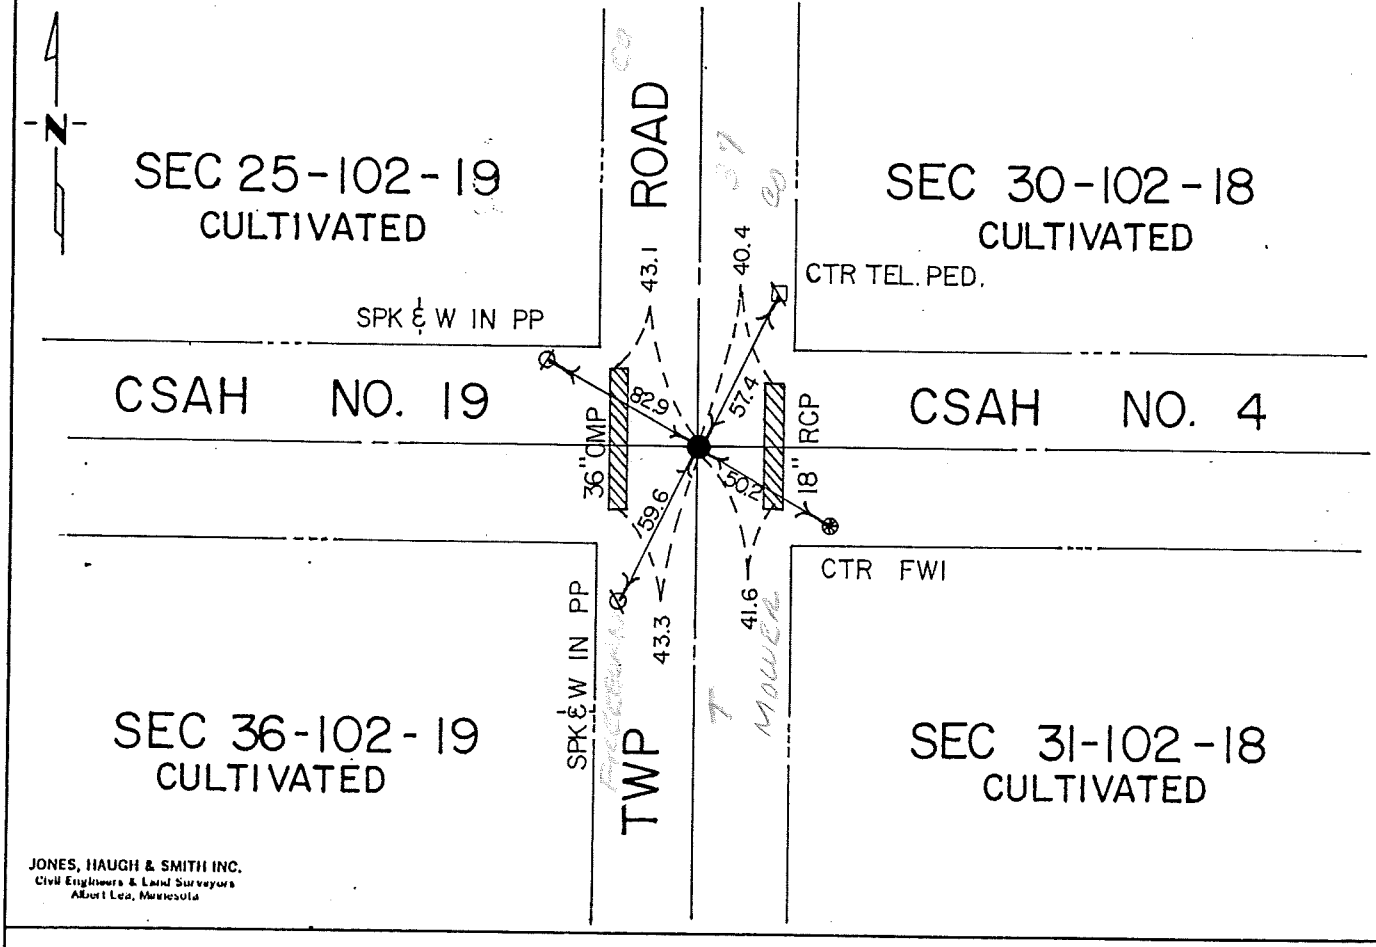

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-16-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 31-102-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show corner was marked with a wood post and charred stake and a trench with a mound of earth. Cherry and locust seeds were planted northeast and southwest of corner.

The following were contacted for section corner information:
Mower County Engg Dept Freeborn County Engg Dept

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1930 Mower County Grading Plans show a monument found at Sta 0+00 and the following ties were taken:
40.0' NW to mail box post
46.0' SW to east gate post
39.3' NE to telephone post
57.7' SW to west gate post

1938 John Nielsen, the Freeborn County Survey RLS 1427, dug in center of intersection of roads, and found an oak stake in center of clay tile.

1953 Recorded in Book 'A' in the office of the Mower County Engineer a concrete monument was found over a 1/2" diameter iron pipe and the following ties were taken:
45.4' NW to a 12" CFP
56.0' SW to power pole
50.0' SW to center tile inlet
39.1' SE to center tile inlet
106.4' ESE to telephone pole

1968 Larry Nelsen, Freeborn County employee, found a wood stake at this corner. Placed a pipe over wood stake found. Took three ties.

1988 Jones, Haugh & Smith crew under the direction of John Schulte, Freeborn County Surveyor RLS 13807, dug on the centerline of north-south-east-west road intersection, and uncovered 5/8" diameter iron two feet deep, and a 1/2" diameter iron and wood stakes cast in concrete inside a clay tile 3 1/2 feet deep.

Found no further evidence of the public land survey. Accepted wood stakes in clay tile found as best evidence of a perpetuation of the original public land survey corner and set cast iron monument on road surface over wood stakes found.

1991 Jones, Haugh & Smith Inc crew uncovered cast iron monument.

For electronic survey data contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 31, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10/15/1991 (DATE) found a NO EVIDENCE OF P.L.S. CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/15/1991 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

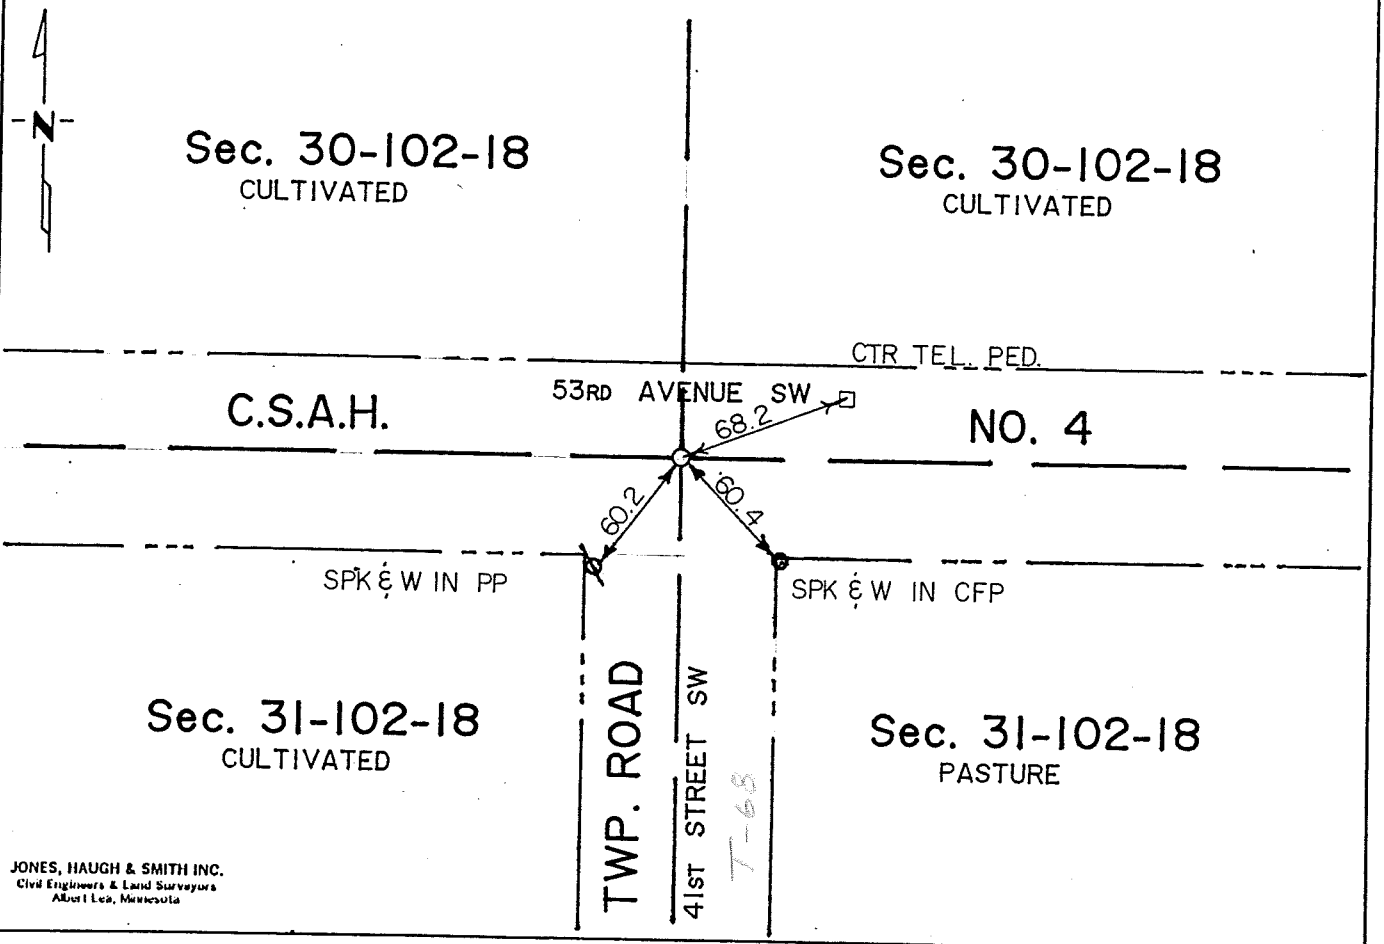

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-16-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 31-102-18

This corner was originally established by Deputy Surveyor Wm. I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, dug with the County backhoe on centerline centerline and found no evidence of a perpetuation of the original public land survey corner. Accepted centerline centerline as best evidence and set cast iron monument on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 31, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/15/1991 (DATE) found a 6" CLAY TILE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10/15/1991 (DATE) placed a 5/8"ø x 16" IN TILE WITH CAST IRON MONUMENT OVER 5/8"ø IRON

SKETCH OF REFERENCE TIES

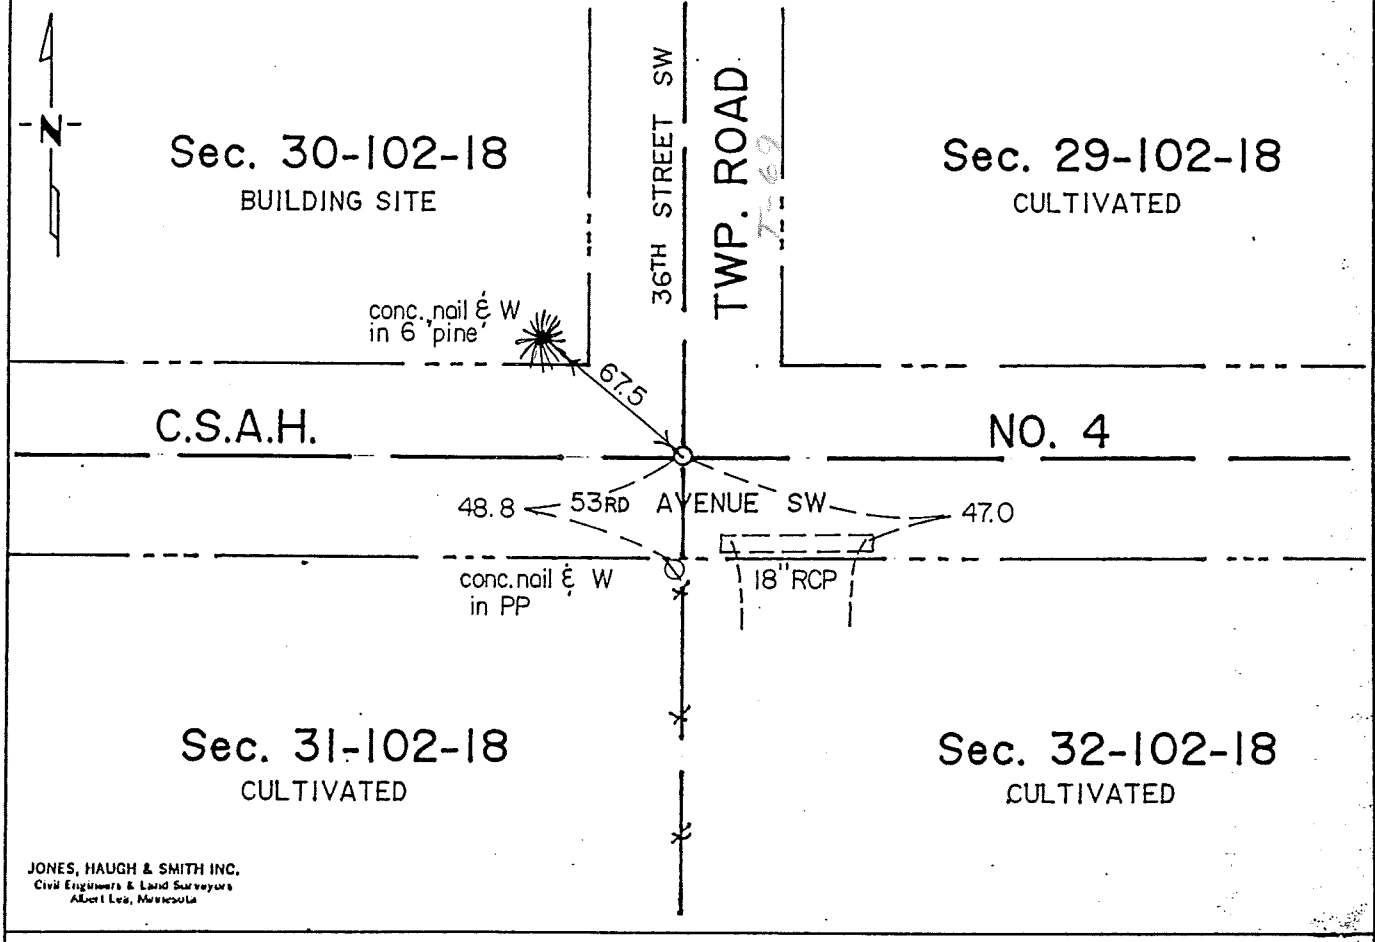

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-16-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec 31-102-18

This corner was originally established by Deputy Surveyor Wm. I Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plans shows a monument inplace and the following ties were taken:
31.0' South the Maple Tree
32.5' NW to CFP
38.2' NE to CFP

1953 Recorded in Book "A" in the Office of the County Engineer a concrete monument is shown and the following ties were taken:
95.5' NNW to 18" blazed Spruce
58.4' NE to telephone pole
99.1' SSE to third steel fence post
50.7' SSW to power pole

1982 County Grading Plan shows a cast iron monument inplace over concrete monument.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, dug with the County backhoe on centerline centerline of north-east-west roads for bituminous overlay project and uncovered a 6" concrete monument cast in a clay tile 3 feet below road surface in virgin soil. Found no evidence of cast iron monument set by County in 1982 Grading Project. Accepted concrete monument which agrees with past records and set a cast iron monument over monument on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. p 49, "U"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 31, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 2-13-80 (DATE) found a 2" x 3" BAR THREE FEET DEEP PLACED A 5/8"ø IRON OVER MONUMENT FOUND

■ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 12-1-92 (DATE) placed a LEFT 5/8"ø IRON AS FOUND

SKETCH OF REFERENCE TIES

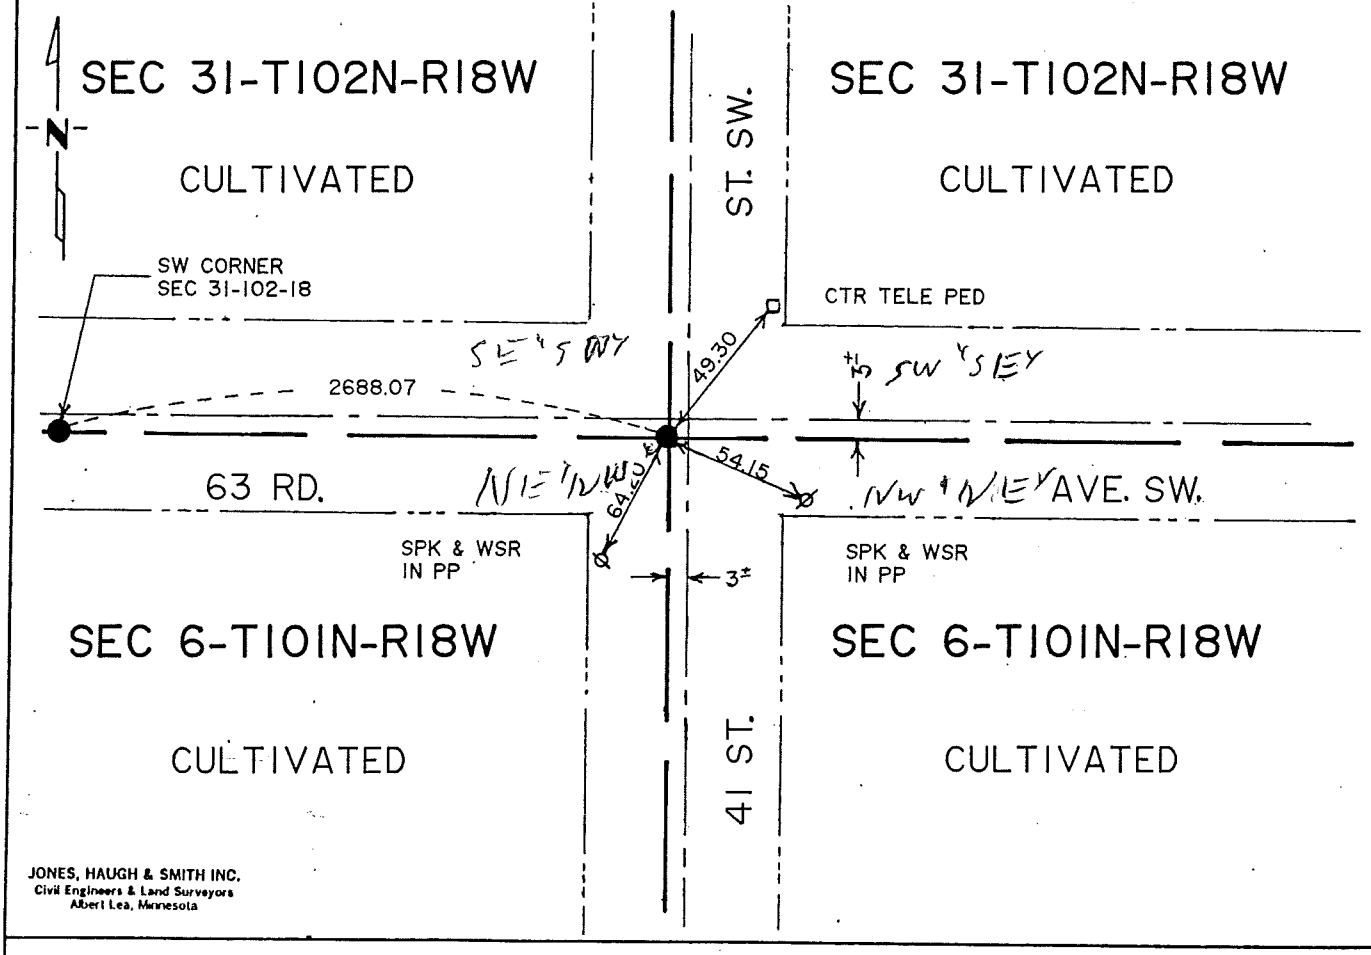

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-30-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 4 day of May A.D., 1993

COUNTY RECORDER Edward E. Enger

By Marlene Manton, Deputy

DOCUMENT NO. 420480

Bk mg misc Pg 326

M.H.D. FORM NO. 2105

BOOK 15 PAGE 326

STATEMENT OF EVIDENCE

S 1/4 corner Section 31-102-18

This corner was originally established by Deputy Surveyor Wm. I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1980 Jones, Haugh & Smith Inc crew dug a 3 foot deep hole and found a 2"x3" bar which lies in the west wheel track and south wheel track. Placed a 5/8" diameter iron near road surface above 2"x3" bar found.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, found 5/8" diameter iron set in 1980 which was placed above 2"x3" bar that was located at a depth of three feet. Accepted 2"x3" bar found in 1980 as best evidence of the location of the original public land survey corner. Left 5/8" diameter iron found in its original location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 327

Jones Haugh

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 32, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/15/1991 (DATE) found a 1"ø x 16" IRON

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☒ On 10/15/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

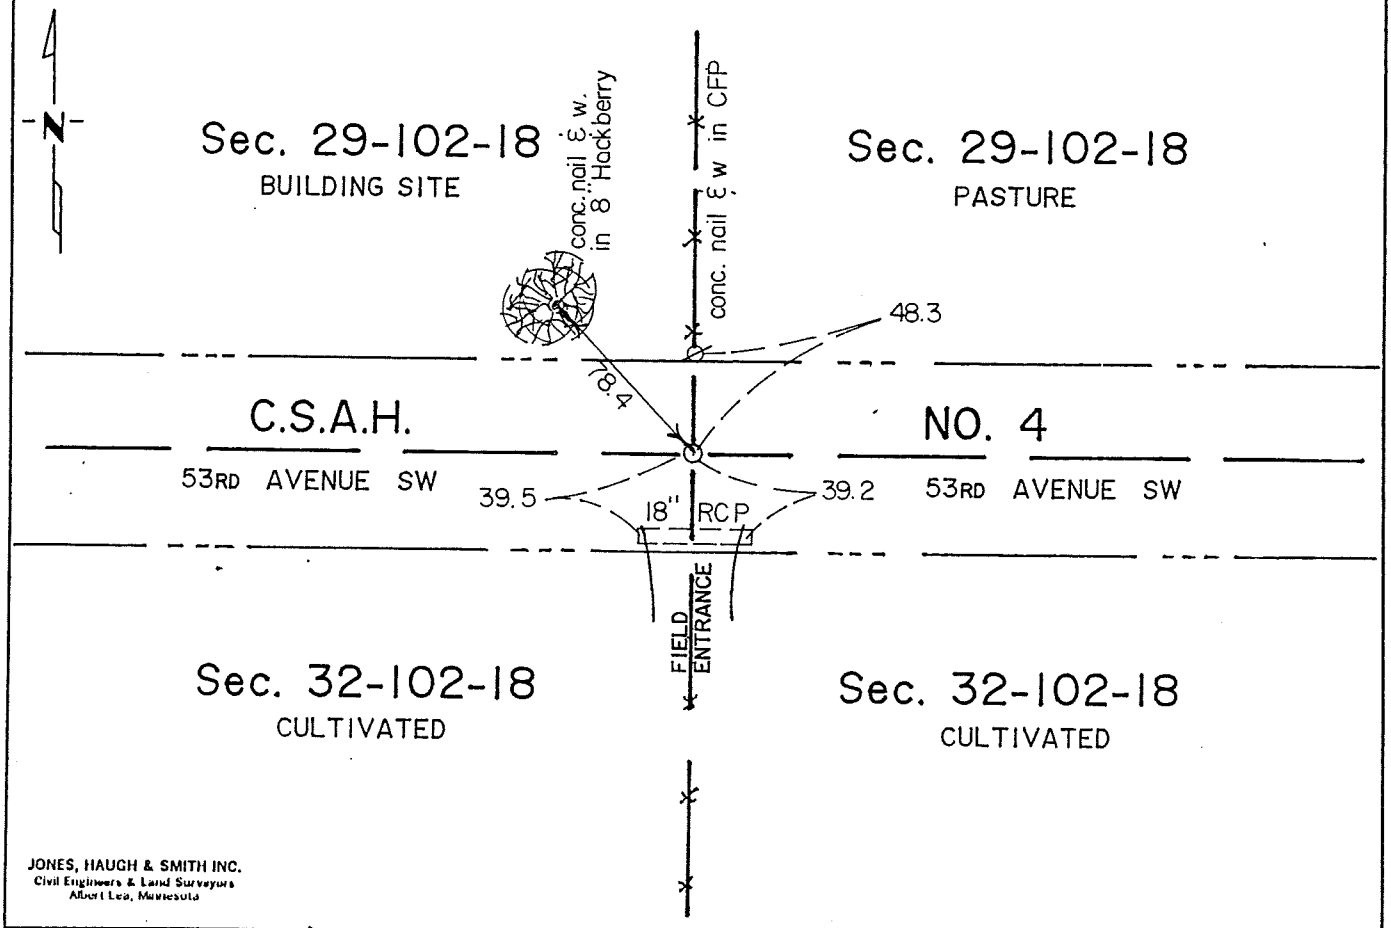

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-16-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 32-102-18

This corner was originally established by Deputy Surveyor Wm. I Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, dug with the County backhoe on centerline of east-west road in line with fence north-south and uncovered a 1" diameter x 16" long iron one foot below road surface. Continued digging to a depth of 5 feet deep and found no further evidence of public land survey corner or a perpetuation thereof. Accepted 1" diameter iron as best evidence and set cast iron monument at same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 32, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/15/1991 (DATE) found a CAST IRON MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

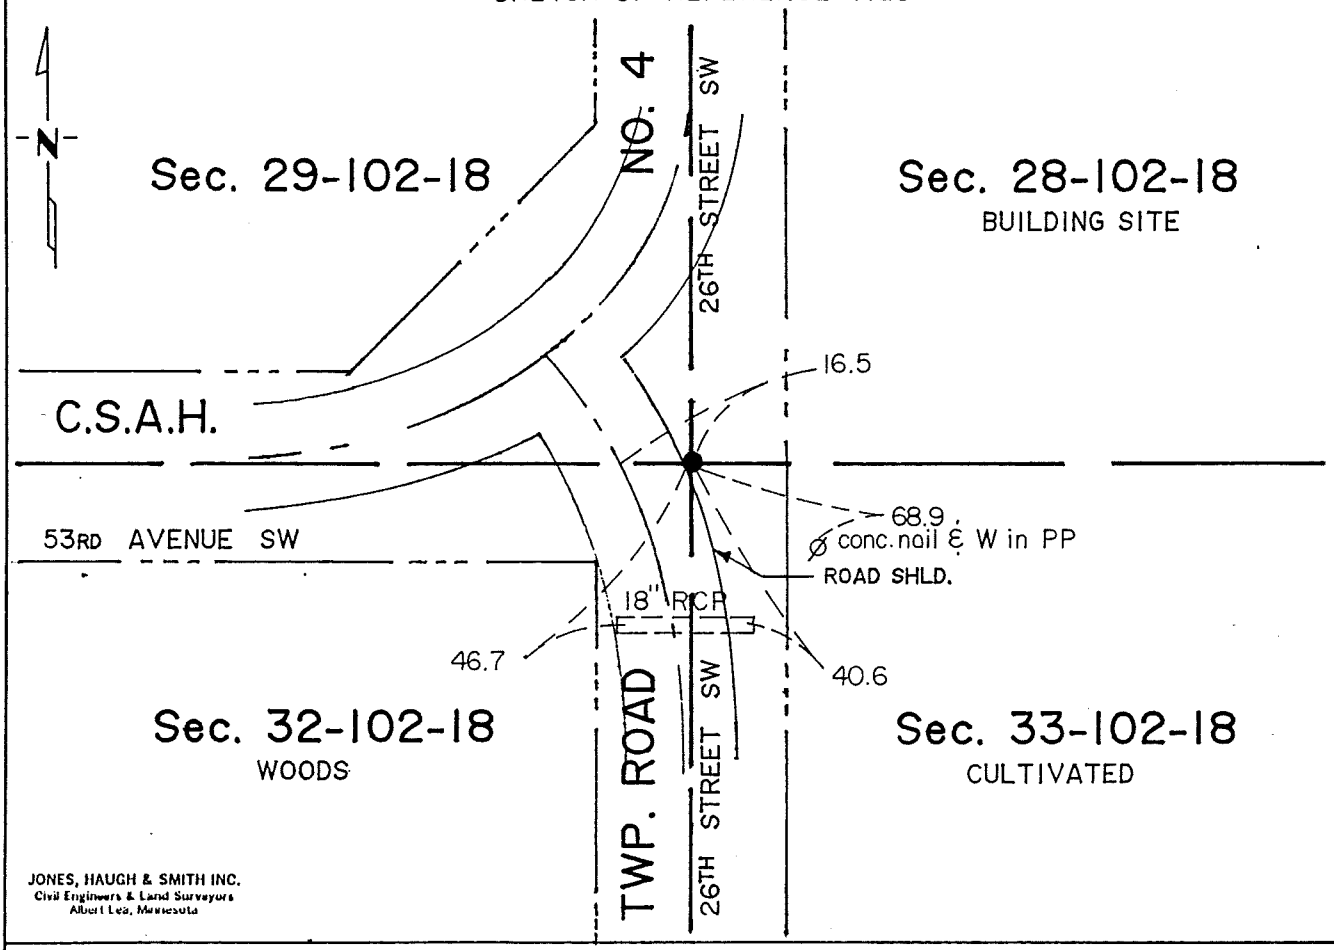

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-16-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec 32-102-18

This corner was originally established by Deputy Surveyor Wm. I Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Dept	Zenk Engineering
Mower County Recorder	Tucker Land Surveying

1930 Mower County Grading Plans shows a monument inplace and the following ties were taken:
- 72.4' East to large Cottonwood Tree
- 49.0' SE to Cottonwood tree
- 48.0' SW to telephone pole
- 44.0' NW to CFP

1945 Recorded in Book "A" in the Office of the County Engineer a monument was found and ties checked with the additional ties taken:
- 122.6' SW to PP
- 123.75' NW to telephone pole

1953 Recorded in Book "A" a concrete monument was found and the following ties were taken:
- 88.8' SW to blazed 12" Oak
- 63.9' SE to spike in CFP
- 68.7' SE to PP
- 129.0' SW to PP

1982 County Grading Plan shows a cast iron monument set over concrete monument during grading project and ties were taken.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, dug with the County backhoe and uncovered a cast iron monument set by Mower County Engineering Department after road construction in 1982. At this time this intersection was obliterated during construction and relocated destroying all evidence of public land survey corner or a perpetuation thereof. The monument found is in agreement with ties taken in 1982 when the monument was reset.

The monument fits past records, occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 32, Township 102N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 5-8-86 (DATE) found a spike and washer; no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 5-8-86 (DATE) placed a 5/8"ø iron on road surface at location of spike found.

SKETCH OF REFERENCE TIES

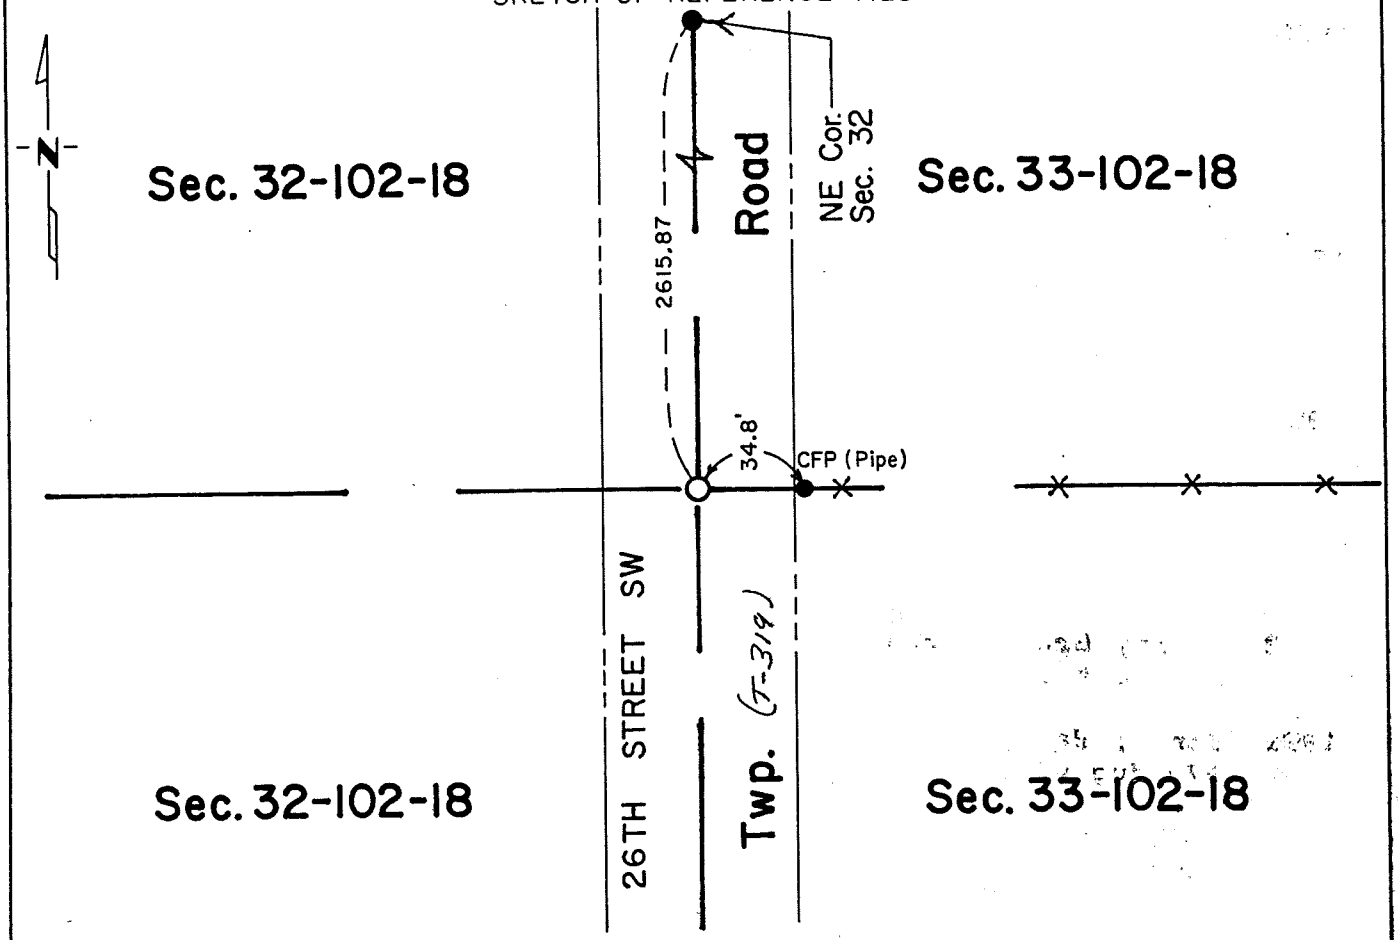

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-10-91

Registration No. 13607

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Sec 32-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a post and the following ties were taken:

10" Burr Oak	South	83 links (54.78 ft)
10" Burr Oak	S 1 1/2° E	81 links (53.46 ft)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1981 Jones, Haugh & Smith crew under the direction of John H. Schulte IV dug in centerline road in line with fences east and west. Placed spike on W 1/4 corner of Section 33.

1986 Jones, Haugh & Smith crew found a spike and washer on centerline north-south road in line with fence east. Excavated with backhoe for original monument and found no further evidence of public land survey corner or a perpetuation thereof. Placed a 5/8" diameter iron on centerline of road surface at location of spike found.

Corner placed fits occupation and road centerline and is accepted as best evidence found of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 33, Township 102N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-17-81 (DATE) found a 1 1/2"Ø×2 1/2'bar 2.1'below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-17-90 (DATE) placed a 5/8"Ø iron monument found.

SKETCH OF REFERENCE TIES

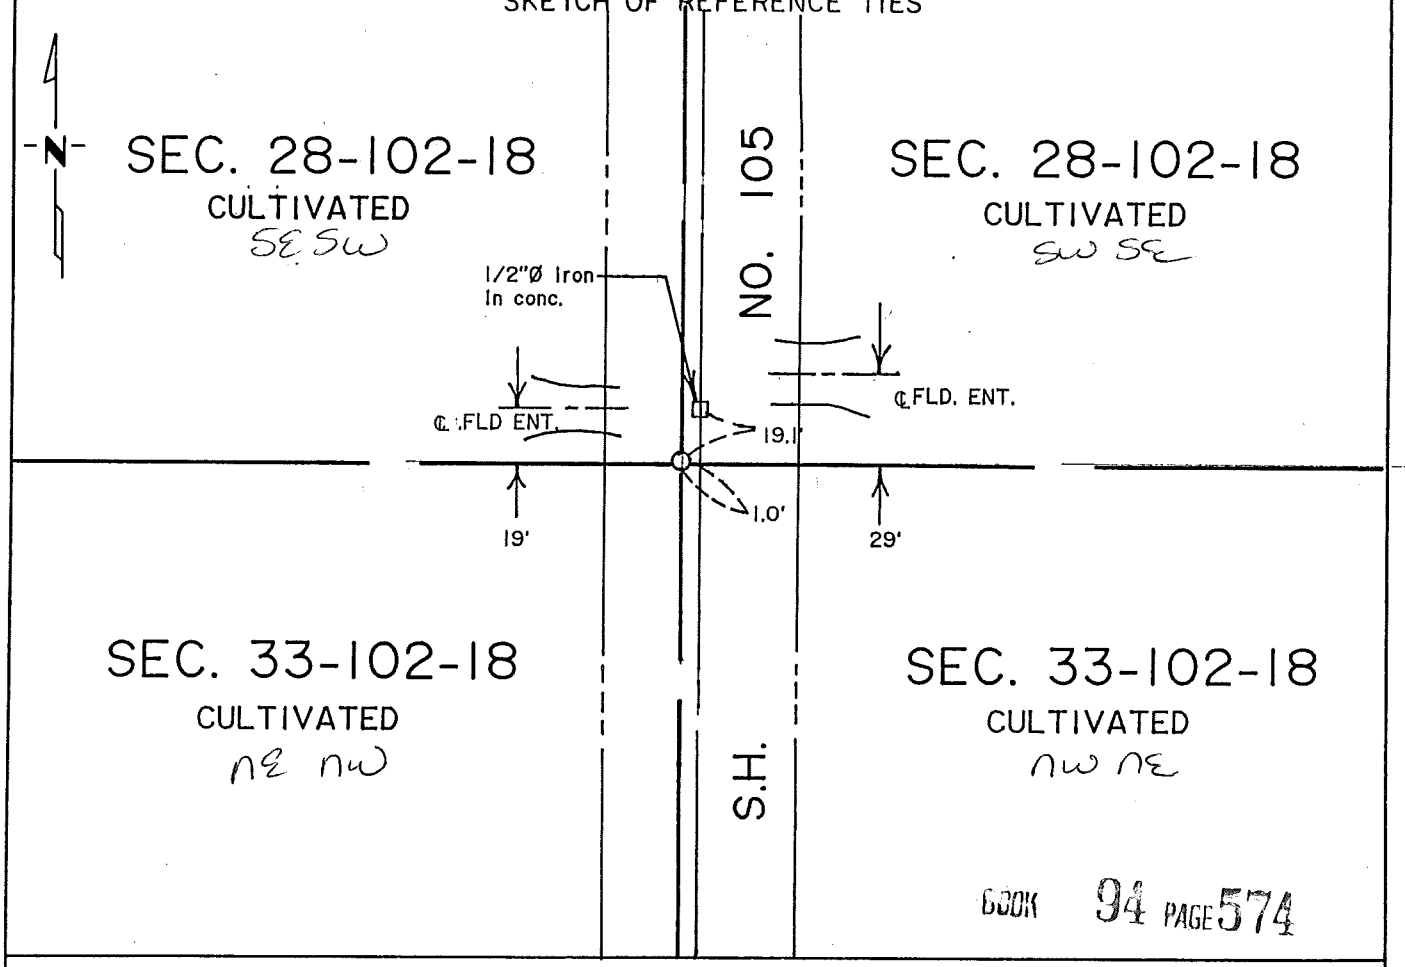

BOOK 94 PAGE 574

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-7-97 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 9 day of Apr A.D., 19 97

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 452262

M.H.D. FORM NO. 2105

Book 94 Misc Page 574

N 1/4 Cor SEC 33-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1953 Book A of the Mower County Engineering department shows a concrete monument inplace.

1957 Jones Haugh and Smith crew located corner during a survey in the NE 1/4 SW 1/4 section 33.

1981 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a concrete monument with a 1/2" diameter iron on CL .5' below road surface. True corner is 19.1' south. Uncovered a 1 1/2"x2 1/2" bar 2.1' below road surface. Placed a 5/8" iron over 1 1/2" bar. The bar found is the same size and diameter of other corners found in this section which were typical of the monuments set by Mower County surveyor, Clausen, in the late 1800's.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 34, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/17/1994 (DATE) found a CAST IRON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/17/1994 (DATE) placed a _____

SKETCH OF REFERENCE TIES

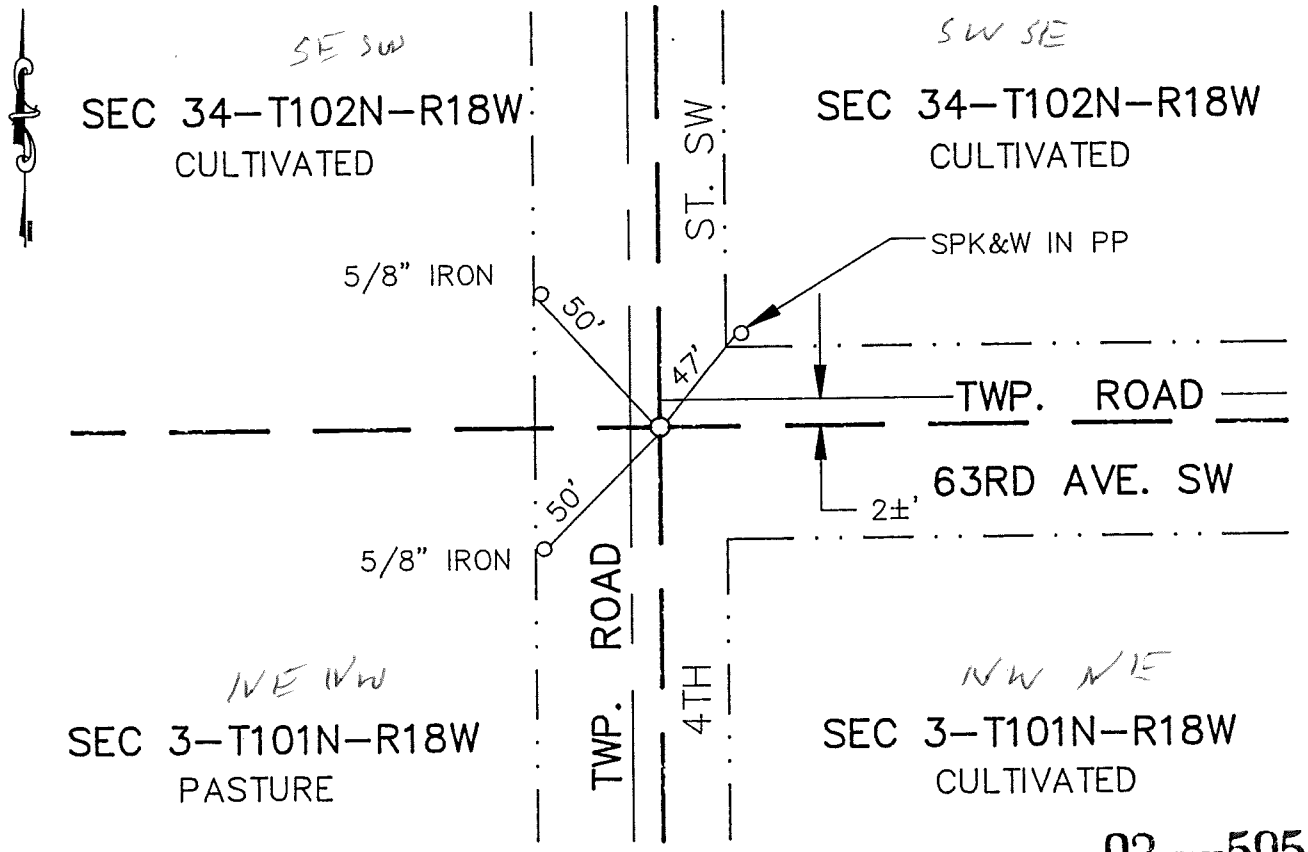

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 93 PAGE 595

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 1-9-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 14 day of Jan A.D., 1997

COUNTY RECORDER Charles Enger
By Susan M Davis, Deputy
DOCUMENT NO. 450526

M.H.D. FORM NO. 2105

Bk 93 Misc Page 595

S 1/4 Cor SEC 34-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a cast iron monument 1' below road surface, 2' south of CL of township road to east.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 34, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/15/1996 (DATE) found a CONC. MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/15/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

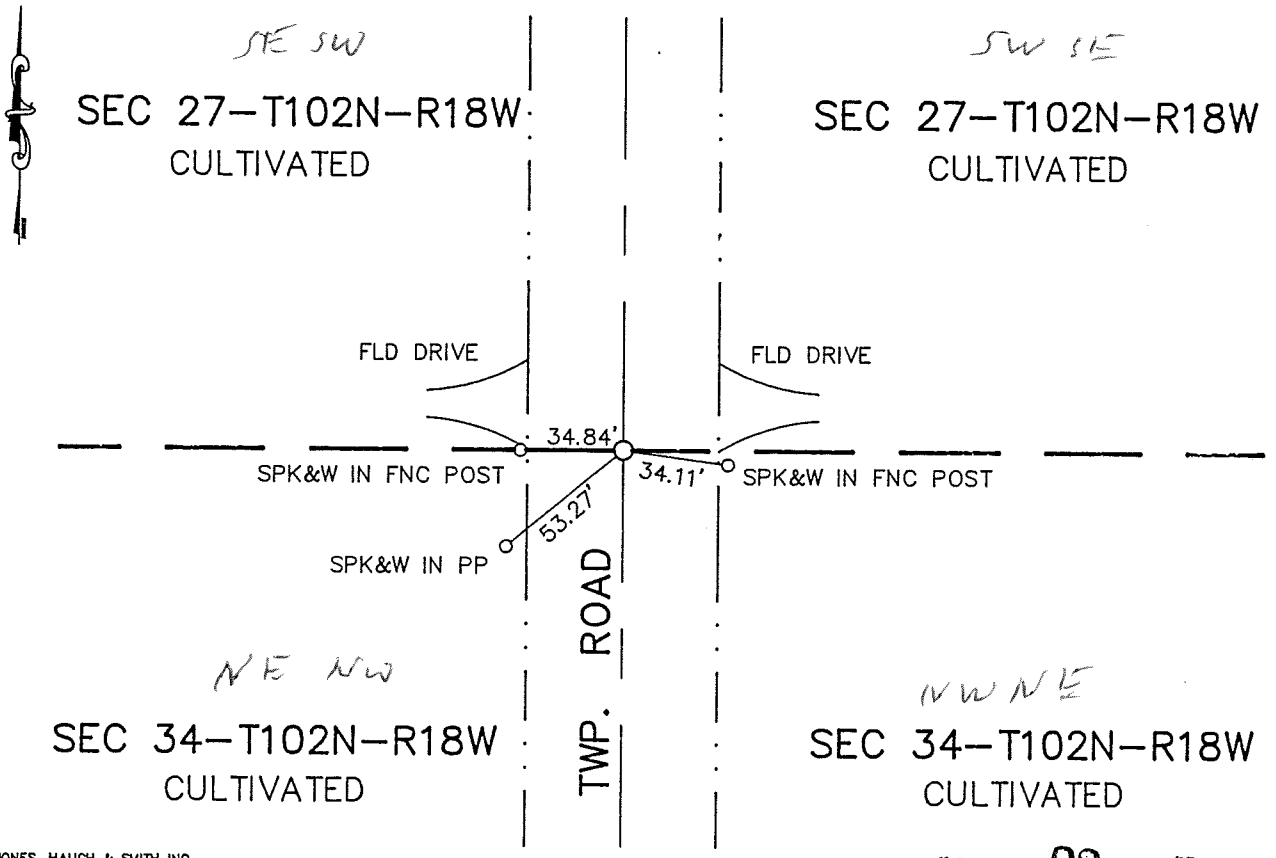

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 93 PAGE 593

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-9-97 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 14 day of Jan A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M Davis, Deputy

DOCUMENT NO. 450525

M.H.D. FORM NO. 2105

Book 93 Misc Page 593

N 1/4 Cor SEC 34-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1930 Mower County Book "A" shows a monument at this location.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S. Uncovered a concrete monument 0.8' below the road surface. Drilled a 3/4" hole in the found monument and set a cast iron monument 0.40' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 35, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/13/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

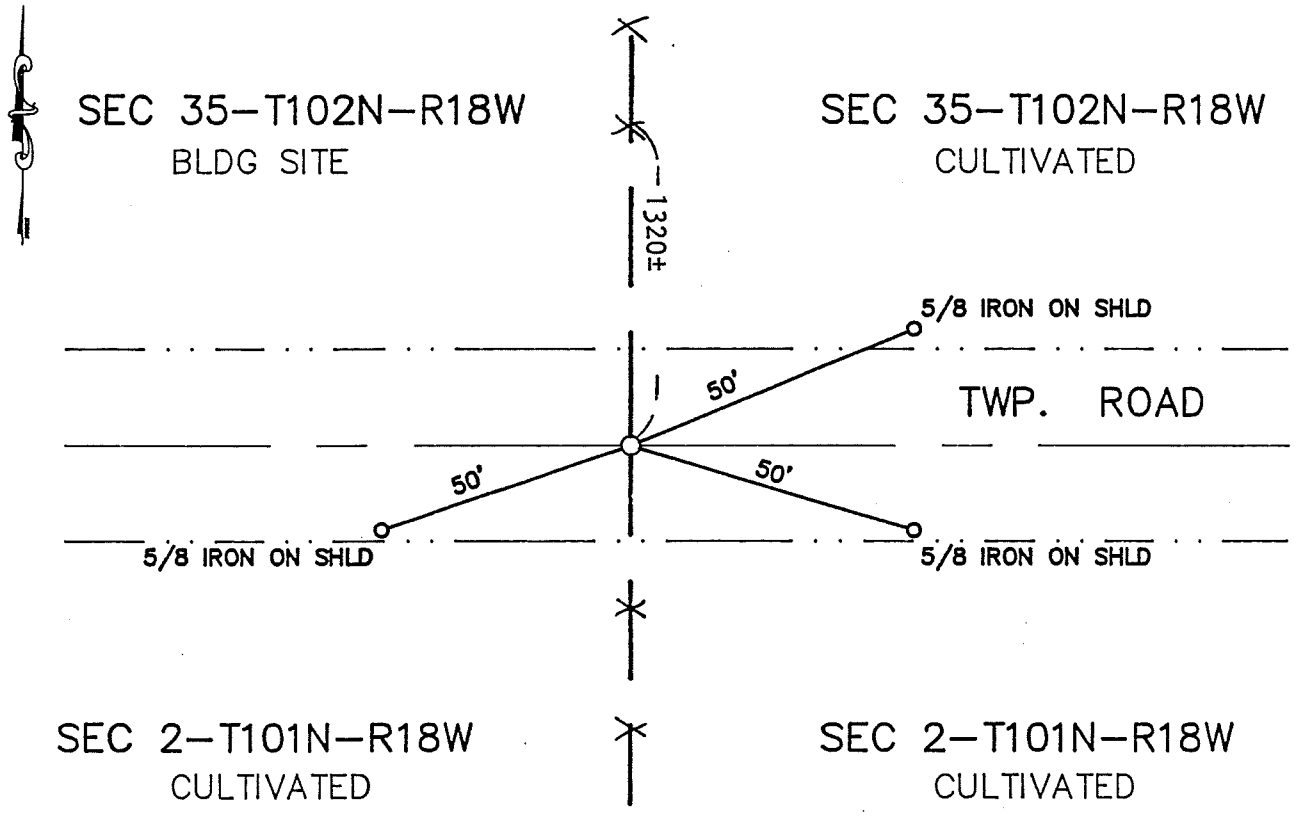

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-16-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor SEC 35-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL township road and in line with fence south. No evidence of the corner was found. A cast iron monument was set on a straight line between the S 1/4 corner of Section 34 and the SE corner of Section 35 in line with fence to the south and in line with a north-south fence line on the north-south 1/4 section line of said Section 35 approximately 1/4 mile north of this corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 35, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/15/1996 (DATE) found a POINTED STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/15/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

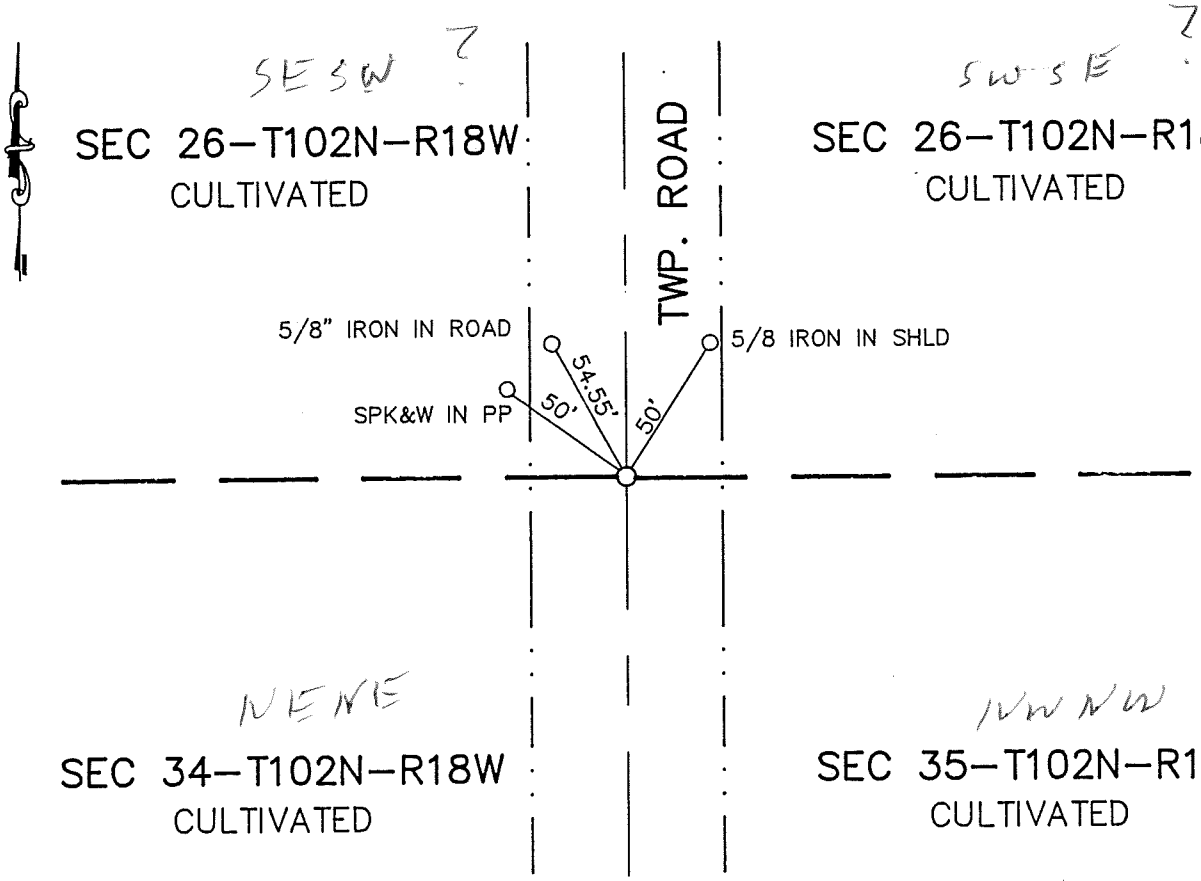

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 93 PAGE 597

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 1-9-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 14 day of Jan A.D., 1997

COUNTY RECORDER Charles Singer

By Susan M. Davis, Deputy

DOCUMENT NO. 450527

M.H.D. FORM NO. 2105

Book 93 Misc Page 597

NW Cor SEC 35-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S. Uncovered a pointed stone with three other stones around, 0.6' below the old road bed. Placed a 5/8" iron capped #13807 on the south side of pointed stone. Placed a cast iron monument over stone found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 35, Township 102N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/09/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/09/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

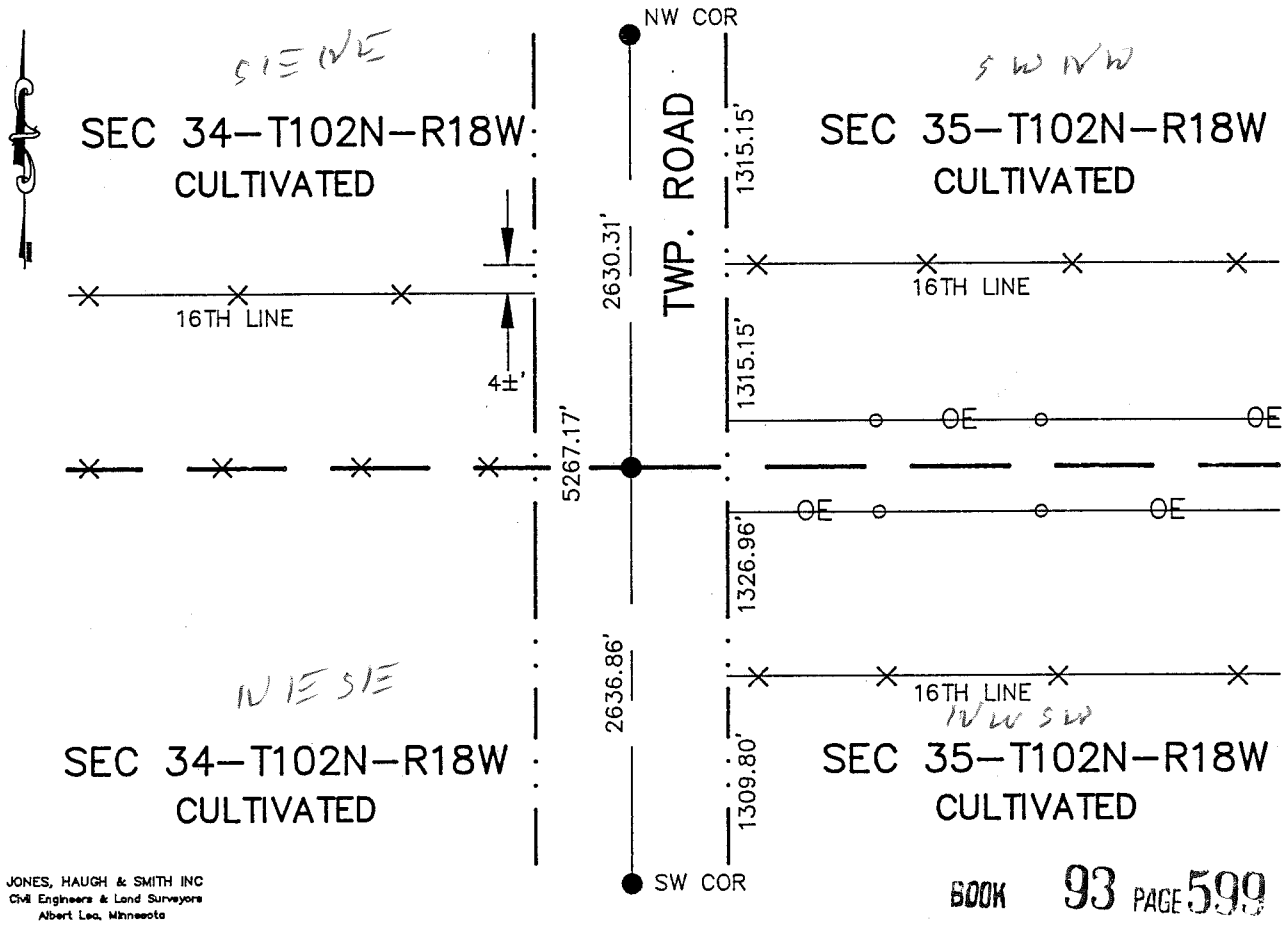

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 93 PAGE 599

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 14 day of Jan A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450528

M.H.D. FORM NO. 2105

Book 93 Misc Pg 599

W 1/4 Cor SEC 35-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and in line with line fence west. Found no evidence of original PLS corner. Placed a cast iron monument on the CL twp. road and in line with line fence to west.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 35, Township T102N Range R18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 9-13-94 (DATE) found NO EVIDENCE OF CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-13-94 (DATE) placed a 5/8"X16" IRON WITH CASTIRON MON.

SKETCH OF REFERENCE TIES

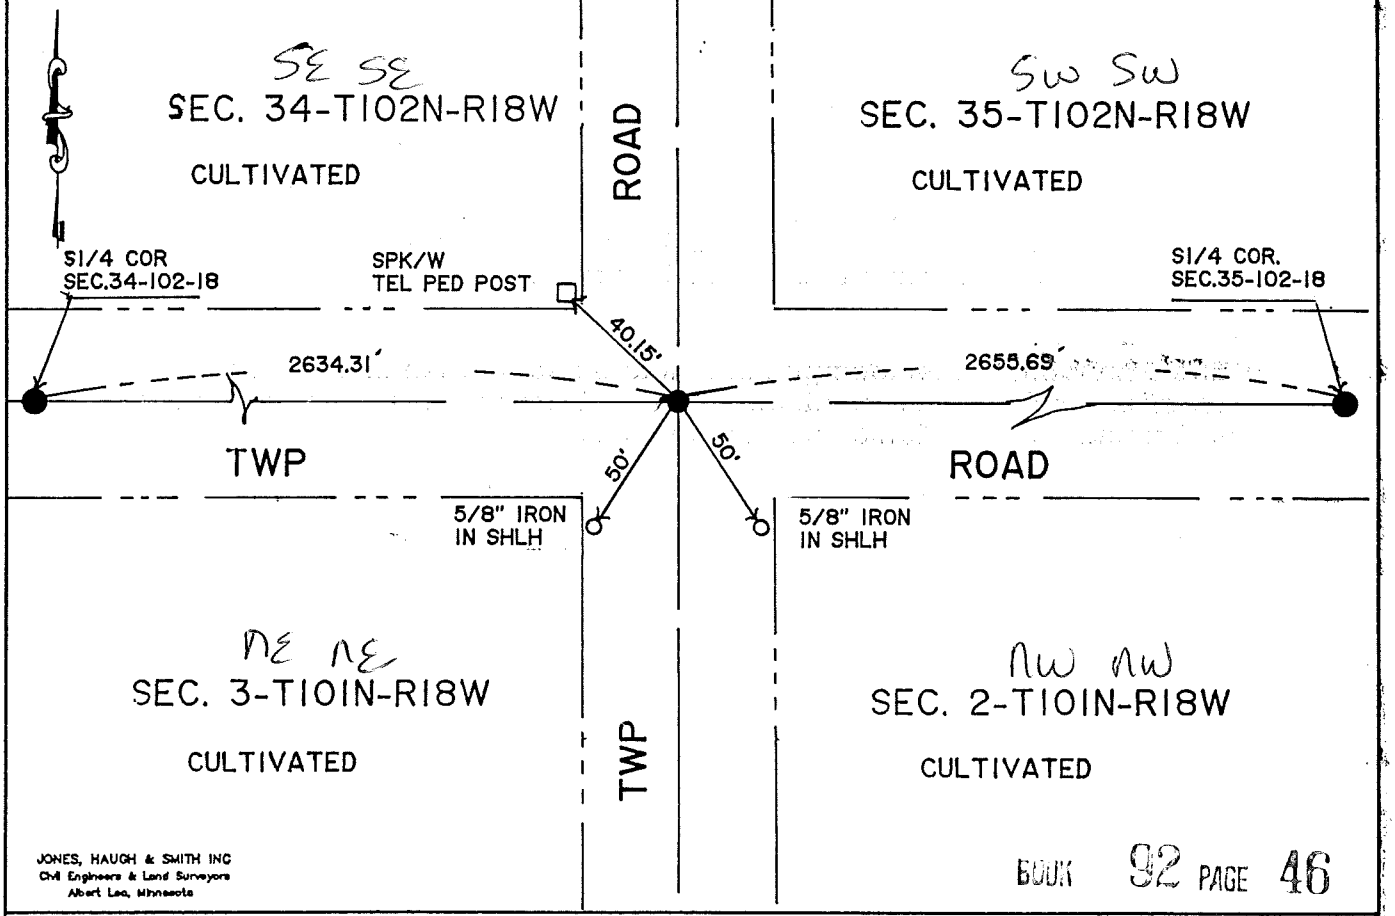

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 46

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-25-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

446685

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a .M. on the 29th day of July A.D., 1996

COUNTY RECORDER Charles Enger

By Melinda Taylor, Deputy

DOCUMENT NO 446685

M.H.D. FORM NO. 2105

Book 92 Page 46 Misc

SW Cor SEC 35-102-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL intersection of twp. roads. No evidence of the corner was found. A cast iron monument was set on a straight line between the south 1/4 corner of section 34 and the south 1/4 corner of section 35, in line with the road centerlines.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.