CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 4, Township 103N, Range 16W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 9-7-90 found 5/8" ROD, BENT, REMOVED DURING EXCAVATION

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

On 9-7-90 placed COUNTY CAP ON 1/2" PIPE INPLACE OF ROD

SKETCH OF REFERENCE TIES

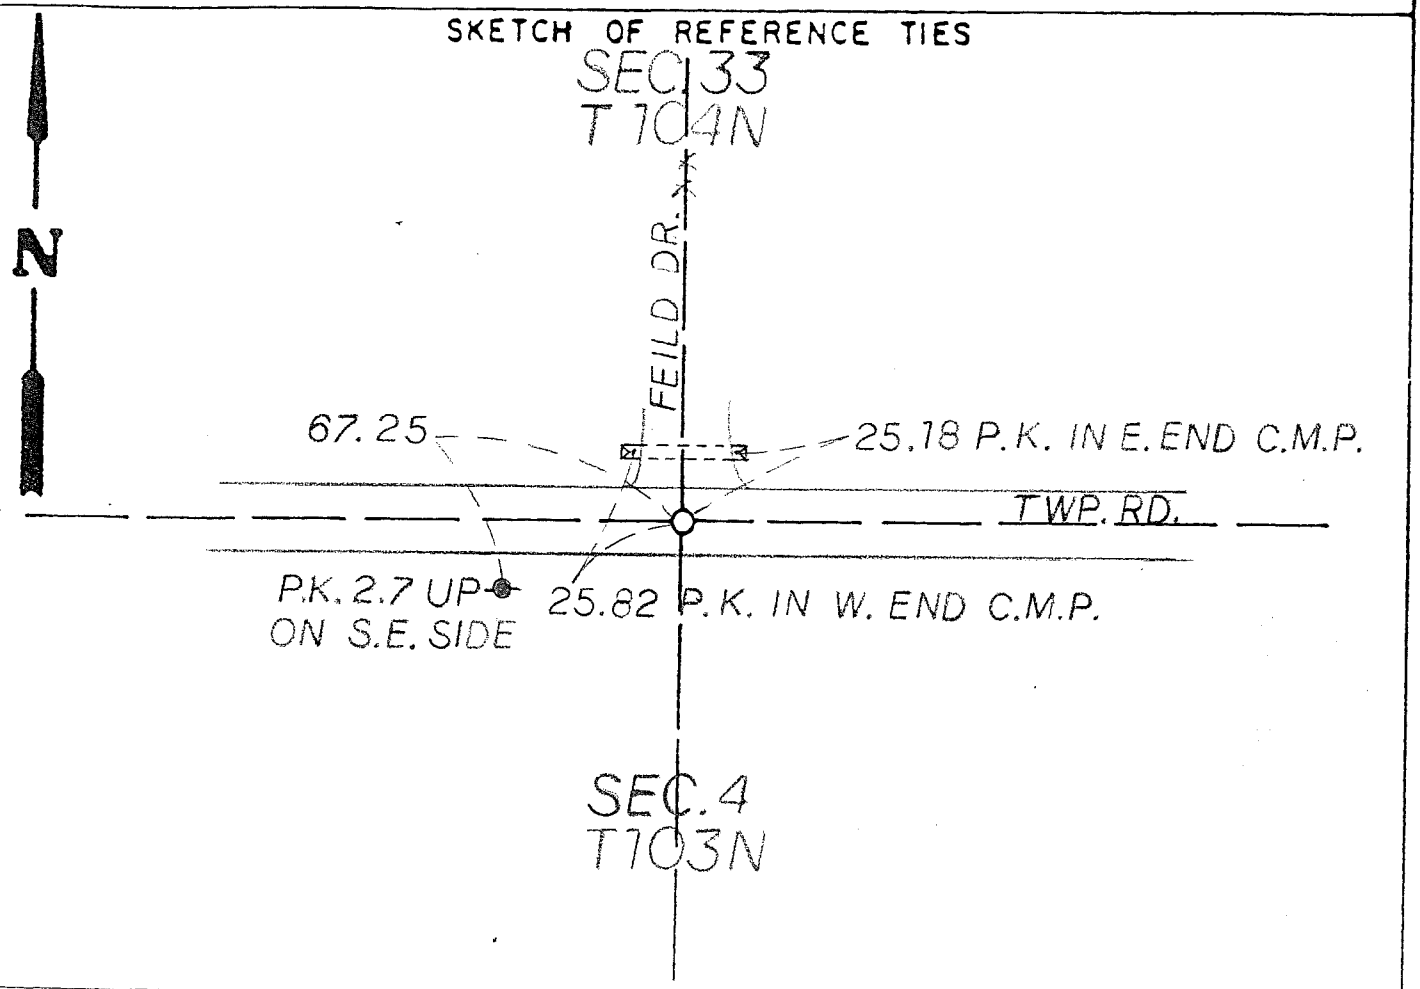

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature

12-26-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer

☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.

Engineers / Architects / Land Surveyors / Planners

Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE

North Quarter Corner Section 4, Township 103 North, Range 16 West, 5 P.M.

July, 1853	John Ball, Deputy Surveyor, set quarter section post, built mound with trench per instructions, drove charred stake in center and planted Osage Orange seed in southeast corner.
April, 1978	Zenk Read Trygstad & Associates, Inc. found an iron at the corner during a survey in Section 4.
September 7, 1990	Zenk Read Trygstad & Associates, Inc. excavated a trench 3.5 feet deep from 4 feet north to 5.5 feet south of center line and 8 feet east to 4 feet west of the fence line north. A 5/8 inch rod was found at the surface on line with centerline and fence line north and it was removed during excavation. An analysis of the record and survey data indicates the 1978 iron to be midway between section corners and the road centerline. The iron rod also agrees with the fence line north. The iron rod is accepted as marking the location of the original Public Land Survey Corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 5, Township 103N, Range 16W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 9-7-90 found 2 1/2" SQUARE BAR

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 9-7-90 placed COUNTY CAP ON 1/2" PIPE OVER BAR

SKETCH OF REFERENCE TIES

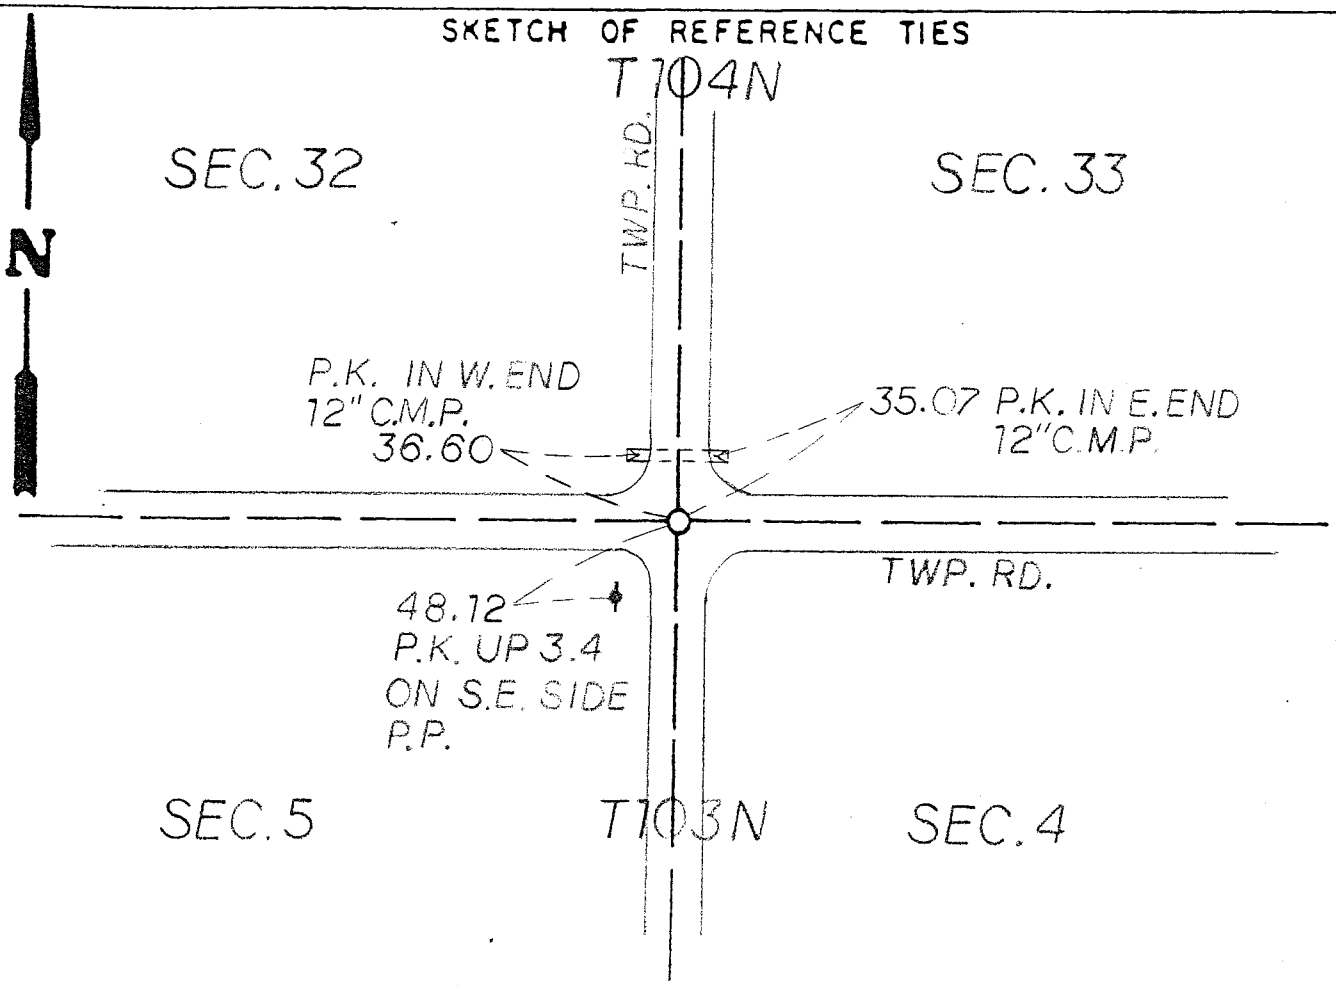

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
12-26-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE

Northeast Corner Section 5, Township 103 North, Range 16 West, 5 P.M.

July, 1853	John Ball, Deputy Surveyor, built mound with trench per instructions, drove charred stake in center and planted Osage Orange seed in southeast corner.
June 30, 1879	Clausen Field Notes show a government post in place and used to subdivide Section 32.
September 7, 1990	Zenk Read Trygstad & Associates, Inc. excavated a trench 4 feet deep from 1 foot south to 4 feet north and center line to 3 feet west of the intersection of the township roads. A 2 1/2 inch square iron bar was found 2.8 feet deep and 2.8 feet north and 1 foot west of the intersection. An analysis of the record data shows no indication of the origin of the bar. The bar is accepted as the location of the original Public Land Survey Corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 7, Township 103 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/15/04 (DATE) found a STONE ON THE WEST SIDE OF FENCE POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/15/04 placed a CAST IRON MONUMENT ON EAST SIDE OF STONE

SKETCH OF REFERENCE TIES

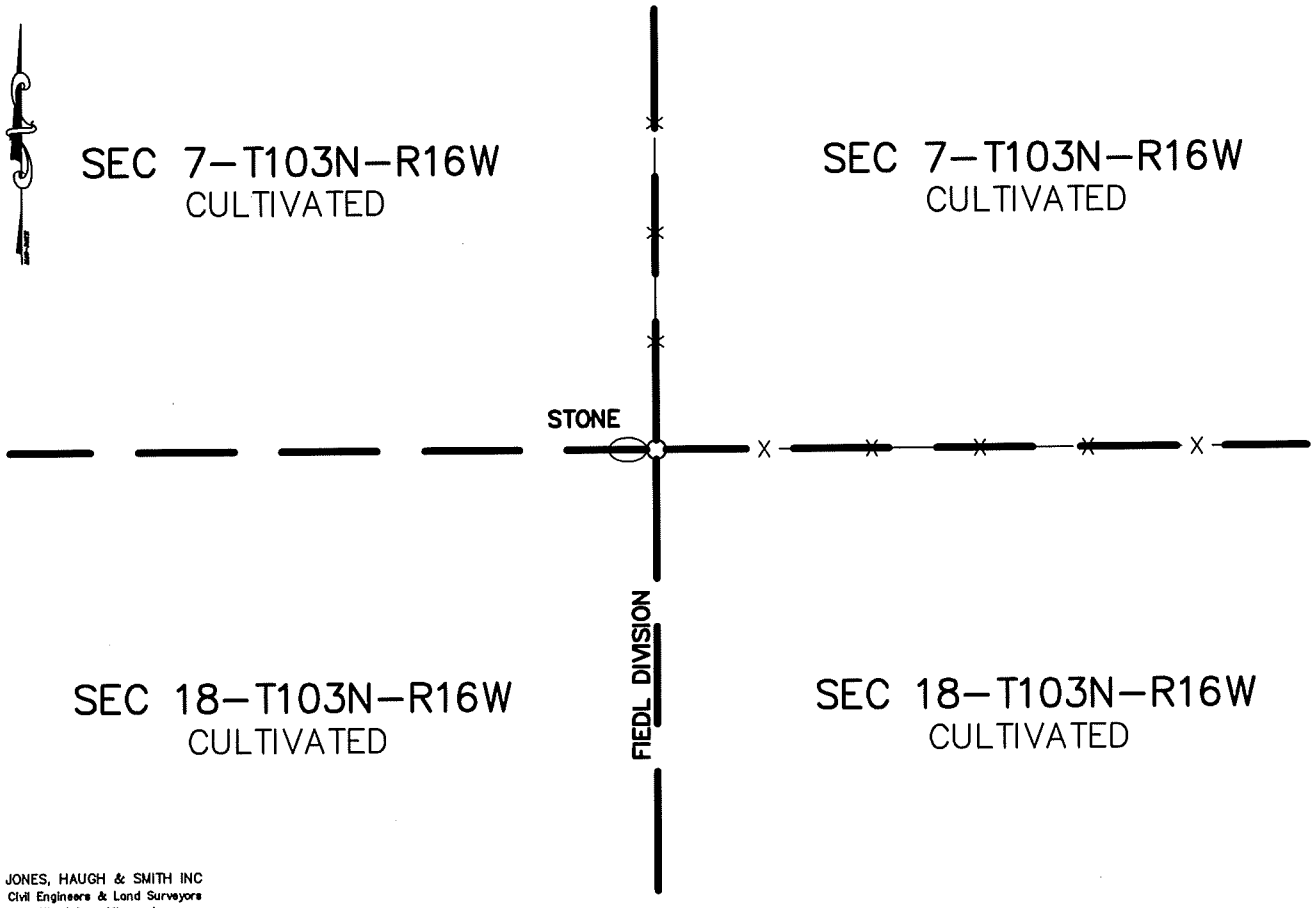

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-5-05

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor Sec 7-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County has no record of corner.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at corner fence post of line fence north & east. Uncovered field stone on the west side of wood post. Stone fit fence lines north & east and was accepted as the true corner. Set a 5/8"x24" iron with a cast iron monument on the east side of stone.

The monument fits occupation, fence lines north & east and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 7, Township 103 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/15*04 (DATE) found a CAST IRON MONUMENT .5'± BELOW SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – placed a –

SKETCH OF REFERENCE TIES

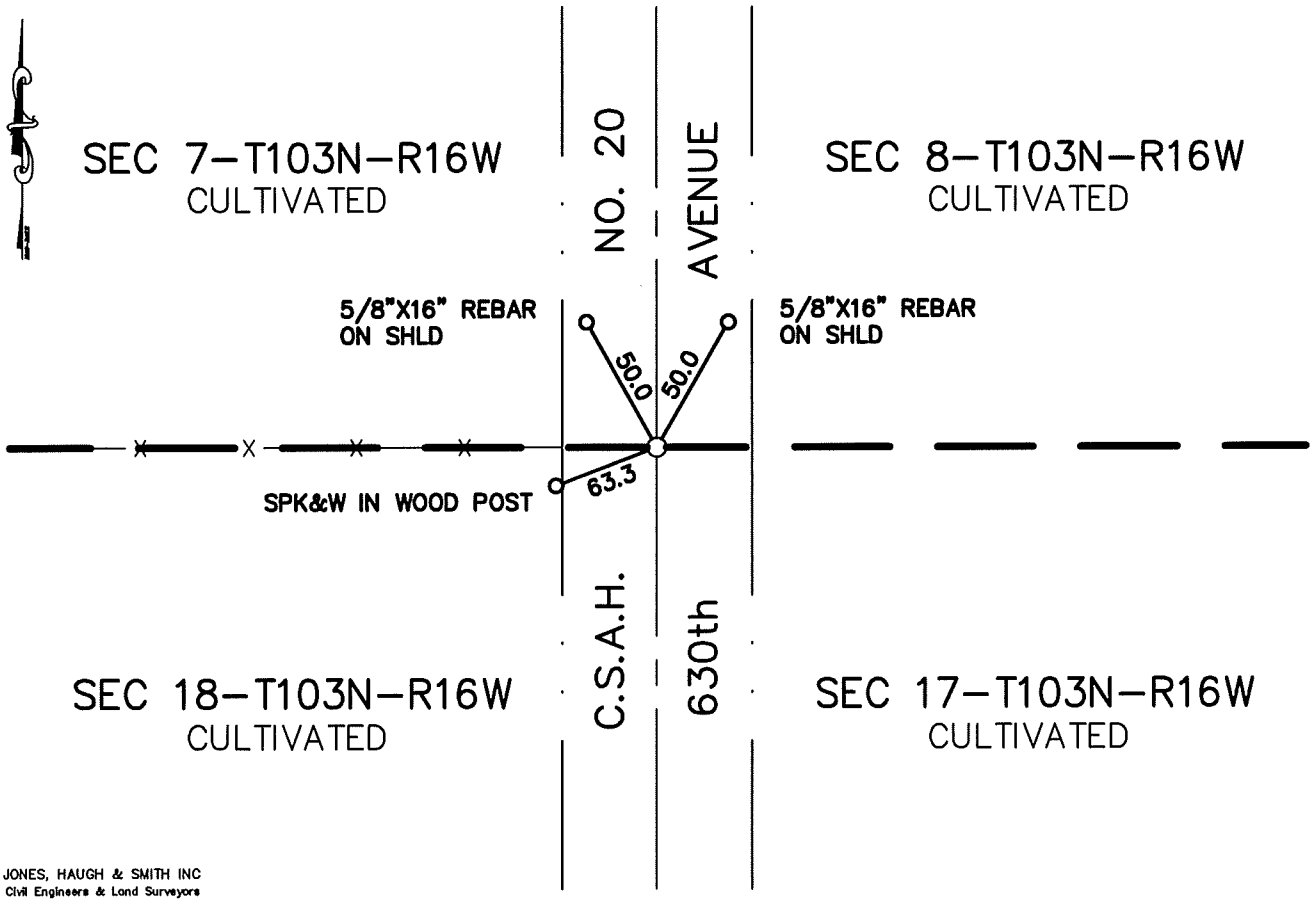

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-5-05

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE 1/4 Cor Sec 7-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County records & road plans show a stone under magnetic monument.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of centerline of County State Aid Highway No. 20 and fence line to the west. Located a cast iron monument .5'± below road surface. Which agrees with data on Mower County road plans. Took new ties.

The monument aggress with the Mower County records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 7, Township 103 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/15/04 (DATE) found a CAST IRON MONUMENT .3'± BELOW SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – placed a –

SKETCH OF REFERENCE TIES

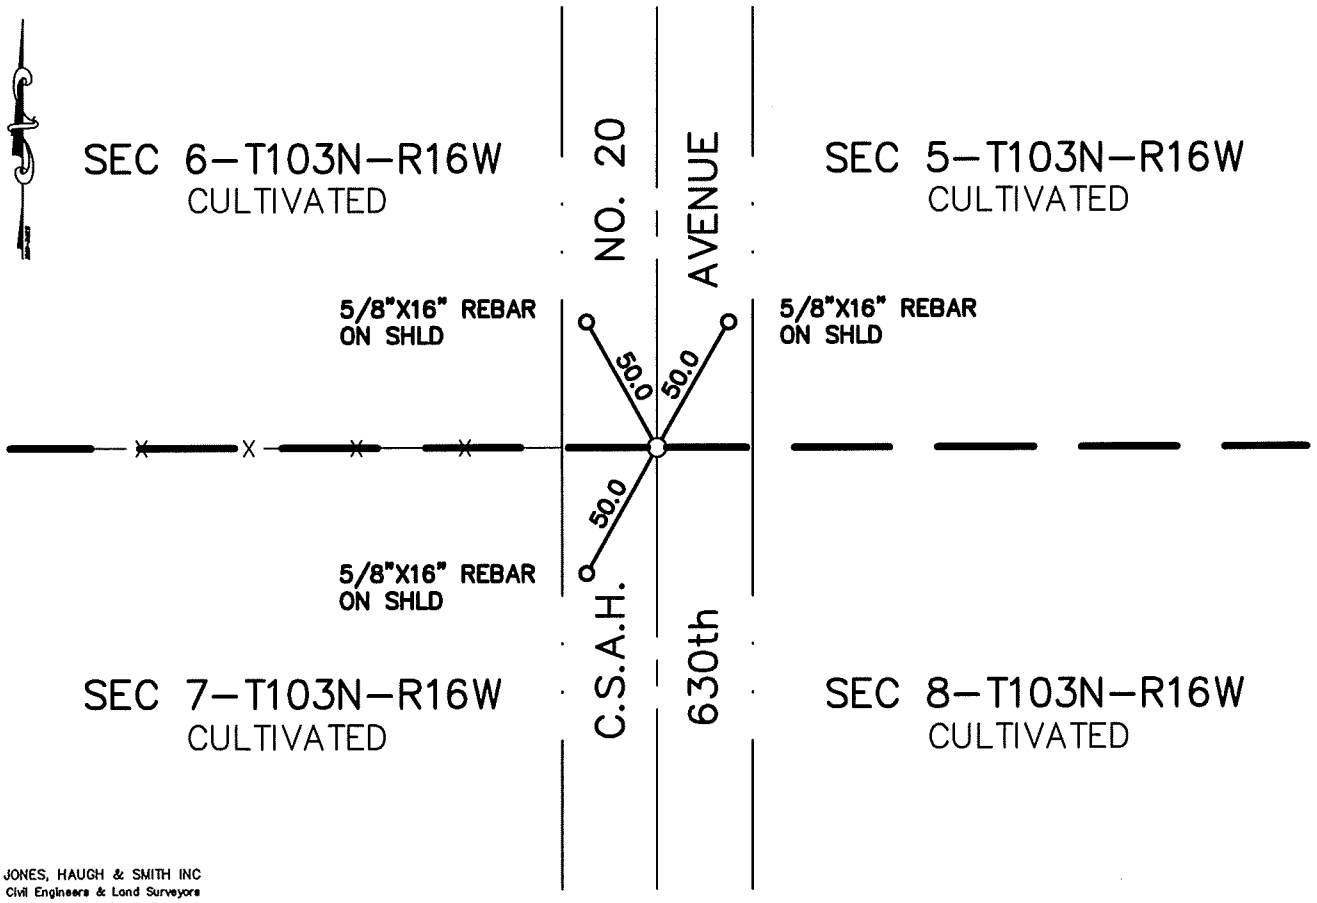

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-5-05

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE 1/4 Cor Sec 7-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County records & road plans show a stone under magnetic monument.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of centerline of County State Aid Highway No. 20 and fence line to the west. Located a cast iron monument .3'± below road surface. Which agrees with data on Mower County road plan. Took new ties.

The monument agrees with the Mower County records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 7, Township 103 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/15/04 (DATE) found a FOUND CORNER FENCE POST IN ROCK PILE @ INTERSECTION OF FENCE LINES EAST, WEST & NORTH

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/15/04 placed a CAST IRON MONUMENT ON EAST SIDE OF POST

SKETCH OF REFERENCE TIES

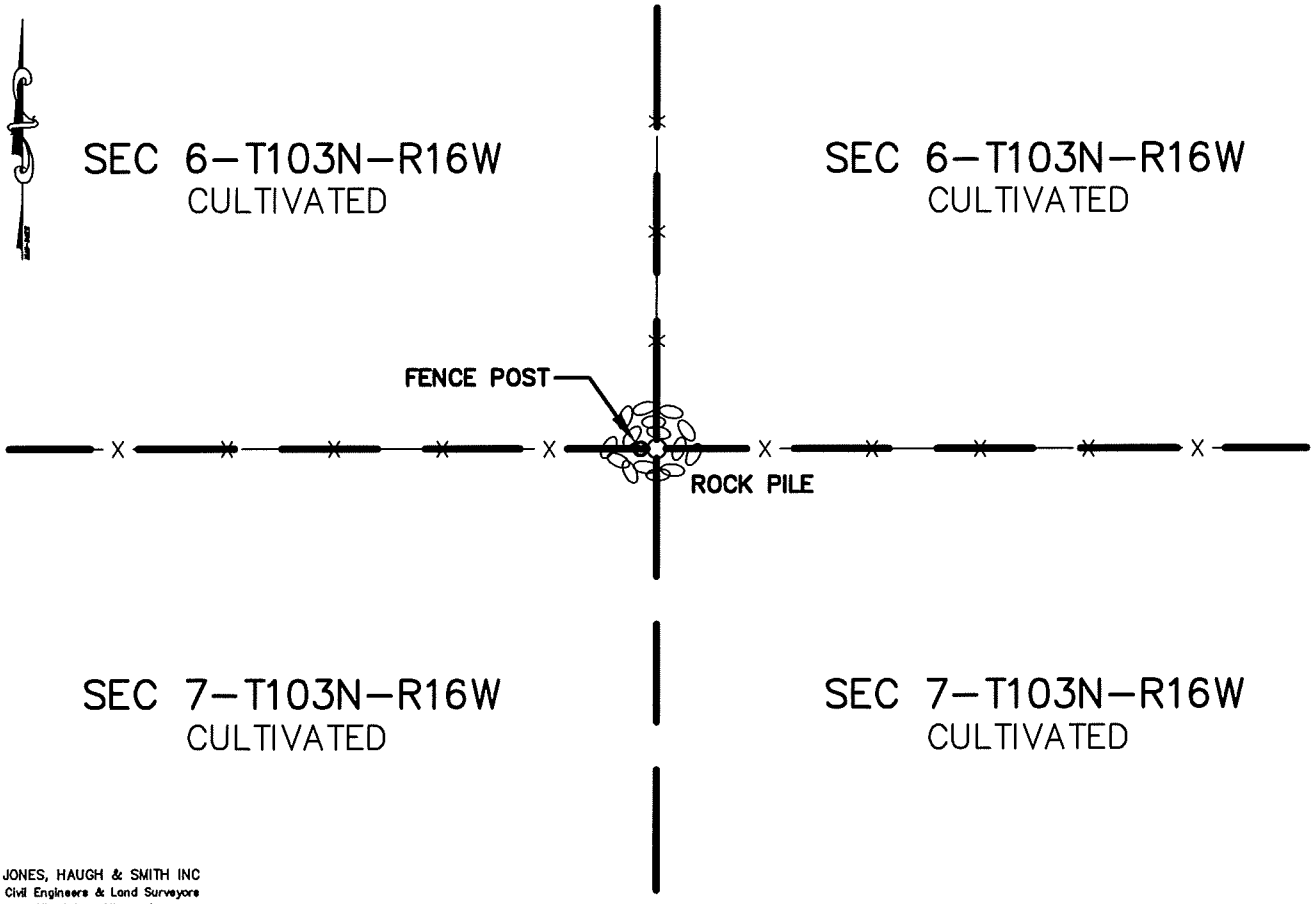

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-5-05

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Cor Sec 7-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County has no record of corner.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of fence lines west-east and fence line north. Found no evidence of corner. Set a 5/8"x24" iron with a cast iron monument in large rock pile on the east side of fence post.

The monument fits occupation, fence lines east-west and fence line and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 7, Township 103 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/15/04 (DATE) found a TWO WOOD POSTS @ INTERSECTION OF FENCE LINES EAST–WEST & FIELD DIVISION SOUTH

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/15/04 placed a CAST IRON MONUMENT BETWEEN WOOD POSTS

SKETCH OF REFERENCE TIES

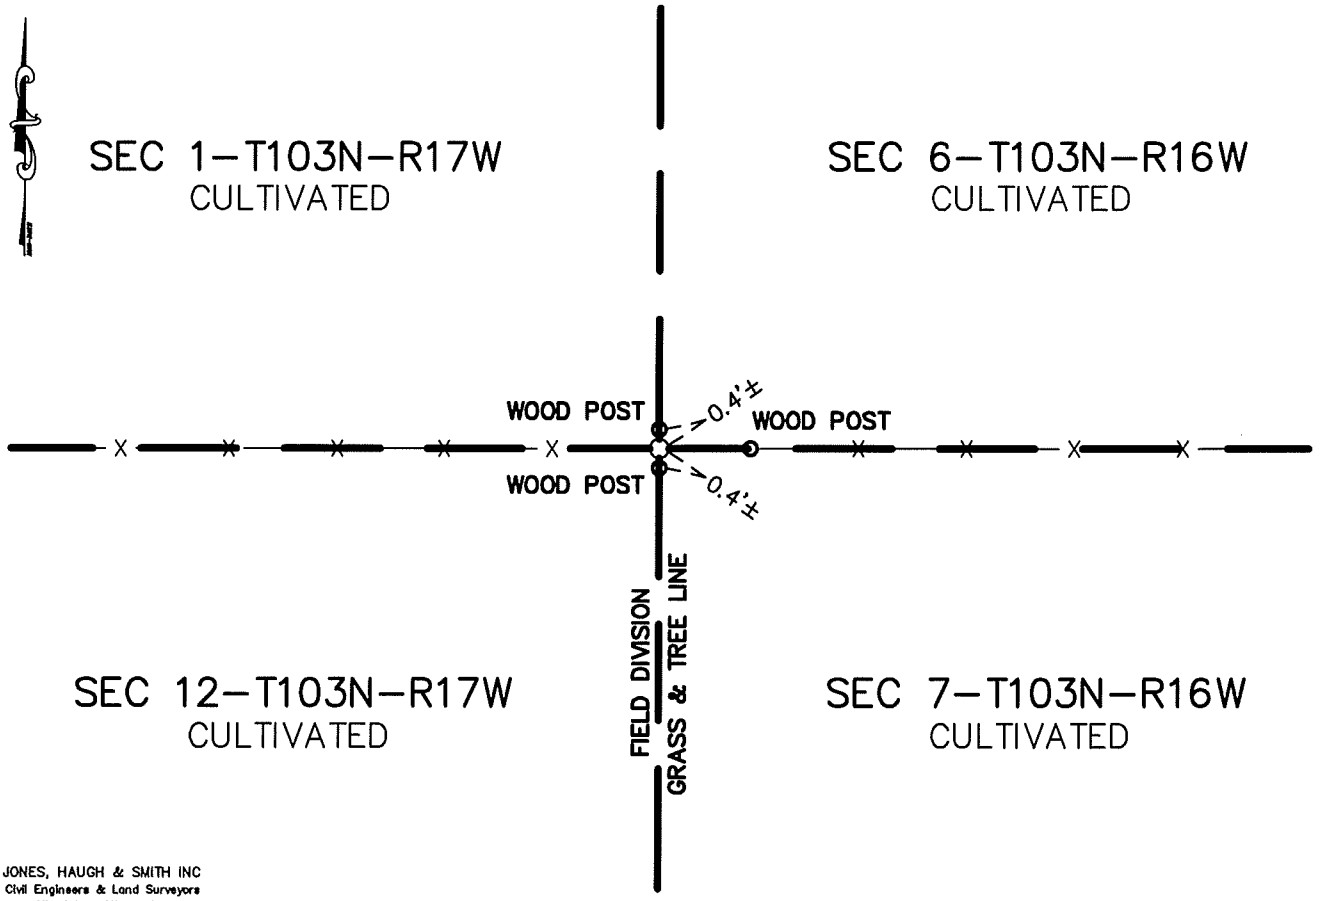

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-5-05

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NW 1/4 Cor Sec 7-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County has no record of corner.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of fence lines E-W and field division south and found 2 wood posts 0.8'±. Found no evidence of corner. Placed a 5/8"x24" iron with a cast iron monument between wood posts..

The monument fits occupation, fence lines east-west and field division south and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 7, Township 103N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-27-91 (DATE) found a 1" Octagon bar 2' below surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-27-91 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

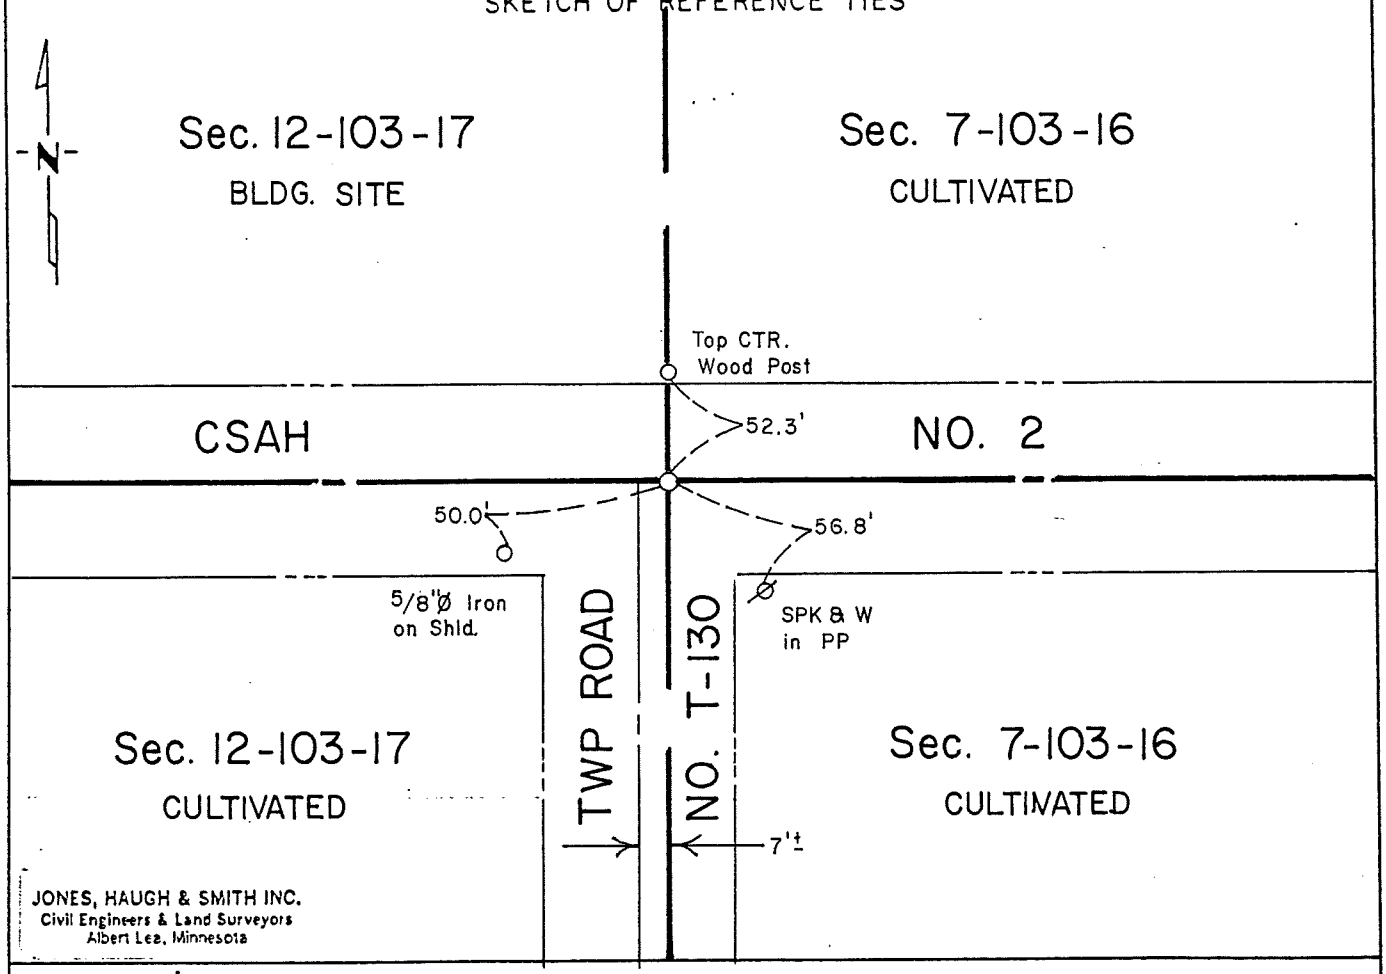

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 7-103-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1892 Clausen, County Surveyor from 1880-1892, field notes show a stone in place.

1940 Book 'A' of the Mower County Engineer's Office show the following ties were taken:
71.9' SW to 16" Cottonwood
54.9' NNW to 24" Cottonwood
67.3' SE to 10th pine from south
77.3' NW to 20" stump

1991 Jones, Haugh & Smith crew under the direction of John Schulte IV, County Surveyor, dug with County backhoe a 6'x12'x5' deep hole and uncovered a 1" iron octagon bar on centerline of east-west road, 2 feet below surface. Continued digging and found no further evidence of the public land survey corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 8, Township 103N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-27-91 (DATE) found a HARRISON CAST IRON MONUMENT OVER A STONE.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

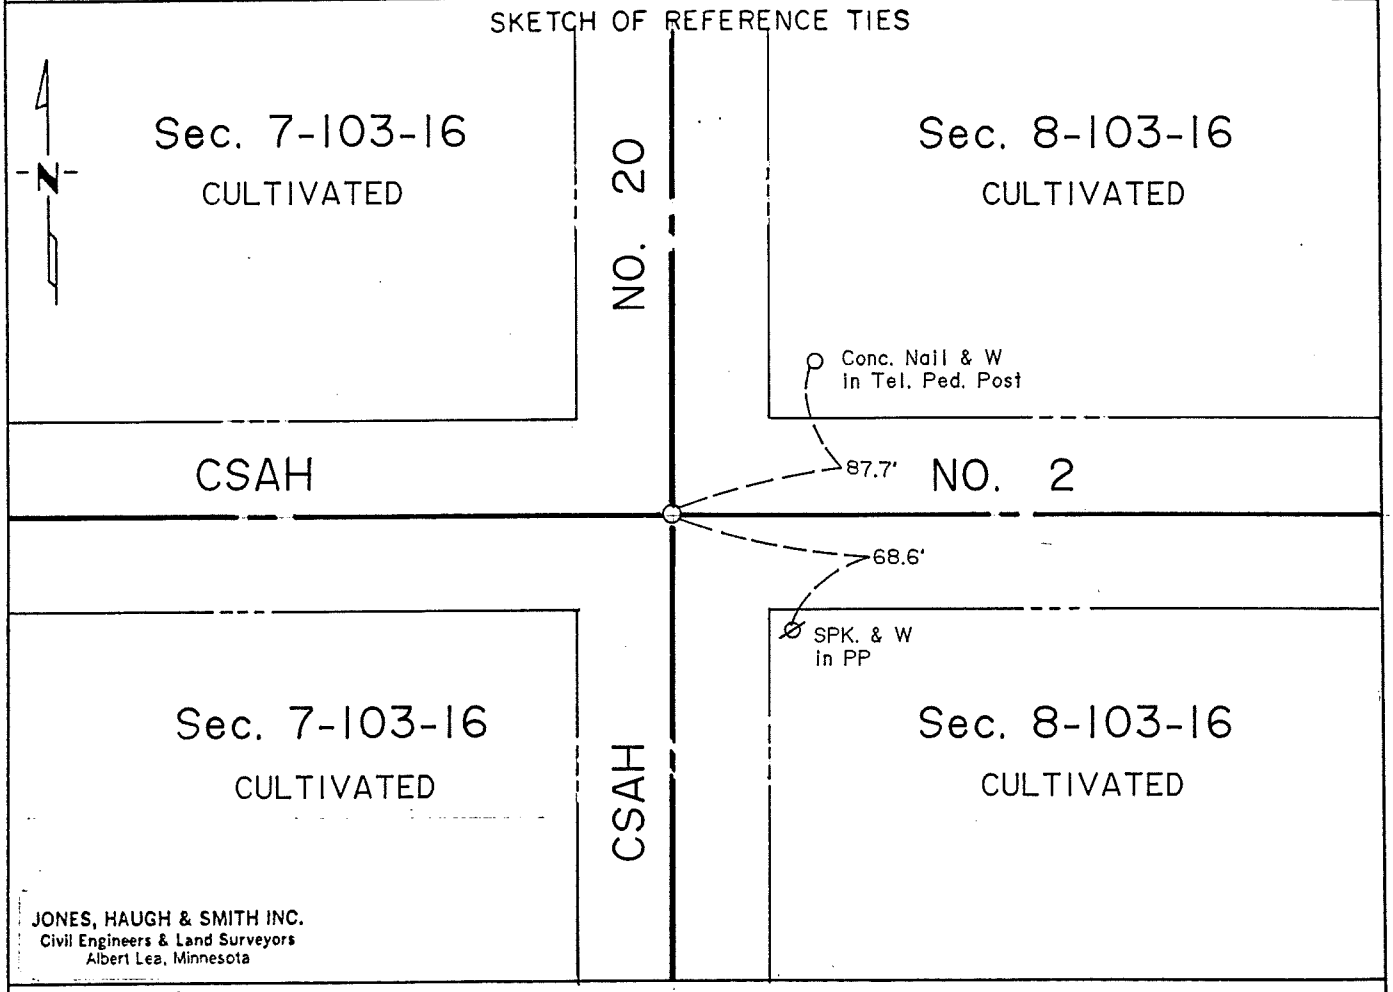

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 9-17-91
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 8-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1890 Clausen, County Surveyor from 1880-1892, field notes show a stone inplace.

1940 Book 'A' of the Mower County Engineer's Office show a stone inplace.

1945 Book 'A' shows an iron rod inplace and the following ties were taken:
47.1' SW to CFP
59.0' NW to 3rd St. FP
46.8' SE to CFP
44.1' NW to TP
72.3' SSW to "C-10" sign
89.0' NNW to nearest leg of mail box
75.7' SE to 3rd St. FP (by guy wire)

1991 Jones, Haugh & Smith crew under the direction of John Schulte IV, County Surveyor, dug with County backhoe and uncovered a harrison cast iron monument over a stone on centerline centerline of north-south-east-west roads. Left monument as found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 8, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1-6-95 (DATE) found a Corner Fence Post

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-6-95 (DATE) placed a 5/8 iron on west side 8" CFP in N-S fence line

SKETCH OF REFERENCE TIES

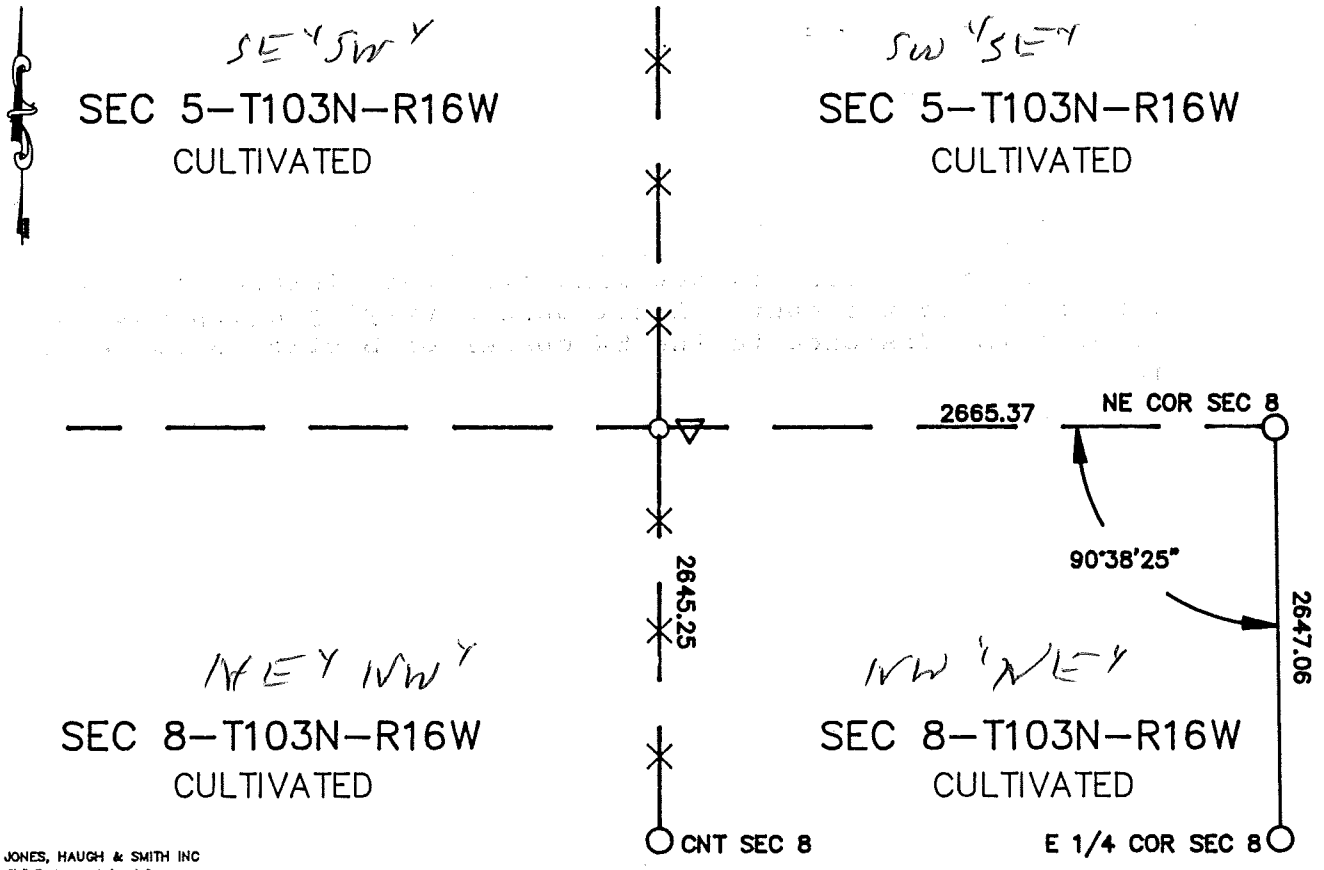

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-24-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 o'clock A.M. on the 24 day of February A.D., 19__

COUNTY RECORDER Charles Enger

By _____, Deputy

DOCUMENT NO. 435084

Book 86 Page 250

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 cor Sec 8-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a charred stake with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above names sources.

1892 Notes of Clausen indicate a government marker inplace at the N 1/4. 40.42 (2667.72) chains west of the northeast corner of Section 8.

1995 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, found a corner fence post in the north-south fence line. Accepted corner fence post as best evidence of the corner and set a 5/8" iron on the west side of the fence post. Electronic surveying equipment was used to measure the distance to the northeast corner and center of Section 8. The distances are as follows:
2665.37'to the northeast corner vs. 2667.72' given in Clausens notes and 2645.25' to the center of Section 8

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 86 PAGE 251

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 8, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1-6-95 (DATE) found a Corner Fence Post

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-6-95 (DATE) placed a 5/8 iron west side RR tie CFP in N-S-E fence

SKETCH OF REFERENCE TIES

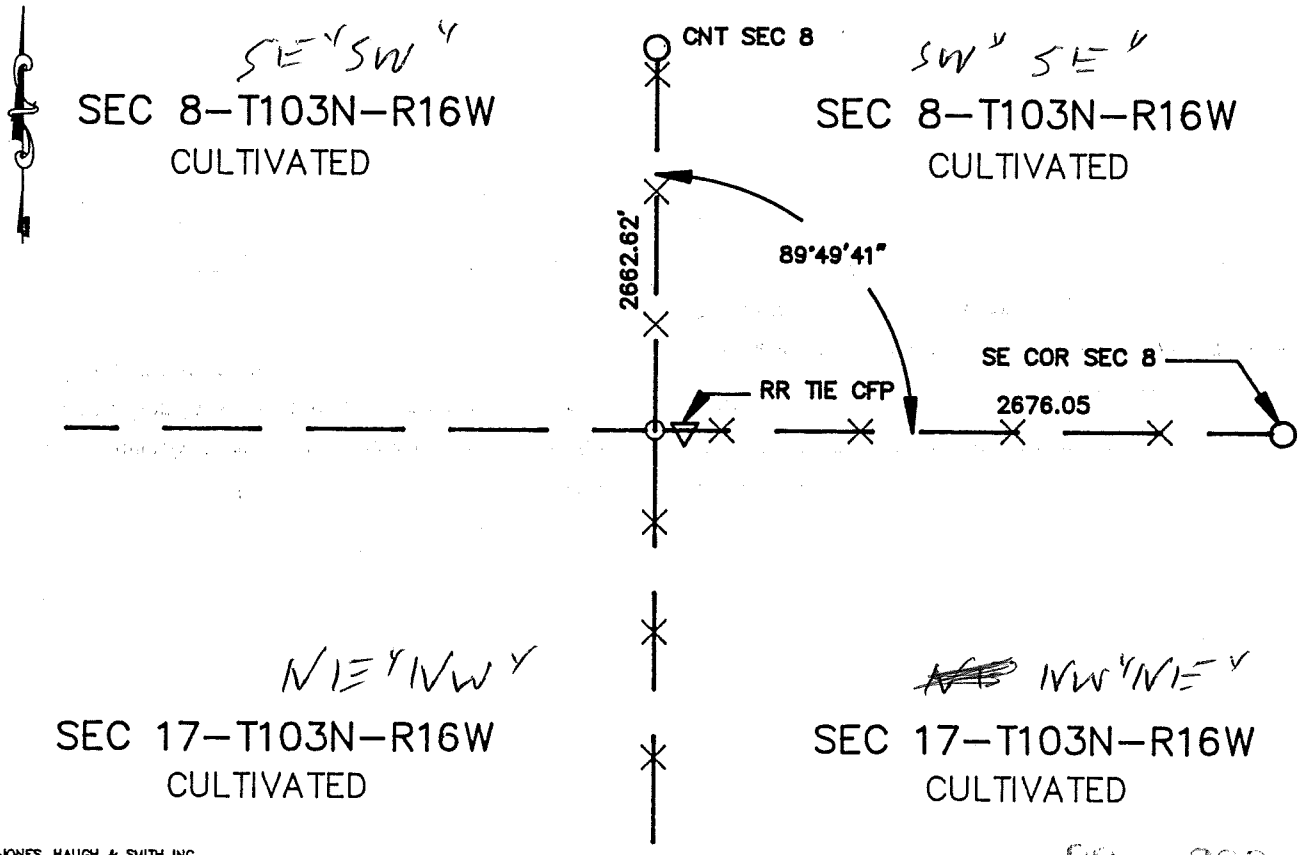

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 86 PAGE 338

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 3-3-95 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 6 day of May A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 435272

BK 86 Misc Pg. 338

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 cor Sec 8-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a charred stake with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above names sources.

1892 Notes of Clausen indicate a post inplace at the S 1/4.

1995 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, found a railroad tie corner fence post at the intersection of the north, south and east fence lines. Accepted corner fence post as best evidence of the original corner and set a 5/8" iron on the west side of the railroad tie. Electronic surveying equipment was used to measure the distance to the southeast corner of Section 8 to be 2676.05 feet and the center of section to be 2647.04 feet.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 86 PAGE 339

JONES, HAUGH & SMITH INC.
515 South Washington
ALBERT LEA MINNESOTA 56007

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 8, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10-26-94 (DATE) found a 6" x 10" rock 2.0' below surface

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-26-94 (DATE) placed a 5/8 Iron on S. side rock

SKETCH OF REFERENCE TIES

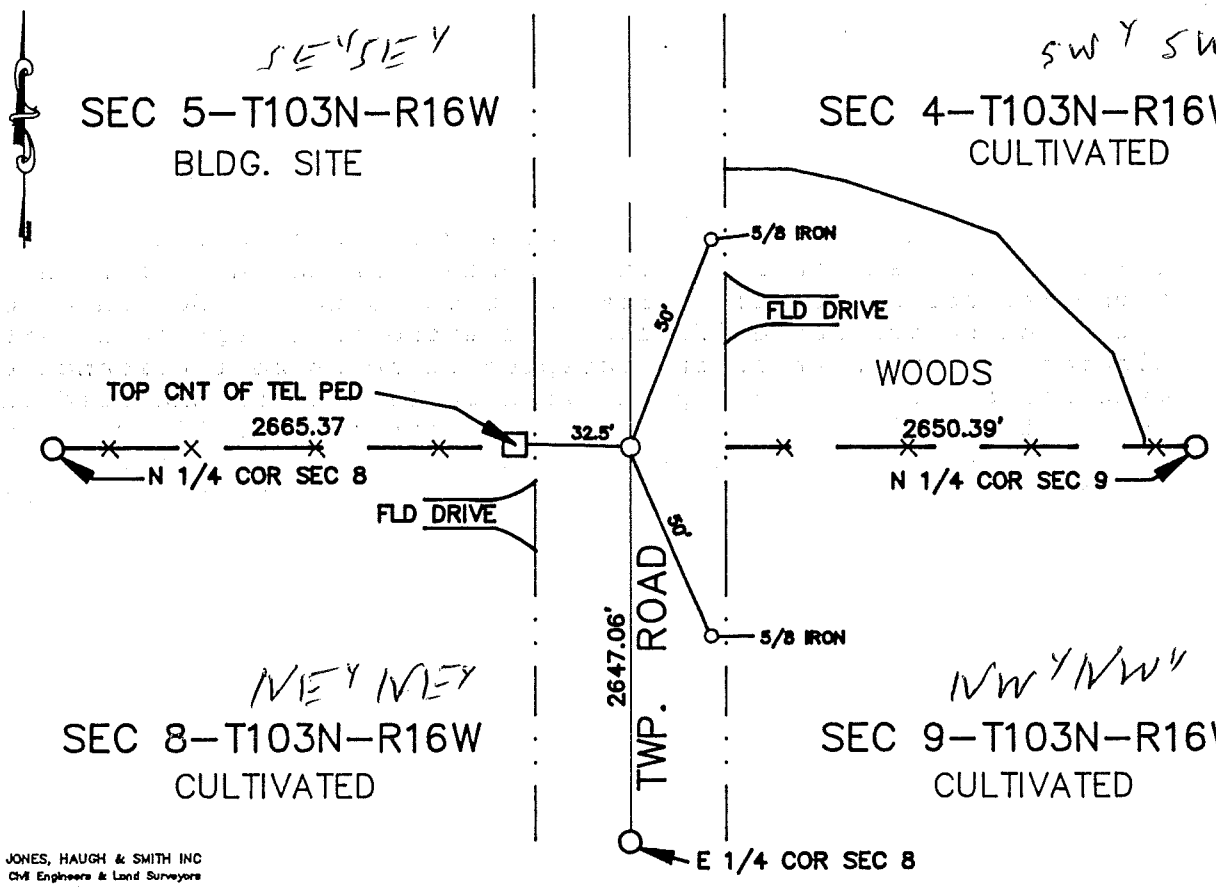

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 86 PAGE 342

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-3-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 6 day of Mar A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 435274

M.H.D. FORM NO. 2105

BK 86 Misc Pg 342

STATEMENT OF EVIDENCE

NE cor Sec 8-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1892 Clausen notes indicate a post inplace at this location.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, dug with county backhoe on centerline of township road and in line with fence lines to the east and west. A 6"x10" stone was found 2.0 feet below the road surface. Continued digging but found no further evidence. Accepted the stone as best evidence of the corner. Stone lies in line with fences to the east and west as well as the centerline of the township road. A 5/8" iron capped RLS 13807 was placed on the south side of the rock. Another iron was placed over the stone 4" below the road surface. Electronic surveying equipment was used to measure the distance to the N 1/4 Section 8, the N 1/4 Section 9 and E 1/4 Section 8. The distances are as follows:

2665.37' W to the N 1/4 cor Sec 8
2650.39' E to the N 1/4 cor Sec 9
2647.06' S to the E 1/4 cor Sec 8

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 8, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10-26-94 (DATE) found a 8" x 12" rock 2.5' below surface

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-26-94 (DATE) placed a 5/8 Iron on N. side rock

SKETCH OF REFERENCE TIES

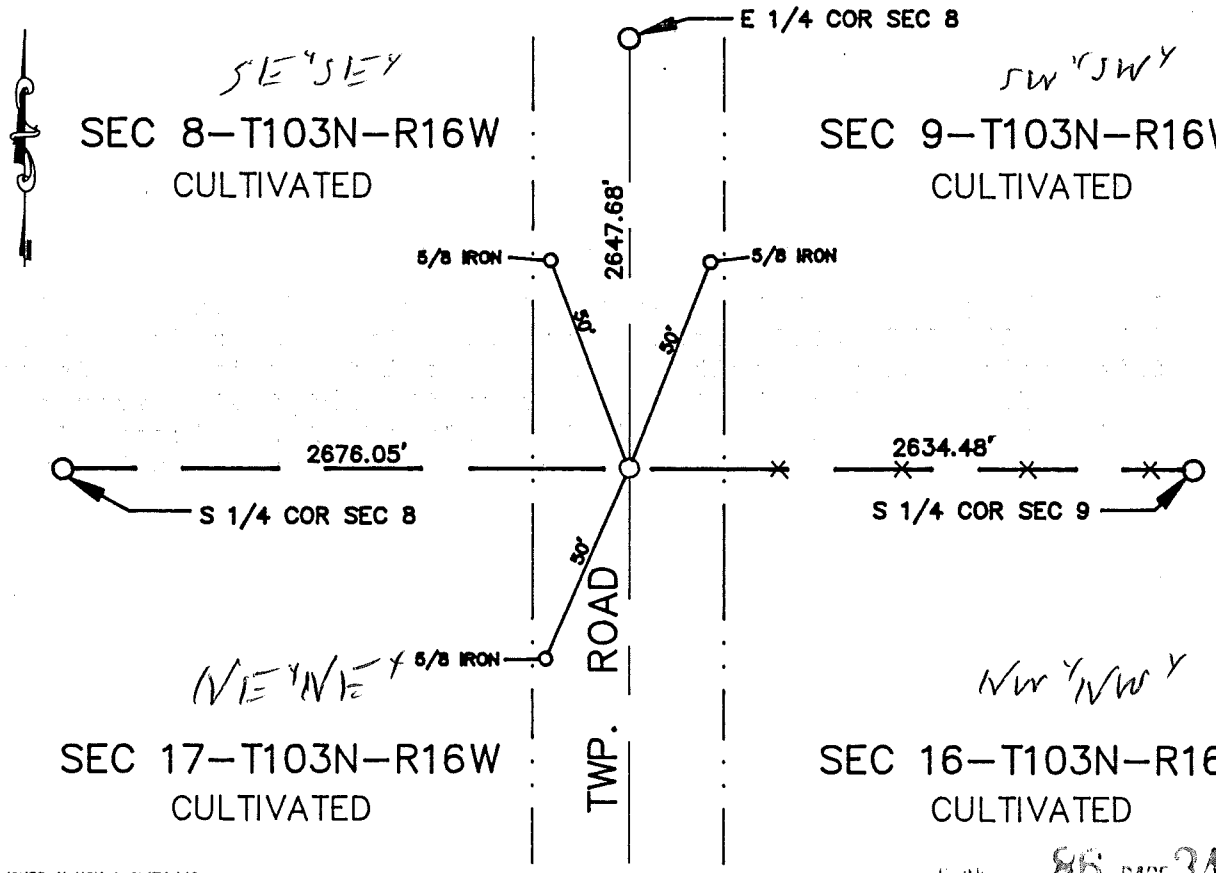

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 86 PAGE 340

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-3-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 6 day of Mar A.D., 1995

COUNTY RECORDER Charles Engen
By Susan M. Davis, Deputy
DOCUMENT NO. 435273

M.H.D. FORM NO. 2105

BK 86 Misc Pg 340

STATEMENT OF EVIDENCE

SE cor Sec 8-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1892 Clausen notes indicate a post inplace at this location.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, dug with county backhoe on centerline of township road and in line with a fence line to the east. A 8"x12" stone was found 2.5 feet below the road surface. Continued digging but found no further evidence. The stone is in agreement with Clausens records, therefore accepted stone as best evidence of the original corner. Stone agreed with centerline of the road and the fence line to the east. A 5/8" iron capped RLS 13807 was placed on the north side of the stone. Another iron was placed over the stone approximately 4" below the road surface. Electronic surveying equipment was used to measure the distance to the S 1/4 and E 1/4 Section 8, and S 1/4 Section 9. The distances are as follows:

2676.05' W to the S 1/4 cor Sec 8
2634.48' E to the S 1/4 cor Sec 9
2647.68' N to the E 1/4 cor Sec 8

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 9, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1-10-1995 (DATE) found a N-E-W FENCE INTERSECTION

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-10-1995 (DATE) placed a 5/8 IRON ON W. SIDE CFP

SKETCH OF REFERENCE TIES

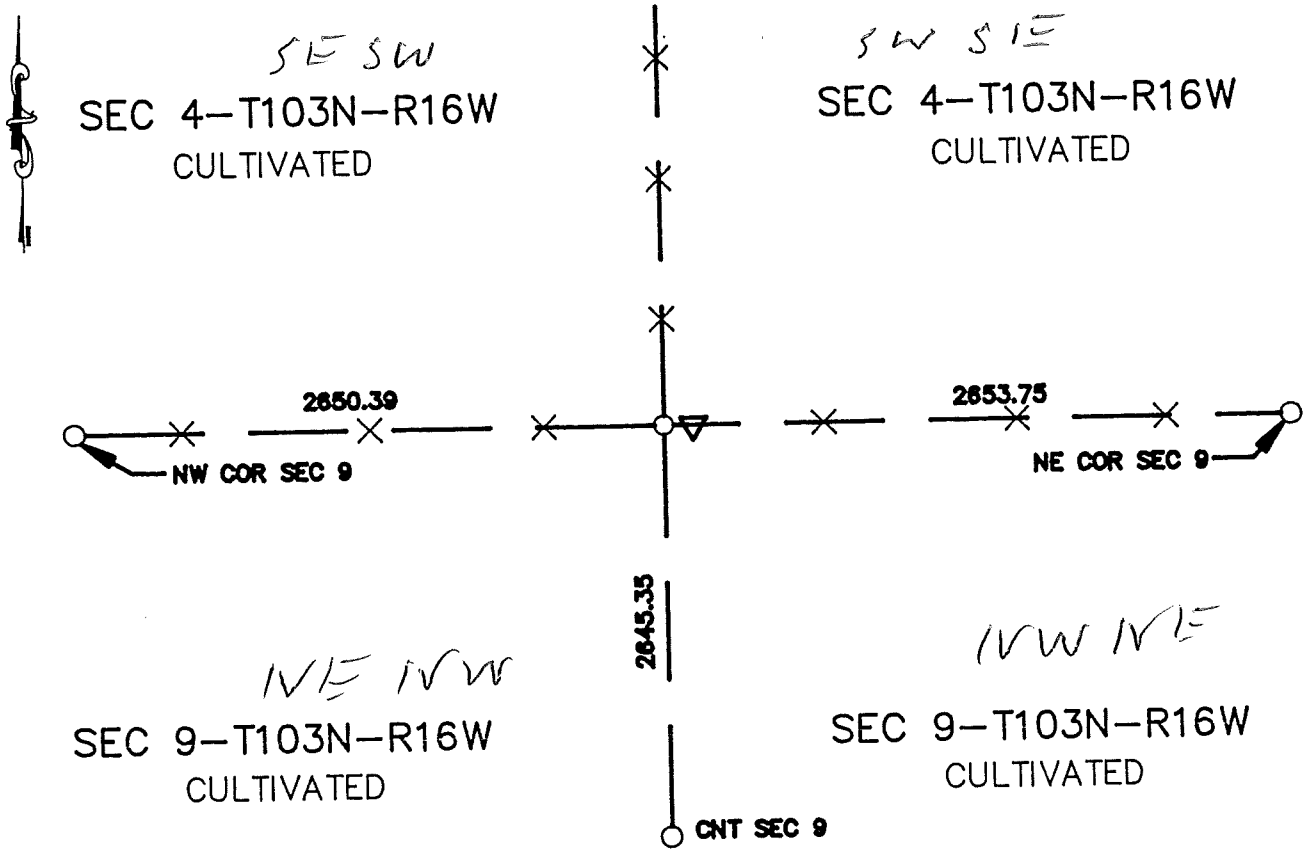

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-15-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 20 day of March A.D., 1995

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 435518

415

M.H.D. FORM NO. 2105

BOOK 86 PAGE 415

Book 86 Misc Page 415

STATEMENT OF EVIDENCE

N 1/4 cor Sec 9-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1995 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, found a north, east & west fence intersection at this location. No other evidence was found and therefor the fence intersection was determined to be the best evidence of the corner. A 5/8" iron was set on the west side of the corner fence post. Electronic surveying equipment was used to measure the distance to the northwest corner, northeast corner and center of Section 9. The distances are as follows:

2650.39' W to the NW cor Sec 9
2653.75' E to the NE cor Sec 9
2645.35' S to the center of Sec 9

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

JONES, HAUGH & SMITH INC.
CONSULTING ENGINEERS
515 SO. WASHINGTON
ALBERT LEA, MINNESOTA 56007

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 9, Township 103N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of mower


At the corner location shown on the sketch:

☐ On 8-27-91 (DATE) found a 6"ø CONCRETE MONUMENT IN CLAY TILE OVER A POINTED FIELD STONE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-27-91 (DATE) placed a CAST IRON MONUMENT OVER STONE AND SET CONCRETE MONUMENT ON EAST SIDE OF STONE FOUND.

SKETCH OF REFERENCE TIES

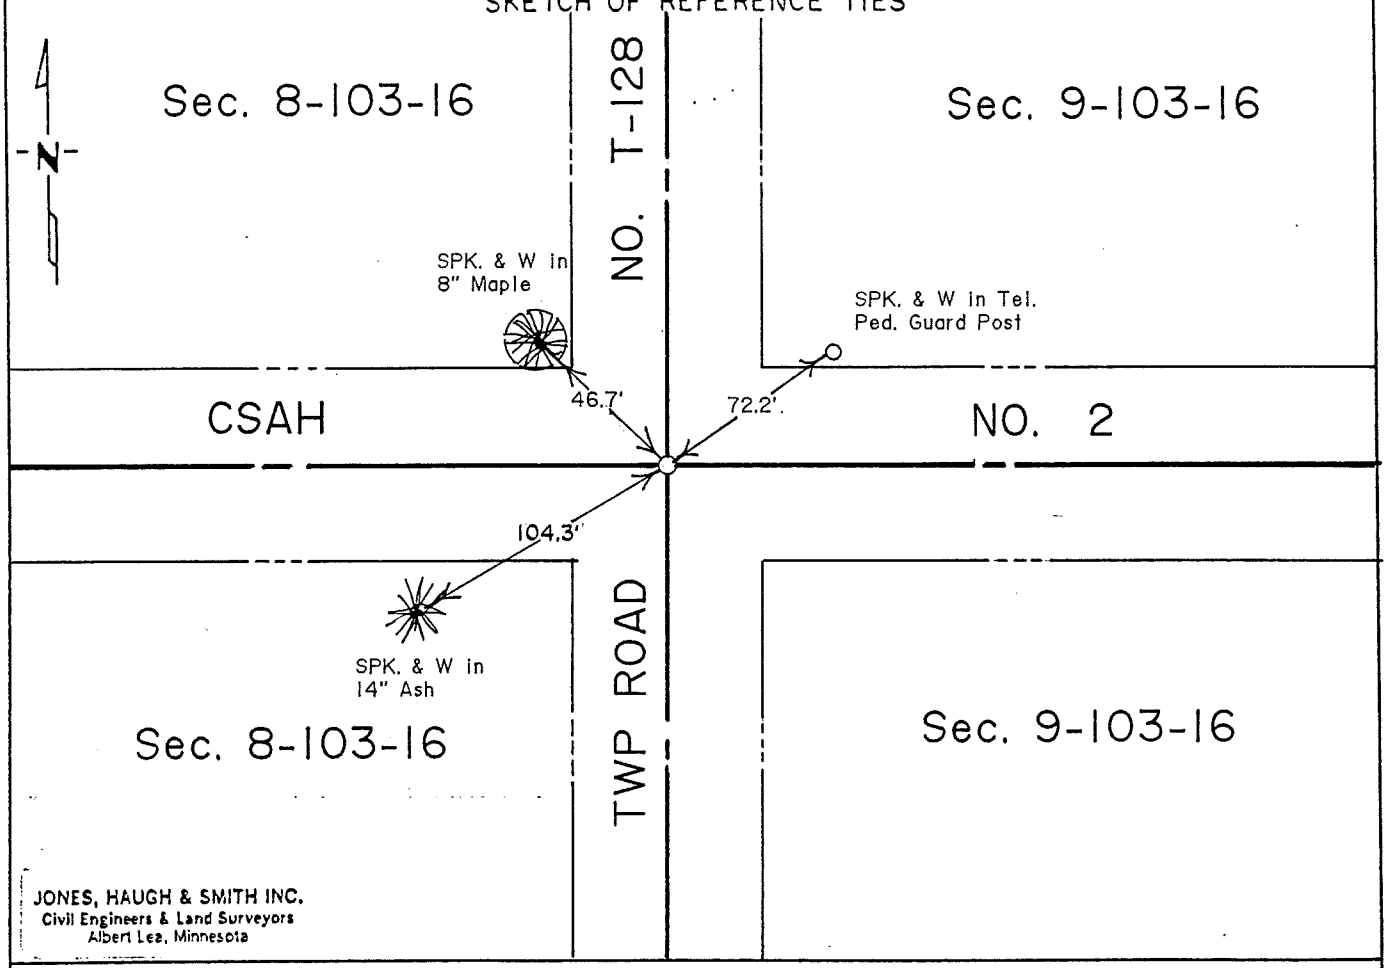

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 9-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1890 Clausen, County Surveyor from 1880-1892, notes show a government post in place.

1935 Book 'A' of the Mower County Engineer's Office show the following ties were taken:
42.8' SW to CFP 34.5' NW to Maple 34.0' to CFP

1938 Book 'A' shows a large stone inplace and a monument placed over stone. The following ties were taken:
65.2' SW to 3rd FP Twp Rd
72.6' SW to tall Cottonwood
93.4' NW to SE cor farm house
69.8' NNW to 24" Elm
67.8' NE to 3rd FP

1946 Book 'A' notes show a concrete monument inplace and the following ties were taken:
69.9' NNW to 18" Elm (BM) 54.1' NE to TP
72.5' SW to 18" Cottonwood 52.5' SE to CFP

1978 Jones, Haugh & Smith crew placed a PK nail and washer on centerline of north-south-east-west roads. The following ties were taken:
Spk & W SW side TP NW 53.8'
Spk & W SE side TP NE 61.2'

1991 Jones, Haugh & Smith crew under the direction of John Schulte IV, County Surveyor, dug with County backhoe on centerline centerline of north-south-east-west roads and uncovered a 6" diameter concrete monument in clay tile. Continued digging and found a pointed field stone 3 feet deep in virgin soil under the clay tile. Set concrete monument on east side of stone and set cast iron monument at road surface over stone found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 9, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1-10-95 (DATE) found a E-W Fence line

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-10-95 (DATE) placed a 5/8 iron in E-W fence line

SKETCH OF REFERENCE TIES

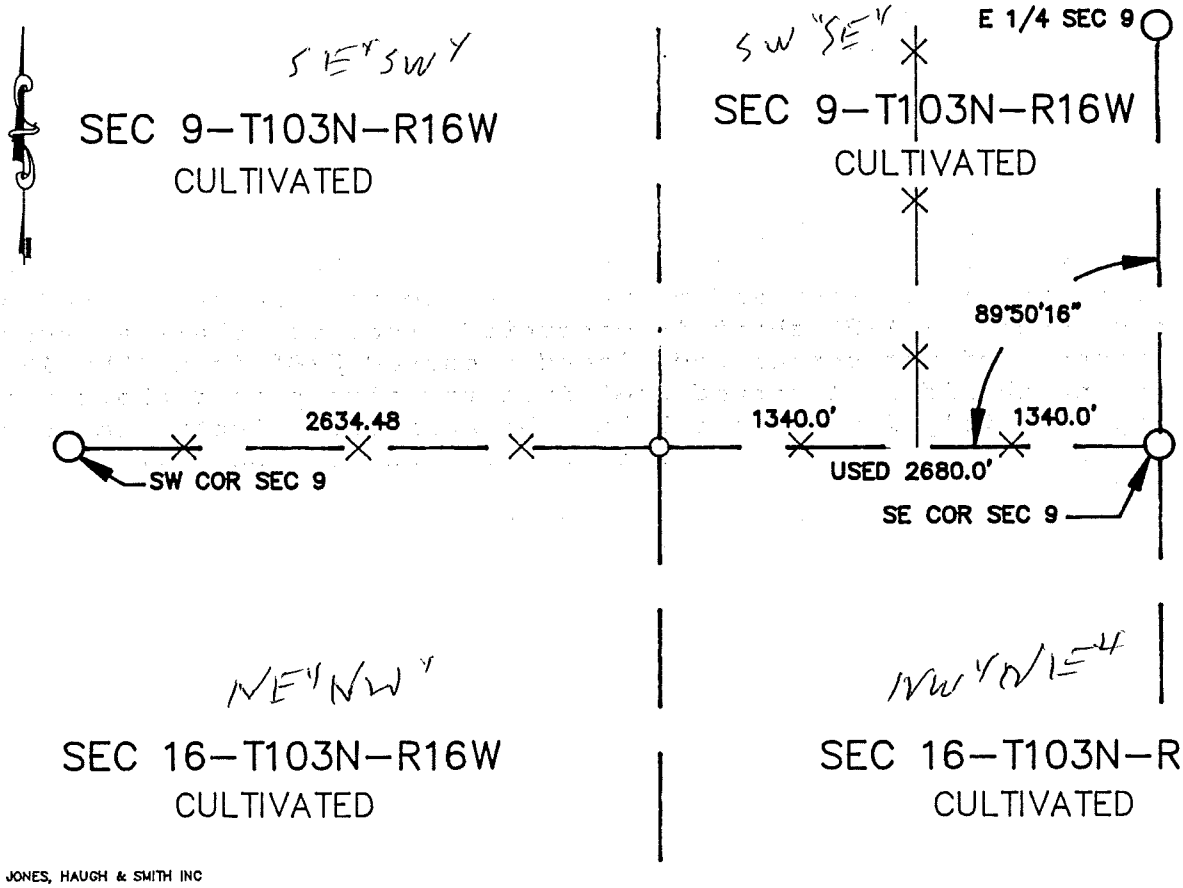

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

BOOK 86 PAGE 248

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 2-21-95
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 23 day of Feb A.D., 1995

COUNTY RECORDER Charles Evgen

By Susan M. Burns, Deputy

DOCUMENT NO. 435071

M.H.D. FORM NO. 2105

Book 86 Misc Page 248

STATEMENT OF EVIDENCE

S 1/4 cor Sec 9-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a charred stake and a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1995 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, found an east-west fence line. No evidence of the original corner was found. A 5/8" iron was set in the east-west fence line by doubling over the distance from the 1/16 line fence to the east. Electronic surveying equipment was used to measure the distance to the SW corner of Section 9 to be 2634.48 feet.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 9, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10-26-94 (DATE) found a 6"x10" pointed stone

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-26-94 (DATE) placed a Capped 5/8 iron over rock 4" below road surface

SKETCH OF REFERENCE TIES

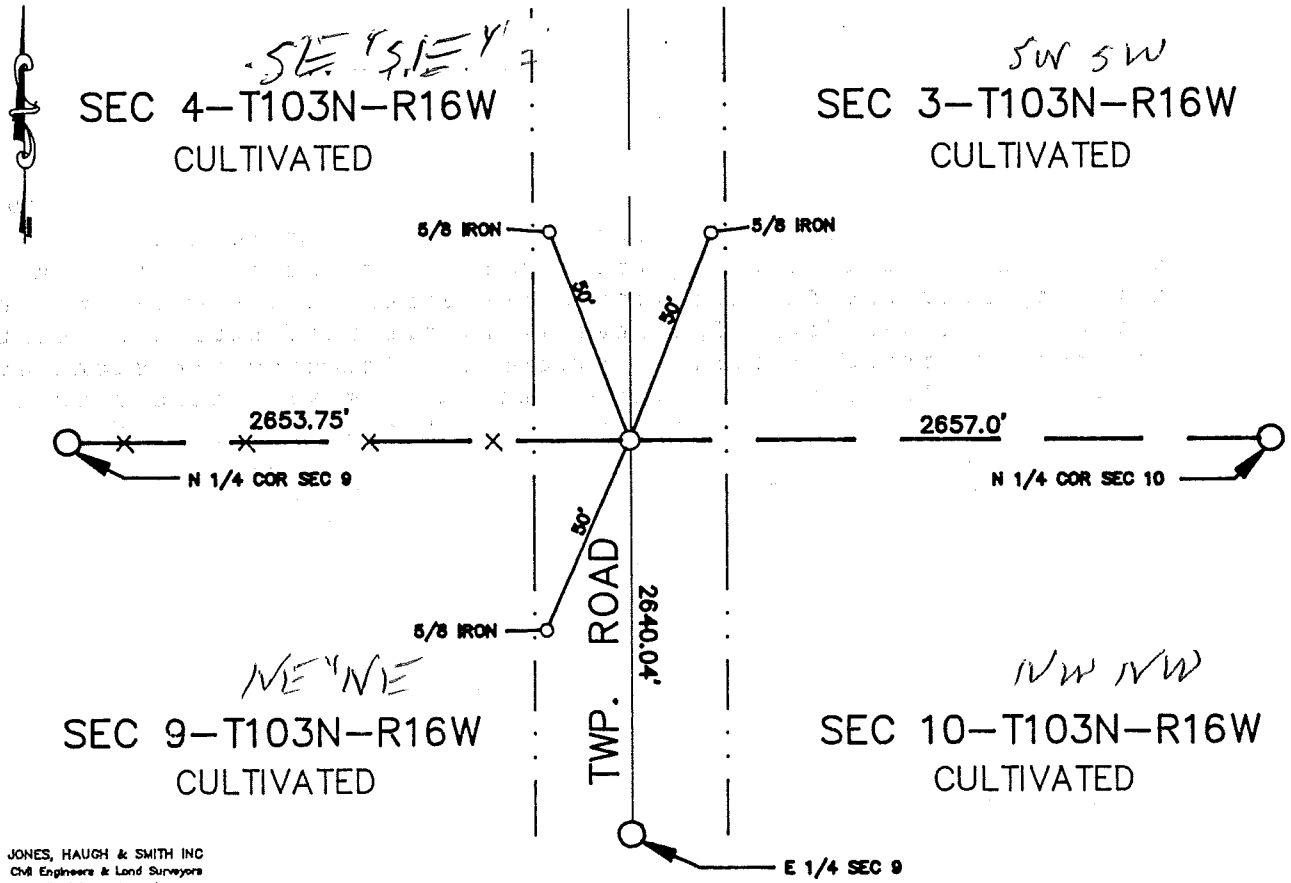

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. bJUR 86 PAGE 344

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 3-3-95
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 6 day of Mar A.D., 1995

COUNTY RECORDER Charles Engen
By Susan M. Davis, Deputy
DOCUMENT NO. 435275

M.H.D. FORM NO. 2105

BK86 Misc Pg-344

STATEMENT OF EVIDENCE

NE cor Sec 9-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, dug with county backhoe on centerline of township road and in line with a fence to the west. A 6"x10" pointed stone was found 2.2 feet below the road surface and in line with the centerline and the fence line west. Continued digging yielded no further evidence and the stone was accepted ad the true corner. A 5/8" iron capped RLS 13807 was placed on the north side of the stone. Another 5/8" iron was placed above the stone approximately four inches below the road surface. Electronic surveying equipment was used to measure the distance to the N 1/4 and the E 1/4 Section 9 and to the N 1/4 Section 10. The distances are as follows:

2653.75 W to the N 1/4 cor Sec 9
2640.04 S to the E 1/4 cor Sec 9
2657.0 E to the N 1/4 cor Sec 10

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 9, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10-26-94 (DATE) found a Pointed rock 1.5 S RCP pipe

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-26-94 (DATE) placed a Capped 5/8 iron over rock 4" below road surface

SKETCH OF REFERENCE TIES

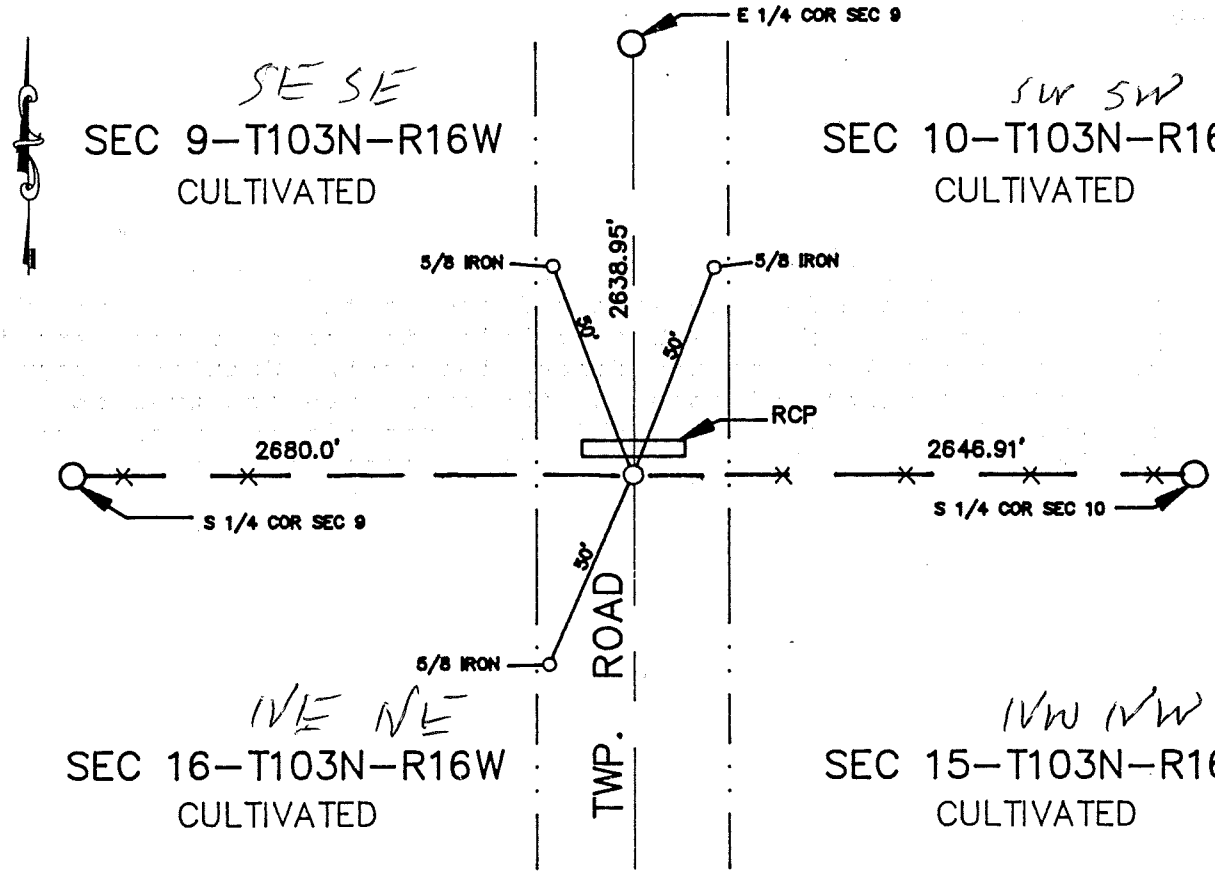

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 86 PAGE 346

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 3-395
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 6 day of May A.D., 1995

COUNTY RECORDER Charles Engen
By Susan M. Davis, Deputy
DOCUMENT NO. 435276

M.H.D. FORM NO. 2105

BK 86 Misc Pg 346

STATEMENT OF EVIDENCE

SE cor Sec 9-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, dug with county backhoe on centerline of township road and in line with a fence to the east and with a fence/field division to the west. A pointed stone was found 2.4 feet below the road surface. The stone was found 1.5 feet south of an apparently abandoned RCP pipe. Pieces of wood were also found on the west side of the stone. The stone was accepted as the true corner and a 5/8" iron capped RLS 13807 was placed on the north side. Another 5/8" iron was placed above the stone four inches below the road surface. Electronic surveying equipment was used to measure the distance to the S 1/4 and the E 1/4 Section 9 and to the S 1/4 Section 10. The distances are as follows:

2680.0 W to the S 1/4 cor Sec 9
2638.95 N to the E 1/4 cor Sec 9
2646.91 E to the S 1/4 cor Sec 10

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 10, Township 103N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-27-1991 (DATE) found a 5/8"ø x 8" IRON OVER 6"ø CLAY TILE, WITH A 1/2"ø IRON CAST IN THE CENTER.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 8-27-1991 (DATE) placed a CAST IRON MONUMENT OVER MONUMENTS FOUND

SKETCH OF REFERENCE TIES

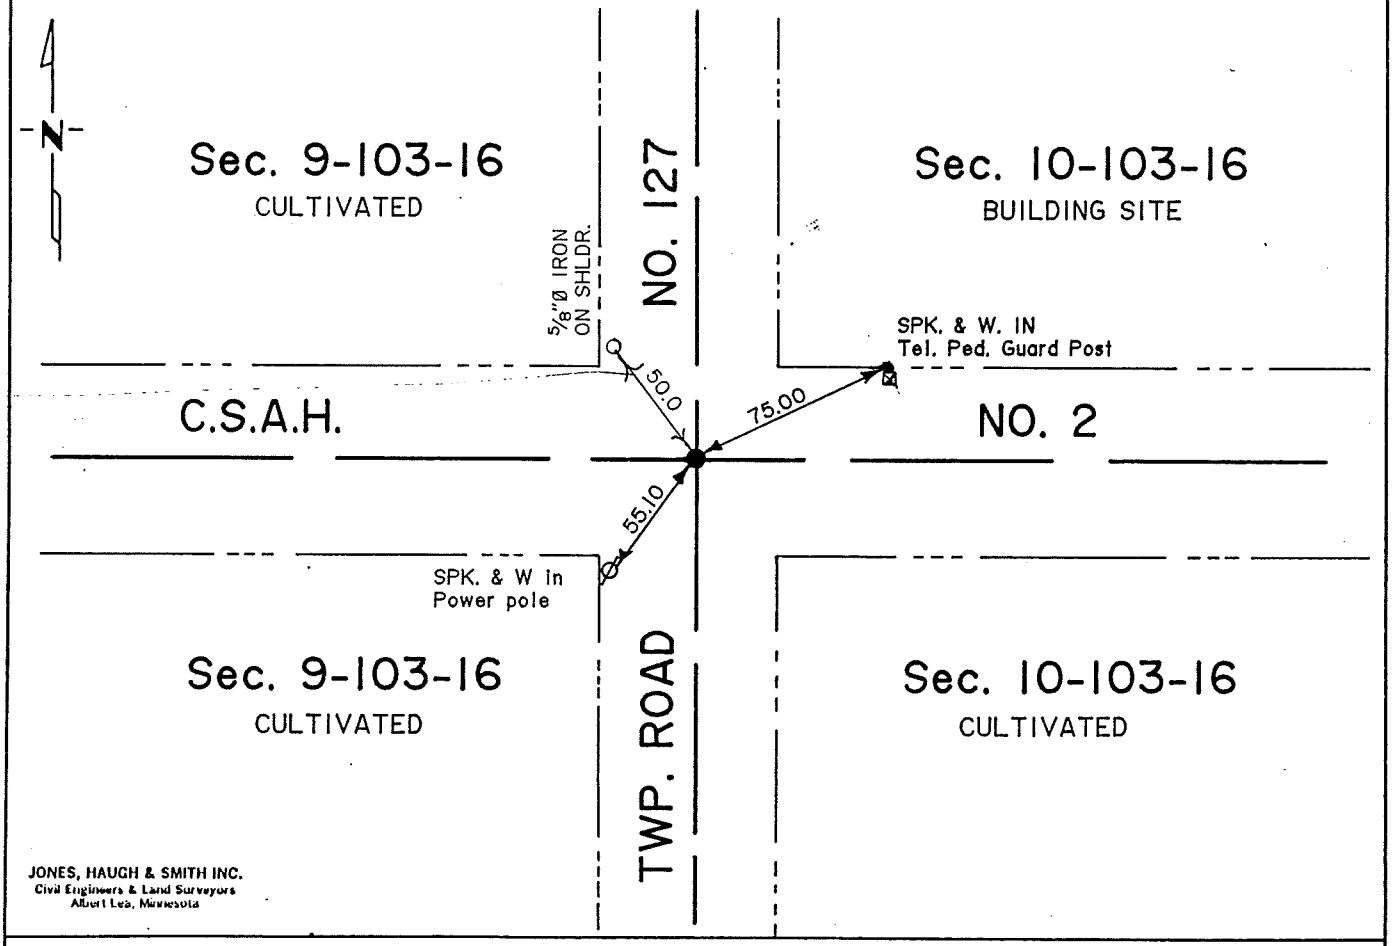

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-20-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 10-103-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

1938 County Grading Plan shows a stone, and three wood stakes 3 feet below road surface. A monument was set over stone and the following ties were taken:
55.8' SE to 2nd fence post on Twp Rd
57.8' SW to 2nd fence post on Twp Rd
68.4' NW to 3rd fence post on Twp Rd
79.4' NE to 3rd fence post on Twp Rd

1946 Recorded in Book "A" in the Office of the County Engineer it shows a monument found and the following ties were taken:
47.5' NW to fence post
46.0' NE to fence post
37.6' SW to telephone pole
45.0' SE to fence post
46.6' SW to fence post

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, Mower County Surveyor RLS 13807, dug with the County backhoe on centerline centerline on north-south-east-west road and uncovered a 5/8" diameter x 18" long iron on road surface. Continued digging and uncovered a 1/2" diameter iron cast in the center of a 6" diameter concrete monument 3 feet below road surface. Monument agrees with past records. Accepted as best evidence and set a cast iron monument over concrete monument on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 10, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1-6-95 (DATE) found a Corner Fence Post

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-6-95 (DATE) placed a 5/8 iron at base rotted CFP, fence lines E-W-S

SKETCH OF REFERENCE TIES

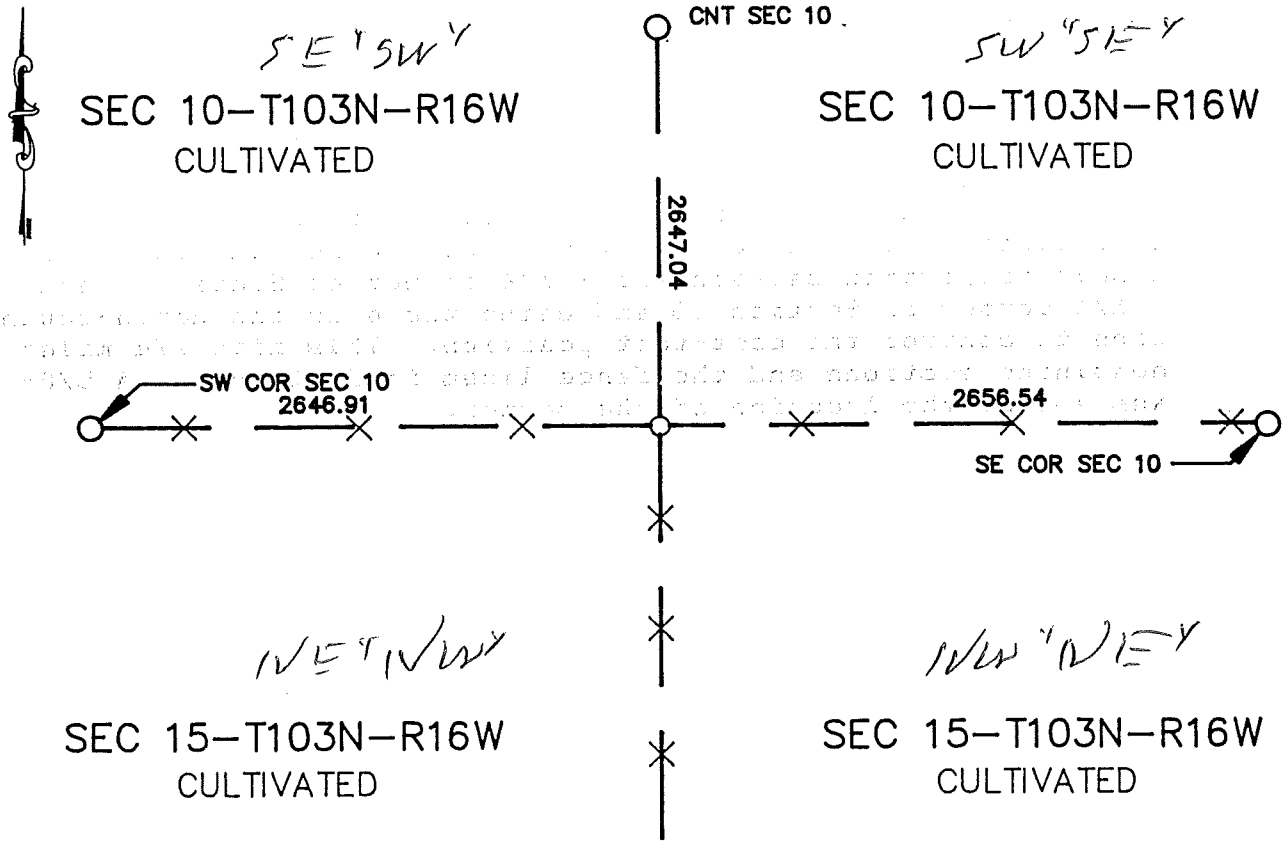

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-24-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 a M. on the 24 day of February A.D., 1995

COUNTY RECORDER Charles Enger

By Meryl A Taylor, Deputy

DOCUMENT NO. 435086

M.H.D. FORM NO. 2105

Book 86 Page 254

STATEMENT OF EVIDENCE

S 1/4 cor Sec 10-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1995 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, found a rotted corner fence post at an intersection of fence lines to the east, west and south. The rotted corner fence post was accepted as the best evidence of the public land survey corner and a 5/8" iron was set at the base of the rotted corner fence post. Electronic surveying equipment was then used to measure the distances to the southwest and southeast corners as well as to the center of Section 10. The distances are as follows:

2646.91' to the southwest corner
2656.54' to the southeast corner
2647.04' to the center of Section 10

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 86 PAGE 255

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 10, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1-10-95 (DATE) found a No evidence of PLS cor

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-10-95 (DATE) placed a 5/8 iron N side fld stone in nest in N-S fnc ln

SKETCH OF REFERENCE TIES

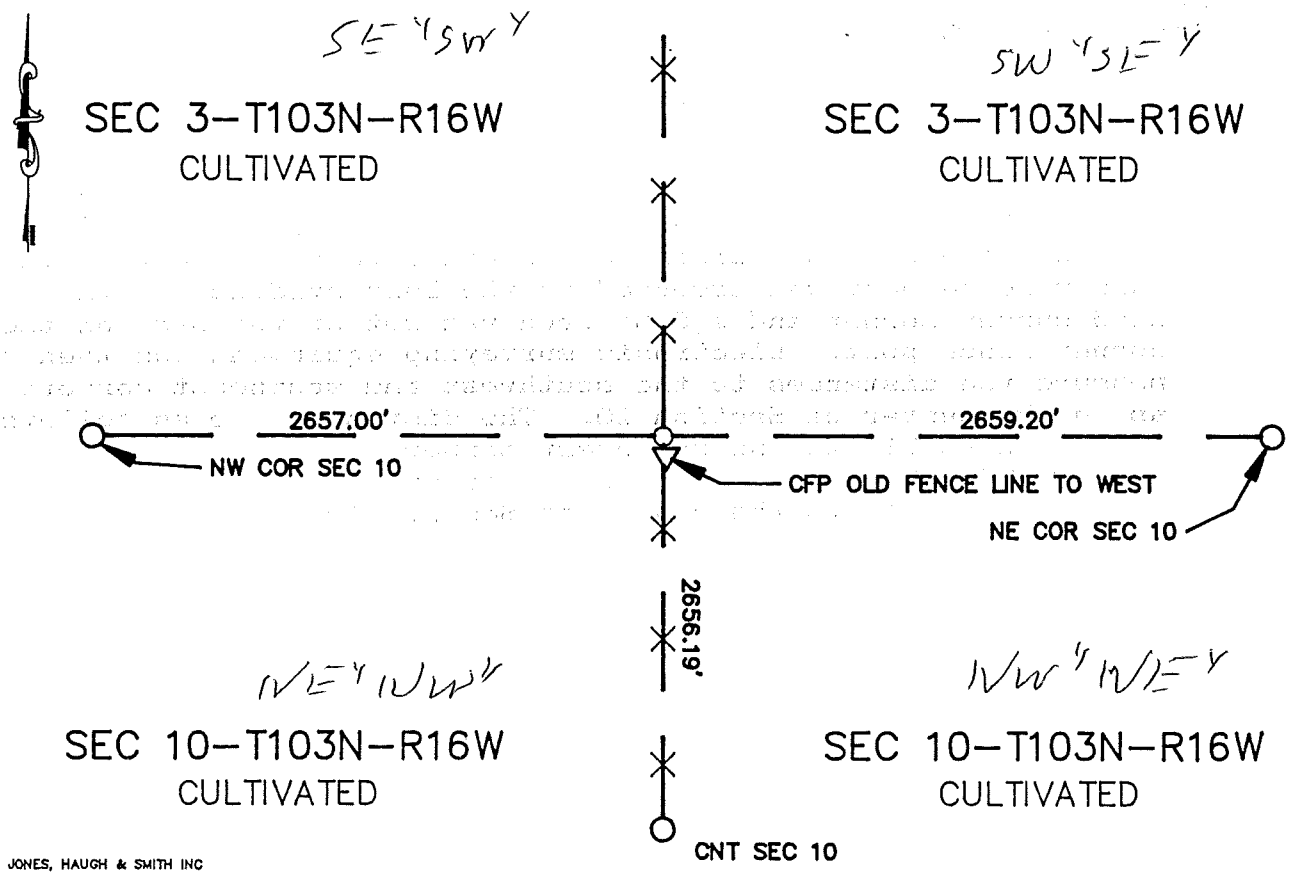

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-25-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 a.M. on the 24 day of February A.D., 1995

COUNTY RECORDER Charles Engler

By Sheryl A Rayburn Deputy

DOCUMENT NO 45508

M.H.D. FORM NO. 2105

Book 86 Page 256

STATEMENT OF EVIDENCE

N 1/4 cor Sec 10-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1995 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, found no evidence of the original corner. The corner was set using electronic surveying equipment on the north side of a field stone, within a nest of field stones in the existing north-south fence line, at what appears to be the location of an old corner fence post for a fence line to the west. Electronic surveying equipment was used to measure the distances to the northeast and northwest corners. The distances are as follows:

2657.0' west to the northwest corner
2659.2' east to the northeast corner
2656.19 to the center of section

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 86 PAGE 257

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE 1/4 Corner of Section 10, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 1-10-95 (DATE) found a N-S fence line

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-10-95 (DATE) placed a 5/8 iron at N-S fence line

SKETCH OF REFERENCE TIES

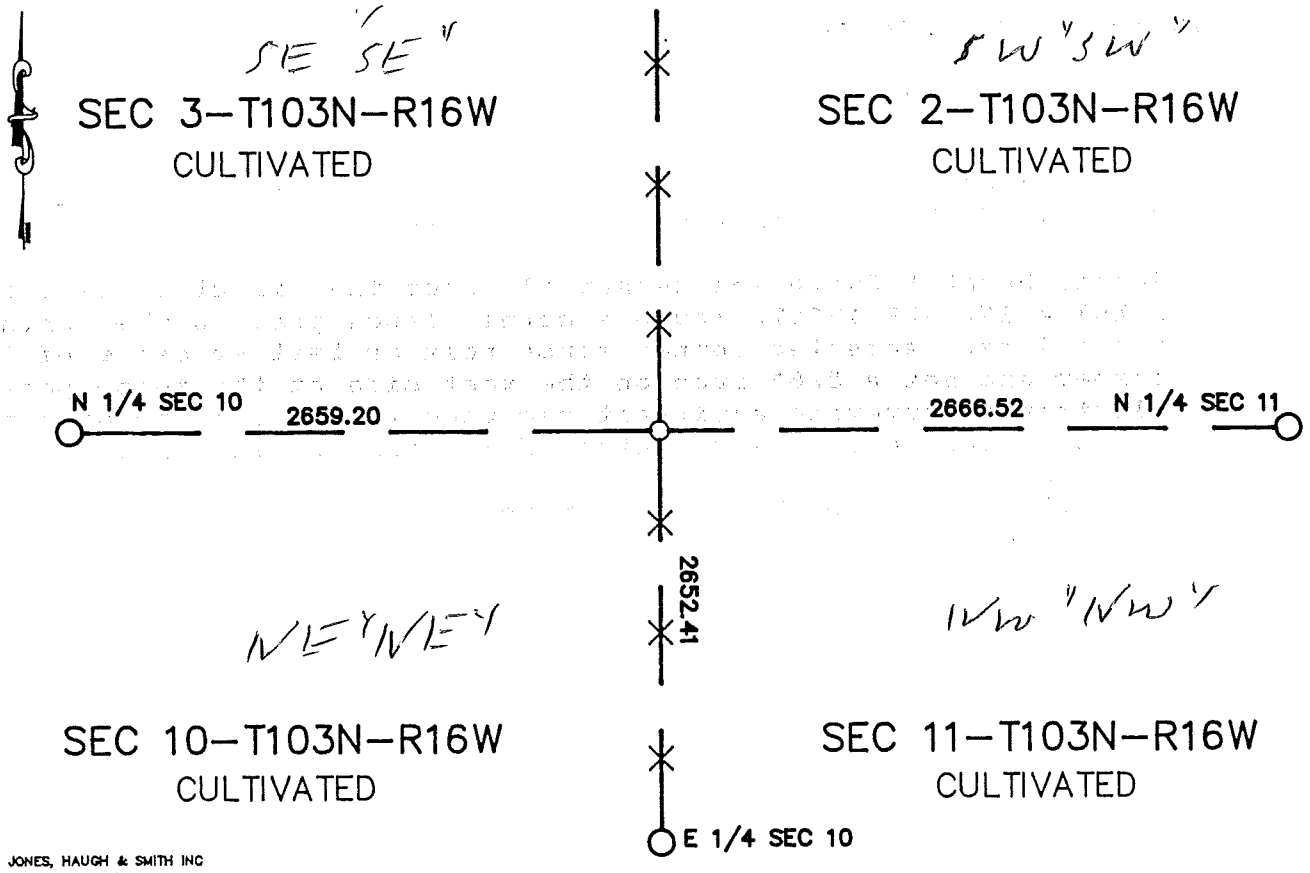

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-24-94

Registration No. 13807

☐ Land Surveyor, ☒ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 a.M. on the 24 day of February A.D., 1995

COUNTY RECORDER Charles Enger

By Cheryl A. Taylor, Deputy

DOCUMENT NO. 455085

M.H.D. FORM NO. 2105

Book 86 Page 252

STATEMENT OF EVIDENCE

NE cor Sec 10-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a charred stake and a trench with a mound of earth.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1995 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, found no evidence of the original corner. Electronic surveying equipment was used to set the corner using a single proportion between the E 1/4 corner of Section 3 and the E 1/4 corner of Section 10 and using the existing north-south fence line to control the east-west position. This fits 1/4 miles in the adjoining sections and the fence lines in Section 3. A 5/8" iron was set at the location of the corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 250

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 10, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10-26-94 (DATE) found a 1 1/2 shaft in conc. 1' below surface

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-26-94 (DATE) placed a 5/8 Iron on N. side shaft

SKETCH OF REFERENCE TIES

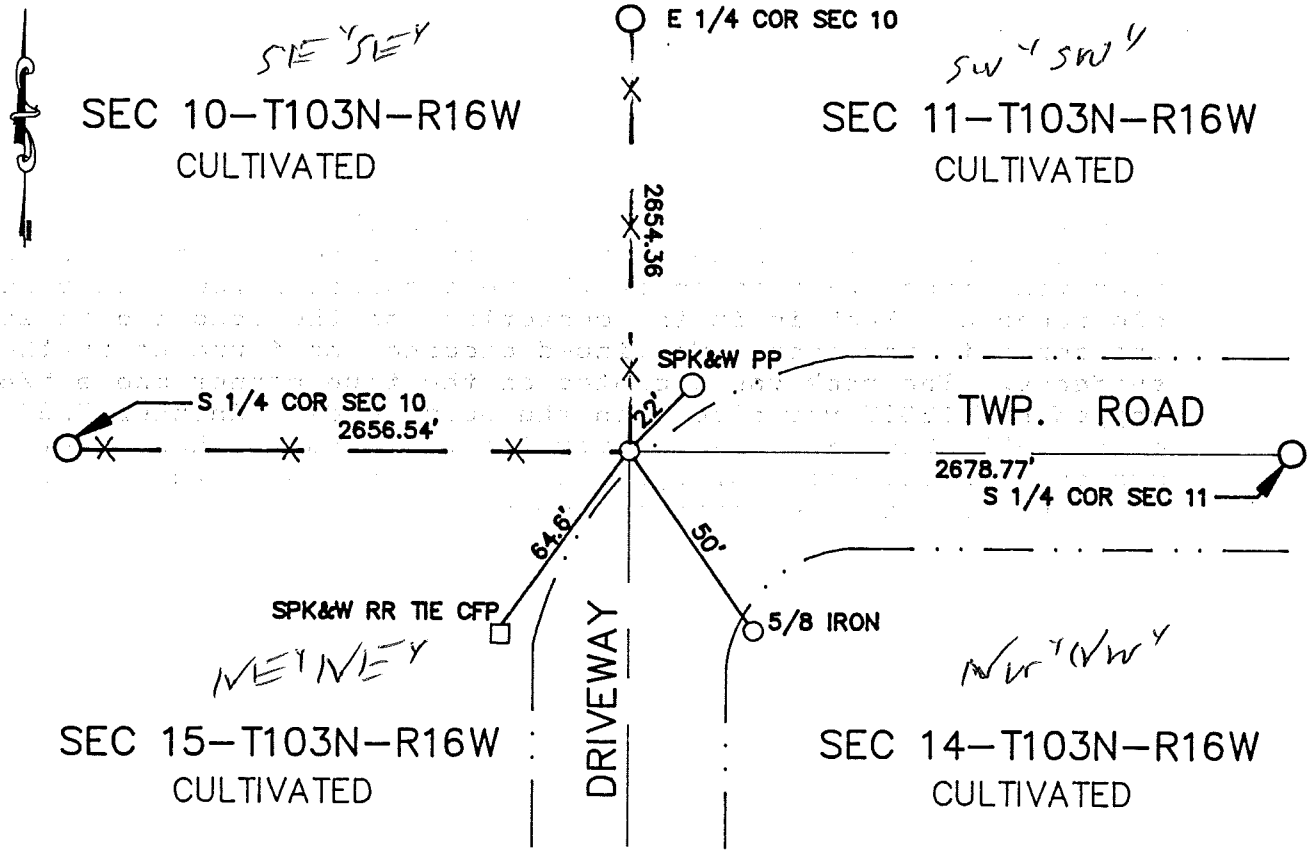

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 86 PAGE 246

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-21-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 23 day of Feb A.D., 1995

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 435070

M.H.D. FORM NO. 2105

Book 86 Misc Page 246

STATEMENT OF EVIDENCE

SE cor Sec 10-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Book A in the office of the County Engineer indicates a monument. No notes or ties were given.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, dug with County backhoe at the intersection of a line fence west and north. Dug one foot below ground surface and found a 1 1/2" shaft in concrete. Accepted shaft as best evidence of the corner and placed a capped 5/8" iron (RLS 13807) on the north side. A capped 5/8" iron was also placed above the shaft approximately four inches below the surface. Electronic surveying equipment was used to measure the distance to the S 1/4 corner of Section 10, the E 1/4 of Section 10 and to the S 1/4 corner of Section 11. The distances are as follows:

2656.54' to the S 1/4 corner of Section 10
2659.36' to the E 1/4 corner of Section 10
2678.77' to the S 1/4 corner of Section 11

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 11, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10-26-94 (DATE) found a 8" x 10" rock 1.7' below surface

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-26-94 (DATE) placed a 5/8 Iron on N. side rock

SKETCH OF REFERENCE TIES

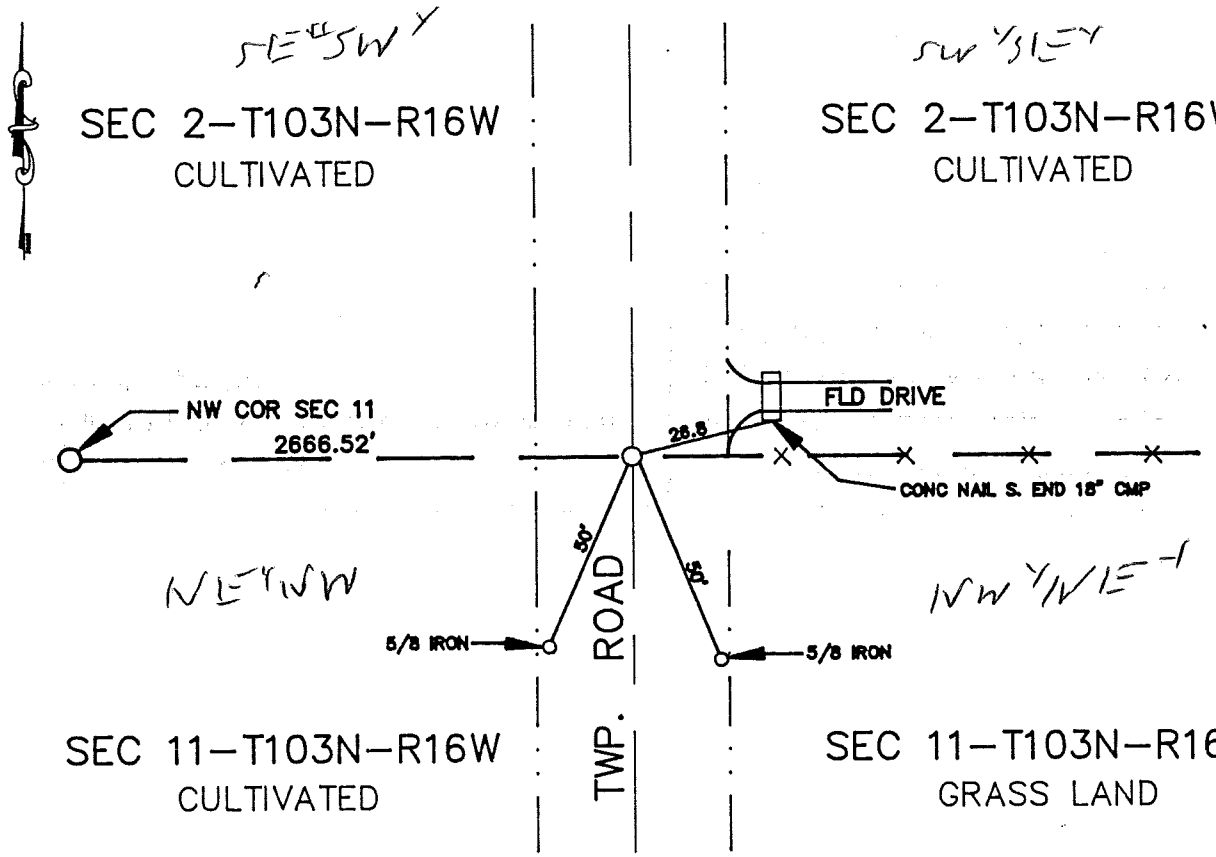

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

BOOK 86 PAGE 244

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-21-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 23 day of Feb A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 435069

M.H.D. FORM NO. 2105

Book 86 Misc Page 244

STATEMENT OF EVIDENCE

N 1/4 cor Sec 11-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show this corner was marked with a charred stake and a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, dug with county backhoe on centerline of a township road and in line with the fence line to the east. A 8"x10" rock was found 1.7 feet below the road surface, .50 feet below the old roadbed. Rock is in the centerline of the road and in line with the fence to the east. Continued digging and found no further evidence. The rock was accepted as the true corner and a 5/8" iron capped RLS 13807 was placed on the north side. Another 5/8" iron capped RLS 13807 was placed over the rock four inches below the road surface. Electronic surveying equipment was used to measure the distance west to the northwest corner of Section 11 to be 2666.52 feet.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 86 PAGE 245

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 11, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10-26-94 (DATE) found a No evidence

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12-22-94 (DATE) placed a 5/8 Iron on CL Twp. Rd.

SKETCH OF REFERENCE TIES

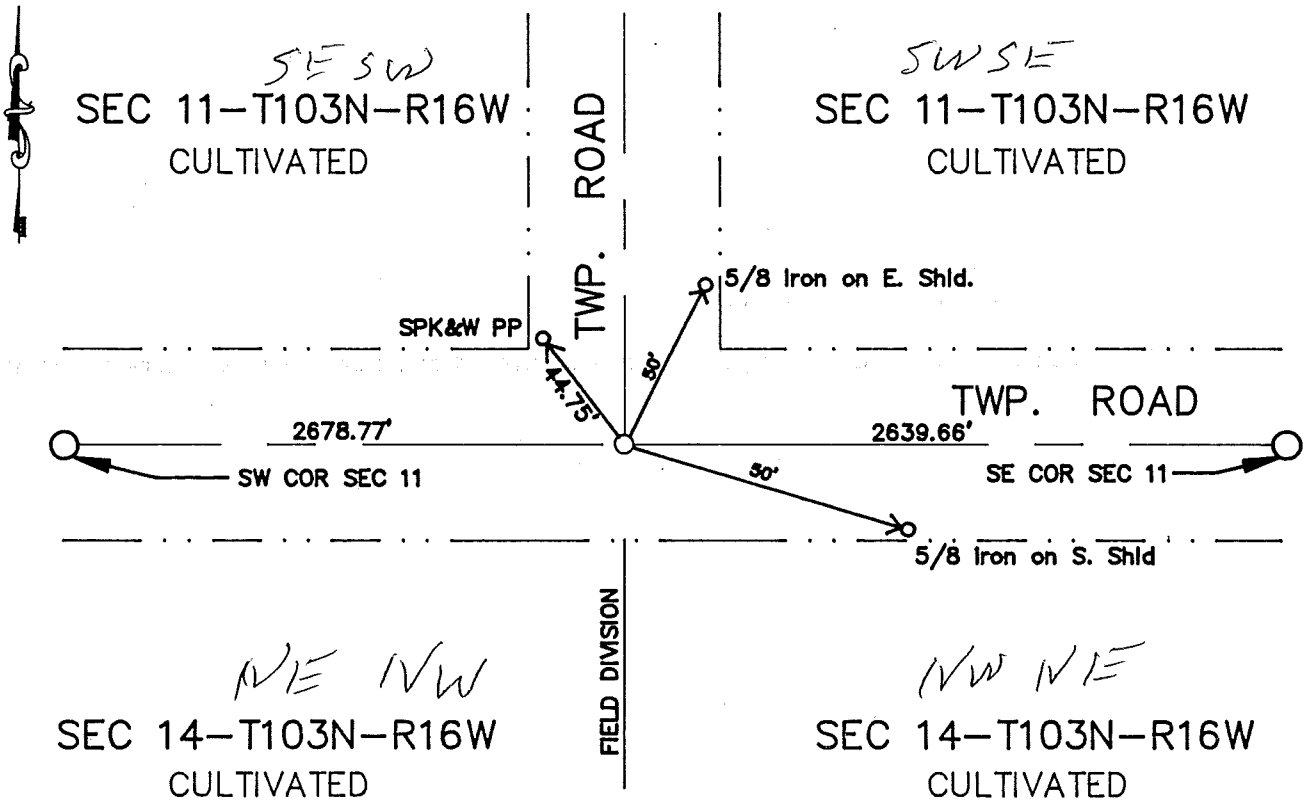

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

BOOK 86 PAGE 350

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-3-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 6 day of May A.D., 1995

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 435278

M.H.D. FORM NO. 2105

BK 86 Misc Pg 350

STATEMENT OF EVIDENCE

S 1/4 cor Sec 11-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, dug with county backhoe on centerline centerline of east, west and north township roads. A hole 8"x10"x4' was excavated but no evidence was found of the corner. a 5/8" iron was set on centerline centerline of the township roads. Electronic surveying equipment was used to determine the distance to both the SW and SE corner. The distances are as follows:

2678.77' W to the SW corner
2639.66' E to the SE corner

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 11, Township 103N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-27-91 (DATE) found a HARRISON MONUMENT OVER A 3/4"ø IRON DRIVEN INTO A 4" CHARRED STAKE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-27-91 (DATE) placed a CAST IRON MONUMENT OVER MONUMENT FOUND.

SKETCH OF REFERENCE TIES

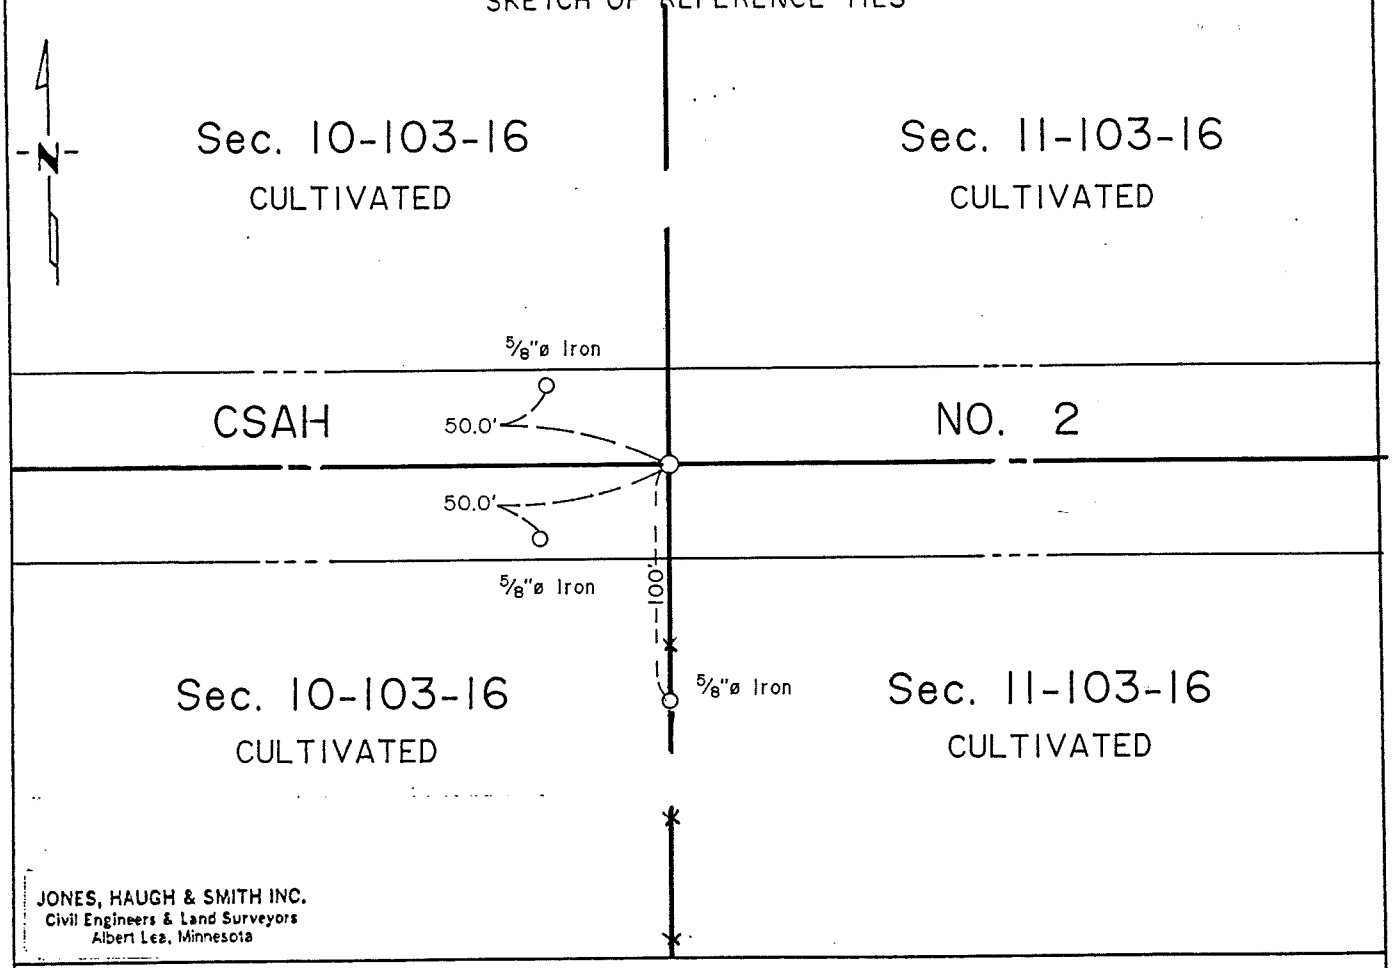

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 11-103-16

This corner was originally established by Deputy Surveyor of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Book 'A' of the Mower County Engineer's Office show the following ties:
37.5' South to Cottonwood
58.5' SW to Cottonwood
29.4' North to TP

1938 Book 'A' notes show a concrete monument inplace and the following ties were taken:
29.8' N to TP
50.9' S to twin Cottonwood
89.6' WSW to Cottonwood
54.3' SW to Cottonwood
33.7' N to CFP
59.0' N to 3rd FP

1982 Jones, Haugh & Smith crew found a 2 foot long wood post with field stones around base. Placed a 5/8" diameter iron in center of post 1.0 feet deep in line with fence south and 0.5' south of road centerline. The following ties were taken:
5/8" diameter iron 0.5' above ground 46.2' south
Concrete nail & washer 10' N & 10' E

1991 Jones, Haugh & Smith crew under the direction of John Schulte IV, County Surveyor, dug with County backhoe on centerline of east-west road in line with fence south and uncovered a harrison cast iron monument 0.5 feet deep. Continued digging and found a 3/4" diameter iron driven into a 4" charred stake two feet deep in virgin soil. Left monument as found and set a cast iron monument over.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

TIE BOOK P 39

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W. 1/4 Corner of Section 11, Township 103, Range 16, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☑ On 4-22-82 (DATE) found a 3" DIA. WOOD POST WITH FLD STONES AROUND BASE

☑ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☑ On 4-22-82 (DATE) placed a 5/8"Ø X24" LONG IRON - CAPPED RLS 13807, OVER WOOD POST.

SKETCH OF REFERENCE TIES

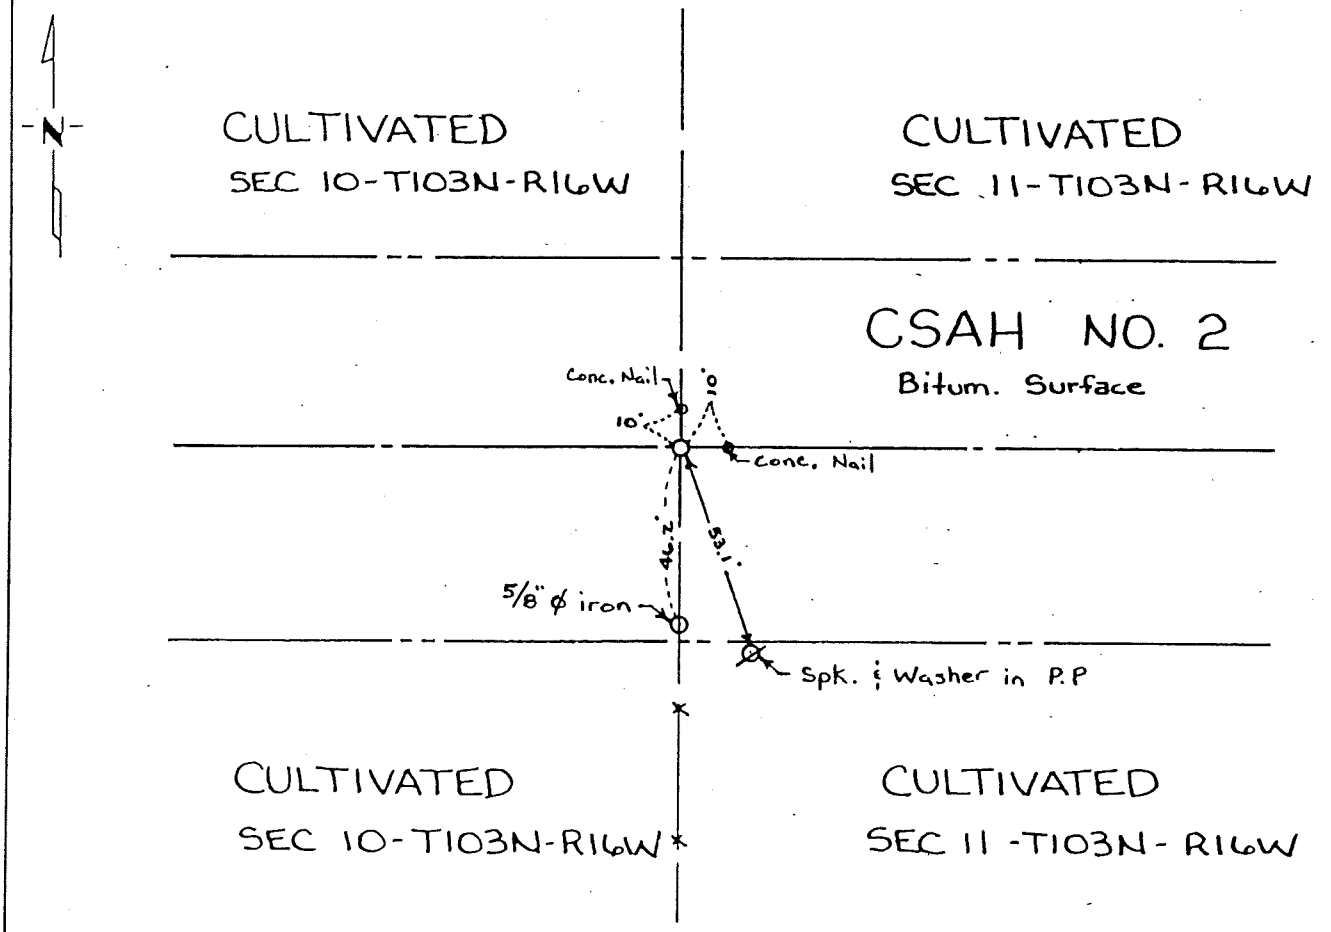

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] SIGNATURE 4-26-82 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the ____ day of _____ A.D., 19__

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 11, Township 103N Range 16W, 5th P.M.


STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch

☐ On 1-10-95 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-10-95 (DATE) placed a Not set due to existence of manhole

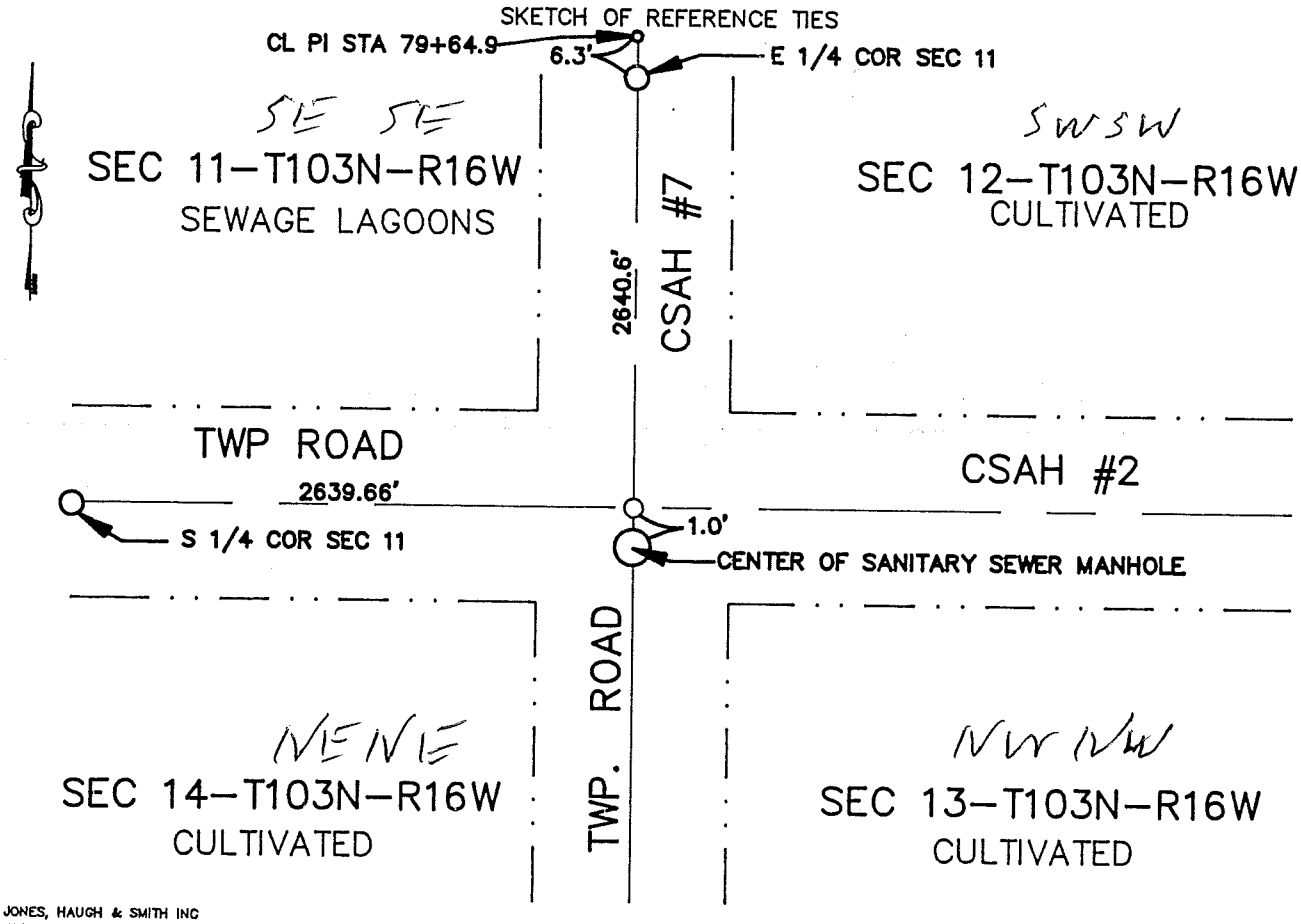

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 86 PAGE 348

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 3-3-95
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 6 day of May A.D., 1995

COUNTY RECORDER Charles Engen
By Susan M. Davis, Deputy
DOCUMENT NO. 435277

M.H.D. FORM NO. 2105

BK 86 Misc Pg 348

STATEMENT OF EVIDENCE

SE cor Sec 11-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was available from the above sources.

Recorded in Book A in the office of the County Engineer it shows an inplace concrete monumented stamped 1957 and the following ties were taken:

44.2' SE to CRP
57.8' SW to TP
76.8' WNW to TP

The corner was destroyed during construction of sanitary sewer line.

1995 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, set corner using data from CSAH No. 7 and CSAH No. 2 right-of-way plans. The centerline of County Road No. 7 from the west was extended until it intersected with the centerline of County Road No. 2. This location fits the plan distance from the north when using stations on PI and the 1/4 section corner. There was no monument set as it would be in a sanitary sewer manhole. Electronic survey equipment was used to measure the distance to both the E 1/4 and the S 1/4 Section 11. The distances are as follows:

2640.6' N to the E 1/4 cor Sec 11
2639.66' W to the S 1/4 cor Sec 11

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 11, Township 103N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-27-91 (DATE) found a HARRISON CAST IRON MONUMENT OVER (2) 5/8"ø IRONS

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-27-91 (DATE) placed a CAST IRON MONUMENT (Reset)

SKETCH OF REFERENCE TIES

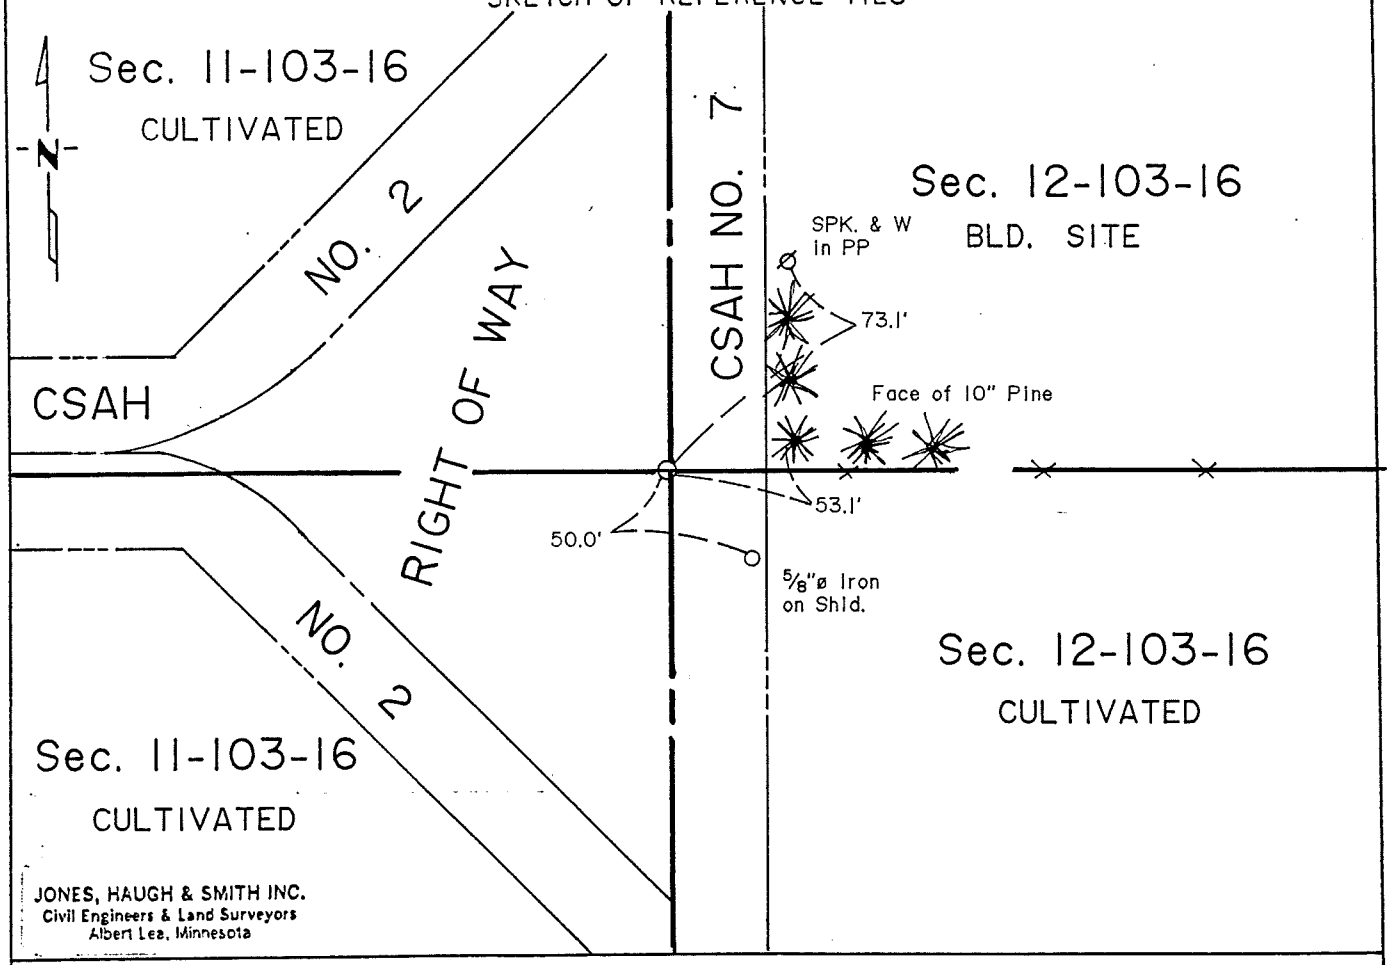

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 9-17-91
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Sec 11 T103 R16 established by Deputy Surveyor of the U.S. General Land Office in 1853. The government notes show a wood post and a handful of small stones were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Book 'A' of the Mower County Engineer's Office show a stake in place. The following ties were taken:
33.9' NE to TP
35.3' E to CFP
105.5' W to culv. post
53.6' SW to Sargeant sign

1982 Jones, Haugh & Smith crew found a 6"x8"x4" split field stone with point up in line with fence east and centerline of north-south road 0.5 feet west. Placed a 5/8" diameter x 24" iron capped 13807 over field stone found. The following ties were taken:

Spk & W NW side PP	NE	73.5'
Spk & W S side CFP	E	42.0'
Concrete nail	W	10.0'
Concrete nail	S	10.0'
Co. PI 5/8" diameter	N	6.0'

1991 Jones, Haugh & Smith crew under the direction of John Schulte IV, County Surveyor, dug with County backhoe on centerline of north-south road in line with fence east. Uncovered a harrison cast iron monument over two 5/8" diameter irons extending 4 feet below road surface. Found no further evidence of public land survey corner. Reset cast iron monument found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

"D" p39
"A" p65 TIEBOOK Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 11, Township 103, Range 16, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☑ On 4-22-82 (DATE) found a 6" x 8" x 4" SPLIT FLD. STONE WITH POINT UP

☑ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☑ On 4-22-82 (DATE) placed a 5/8"ø x 24" LONG IRON - CAPPED RLS 13807, OVER FLD STONE.

SKETCH OF REFERENCE TIES

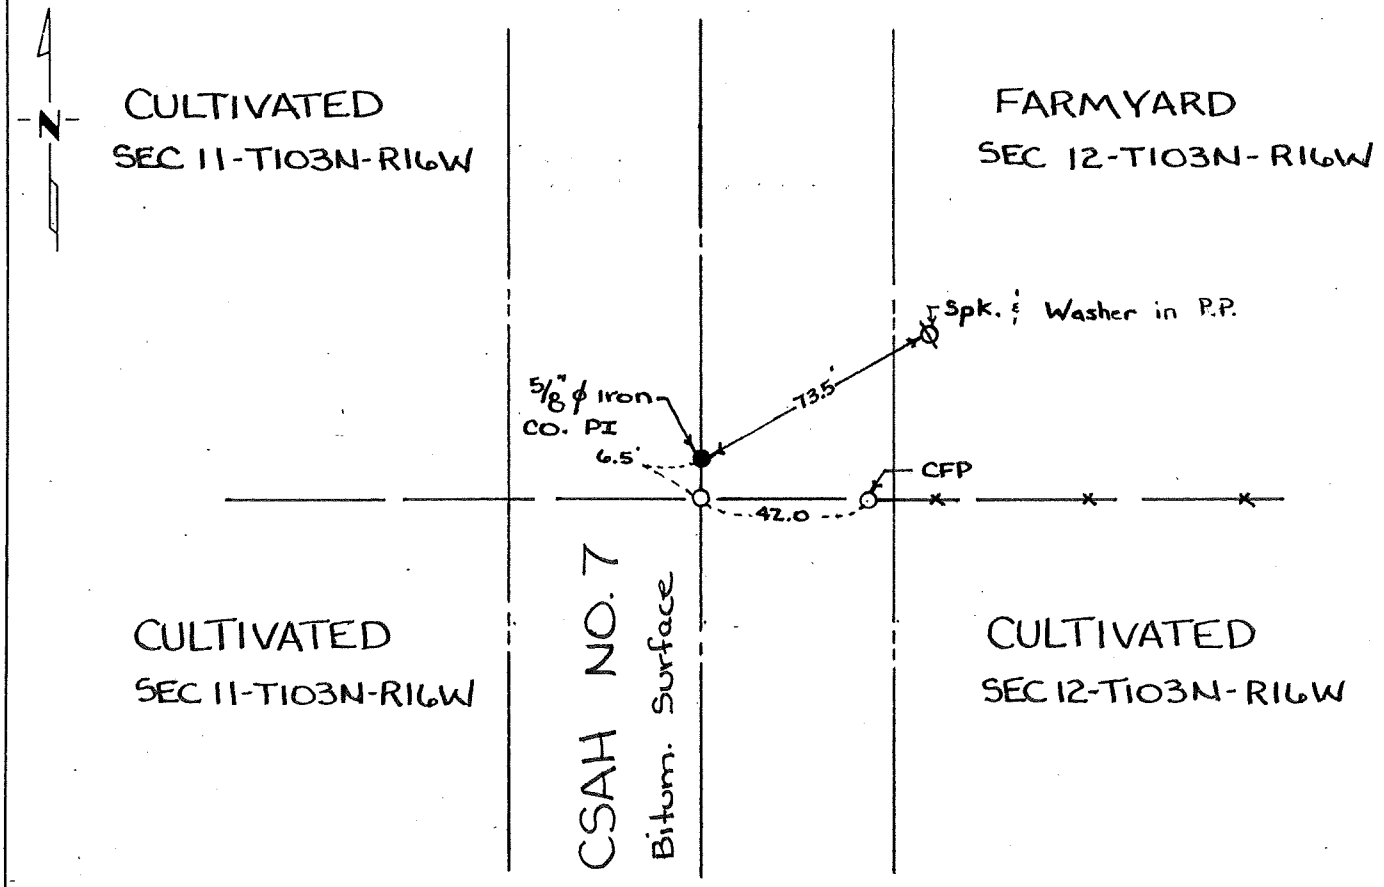

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-26-82

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19__

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105



Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 12, Township 103 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/15/04 (DATE) found a 1/2"ø BENT .3'± BELOW SURFACE (RLS15471)

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – placed a –

SKETCH OF REFERENCE TIES

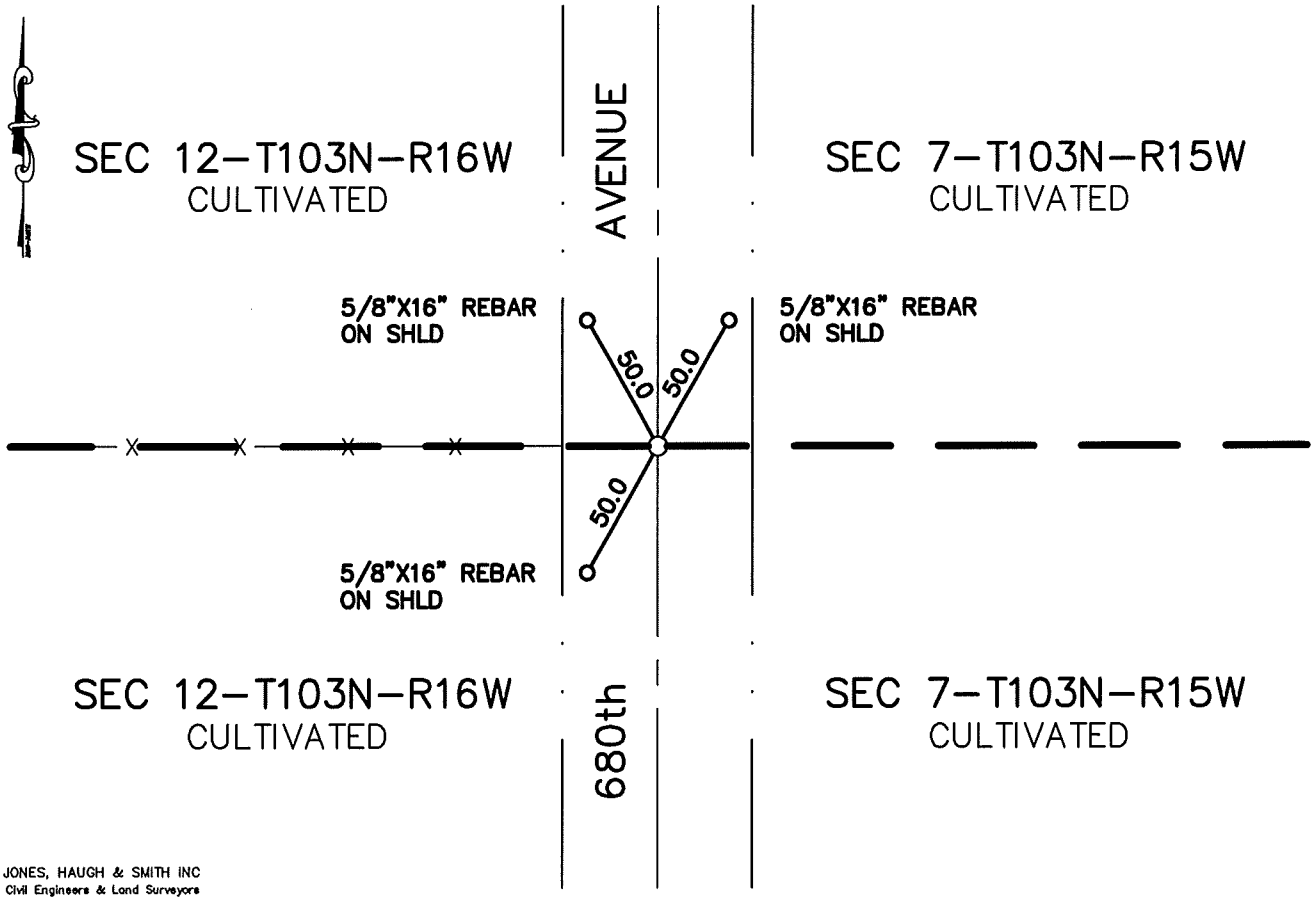

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-5-05

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Cor Sec 12-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County has no record of corner.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of fence line west and centerline of 680th Avenue. Located ½" iron (15471) 0.3± below surface.

The monument fits occupation, fence line west and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 12, Township 103 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/15/04 (DATE) found a CAPPED 1/2" IRON (15471) .3'± BELOW SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ placed a _____

SKETCH OF REFERENCE TIES

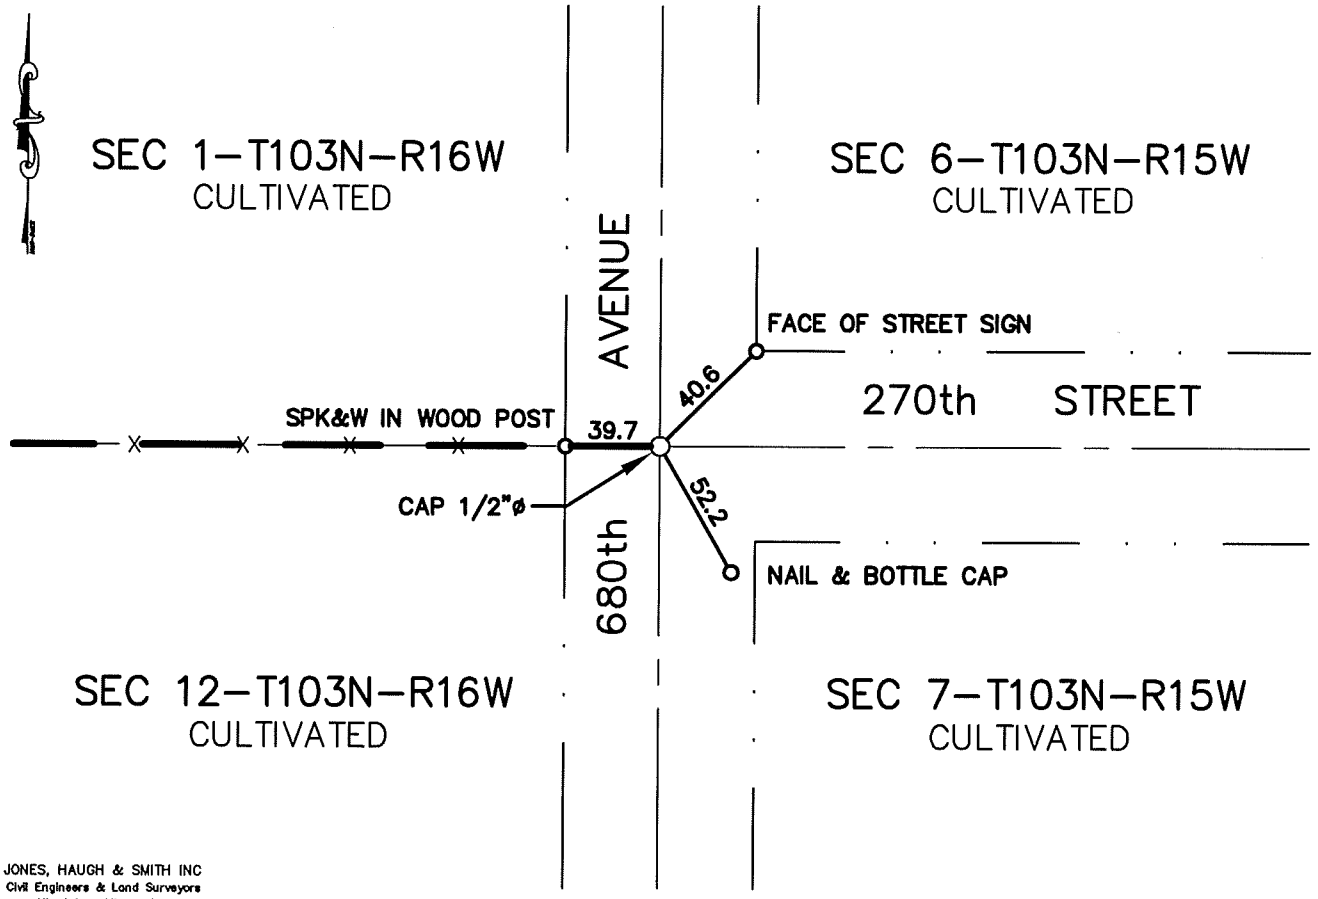

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-5-05

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE 1/4 Cor Sec 12-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County has no record of corner.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of fence lines west and centerlines of 270th Street & 680th Avenue. Located capped ½" iron (15471) 0.3± below surface.

The monument fits occupation, fence line west and road centerlines and is within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 13, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 7-22-03 (DATE) found a 14" LONG PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-22-03 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

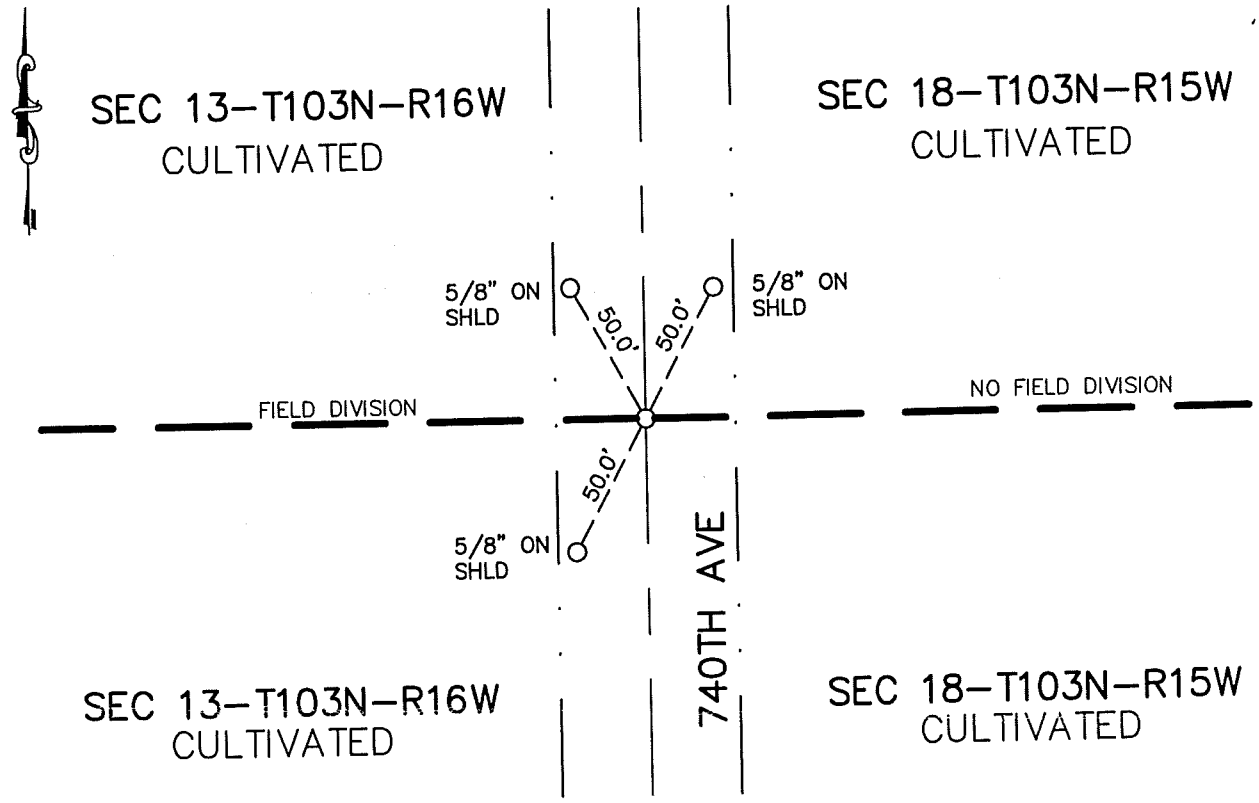

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-20-03

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Corner Section 13-103-16

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained form the above mentioned offices.

1997 GGG engineering, surveying, and planning could not locate corner. Set a temp, ½" inside diameter, iron pipe on centerline of North-South township road, and at a split between Northeast corner and Southeast corner. The split distance is 2649.98'. Found no occupation at 1/16th corners and no East-West occupation lines at center of section.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with backhoe at location of pipe found. Found a 14" long pipe. Found no other evidence of PLS corner. Lowered the pipe and set 5/8"X16" iron with cast iron monument over pipe, 0.60' below road surface. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

"F" P 65 TIE BOOK.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 13, Township 103N, Range 16W, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On June 1983 found a 18"x18"x12" stone with a old lath on the south side

☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☒ On June 1983 placed a 4" diameter cast iron monument above flush with the surface.

SKETCH OF REFERENCE TIES

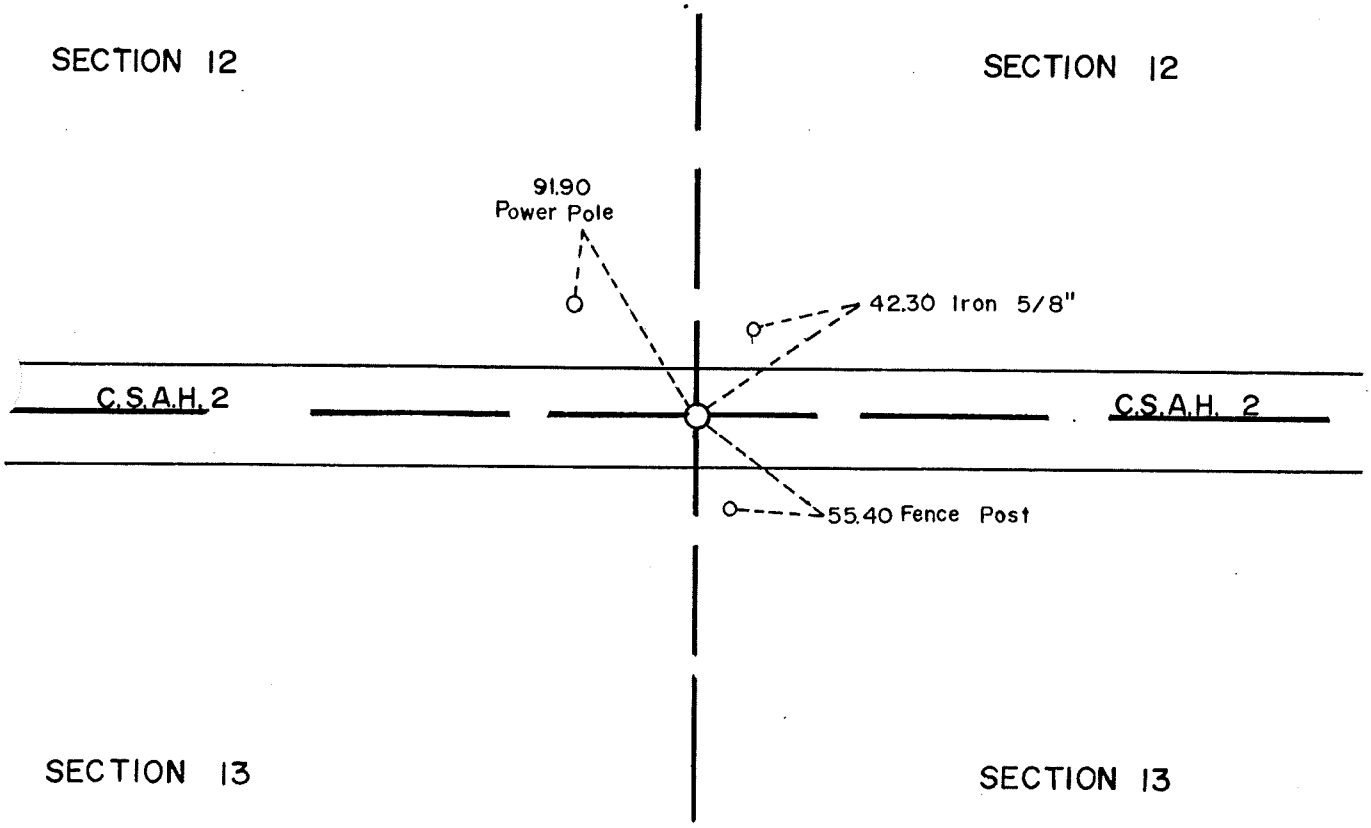

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond J. Tacher — Signature
Aug. 29, 1984 — Date

Registration No. 15471
☒ Land Surveyor, ☐ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE :

NORTH QUARTER CORNER SECTION 13 - T103N - R16W

1853 - John Quigley, Deputy Surveyor, set a post and built a mound and placed a handful of small stones in the center during the original public land survey.

1930 - Mower County Highway Department notes show a inplace concrete monument during a survey on C.A.R. C-8 (now C.S.A.H. #2).

1983 - R. J. Tucker, RLS, assisted by Mower County Highway Department personnel found a 18"x18"x12" stone with a old lath on the south side and placed a 4" diameter cast iron monument over the stone.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electronic survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.

"4" p. 65 TIE BOOK

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 13, Township 103N, Range 16W, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On June 1983 found a 4" diameter cast iron monument, and a concrete cylinder with a rebar in the center below, raised cast iron to surface.
☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☐ On _____ placed a _____

_____

SKETCH OF REFERENCE TIES

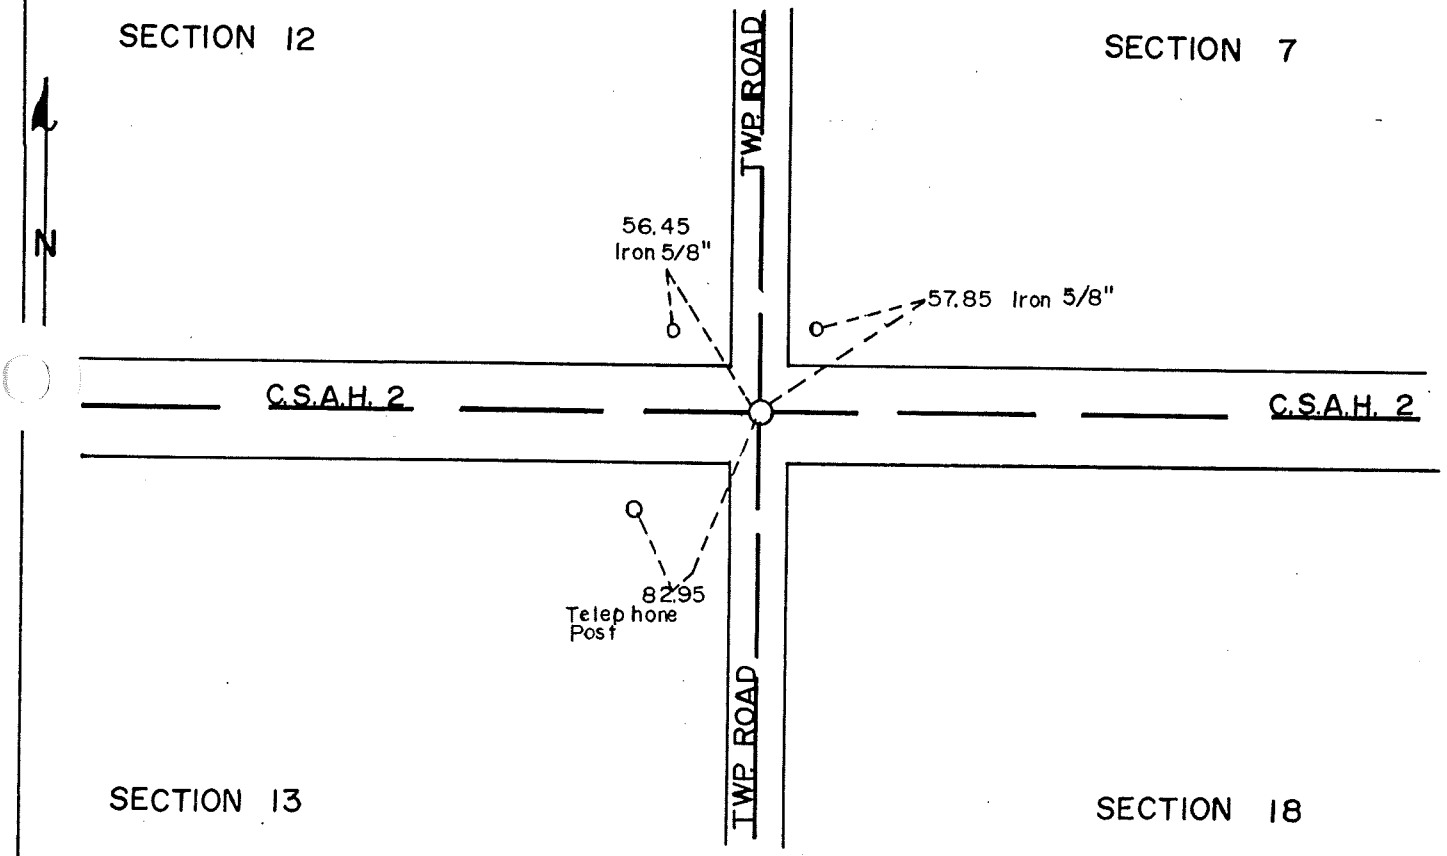

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond J Tucker — Signature
Aug 29, 1984 — Date

Registration No. 15471
☒ Land Surveyor, ☐ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER SECTION 13 - T103N - R16W

1853 - John Ball, Deputy Surveyor, set a post and built a mound and placed a handful of small stones in the center during the original public land survey.

1930 - Mower County Highway Department notes show a inplace stone monument during a survey on C.A.R. C-8 (now C.S.A.H. #2).

1957 - Minnesota Highway Department notes show a inplace stone and placed a 2"x2" hub above flush with the surface during a survey on interstate 90.

1960 - Mower County Highway Department notes show a inplace concrete monument-stone during a survey on C.S.A.H. #2.

1980 - Mower County Highway Department notes show a inplace 3/4" iron rod during a survey on C.S.A.H. #2.

1983 - R. J. Tucker, RLS, assisted by Mower County Highway Department personnel found a 4" diameter cast iron monument and a concrete cylinder with a rebar in the center below, the cast iron monument was raised to the surface.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electronic survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 16, Township T103N Range R16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/16/1995 (DATE) found a POINTED STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/16/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

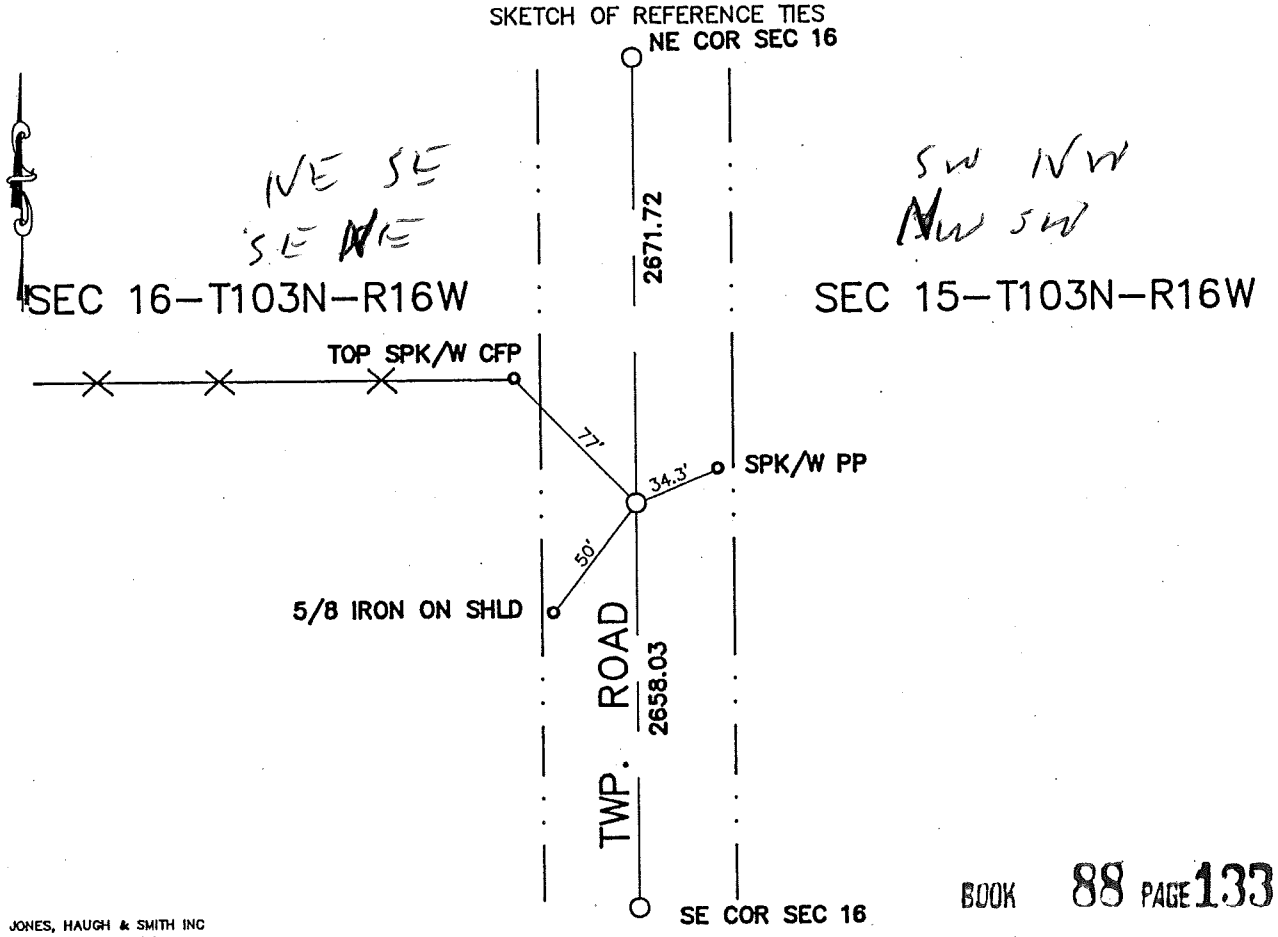

BOOK 88 PAGE 133

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-14-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 21 day of Aug A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 438793

M.H.D. FORM NO. 2105

Book 88 Misc Page 133

E 1/4 Cor SEC 16-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the split of the mile between the NE and SE corners. Three stones were uncovered 6" below the 2nd road bed. Two 1.5' X 1.5' stones supporting a 1' X 1' stone. The stone formation was accepted as the true corner and a 5/8 iron was placed on the north side. A CIM was also set above the stones, 4" below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 16, Township T103N Range R16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/16/1995 (DATE) found a 1/2" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/16/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

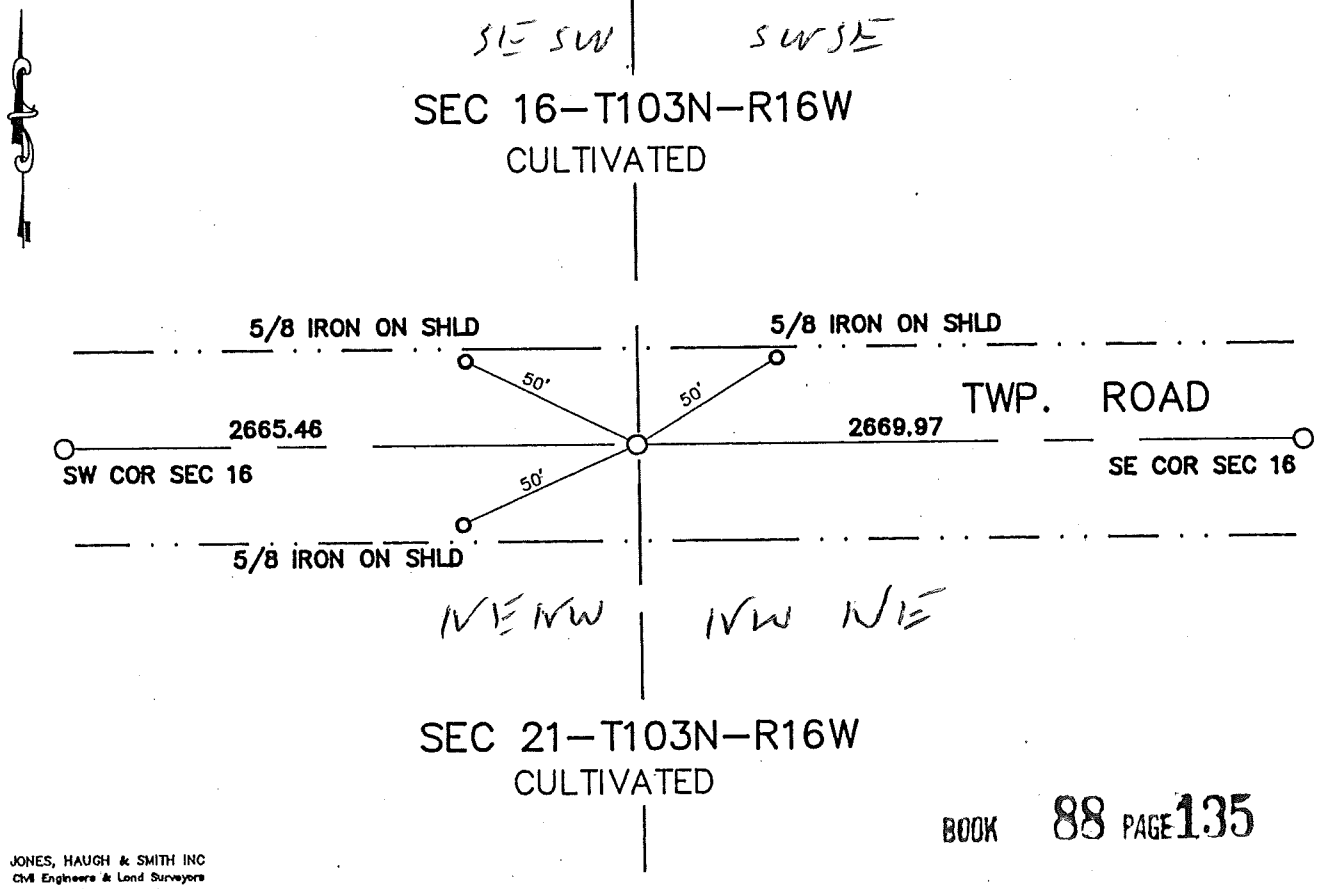

BOOK 88 PAGE 135

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-14-95 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 21 day of Aug A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 438794

M.H.D. FORM NO. 2105

Book 88 Misc Page 135

S 1/4 Cor SEC 16-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1977 Jones Haugh and Smith records indicate a 5/8 in place at this location.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL twp road and in line with a field division to the south. A 1/2" iron was uncovered 6" below the road surface. Continued digging but found no further evidence of the corner. Accepted 1/2" iron as the true corner and placed a 5/8 iron capped RLS 13807 on the north side. A CIM was also placed over the 1/2" iron, 4" below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 16, Township T103N Range R16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 6/16/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6/16/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

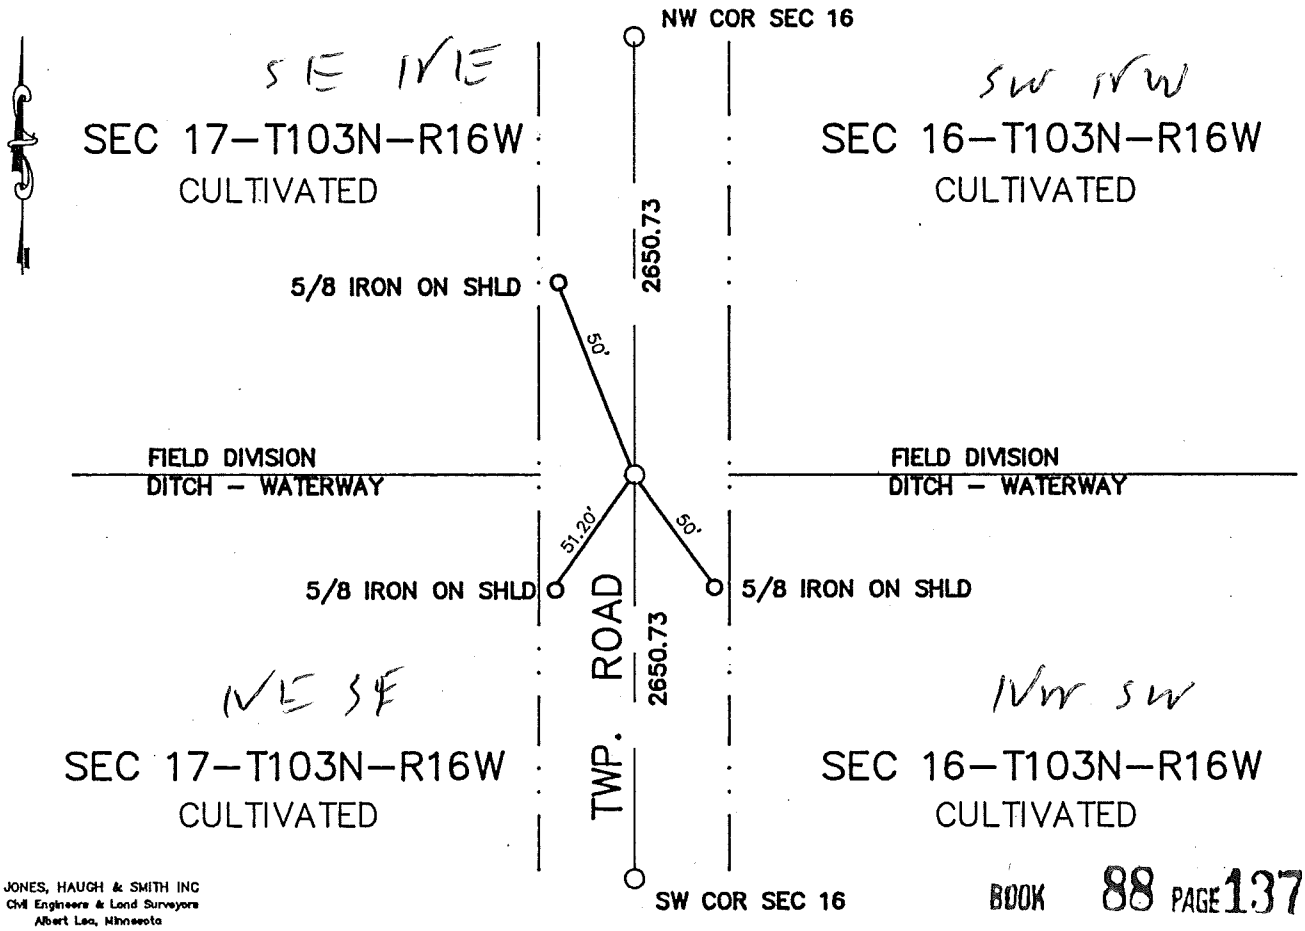

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 88 PAGE 137

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-14-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 21 day of Aug A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 438795

M.H.D. FORM NO. 2105

Book 88 Misc Page 137

W 1/4 Cor SEC 16-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at intersection of CL twp. road and field division west. No evidence was found of the corner. A cast iron monument was set on a straight line at the midpoint between the NW and SW corners.

The monument set fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 16, Township T103N Range R16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 6/16/1995 (DATE) found a 1/2" IRON CAPPED RLS 15471

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6/16/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

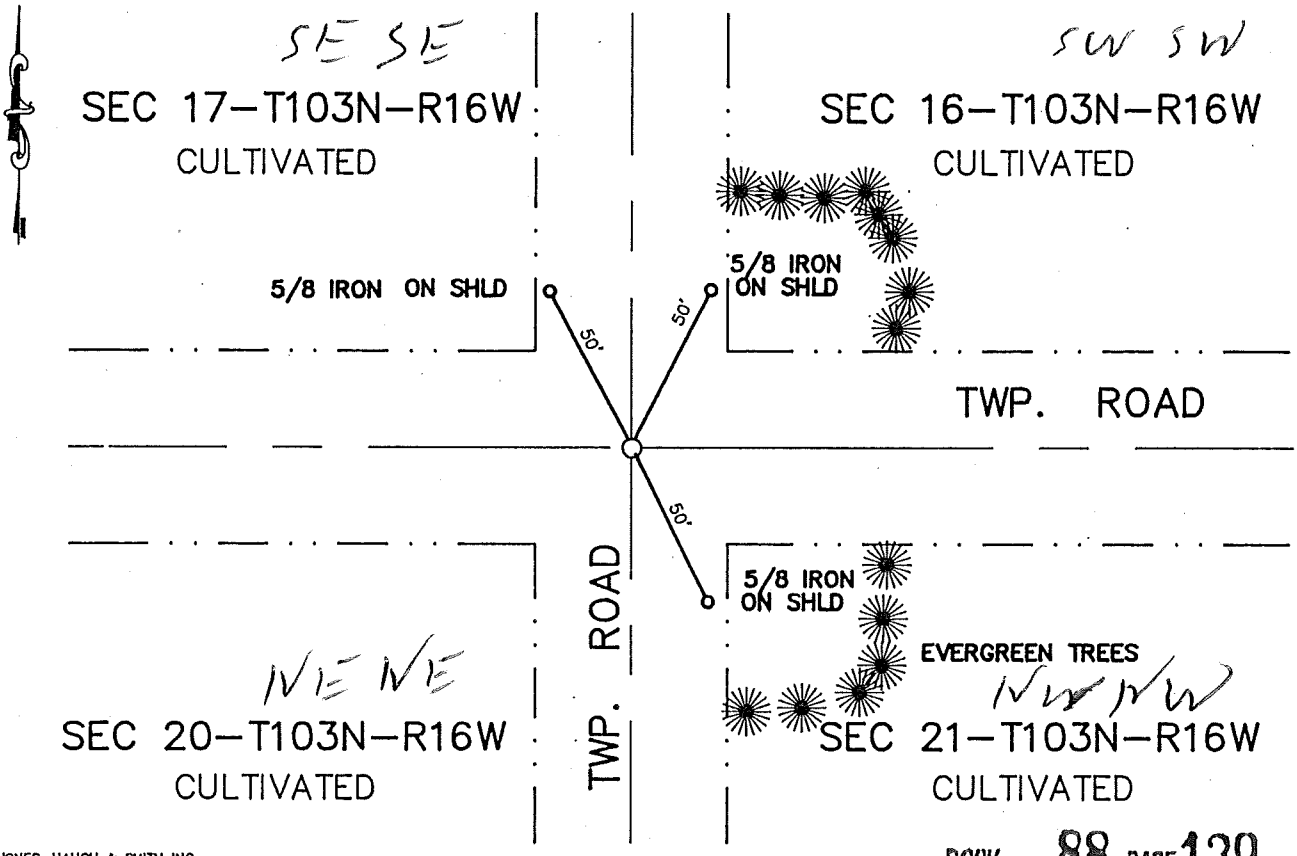

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 88 PAGE 139

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-14-95 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 21 day of Aug A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 438796

M.H.D. FORM NO. 2105

Book 88 Misc Page 139

SW Cor SEC 16-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL intersection of twp. roads. A 1/2" iron capped No. 15471 was found 8" below the road surface. Continued digging but found no further evidence of the corner. The iron was accepted as a perpetuation of the PLS corner and a cast iron monument was set over it, 4" below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 16, Township T103N Range R16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 6/16/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6/16/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

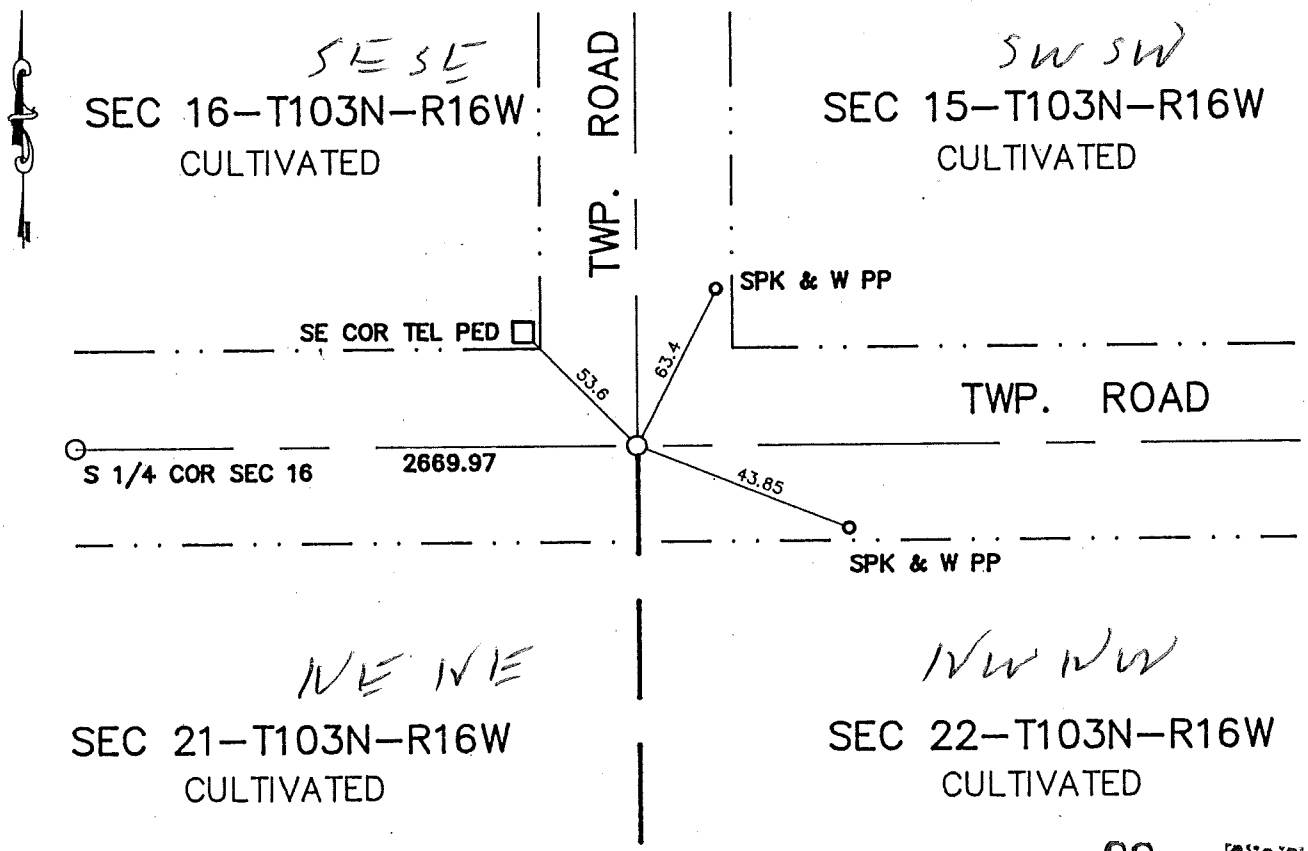

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 88 PAGE 141

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-14-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 21 day of Aug A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 438797

M.H.D. FORM NO. 2105

Book 88 Misc Page 141

SE Cor SEC 16-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1977 Jones Haugh and Smith crew found RR spike at this location. Measured distance to the S 1/4 cor to be 2669.97'.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL intersection of twp. roads E-W and N. No evidence was found of the corner or the RR spike. The corner was set at the same location as the RR spike found in 1977, the CL CL intersection 2669.97' from the S 1/4 corner. A CIM was set for the corner.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 18, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/05/2003 (DATE) found a 5/8" REBAR OVER STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/22/2003 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

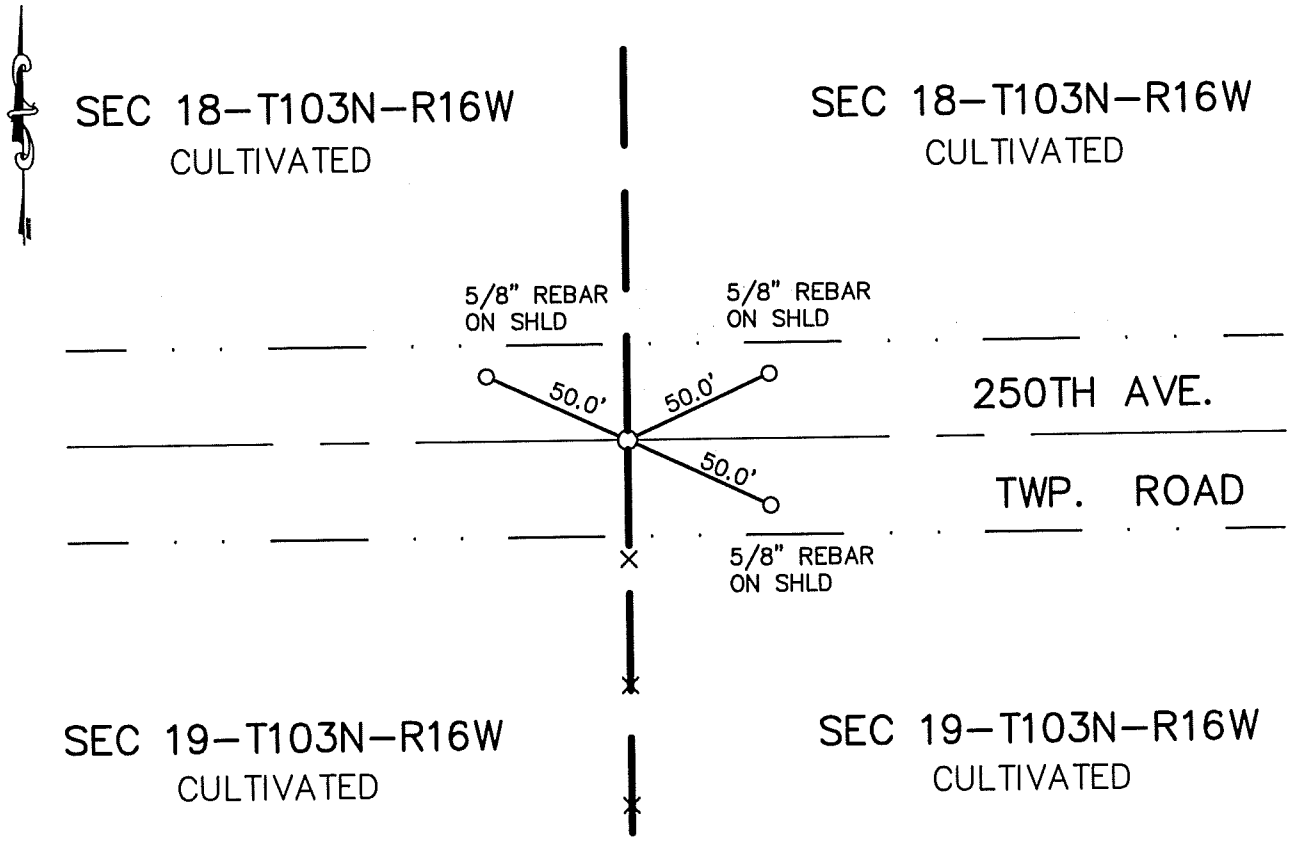

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 8-20-03
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Corner Section 18-T103N-R16W

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained form the above mentioned offices.

1980 Jones Haugh and Smith crew located a stone and placed a 5/8" iron over.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with backhoe and located a 5/8" rebar 0.1' below road surface. Continued digging and found a stone under rebar with a ¾"x24" pipe on the east side of the stone. Left monuments as found and placed a 5/8"x16" rebar with cast iron monument over monuments found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 19, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/22/2003 (DATE) found a 1/2"X1/4"X36" FLAT IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/22/2003 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

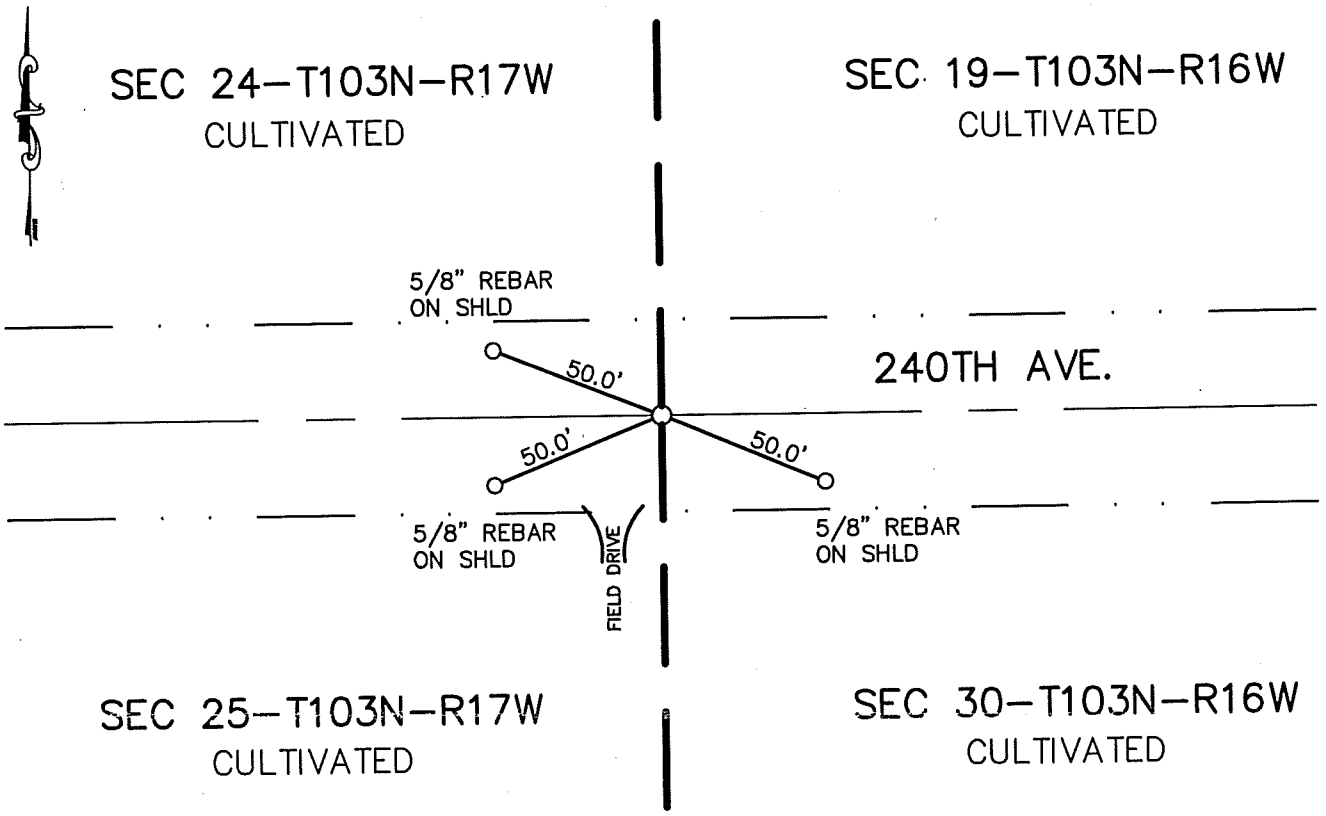

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-28-03

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SW Corner Section 19-T103N-R16W

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained form the above mentioned offices.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with backhoe at the centerline of 240th Ave. and field division south. Located a ½"x1/4"x36" flat iron. Lowered iron found and placed a 5/8"x16" rebar with cast iron monument 0.60' below the road surface and over the monument found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 19, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 00/00/1992 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/22/2003 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

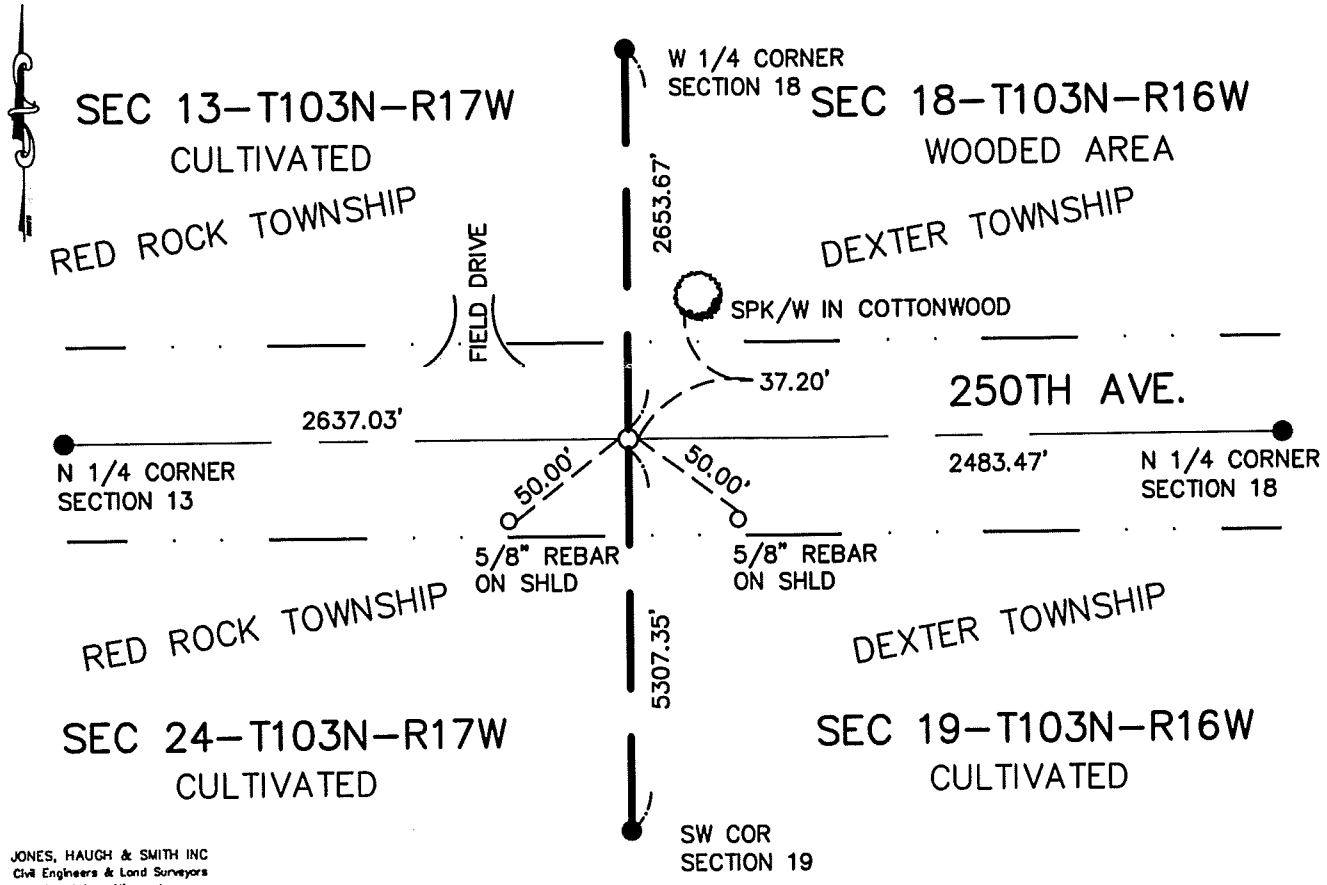

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-31-03

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NW Corner Section 19-T103N-R16W

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained form the above mentioned offices.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with backhoe on the centerline of the East-West township road and in line with line fence remains North. Dug a 18'x15' hole, 3' deep and found evidence of the original PLS corner. Set a cast iron monument 0.6' below road surface on centerline E-W Twp. Road by intersecting road with a straight line between the W 1/4 cor Sec 18 & the SW cor of Sec 19.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 20, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/14/1997 (DATE) found a LARGE SPIKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/14/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

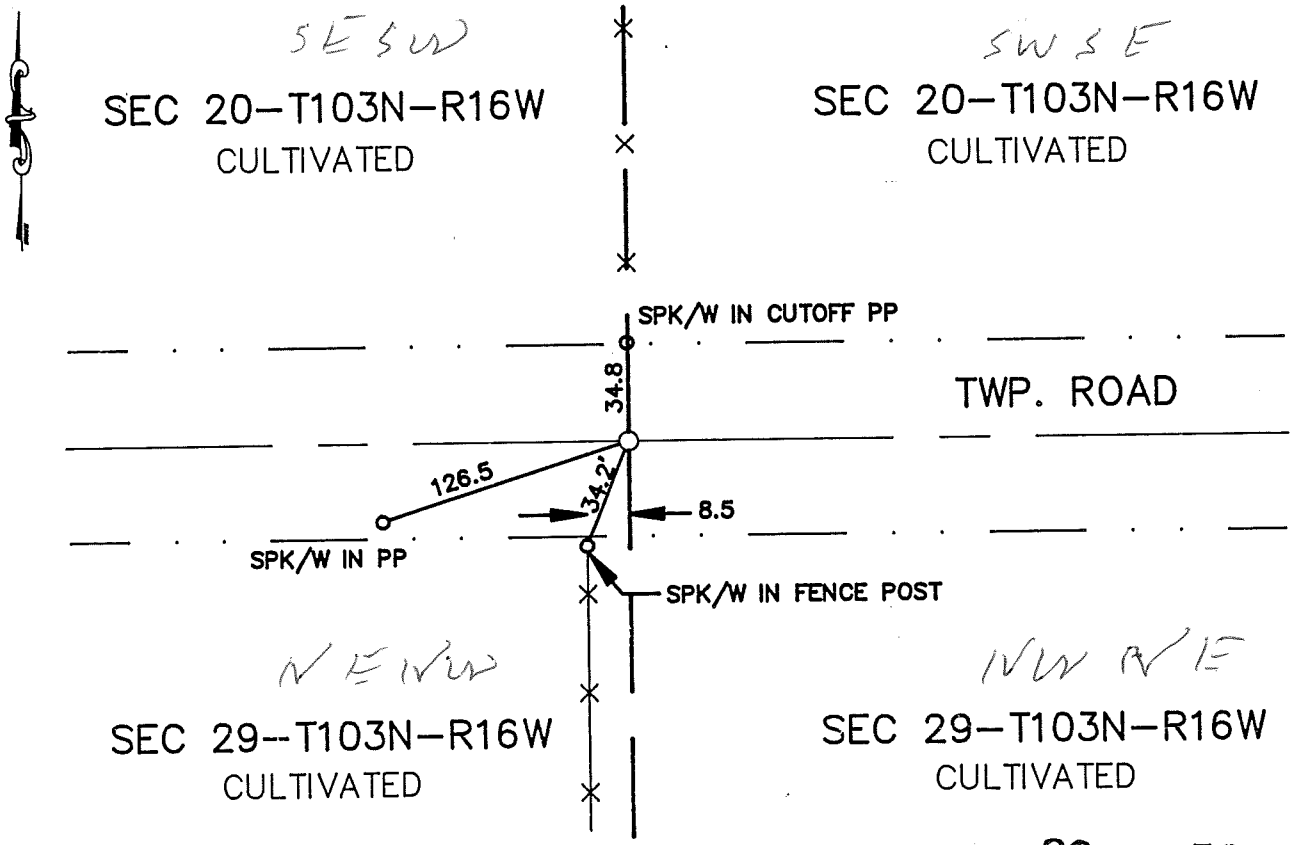

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 50

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-18-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 29 day of July A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 454998

M.H.D. FORM NO. 2105

Book 96 Misc Page 50

S 1/4 Cor SEC 20-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and in line with line fence north. Uncovered a large spike 0.40"+- below road surface. Continued digging and found no other evidence of original PLS corner. Placed a cast iron monument inplace of spike found. Monument is in line with road CL and fence north. It is 8.5' east of line fence south.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 20, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/14/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

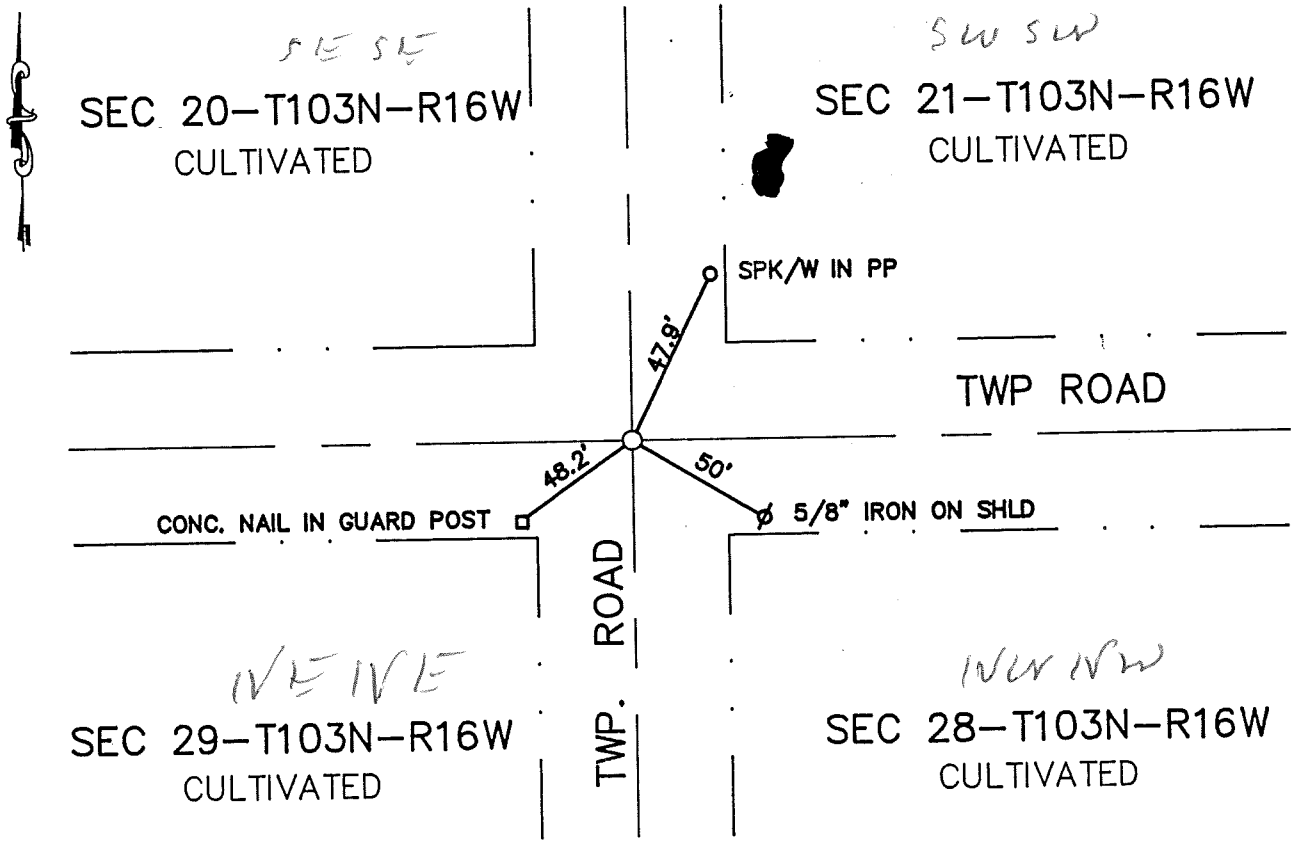

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 96 PAGE 110

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-4-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 6 day of Aug A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 455219

M.H.D. FORM NO. 2105

Book 96 Misc Page 110

SE Cor SEC 20-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on centerline of N-S and centerline of E-W township roads. Dug a 6' x 10' hole down to virgin soil, and found no evidence of PLS corner. Set 5/8" x 16" iron with cast iron monument on centerline of township road N-S and centerline of township road E-W.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 21, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/05/2004 (DATE) found a LARGE STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/05/2004 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

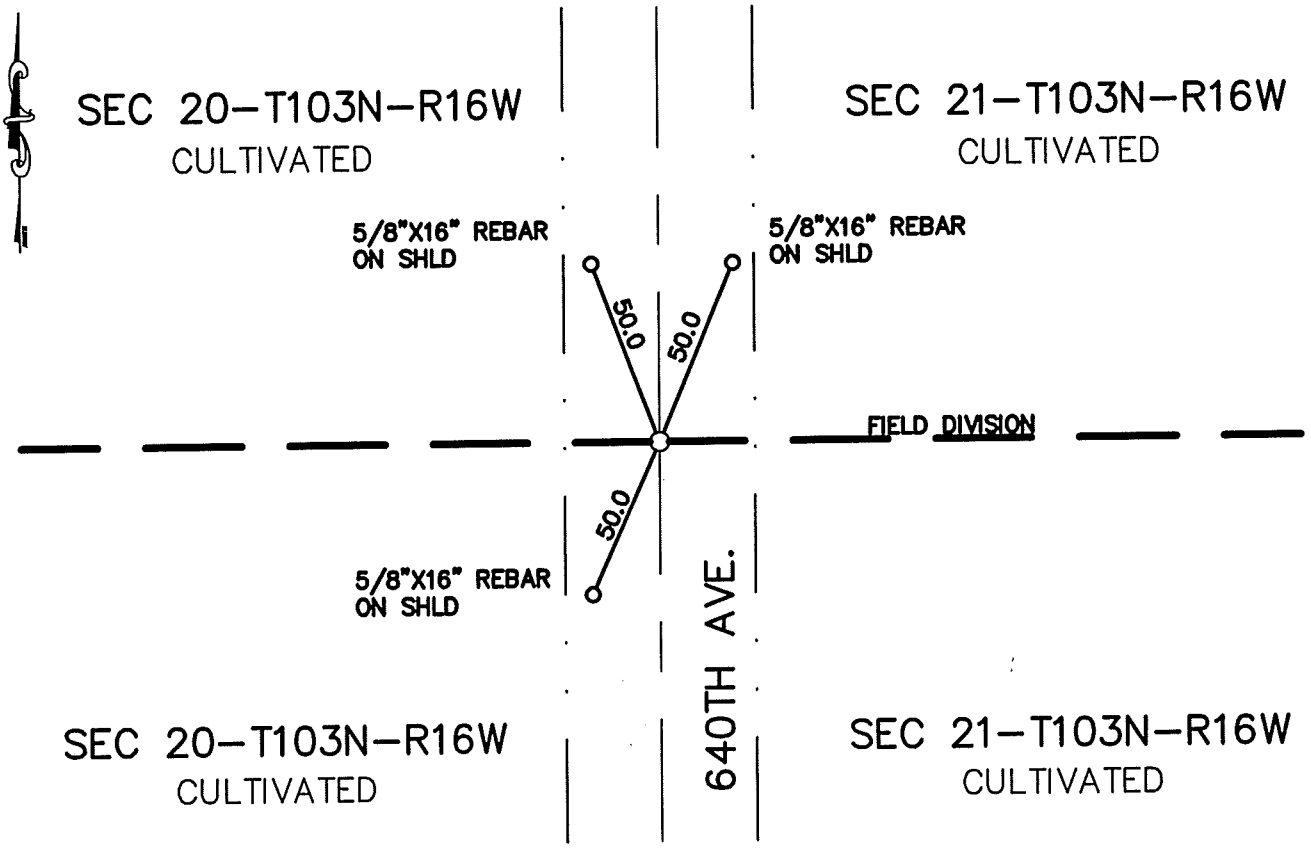

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-24-04

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Corner Section 21-T103N-R16W

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the centerline of township road north-south field division east. Dug 3.5' x 8' hole and uncovered a large stone. The stone fits centerline of road and field division east. Accepted stone as the best perpetuation of the original PLS corner. Placed a 5/8" x16" rebar capped #13807 on the south side of stone found. Placed a 5/8"x16" rebar with cast iron monument above stone 0.60' below road surface.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 21, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/05/2004 (DATE) placed a 5/8" X16" REBAR WITH CAST IRON MONUMENT ABOVE

SKETCH OF REFERENCE TIES

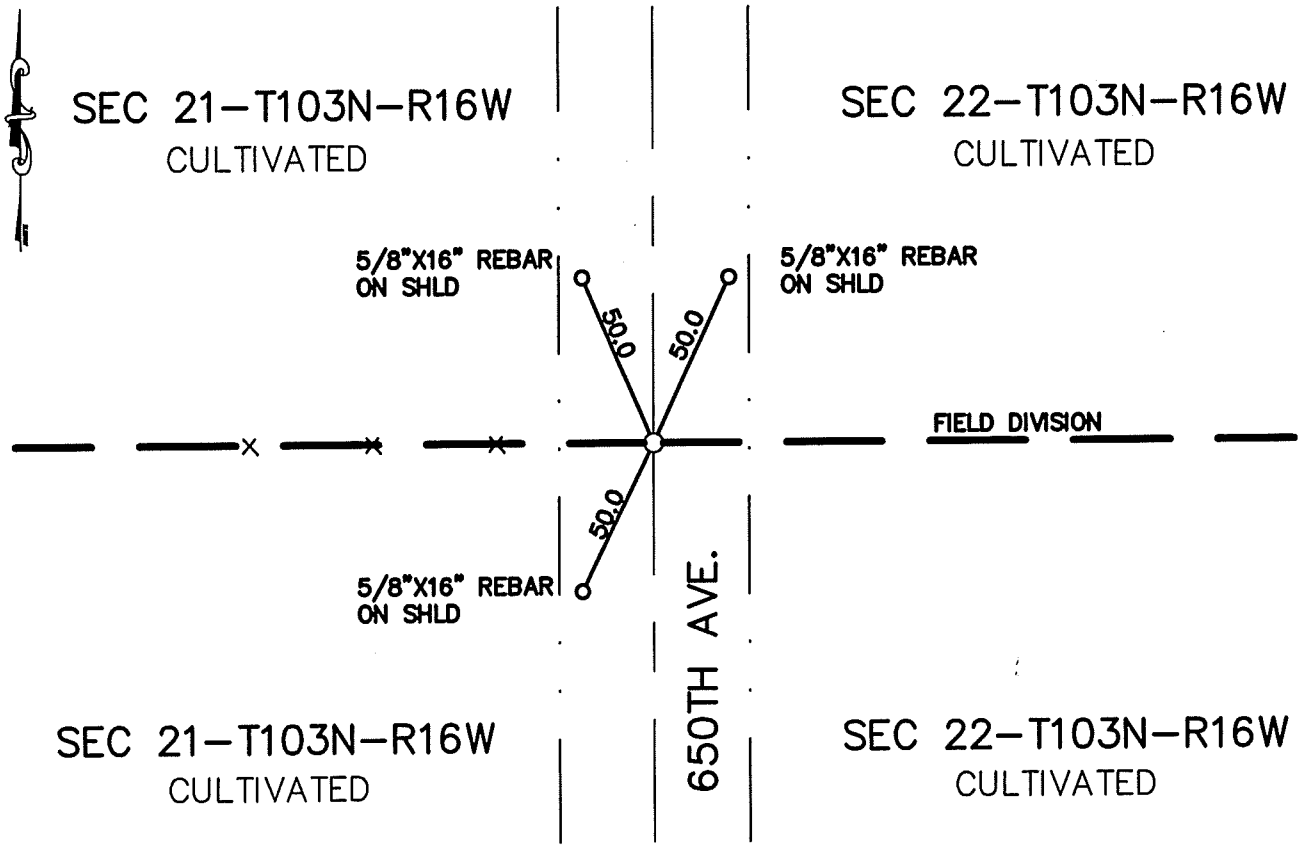

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-24-04

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Corner Section 21-T103N-R16W

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the centerline of township road north-south and in line with line fence west. Dug a 8' x 15' hole and found no evidence of the original PLS corner. Used the intersection of centerline of said township road and fence line as the best evidence of the original PLS corner.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 24, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/17/1996 (DATE) found a 1/2"X2' IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/17/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

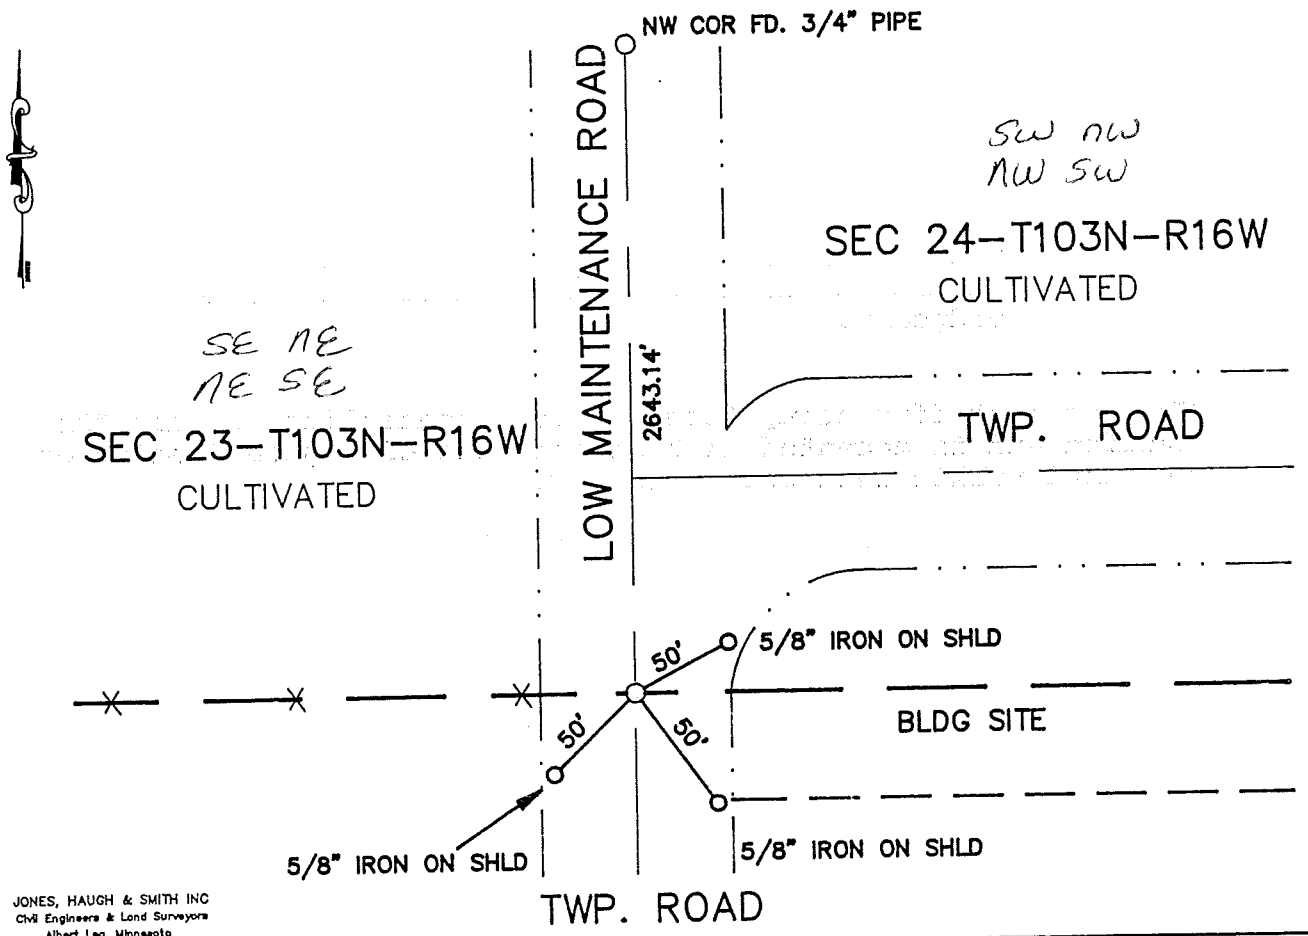

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 92 PAGE 218

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-16-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 19 day of August A.D., 1996

COUNTY RECORDER Charles Ezzer

By Susan M. Davis, Deputy

DOCUMENT NO. 447268

M.H.D. FORM NO. 2105

Book 92 Misc Page 218

W 1/4 Cor SEC 24-103-16

This corner was originally established by Deputy John Quigley the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1979 Mower County records in indicate a 3/4" iron was found by Jones Haugh and Smith in 1979.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on CL N-S road. Uncovered a bent 1/2" iron. Continued digging to virgin soil but found no other evidence of the PLS corner. Accepted 1/2" iron as best evidence and replaced it with a cast iron monument.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 24, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/17/1996 (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/17/1996 (DATE) placed a CAST IRON MONUMEN

SKETCH OF REFERENCE TIES

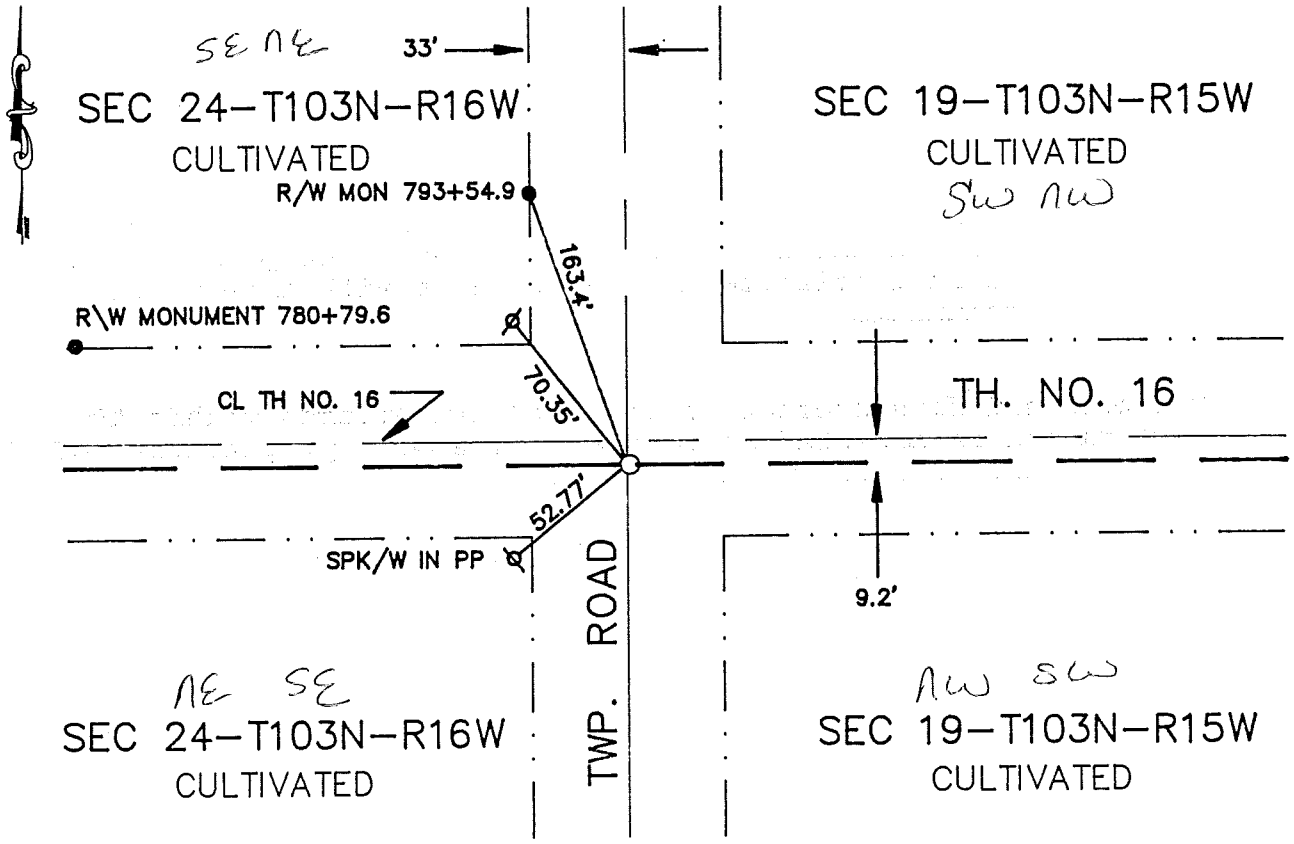

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 92 PAGE 220

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 8-16-96
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 19 day of August A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447269

M.H.D. FORM NO. 2105

Book 92 Misc Page 220

E 1/4 Cor SEC 24-103-16

This corner was originally established by Deputy Surveyors John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1996 Jones Haugh and Smith records indicate a drill hole set by R/W stationing at this location.

1996 Ray Tucker records show he has used this corner for surveys in the NE 1/4.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set a cast iron monument by using stationing from R\W markers and DOT coordinates for CL. Calculated position fit R\W markers and DOT CL within .07'. Set cast iron monument using mean position between DOT coordinates and found R\W markers.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

p 10 "F"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 25, Township 103N, Range 16W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 4-12-89 found A 6" BY 6" BY 9" STONE DOWN 2'

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 4-12-89 placed A CTY. MON. ON A 24" BY 3/4" REBAR OVER STONE

SKETCH OF REFERENCE TIES

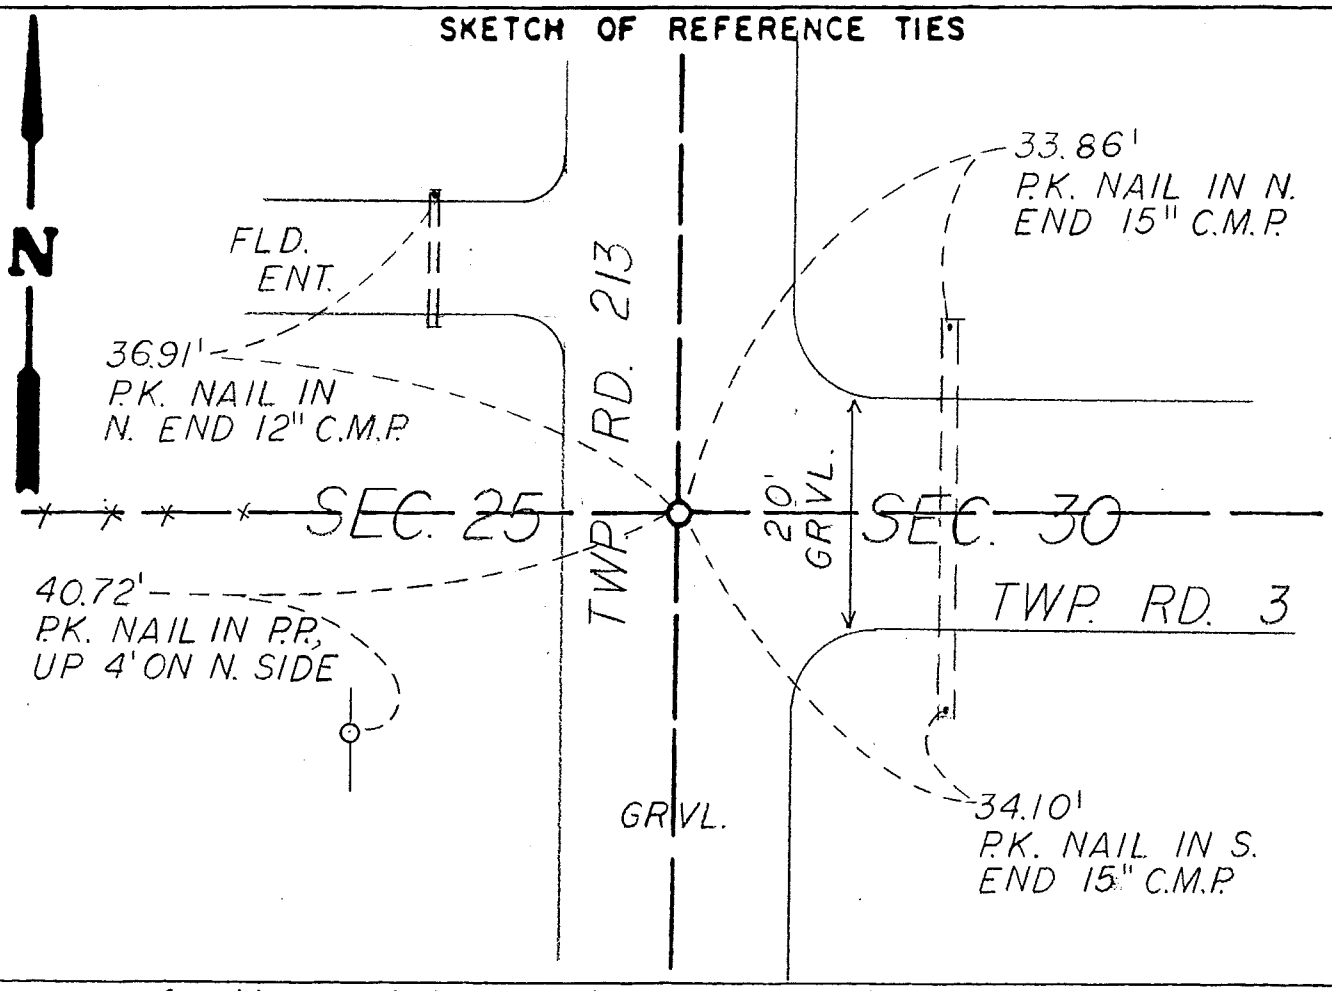

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature

7-25-89 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 25 TOWNSHIP 103 NORTH RANGE 16 WEST 5TH P.M.

July, 1853 — John Ball, Deputy Surveyor, set post for corner and built mound with trench per instructions. Put hand full of small stones in center & planted Osage Orange Seed in SE Corner during the original Public Land Survey.

April 12, 1989 — Ronald J. Olson, RLS 11009, excavated with a backhoe 4 feet North to 4 feet South of the road centerline East by 4 feet West to 6 feet East of the road centerline N-S by 5.5 feet deep and found a 6 inch by 6 inch by 9 inch high stone 4 feet East of the intersection of roads and 2 feet below the surface in an old road bed. A 1/2 inch by 24 inch pipe was found at the surface 1 foot South and 1 foot West of the intersection of centerlines and 2. 5 feet west of the stone. The stone was reset and a 1/2" iron pipe was placed along side of it.

An analysis of the record data gives no indication of the origin of the stone. It is similar in size to other corners found in this area and agrees with the lines of occupation. It is accepted as marking the location of the original Public Land Survey Corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 26, Township 103N, Range 16W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 4-12-89 found A .9' N-S BY .75' E-W BY .55' HIGH STONE DOWN 4'

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 4-12-89 placed A CTY. MON. ON A 24" BY 3/4" REBAR OVER STONE

SKETCH OF REFERENCE TIES

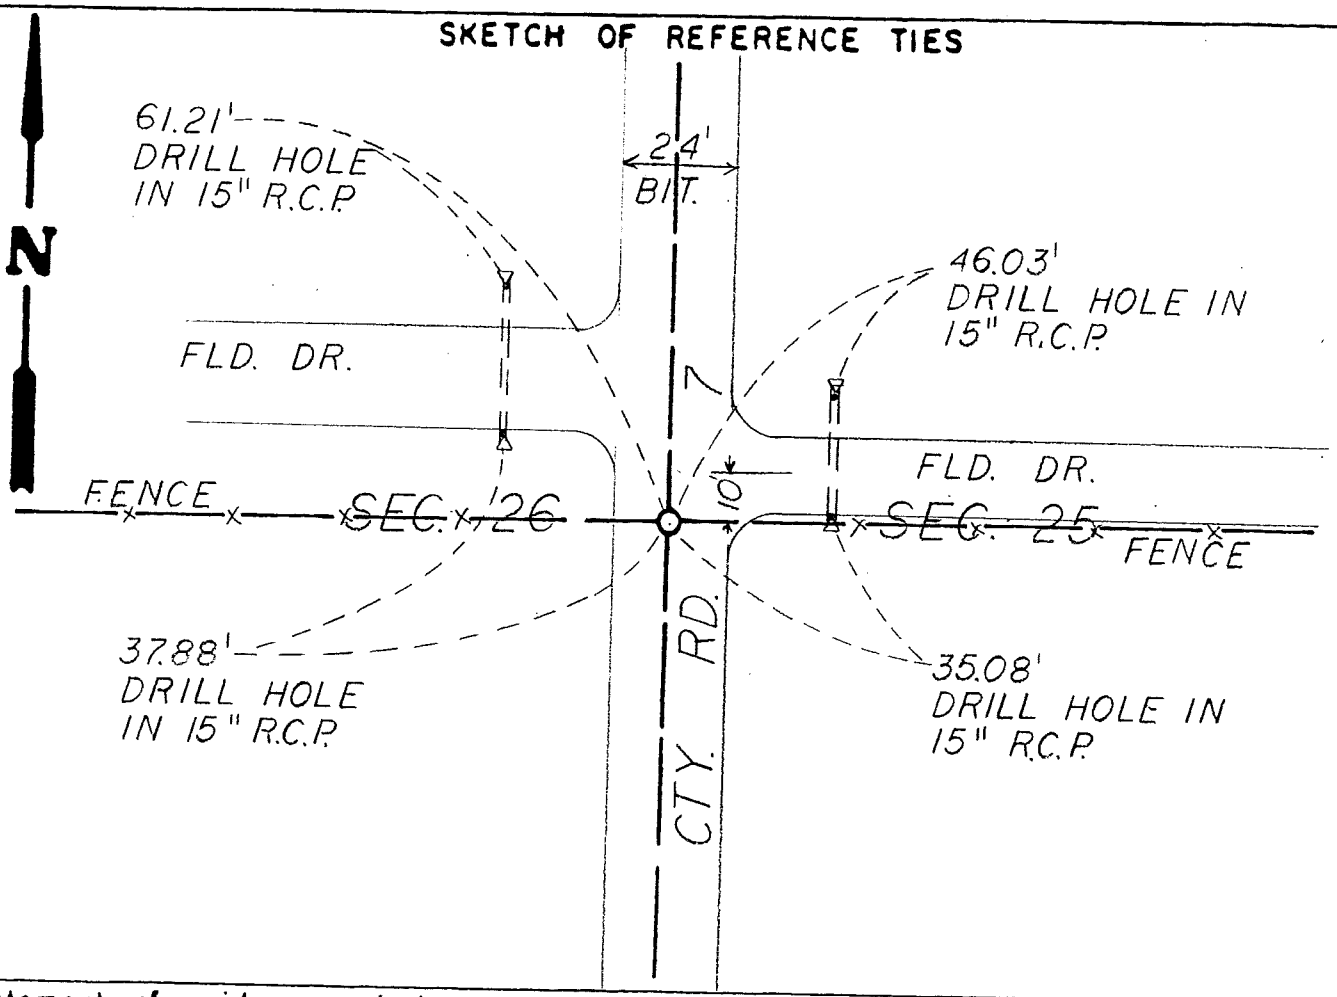

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson (Signature) 7-25-89 (Date)

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 26 TOWNSHIP 103 NORTH RANGE 16 WEST 5TH P.M.

July, 1853 — John Quigley, Deputy Surveyor, set post for corner and built mound with trench per instructions and at center deposited hand full of small stones. SE planted Osage Orange Seeds during the original Public Land Survey.

Mower County Engineer's plans show a fence line east and west near the corner. No monument was shown.

April 12, 1989 — Ronald J. Olson, RLS 11009, excavated with a backhoe 4 feet north to 4 feet south of fence lines by 1.3 feet West to 3.7 feet East of the road centerline and found a 10 inch by 9 inch by 8 inch high stone near a 2inch piece of cut and charred stake 5 feet below the surface in mottled soil at the road centerline and the fence lines E-W. An 11 inch by 8 inch by 7 inch stone was found down 4 feet and a rebar in concrete was found over the stone 2.2 feet down. A 1 inch by 2 inch hub was found on the north side of the rebar. The stone was reset and a 3/4 inch by 18 inch pipe was placed on the west edge of the stone.

An analysis of the record data gives no indication of the origin of the stone. The location of the stone has been perpetuated over the years as evidenced by the additional monuments above it and it agrees with the lines of occupation. The rebar in concrete is typical of monuments placed by the County Engineer during road construction. The Stone is accepted as marking the location of the original Public Land Survey Corner

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 26, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/12/1998 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/12/1998 (DATE) placed a CAST IRON MOUMENT

SKETCH OF REFERENCE TIES

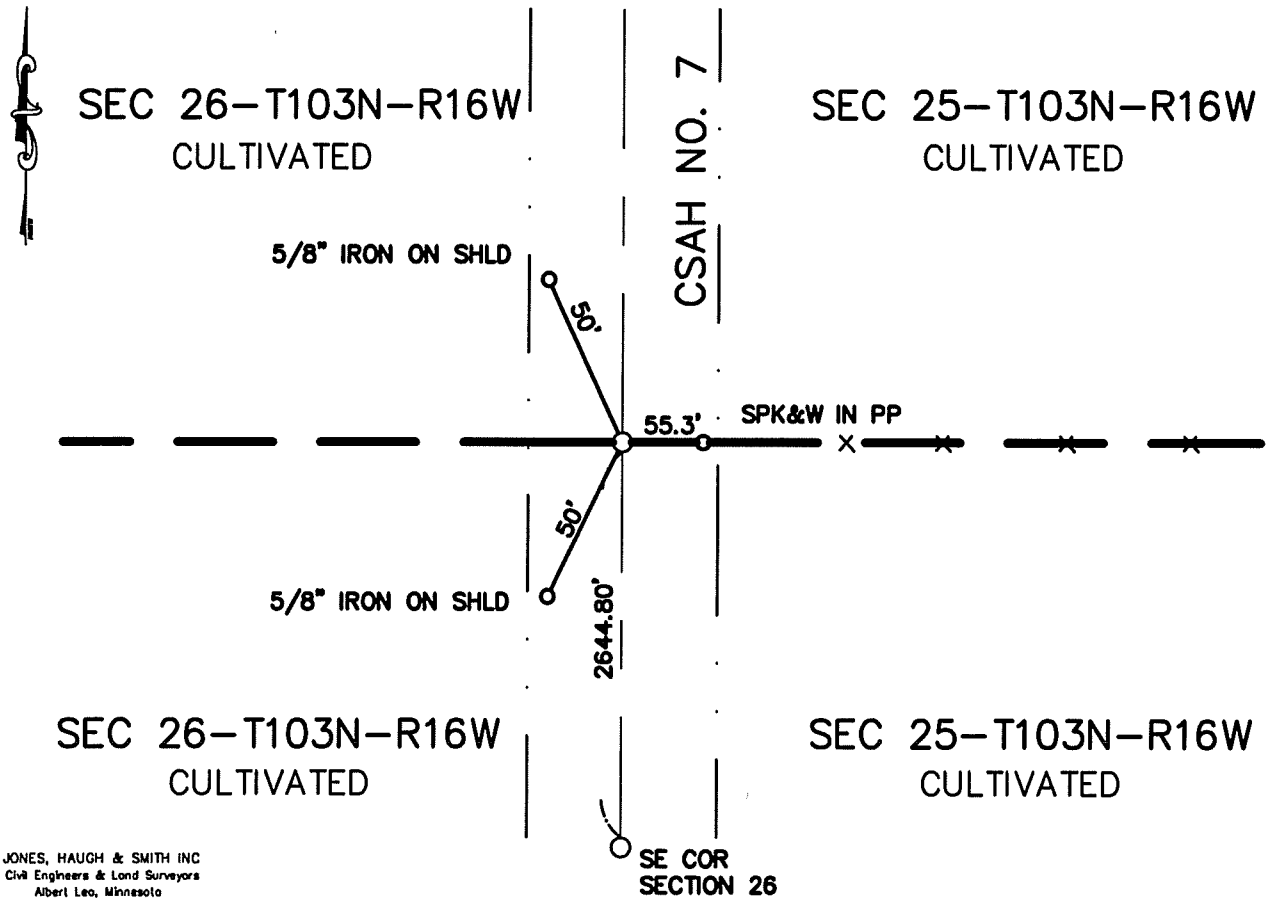

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 6-1-98 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Cor Sec 26-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1998 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the centerline of CSAH No. 7 and in line with line fence east and at the location of patch in bituminous surface made by backhoe following excavation of section corner. Located an aluminum monument at this location. Left monument as found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 26, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/05/2004 (DATE) found a CONCRETE MONUMENT WITH IRON PIN IN CENTER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/05/2004 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

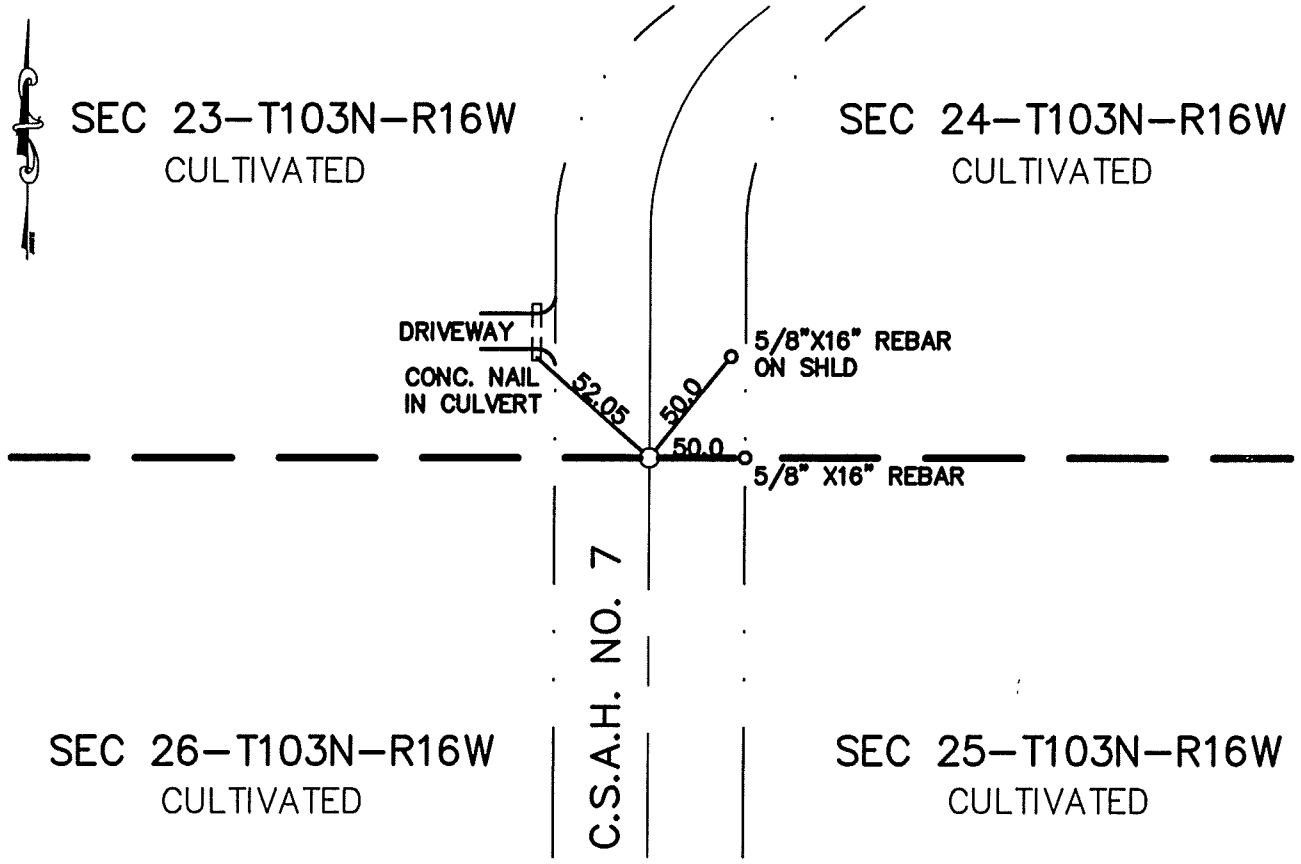

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-24-04

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Corner Section 26-T103N-R16W

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Interstate 90 road plan states that there is a 2"x2" wood hub over a ¾" iron pin.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at a point computed from information on Interstate Highway No. 90 Right-of-Way Map. Uncovered a concrete monument with an iron pin in the center and wood hub on the south side of monument. Continued digging and found no further evidence of corner. Placed a 5/8"x16" rebar on the north side of monument found. Placed a 5/8"x16" rebar with cast iron monument above found concrete monument at road surface.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 26, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/12/1998 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/12/1998 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

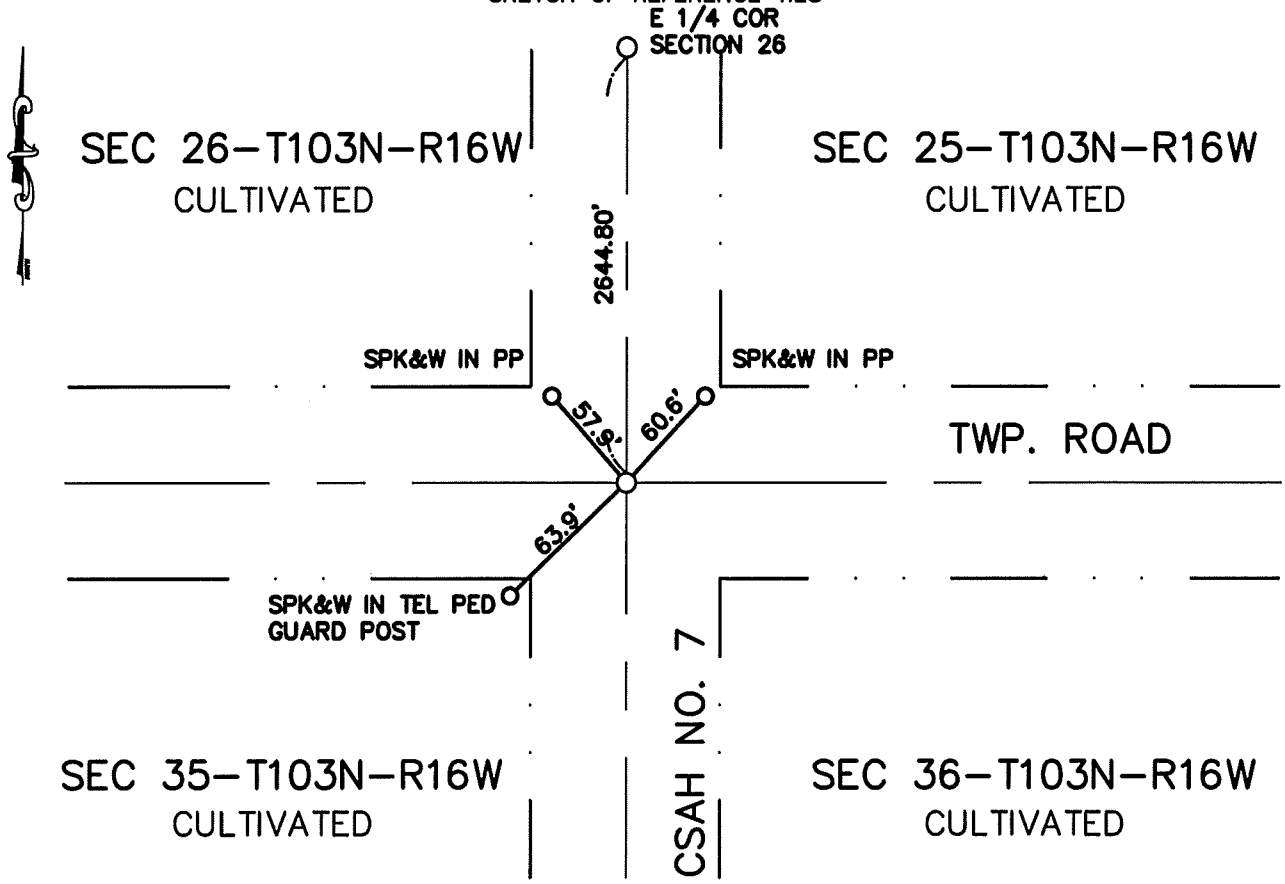

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 5-21-98
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Cor Sec 26-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

CSAH No. 7 road plans show a concrete monument inplace.

1998 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of centerlines of township road E-W and CSAH No. 7 N-S and at the location of patch in bituminous surface made by backhoe following excavation of section corner. Located a Harrison monument 1.20'+/- deep.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 28, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/29/2003 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

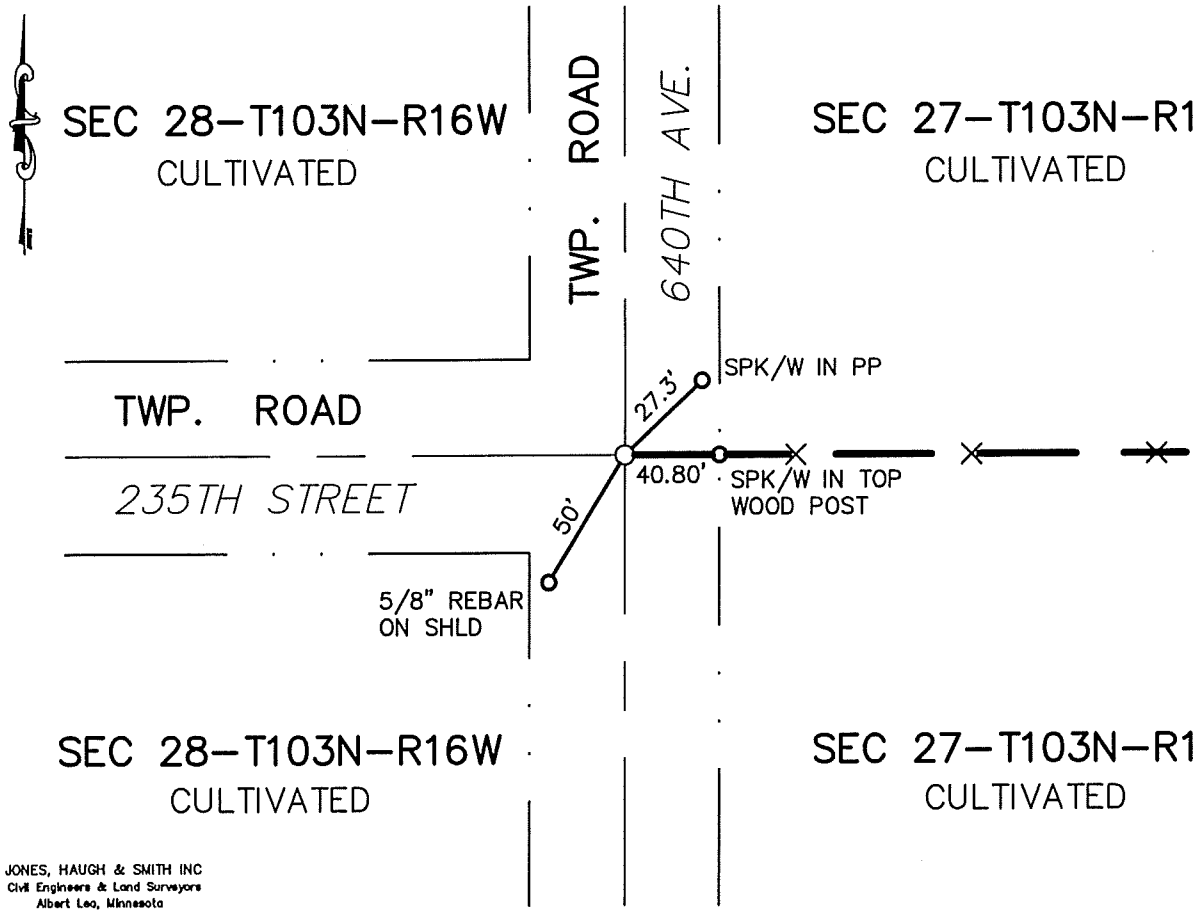

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-3-03

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E ¼ Corner Section 28-T103N-R16W

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807 dug with Boe Brothers backhoe at the centerline of township road N-S-W and in line with line fence East. Dug to virgin soil and found no evidence of original PLS corner. Placed a 5/8"x16" rebar with cast iron monument at the intersection of the centerline of roads and in line with line fence East.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 28, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/29/2003 (DATE) found a LARGE STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/29/2003 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

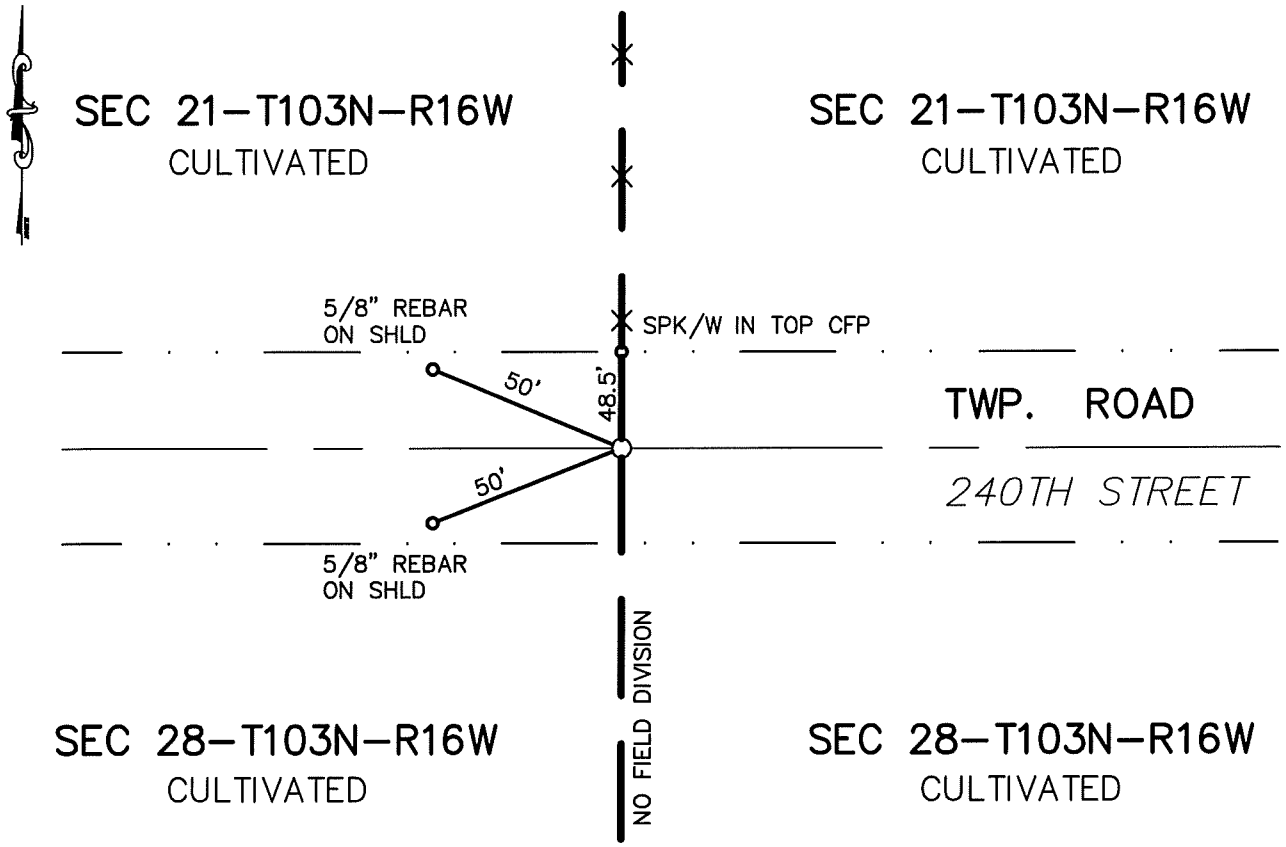

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-3-03

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N ¼ Corner Section 28-T103N-R16W

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807 dug with Boe Brothers backhoe at the centerline of township road E-W and in line with line fence North. Uncovered a large field stone 2.5 feet deep. Placed a 5/8"x16" rebar capped #13807 on the West side of stone found. Placed a 5/8"x16" rebar with a cast iron monument above 0.60 feet below road surface.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 28, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/29/2003 (DATE) found a LARGE STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/29/2003 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT OVER

SKETCH OF REFERENCE TIES

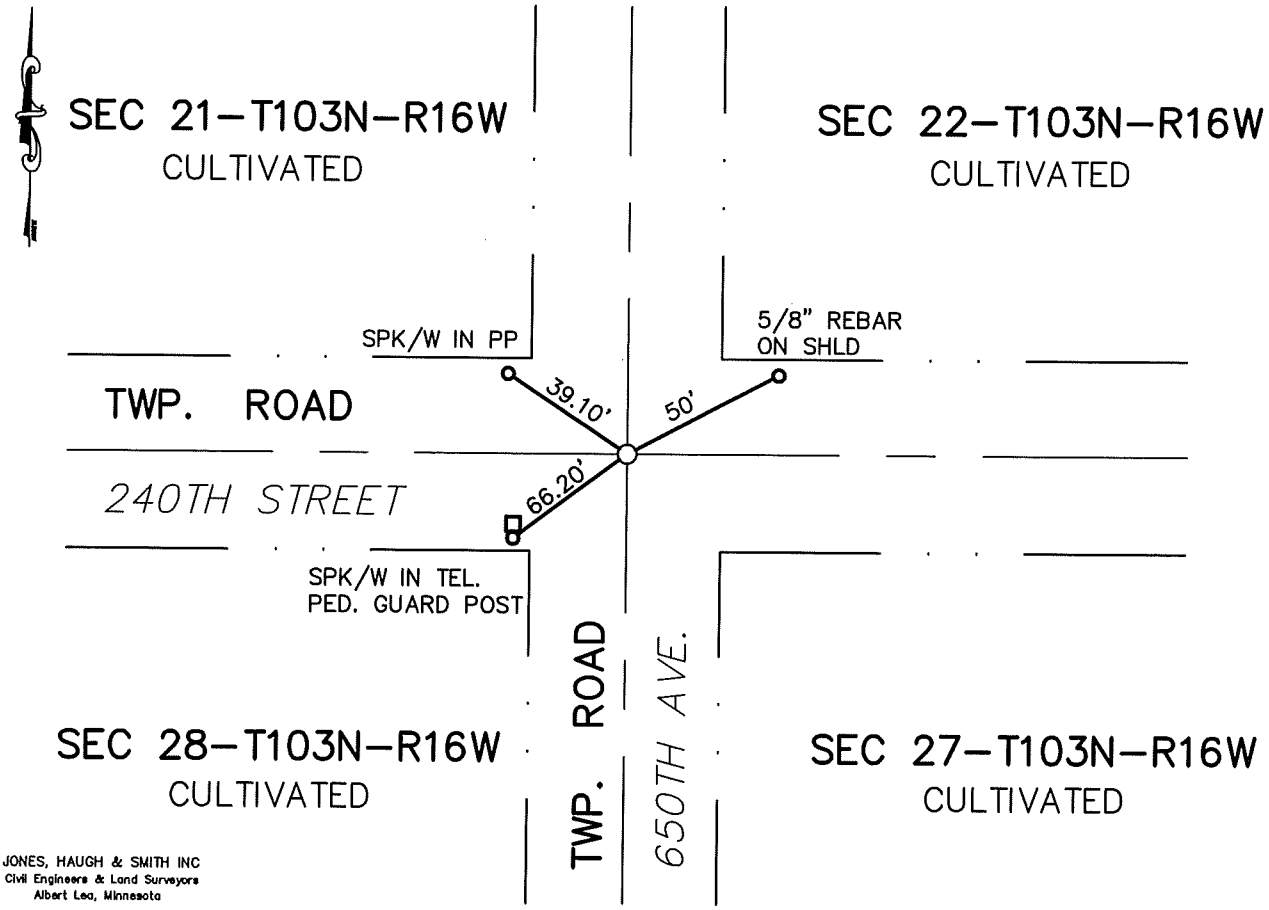

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-3-03

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Corner Section 28-T103N-R16W

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807 dug with Boe Brothers backhoe at the centerline of township road N-S-E-W. Uncovered a large stone 3.0 feet deep. Placed a 5/8"x16" rebar capped #13807 on the north side. Placed a 5/8"x16" rebar with cast iron monument above 0.60 feet below road surface.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 30, Township T103N Range R16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5/30/95 (DATE) found a 2" pipe

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5/30/95 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

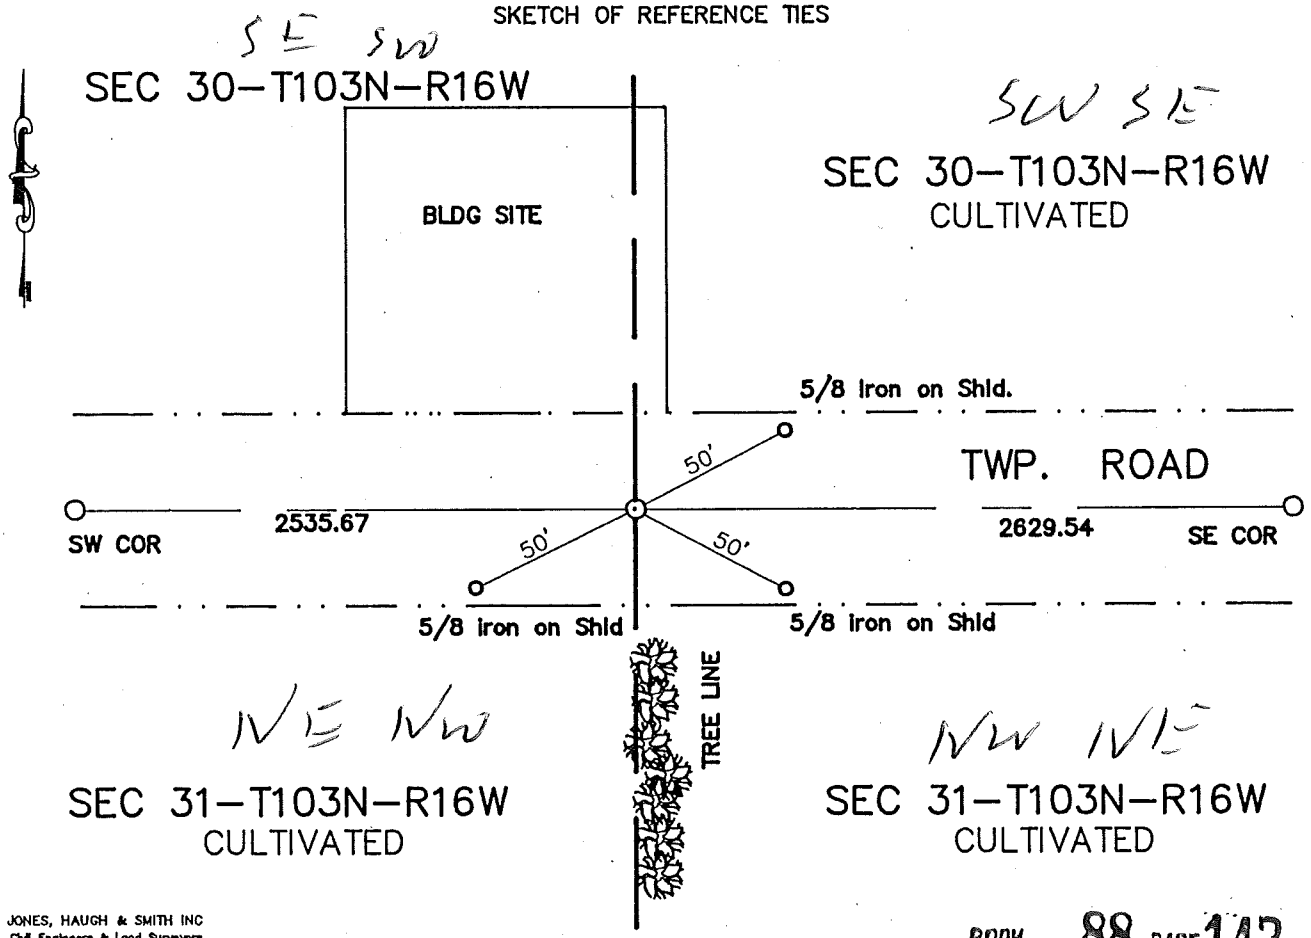

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 88 PAGE 143

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-14-95 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 21 day of Aug A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 438798

M.H.D. FORM NO. 2105

Book 88 Misc Page 143

S 1/4 Cor SEC 30-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at intersection of CL twp. road and edge of tree lines to the north and south. Uncovered a 2" pipe .8' below the road surface. Continued digging but found no further evidence of the corner. Accepted pipe as the true corner and set a 5/8 capped RLS 13807 on the north side. A CIM was placed over the pipe, 4" below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 30, Township T103N Range R16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5/30/1995 (DATE) found a 1 1/2" SHAFT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5/30/95 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

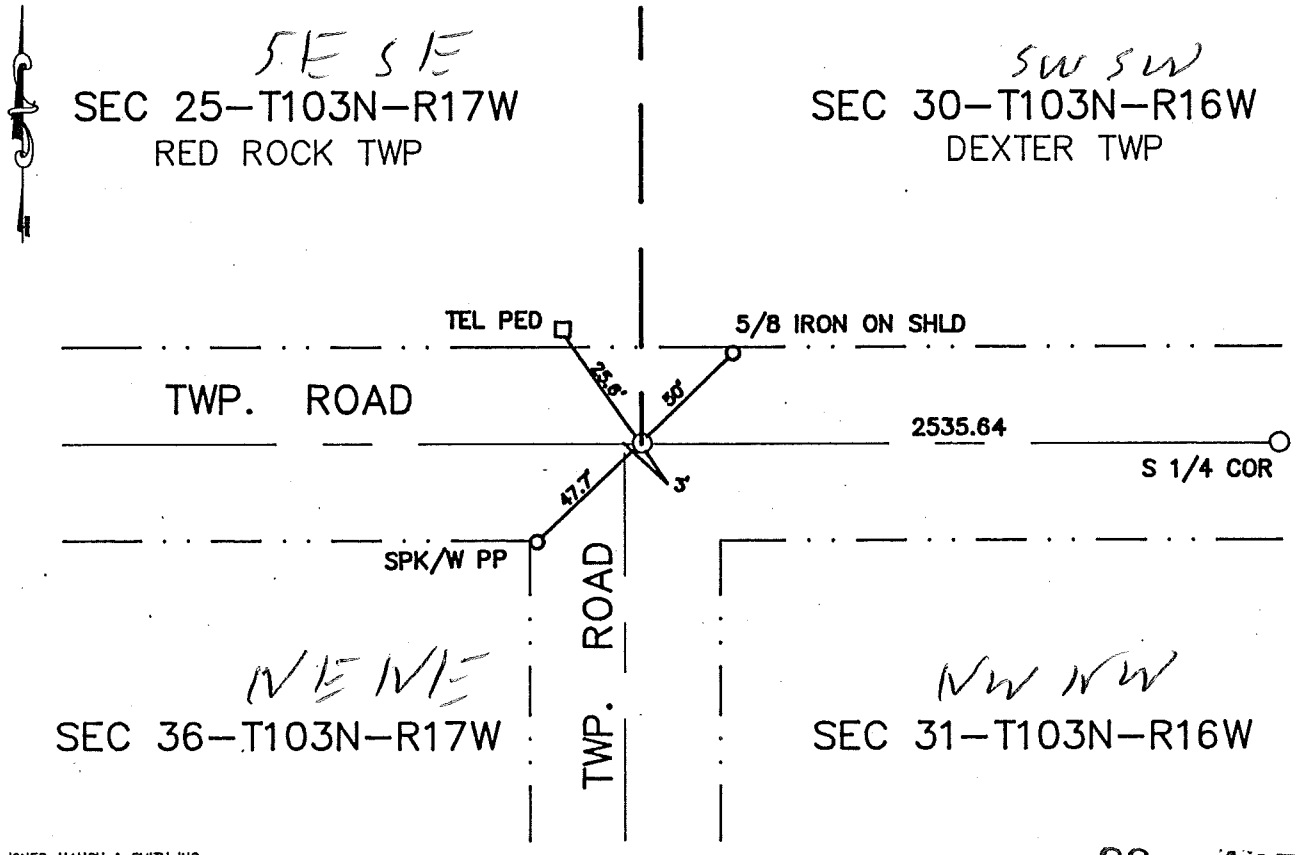

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 88 PAGE 145

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-14-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 21 day of Aug A.D., 1995

COUNTY RECORDER Charles Enger

By Susan M Davis, Deputy

DOCUMENT NO. 438799

M.H.D. FORM NO. 2105

Book 88 Misc Page 145

SW Cor SEC 30-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL intersection of twp. roads E-W, and S. Uncovered a 1.5" shaft 2' long. Continued digging but found no further evidence of the corner. The shaft was left as found and a 5/8 iron capped RLS 13807 was placed on the north side. The corner is on CL of the E-W road and approximately 3' E of the road to the south. A CIM was placed over the shaft, 4" below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 30, Township T103N Range R16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/30/1995 (DATE) found a 2" PIPE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/30/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

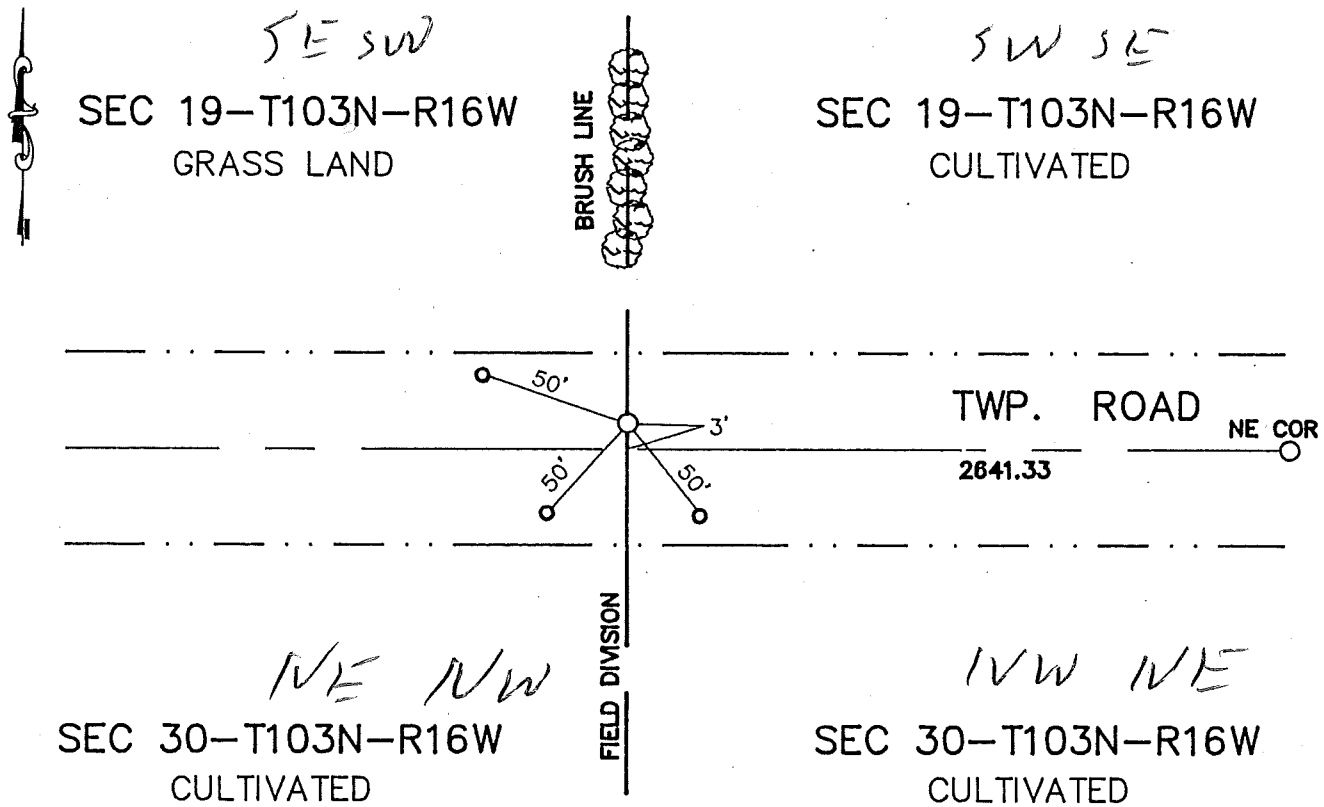

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 88 PAGE 147

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 8-14-95
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 21 day of Aug A.D., 1995

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 438600

M.H.D. FORM NO. 2105

Book 88 Misc Page 147

N 1/4 Cor SEC 30-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at intersection of CL twp. road, a field division to the south, and a tree line to the north. A 2" pipe was uncovered .8' below the road surface. Continued digging, but no further evidence of the corner was found. The pipe was accepted as the true corner, and a 5/8 iron capped RLS 13807 was placed on the north side. A CIM was also set over the pipe at the road surface. The corner is in line with the field division and 3' north of the road CL.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 88 PAGE 148

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 31, Township 103N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/28/1982 (DATE) found a CONCRETE MONUMENT 1' BELOW SURFACE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/15/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

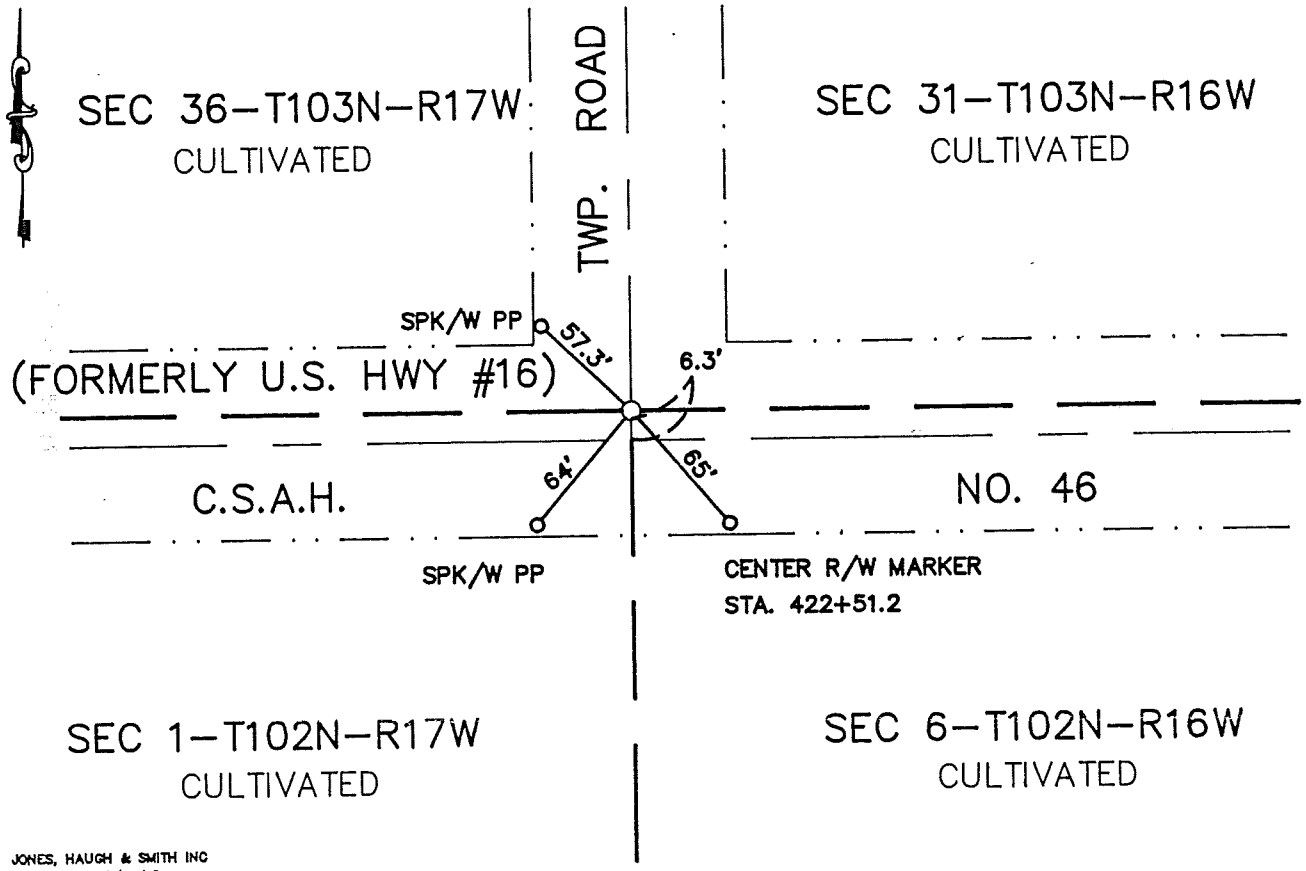

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-11-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SW Cor SEC 31-103-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower Co. Highway Dept. records indicate a concrete monument at this location.

1982 Jones Haugh and Smith crew dug and found a concrete monument 1' below the concrete road surface of State Highway #16 and placed a 5/8" iron capped #13807.

1992 Jones Haugh and Smith crew dug and found a 3/4" pipe in concrete. The monument agrees with the 1982 corner location.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and found and removed 3/4" pipe and set a 5/8"x9" iron with a cast iron monument above the concrete monument.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 31, Township 103 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/29/1982 (DATE) found a REMAINS OF WOOD POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/15/1995 (DATE) placed a CAST IRON MONUMENT OVER CAPPED IRON

SKETCH OF REFERENCE TIES

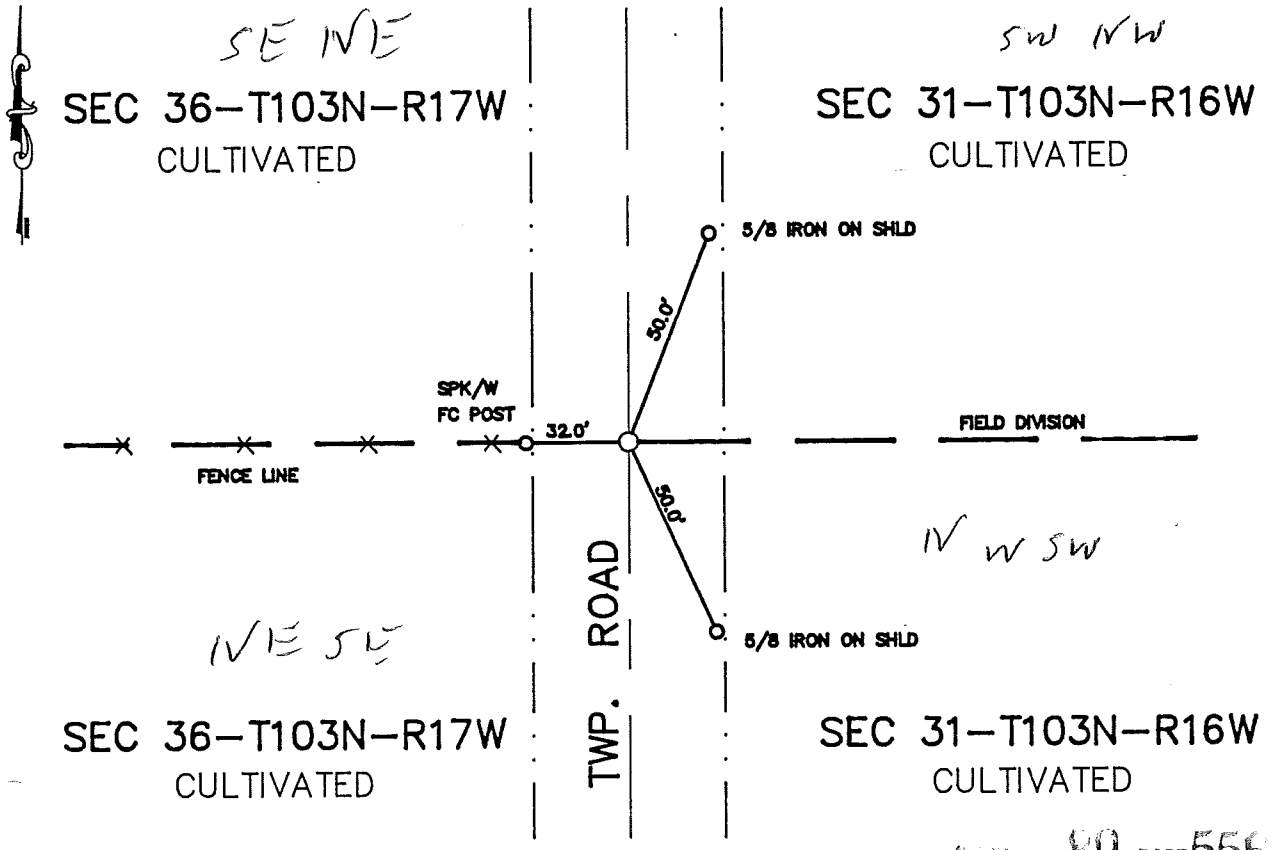

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 89 PAGE 556

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-27-95 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p.M. on the 2 day of Jan A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 441690

M.H.D. FORM NO. 2105

Book 89 Misc Page 556

W 1/4 Cor SEC 31-103-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post and a handful of stones were set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1982 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL of township road and in line with field division E and fence line W. Found remains of a wood post and accepted it as best evidence of the original PLS corner. Set a 5/8"x24" iron pin capped RLS 13807.

1995 Jones, Haugh, and Smith crew dug by hand at the CL of township road and found a 5/8"x16" iron capped RLS 13807 in agreement with 1982 record. Placed a cast iron monument over pin found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

plot "E"

NORTH QUARTER Corner of Section 35, Township 103N, Range 16W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 4-13-89 found A 12" E-W BY 12" N-S BY 7" HIGH STONE DOWN 1.3'

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 4-13-89 placed A CTY. MON. ON A 24" X 3/4" REBAR IN PLACE OF STONE

SKETCH OF REFERENCE TIES

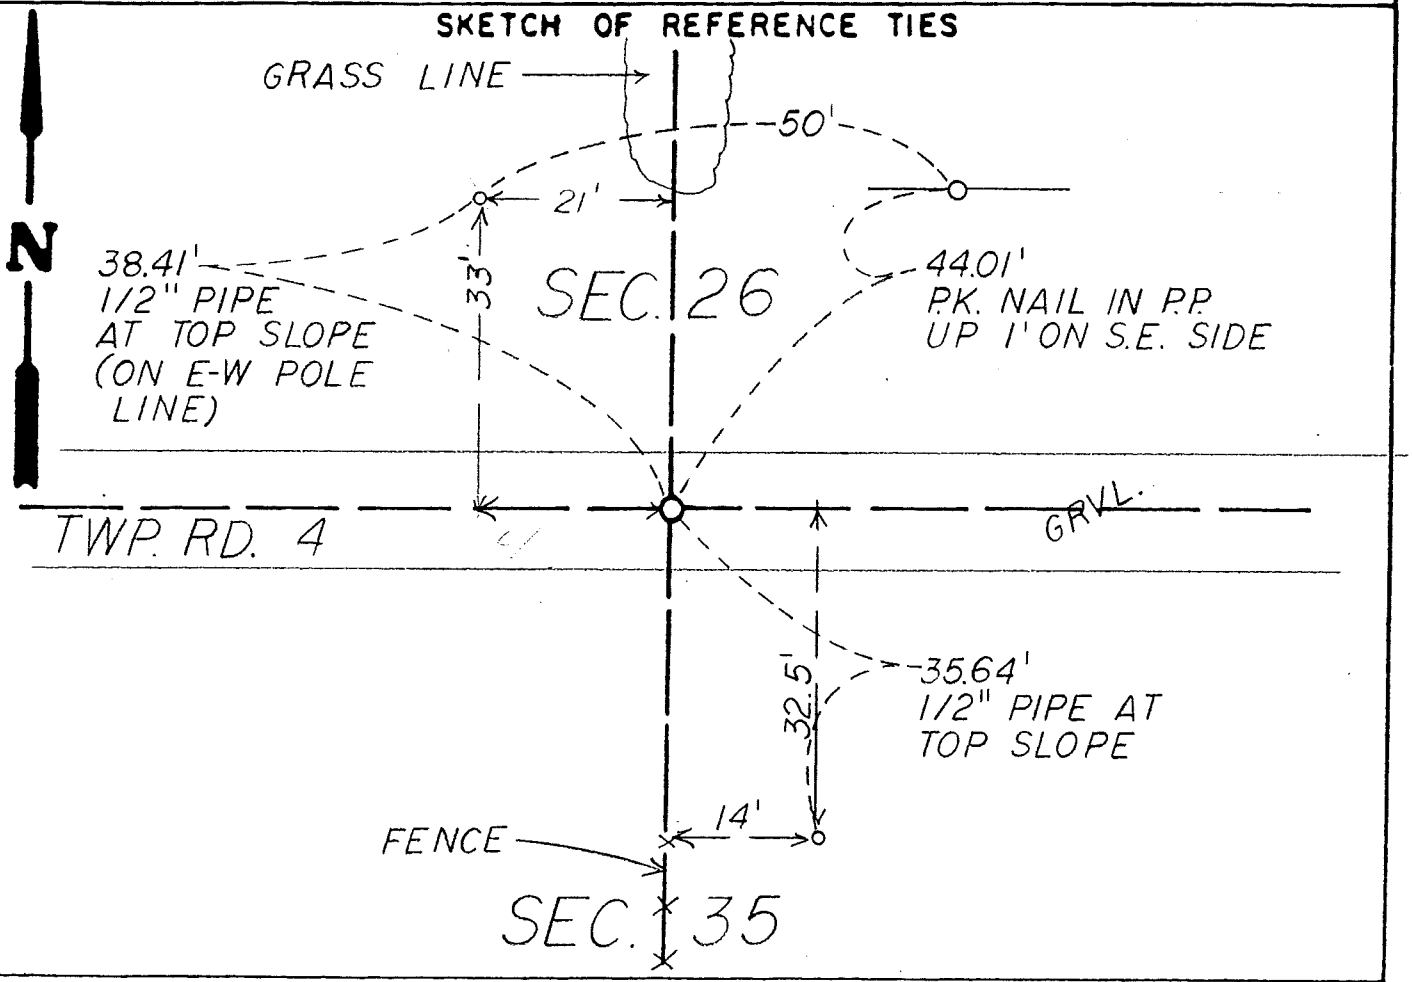

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-25-89 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTH QUARTER CORNER SECTION 35 TOWNSHIP 103 NORTH RANGE 16 WEST 5TH P.M.

July, 1853 — John Quigley, Deputy Surveyor, set post for corner and built mound with trench per instructions and deposited hand full of small stones. He planted Osage Orange Seeds in SE corner during the original Public Land Survey.

April 13, 1989 — Ronald J. Olson, RLS 11009, excavated with a backhoe 3 feet East to 3 feet West of the fence line South by 2 feet North to 2 feet South of the road centerline by 4.5 feet deep and found a 12" E-W by 12" N-S by 7" high stone 1.3 feet below the surface near natural ground. An old VCP tile was found below the stone and 3 feet east of it. The stone was removed during excavation.

An analysis of the record data gives no indication of the origin of the stone. It was found near natural ground and agrees with the lines of occupation. It is accepted as marking the location of the original Public Land Survey Corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 35, Township 103N, Range 16 W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 4-12-89 found A 8" BY 7" BY 8" STONE DOWN 5.3'

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 4-12-89 placed A CTY. CAST IRON MON. OVER STONE.

SKETCH OF REFERENCE TIES

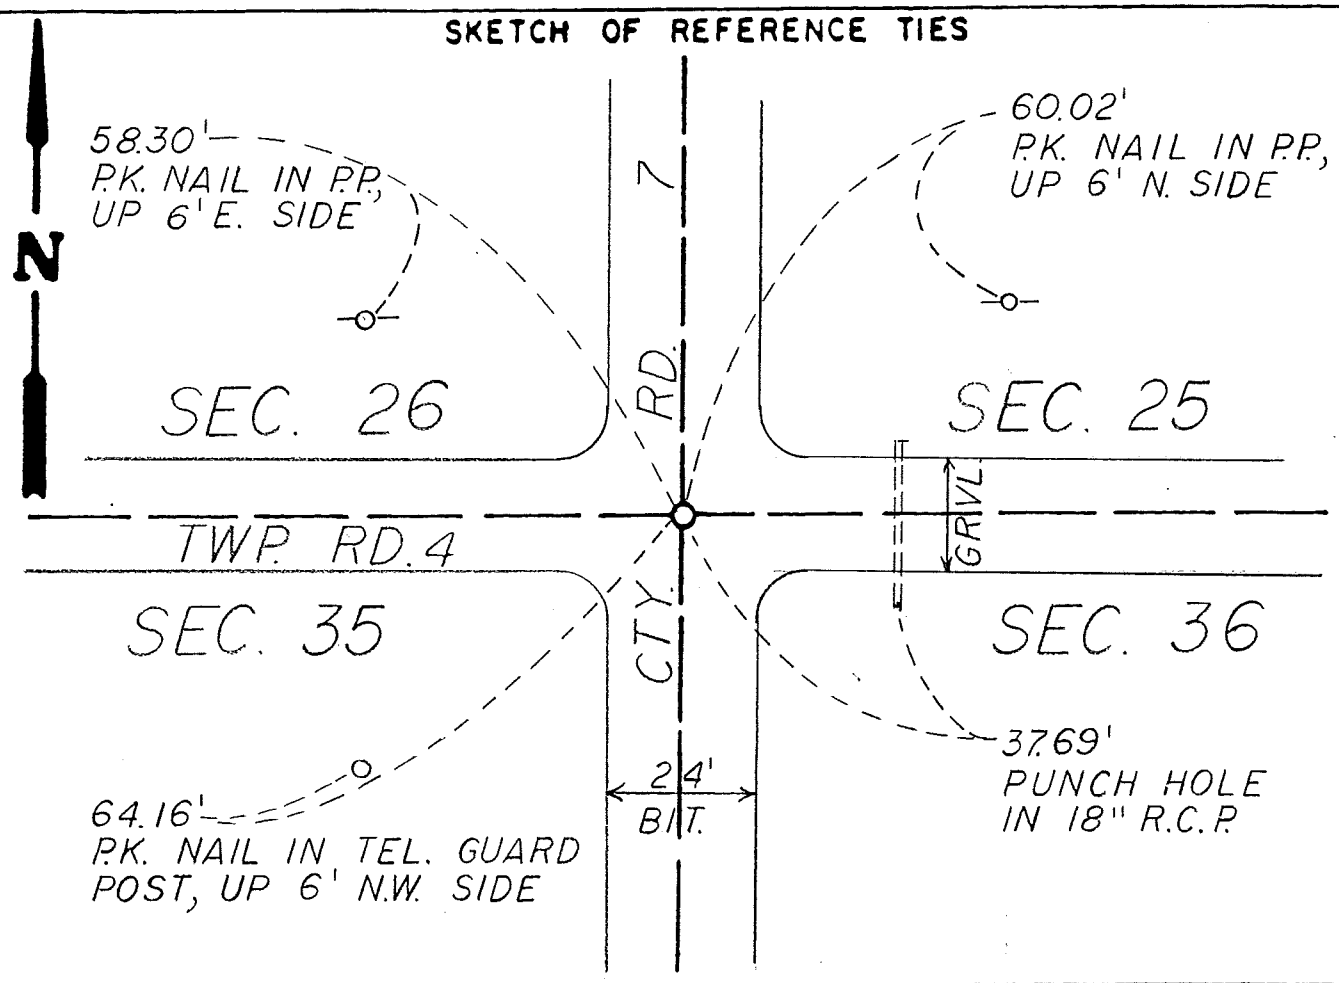

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-25-89 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHEAST CORNER SECTION 35 TOWNSHIP 103 NORTH RANGE 16 WEST 5TH P.M.

July, 1853 — John Quigley, Deputy Surveyor, set post for corner and built mound with trench per instructions and deposited hand full of small stones. He planted Osage Orange Seeds in SE corner during the original Public Land Survey.

Mower County Engineer's plans show an inplace concrete monument at the corner with ties.

April 12, 1989 — Ronald J. Olson, RLS 11009, excavated with a backhoe 2 feet East to 2 feet West of centerline by 5 feet north to 5 feet South of road centerline East by 6.5 feet deep and found a 8" E-W by 7" N-S by 8" high stone 5.3 feet below the surface. Another stone and a 12 high rebar in concrete was found 2.3 feet down and directly over the stone. A 6" spike was found 1 inch below the surface 3 feet North of the Stone. The Stone was reset and a 12" rebar was set on the South side. The second stone was placed above it with a 1/2 pipe set along the West side.

An analysis of the record gives no indication of the origin of the stone. By evidence of the monuments placed above it, the stone has been recognized and used by the County (rebar in concrete) and other surveyors as the corner for many years and it agrees with the lines of occupation. The stone is accepted as marking the location of the original Public Land Survey Corner.