TIE BOOK P10

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 20, Township 103N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☑ On 1-27-84 (DATE) found a concrete mon. with iron pin in center 1'± deep

☑ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☑ On 1-27-84 (DATE) placed a cast iron monument over conc. marker

SKETCH OF REFERENCE TIES

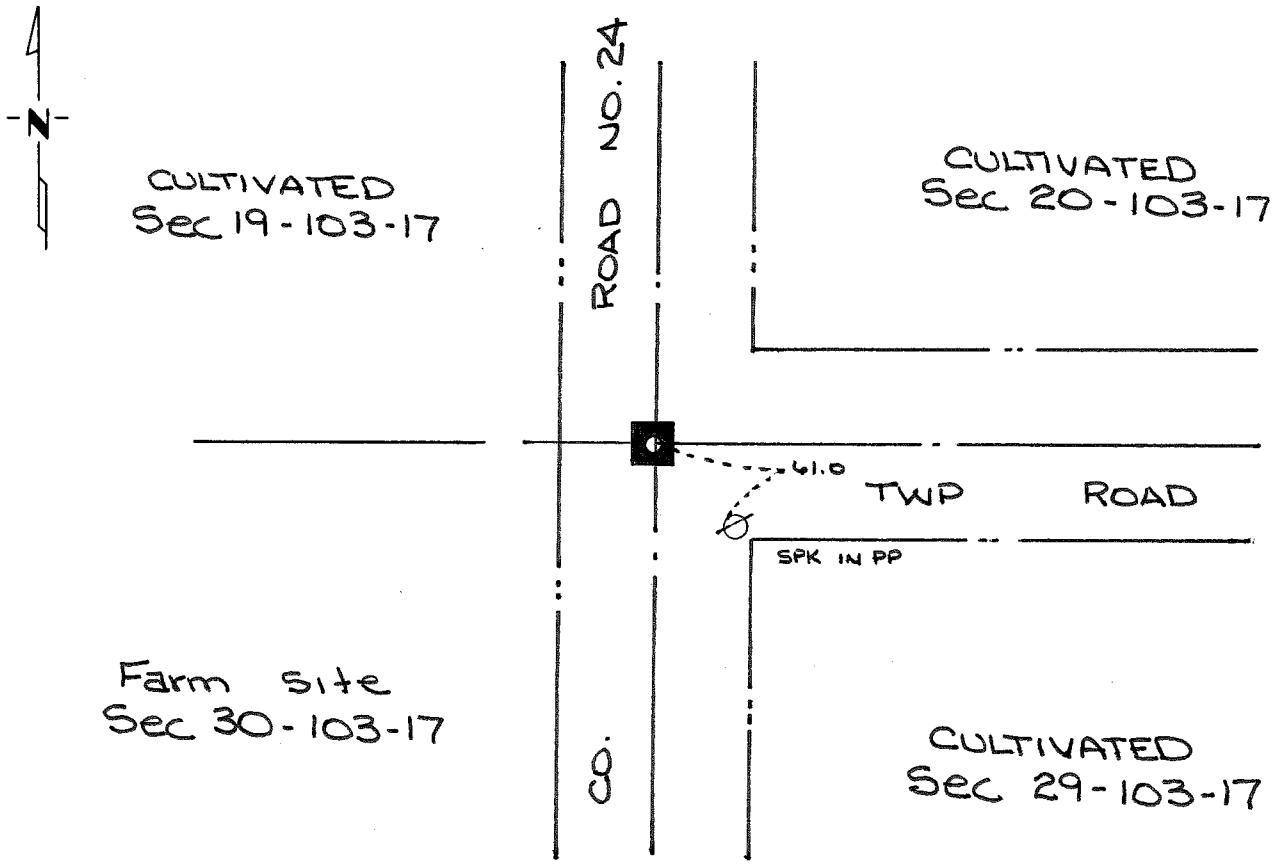

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 2-7-84
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 20-103-17

1856 Wm I. Anderson, Deputy Surveyor, set wood post during public land survey.

1954 Records from Mower County Engineer shows a concrete monument was found and ties were taken during a road survey.

1984 Jones, Haugh & Smith crew dug for section corner in bituminous surface road and at a depth of one foot more or less. Found a concrete monument with a iron pin cast in the center of the monument.

The monument found is in agreement with county records and fits occupation and road centerlines and is accepted as a perpetuation of the public land survey corner.