Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SOUTH QUARTER Corner of Section 1, Township 103N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-6-99 (DATE) found a CAST IRON MONUMENT IN THE CENTERLINE OF CO. ROADS, FLUSH W/ROAD SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

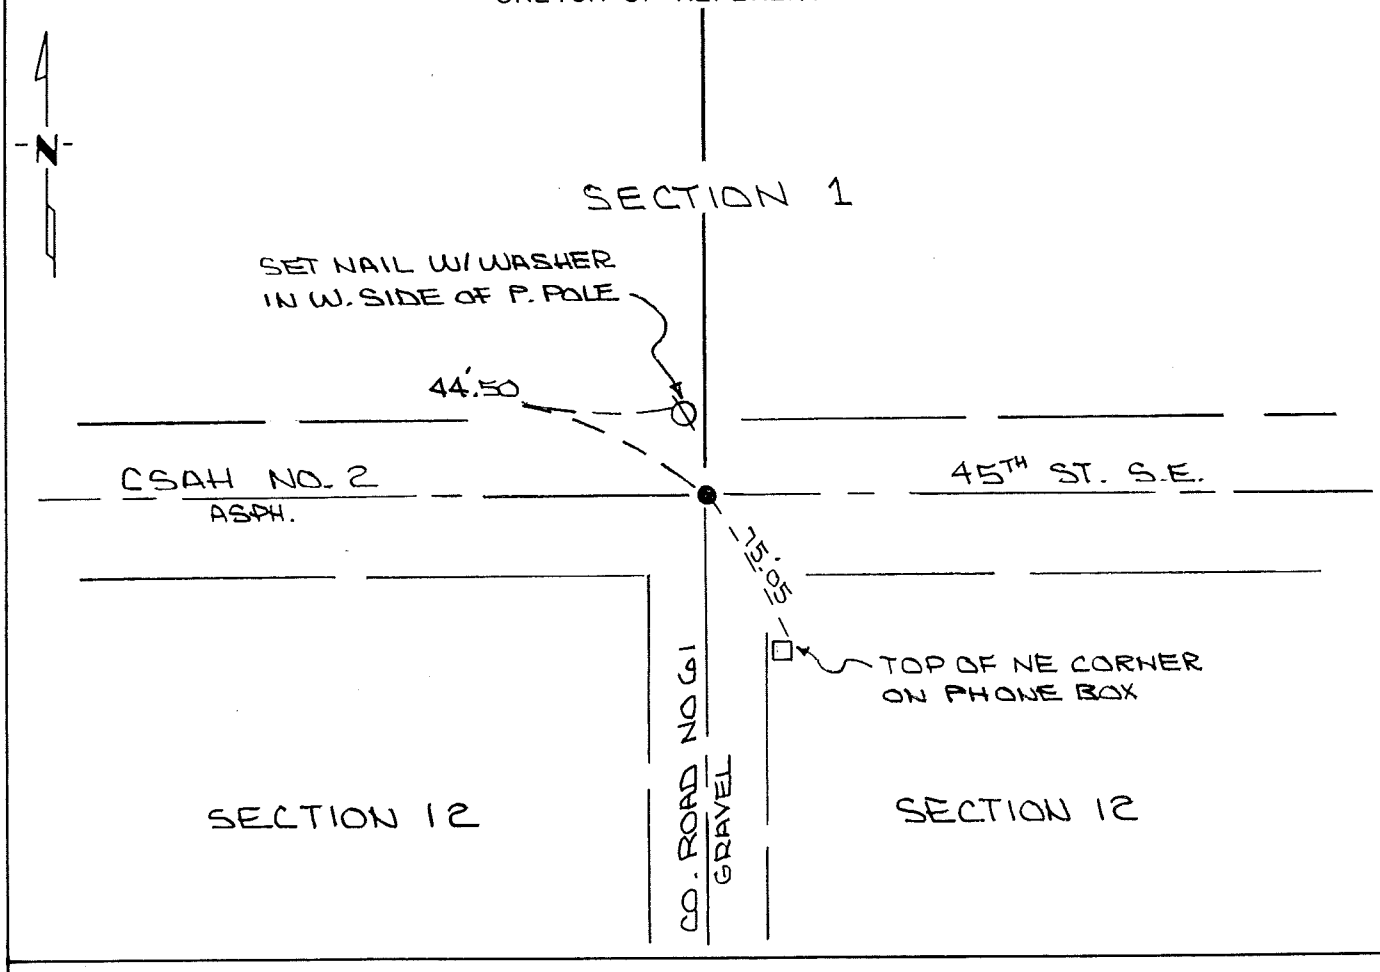

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bryan Closson (SIGNATURE) 1-11-2000 (DATE)

Registration No. 7112

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19__

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SOUTH QUARTER Corner of Section 1, Township 103N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-6-99 (DATE) found a CAST IRON MONUMENT IN THE CENTERLINE OF CO. ROADS, FLUSH W/ROAD SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

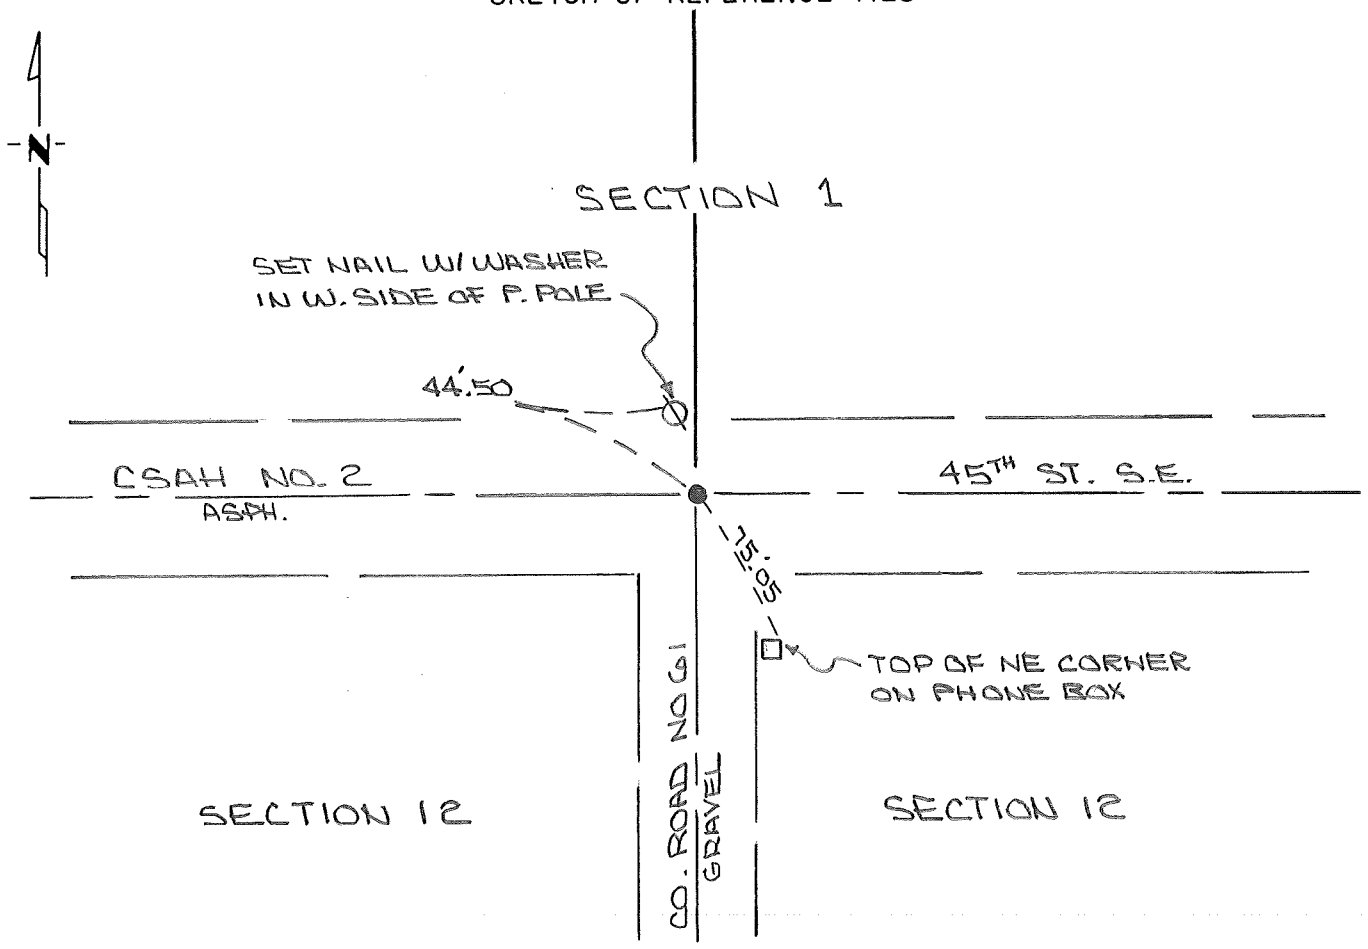

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-11-2000 (DATE)

Registration No. 7112

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ___

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Index No. P35 "E" P108 "M"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 1, Township 103N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-22-91 (DATE) found a 3/4"ø x 18" PIPE WITH ALUM. CAP

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-22-91 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

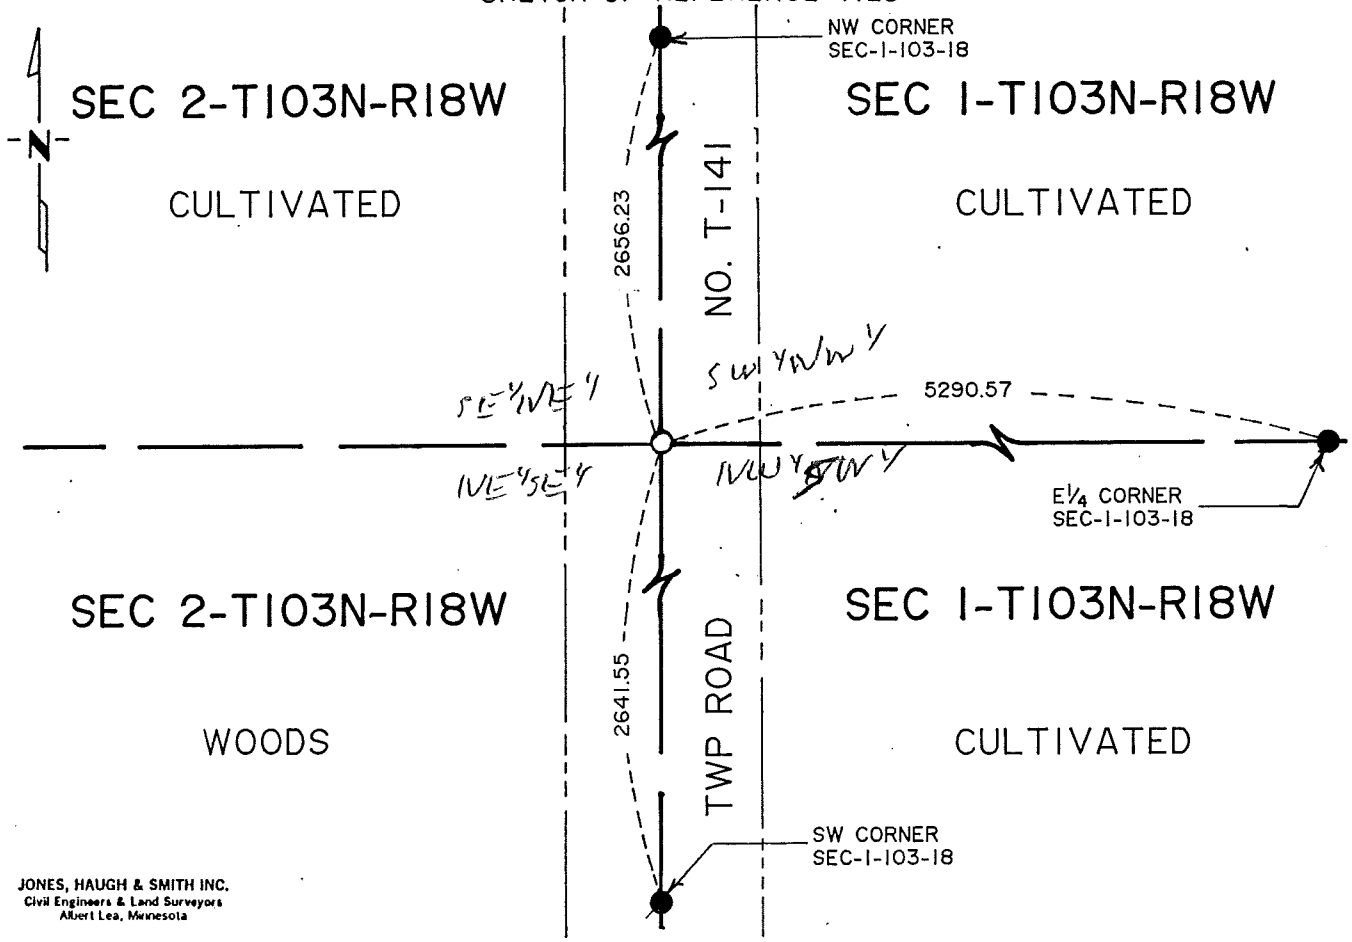

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-30-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 4 day of May A.D., 1993

COUNTY RECORDER Shanlon Engel

By Marlene Martin, Deputy

DOCUMENT NO. 420181

Bk MG Misc Pg 328

M.H.D. FORM NO. 2105

BOOK 19 PAGE 328

STATEMENT OF EVIDENCE

W 1/4 corner Section 1-103-18

This corner was originally established by Deputy Surveyor Wm. I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following tie was taken:

18" Burr Oak S 81 1/2° W 23 links (15.18 ft)

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1884 Clausen, Mower County Surveyor, found a government post at this location.

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, dug with county backhoe on centerline of north-south road in line with fence running east-west and uncovered a 4" diameter charred wood post three feet long and two feet deep. Therefore we accepted the charred wood post found as the location of the original public land survey corner. We set a 5/8" x 16" iron on the north side of post and a cast iron monument near road surface above post found.

The monument set fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 329

Jones Haugh

Index No. P 35, "F"
P 108, "N"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 1, Township 103N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On NOV. 1991 (DATE) found a CFP AND A FOUR WAY FENCE INTERSECTION

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On NOV. 1991 (DATE) placed a CAST IRON MONUMENT ON NORTH SIDE OF CFP

SKETCH OF REFERENCE TIES

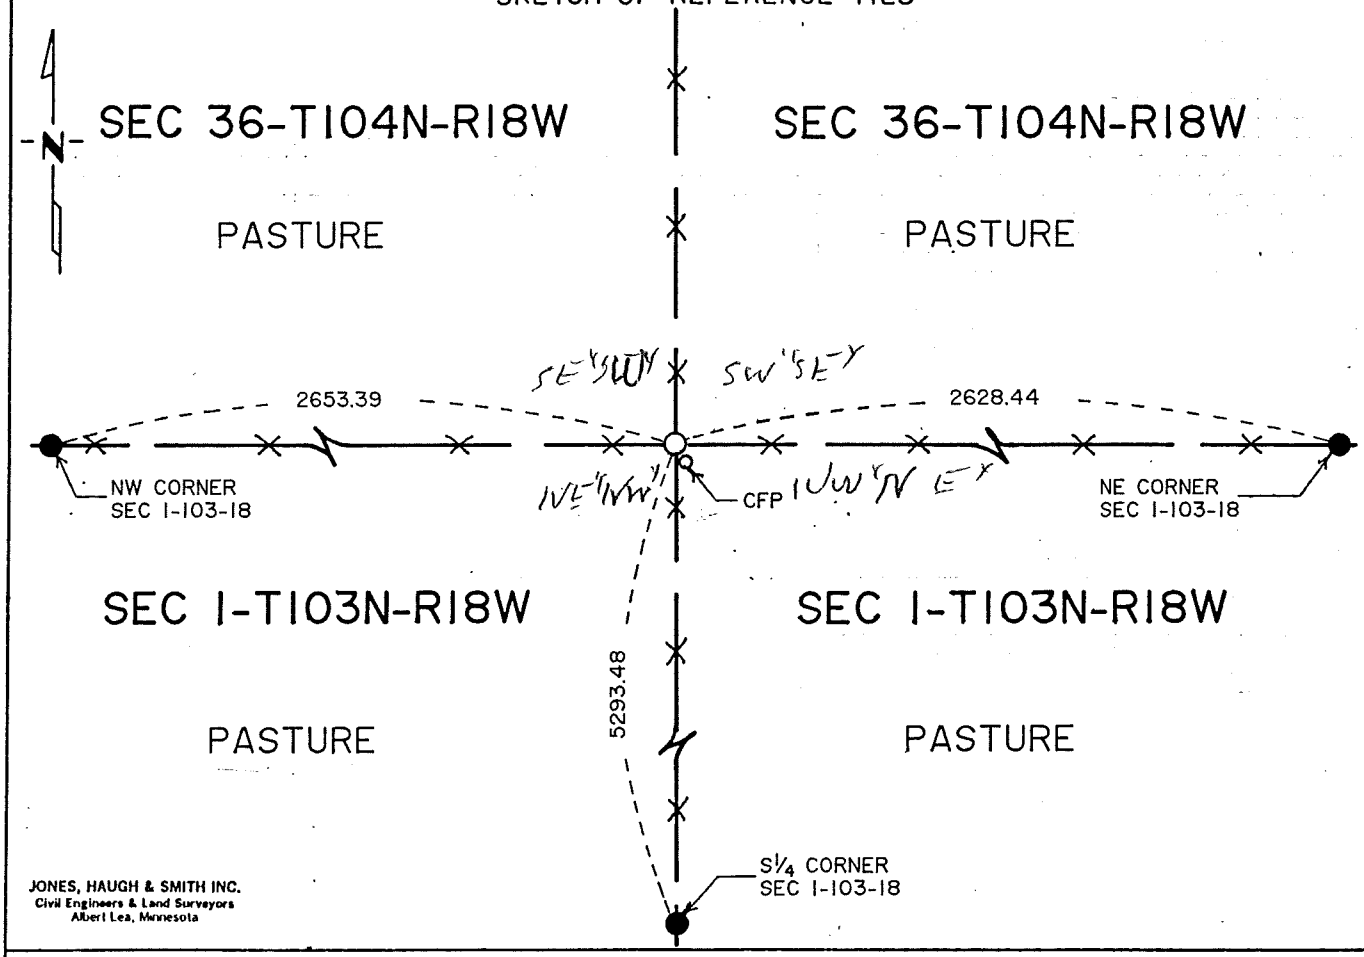

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-30-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 4 day of May A.D., 1993

COUNTY RECORDER Edwards Engen

By Marlene Morton, Deputy

DOCUMENT NO. 420483

Bk 79 Misc Pg 332

M.H.D. FORM NO. 2105

BOOK 79 PAGE 332

STATEMENT OF EVIDENCE

N 1/4 corner Section 1-103-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

7" Burr Oak	S 31 3/4° E	252 links (166.32 ft)
15" Burr Oak	S 71° W	910 links (600.60 ft)

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1884 Clausen, Mower County Surveyor, found a government post at the N 1/4 of Section 1.

1887 Clausen, Mower County Surveyor, found a government post at the S 1/4 Section 36-104-18.

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, set a cast iron monument on the north side of a corner fence post at a 4-way fence intersection which runs north-south and east-west. The corner fence post at the 4-way fence intersection is considered best evidence of the location of the original public land survey corner.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 333

Jones & Haugh

Index No. P 35 "G" P 108 "O"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 1, Township 103N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On NOV. 1991 (DATE) found a 5/8"ø IRON OVER A 2.5" × 3/4" × 16" IRON OBJECT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On NOV. 1991 (DATE) placed a CAST IRON MONUMENT OVER 5/8"ø IRON

SKETCH OF REFERENCE TIES

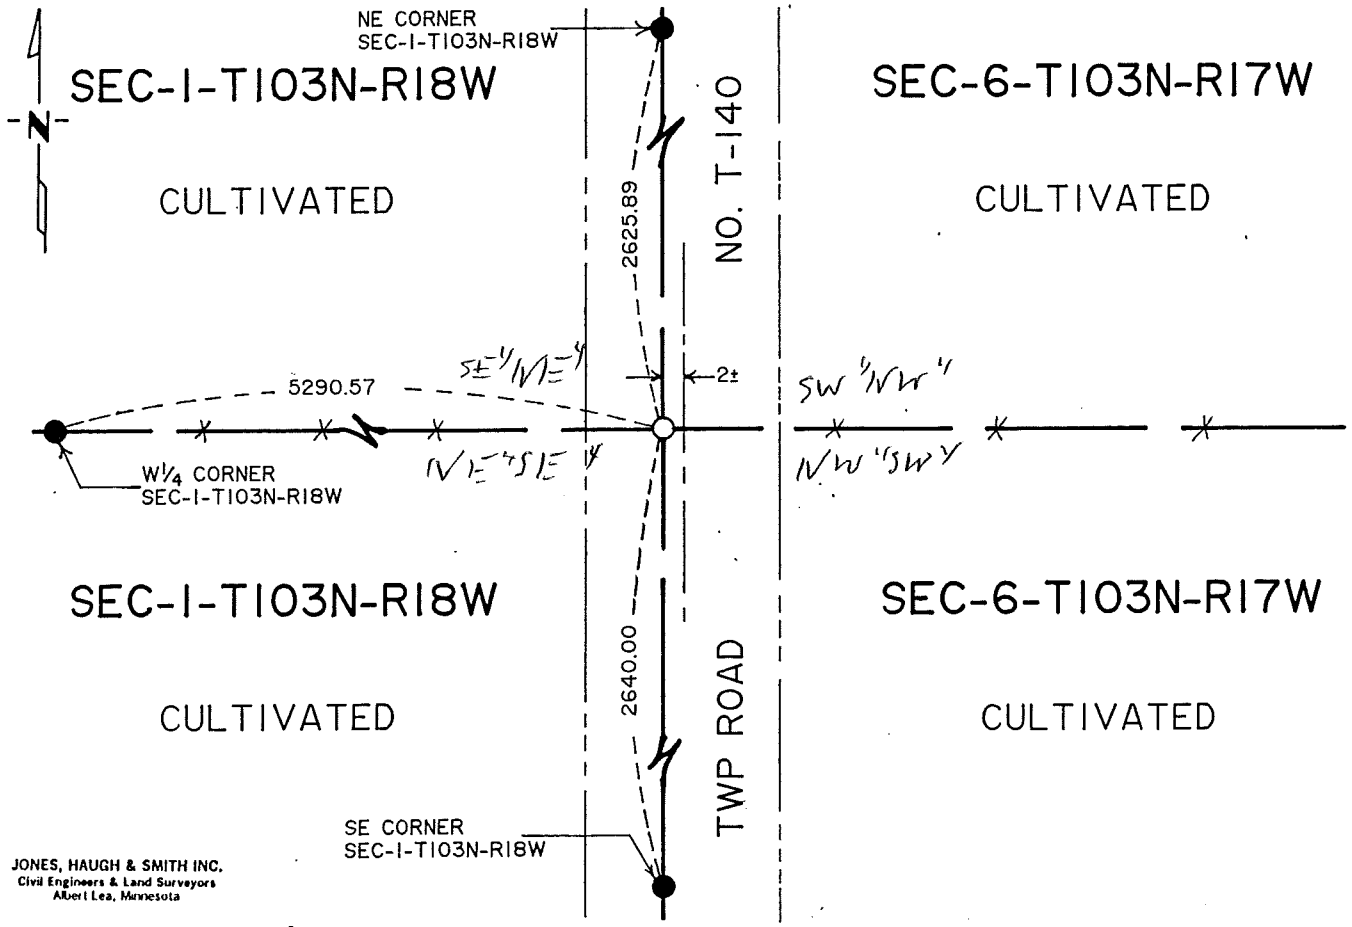

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-30-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 4 day of May A.D., 1993

COUNTY RECORDER Charlene Conger

By Marlene Martin, Deputy

DOCUMENT NO. 420482.

Bk 79 Misc Pg. 330

M.H.D. FORM NO. 2105

BOOK 79 PAGE 330

STATEMENT OF EVIDENCE

E 1/4 corner Section 1-103-18

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following tie was taken:

18" Burr Oak N 20 1/2° E 340 links (224.40 ft)

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1884 Clausen, Mower County Surveyor, found a government post at the E 1/4 of Section 1.

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, dug with county backhoe and found a 5/8" diameter iron 0.5 feet deep over a 2 1/2" x 3/4" x 16" long iron object two feet deep. The monuments found agreed with the line fences running east and west. Therefore we set cast iron monument near road surface and above 5/8" diameter iron found.

The monument set fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 331

Jones & Haugh

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 1, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/18/1991 (DATE) found a 1/2"X30" REBAR

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/18/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

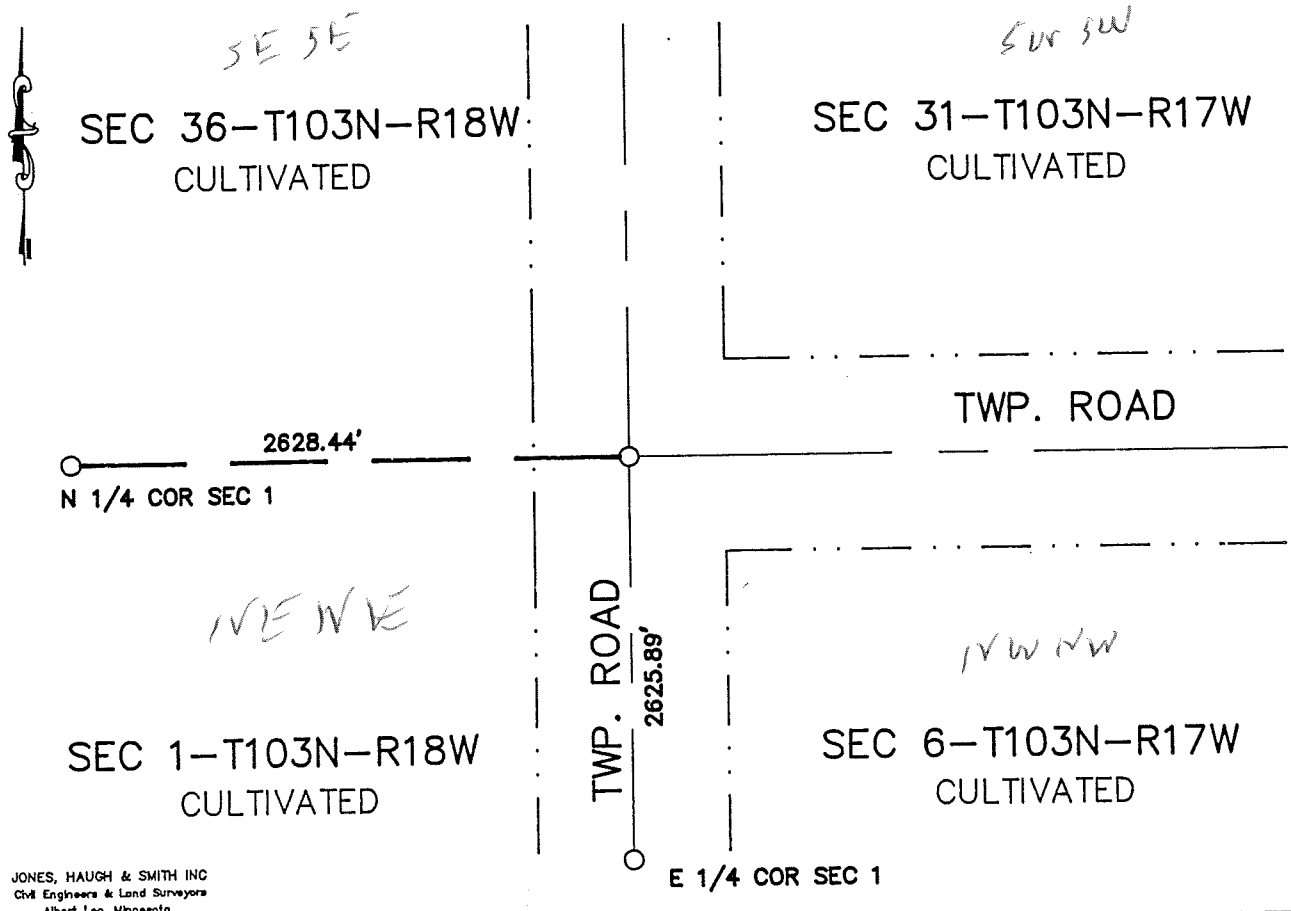

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-17-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 18 day of Oct A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 118642

Book 93 Misc Page 60

BOOK 93 PAGE 60

NE Cor SEC 1-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1991 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and east. Located a 1/2"x30" long rebar. Continued digging and found no other evidence of original PLS corner. Placed a cast iron monument over rebar found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 1, Township 103N Range 18, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/18/1991 (DATE) found a HARRISON MON., OVER 3/4" IRON IN CONCRETE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/18/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

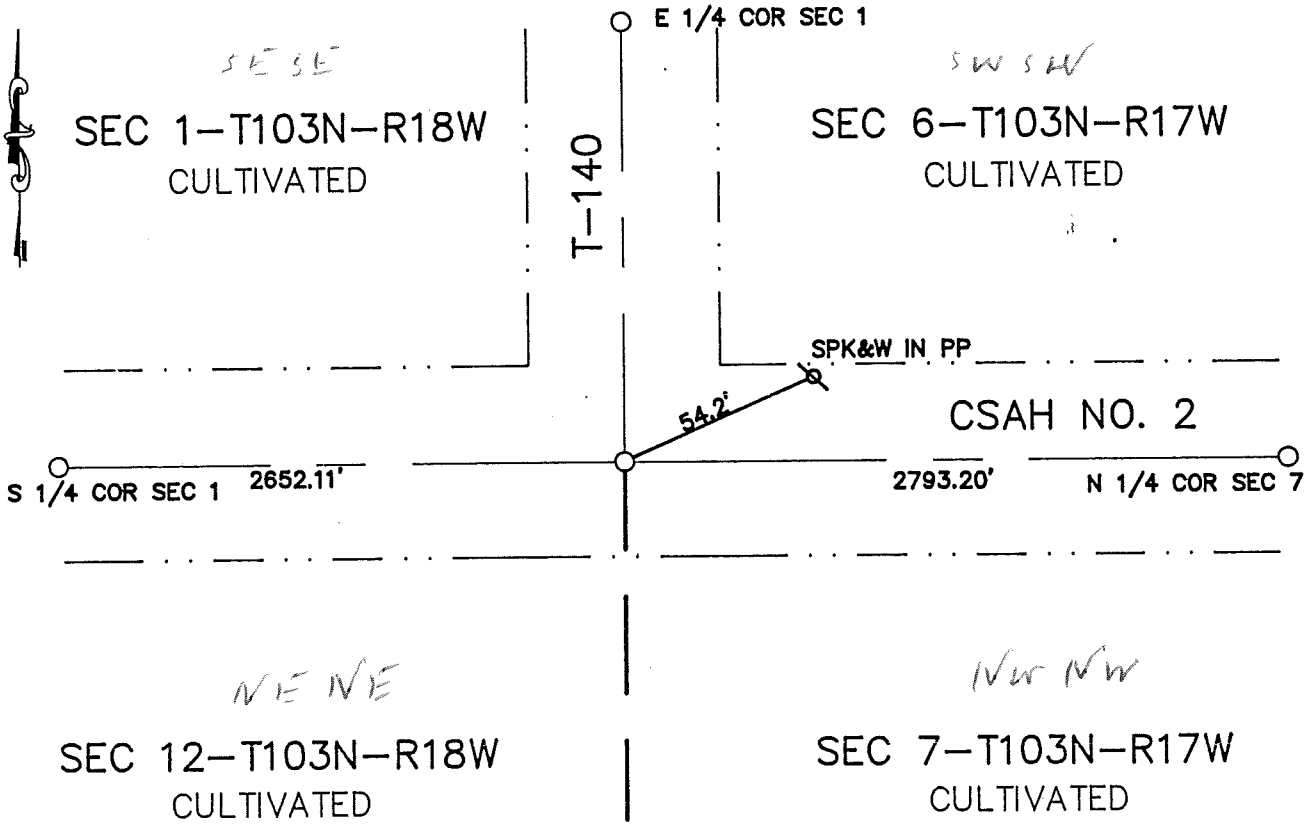

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 10-17-96
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p.m. on the 18 day of Oct A.D., 1996

COUNTY RECORDER Charles Evgen
By Susan M. Davis, Deputy
DOCUMENT NO. 118641

M.H.D. FORM NO. 2105 BOOK 93 PAGE 58

Book 93 Misc Page 58

NW Cor Sec 7 1987

SE Cor SEC 1-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County road plans show a corner at this location.

1991 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on the CL of C.S.A.H. No. 2 and township road T-140. Uncovered a Harrison monument over 5" diameter clay tile with 3/4" cast iron in concrete 3' deep. Continued digging and found no other evidence of original PLS corner. Placed a cast iron monument above Harrison monument.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 1, Township 103N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On NOV 1991 (DATE) found a HARRISION CIM OVER A 5"ø CLAY TILE WITH 3/4"ø CAST IRON IN CONC.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On NOV 1991 (DATE) placed a CIM NEAR ROAD SURFACE

SKETCH OF REFERENCE TIES

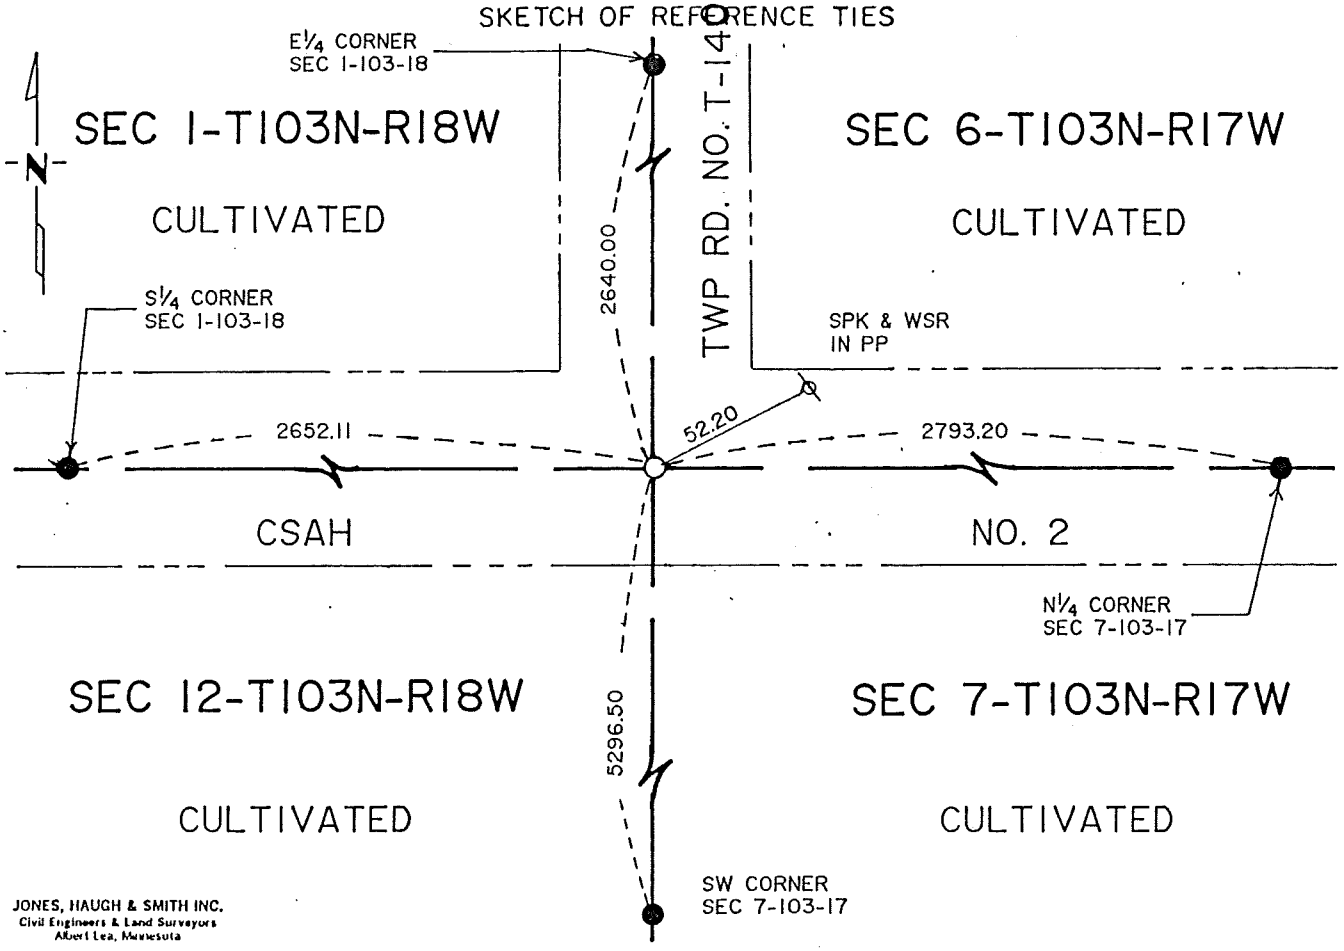

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-10-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 13 day of May A.D., 19 93

COUNTY RECORDER Amanda Ezrow

By Marlene Martin, Deputy

DOCUMENT NO. 420706

Bk 79 Misc Pg. 415

M.H.D. FORM NO. 2105

BOOK 79 PAGE 415

STATEMENT OF EVIDENCE

SE corner Section 1-103-18

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

8" Burr Oak	N 15° E	291 links (192.06 ft)
16" Burr Oak	S 45° E	144 links (95.04 ft)
7" Burr Oak	S 67° W	131 links (86.46 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1884 Clausen, Mower County Surveyor, found a government post at the southeast corner of Section 1.

1926 Mower County Highway Department found southeast corner during survey of CSAH No. 2. The following ties were taken:

83.0' SW to big Burr Oak
32.5' NW to corner fence post
27.4' S to fence post

1942 Mower County Highway Department indicates a tile monument was found at the southeast corner during a survey of CSAH No. 2. The following ties were taken:

53.0'	SE to tele pole	46.3'	S to corner fence post
54.0'	NE to power pole	86.0'	S to wood fence post
87.0'	NNW to steel fence post (stake)		
86.0'	S to wood fence post at knob		
98.2'	NNE to 2nd steel post (stake)		

1987 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, dug on centerline centerline of north-east-west roads and found a 5/8" diameter iron cast in concrete in a 6" diameter clay tile 2.5 feet below road surface. Set a cast iron monument over monument found.

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, dug with county backhoe and found a harrison cast iron monument over a 5" diameter clay tile with 3/4" diameter cast iron in concrete at a depth of 3 feet deep. Found no further evidence of original public land survey corner. The monument found is in agreement with past said records. Therefore we set cast iron monument near road surface over monuments found.

The monument set fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 416

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 1, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/24/1991 (DATE) found a 1/2"X16" REBAR, 5" CONC. MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/24/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

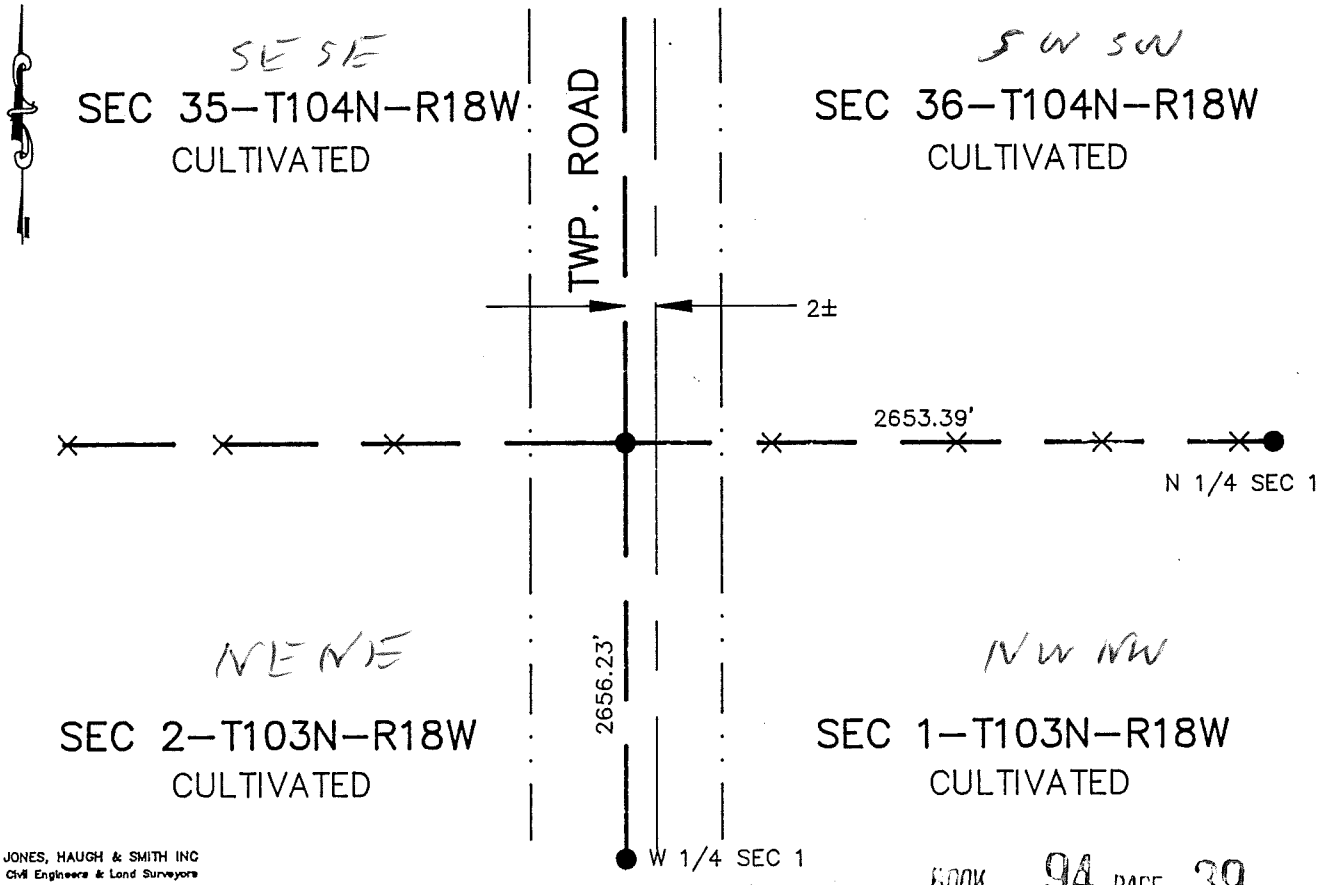

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 39

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-14-92 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 5 P.M. on the 23 day of Jan A.D., 1992

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450688

M.H.D. FORM NO. 2105

Book 94 Misc Page 39

NW Cor SEC 1-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1991 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S. Uncovered a 1/2"x16" rebar 2' west of CL road N-S and 3' north of E-W fence line. Also found a 5" concrete monument under rebar. Placed a cast iron monument over monuments found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 3, Township 103N Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-5-90 found 1 1/8" IRON BAR 2.3' BELOW THE SURFACE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed COUNTY CAP ON 3/4" REBAR OVER IRON BAR

SKETCH OF REFERENCE TIES

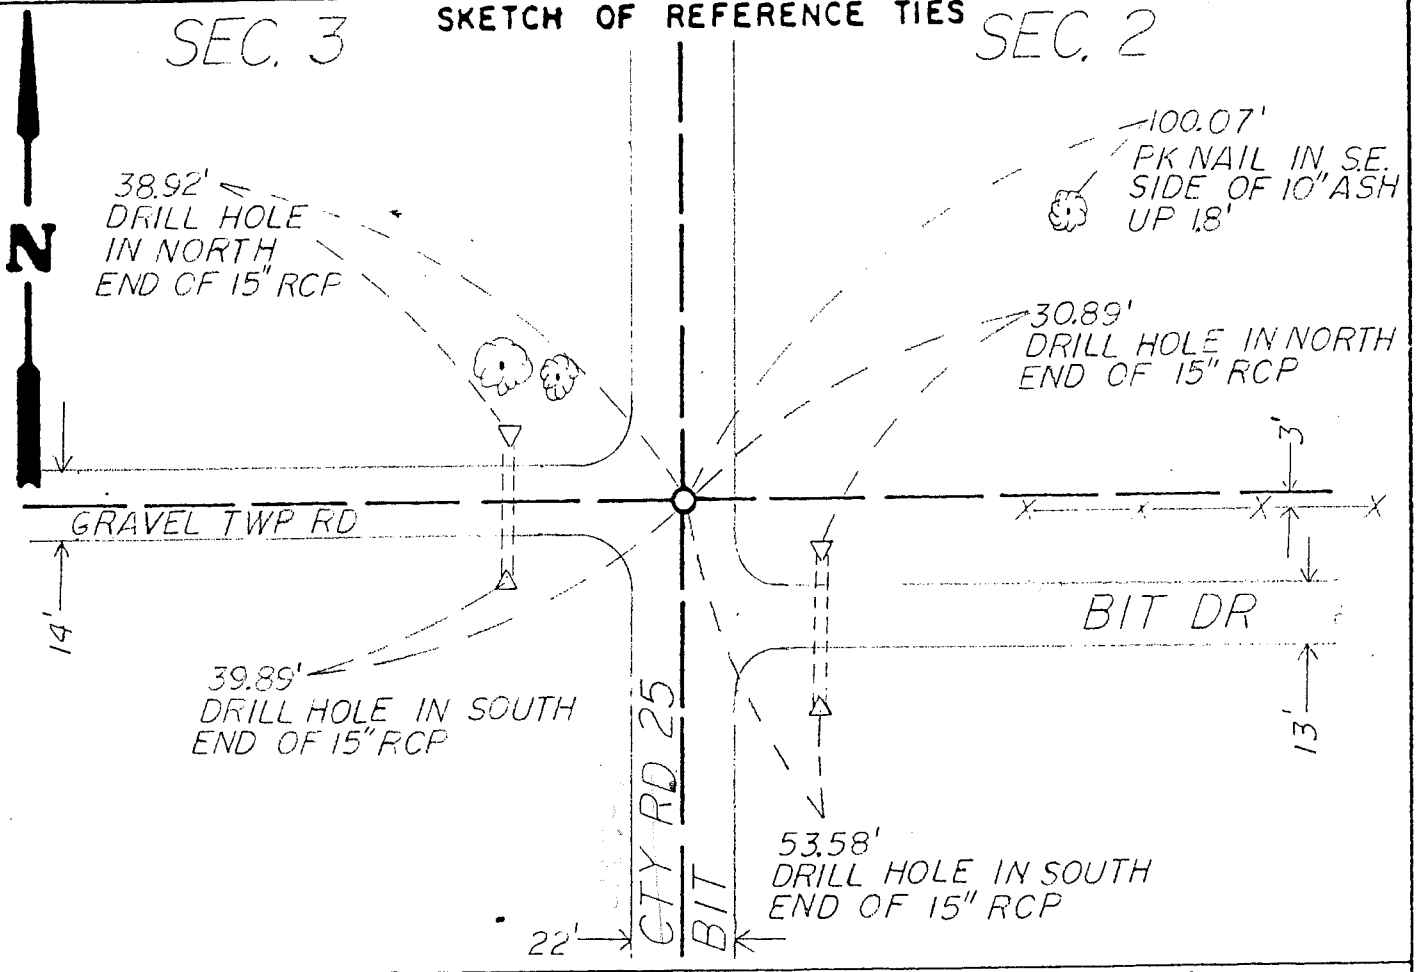

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 3, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5TH P.M.

July, 1854 — William J. Anderson, Deputy Surveyor, set a post at quarter section corner, deposited charred stake and made mound with trench and pits as per instructions.

June 1884 — Government post shown in Clausen field notes on Page 104, and used to subdivide Section 3.

1936 — County Engineer's Plans shows no stone found.

July 5, 1990 — Steven J. Thompson, Zenk Read Trygstad & Associates excavated with a backhoe 1 foot East to 3 feet West of centerline and 3 feet South to 8 feet North of Centerline of road to the West and 5.6 feet deep to clayey sand about 2.5 feet below original ground, and found a 1-1/8 inches square x 1.3 feet long iron bar 2.3 feet deep in mottled soil. A 5/8 inch x 1.5 feet rebar with cap # 13807 was found 0.4 foot deep and 0.9 foot Southwest of iron bar.

Testimony from Clifford Strong, a longtime resident of the area, stated that the Rebar was set by prorational measure and that the bar was never found by the party who set the rebar.

An analysis of the record data gives no indication of the origin of the iron bar. The bar was found below the gravel in black dirt. The bar agrees with the occupation lines defined by the road centerline and is accepted as marking the location of the original Public Land Survey Corner.

(F) P.100 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 4, Township 103 N, Range 18 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On AUGUST 15,1978 (DATE) found a 3/4 INCH IRON PIN FLUSH (SET FROM TIES AUGUST 31, 1977)

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On AUGUST 31,1977 (DATE) placed a 3/4 INCH IRON PIN FLUSH.

SKETCH OF REFERENCE TIES

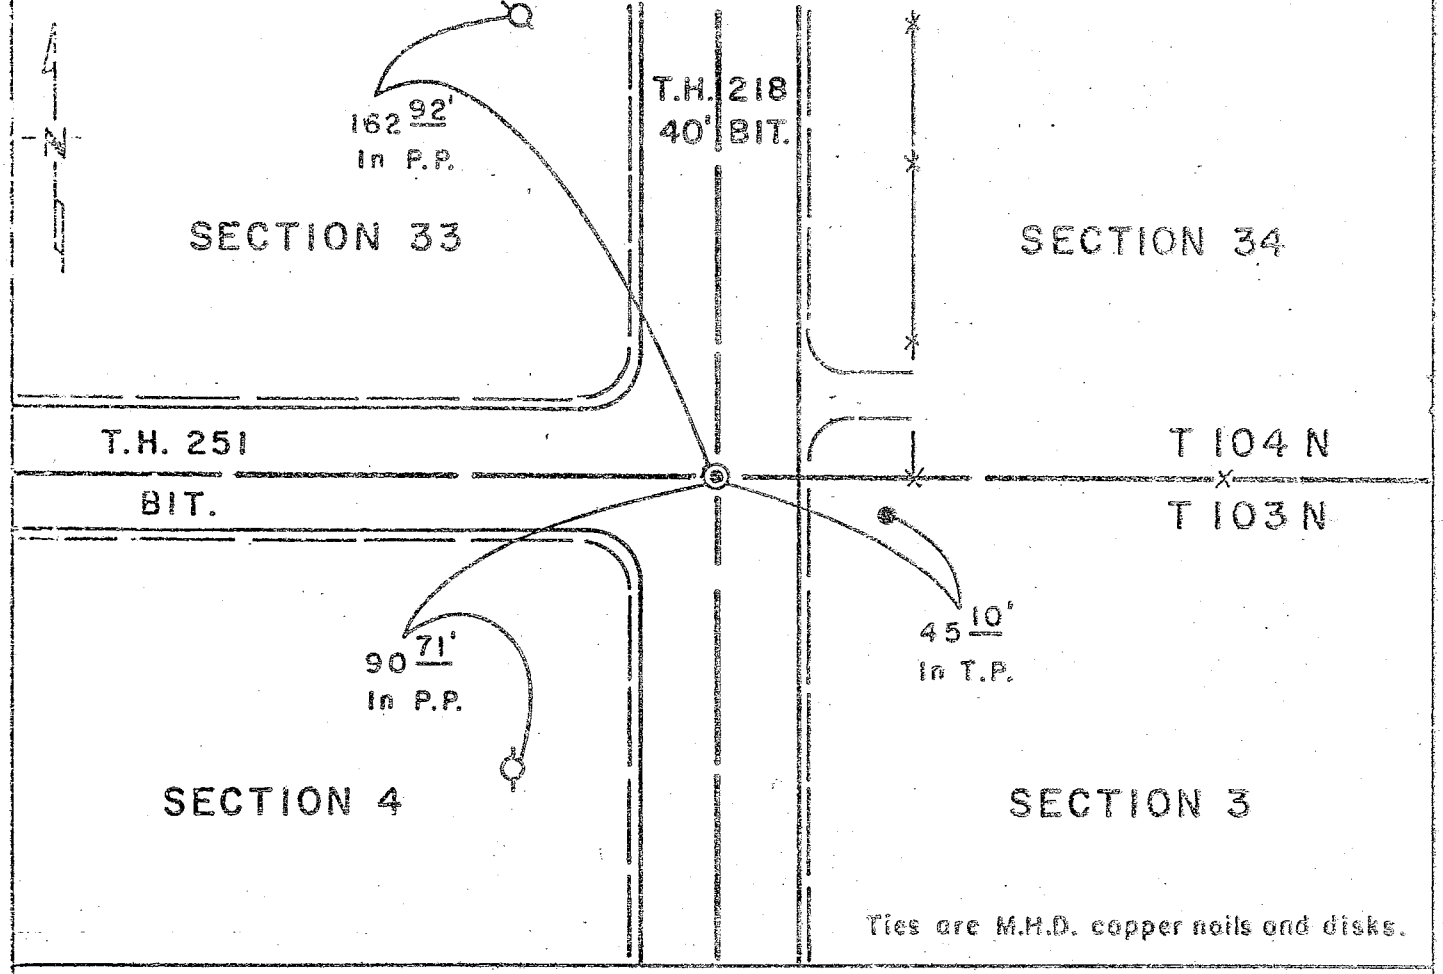

Ties are M.H.D. copper nails and disks.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan 10/25/78
SIGNATURE DATE

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P.M. on the 25 day of OCTOBER A.D., 1978

County Recorder CHARLES ENGER

By DOROTHY JOHNSON, Deputy

DOCUMENT NO. 336623
Book 47 of Misc. Page 167

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER OF SECTION 4, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5th P.M.

JULY, 1854 — J. B. Reyman, Deputy Surveyor, deposited charcoal, made mound with pits and trench at the corner during the original Public Land Survey.

1926 — Minnesota Highway Department placed P.I. 1132+40.3 at the intersection of the existing occupation lines.

1978 — Minnesota Department of Transportation found a 3/4 inch iron pin in the bituminous overlay of T.H. 218.

An analysis of the record and survey data indicates the 1926 position has been perpetuated throughout the years and has marked the corner for over 50 years. The iron pin is therefore, accepted as marking the Public Land Corner.

For details of the electronic survey data, contact the Minnesota Department of Transportation, Surveying and Mapping Section, Rochester District Office.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 7, Township 103N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-24-90 (DATE) found a 3"Øx12" pipe over a 5"x 6"x 18" pointed field stone in a nest of stones in virgin soil.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-24-90 (DATE) placed a 5/8"Ø iron capped (13807) over monument found.

SKETCH OF REFERENCE TIES

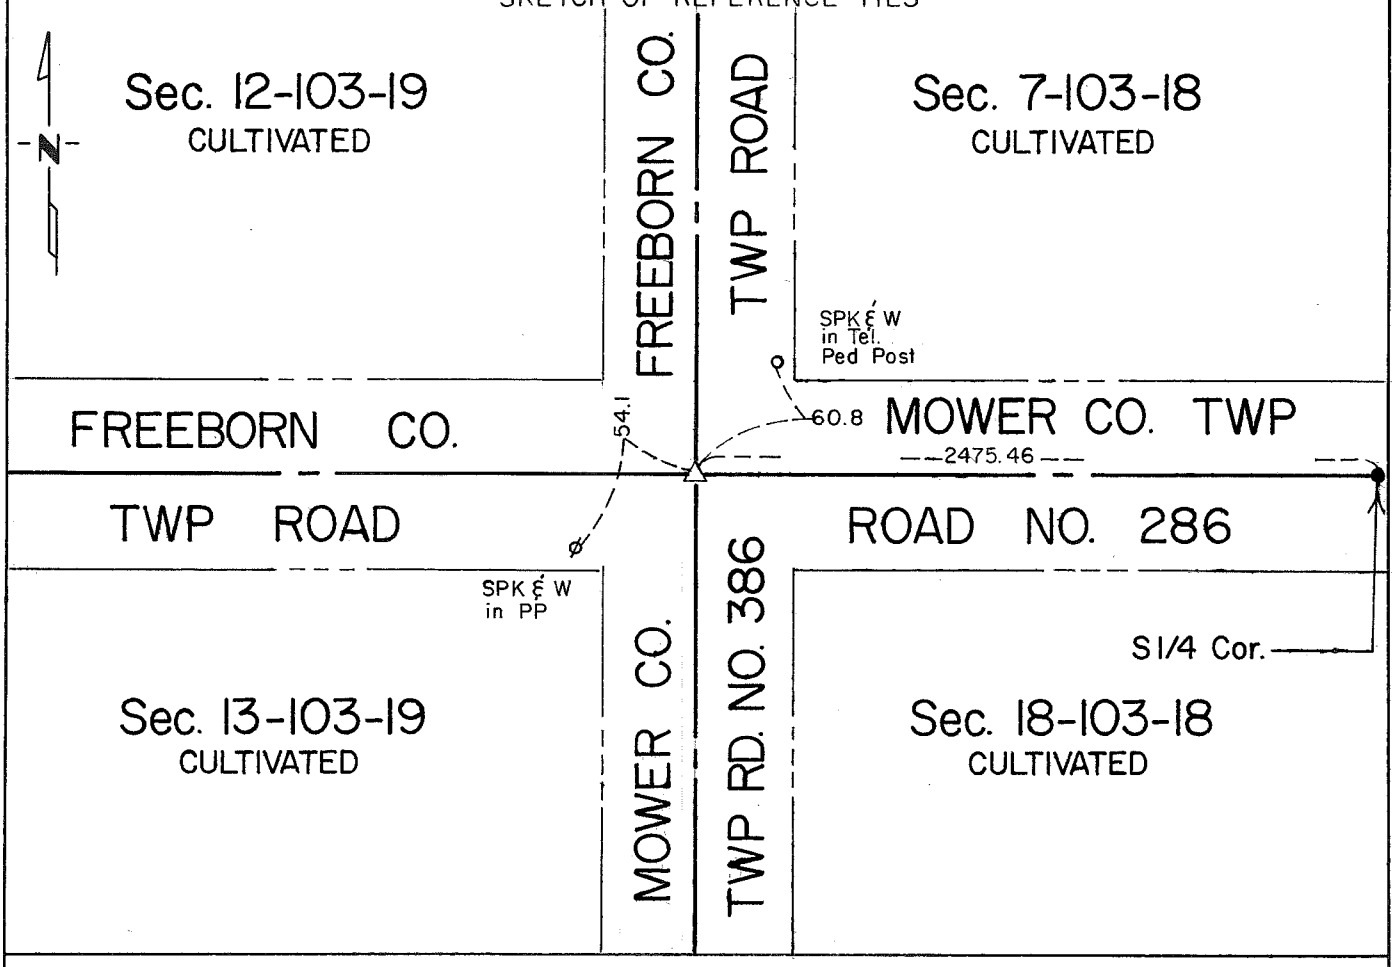

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 9-18-90
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 7-103-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post. The following ties were taken:

10"	Burr Oak	N 35° W	88 links	(58.08 feet)
10"	Burr Oak	N 43° E	79 links	(52.14 feet)
12"	Burr Oak	S 88° E	78 links	(51.48 feet)
10"	Burr Oak	S 37° W	158 links	(104.28 feet)

The following were contacted for section corner information:

Freeborn County Engineering Department
Mower County Engineering Department
Mower County Recorder's Office

1938 John Nielsen, Freeborn County Highway Department, uncovered a stone in approximate center of intersection. Placed gas pipe above stone. The following ties were taken:

Spk & W in Power pole	40.7	SE
Spk & W in Telephone pole	73.8	ENE
NE cor of school house (porch)	101.1	WSW
SE cor of school house (Main Bldg)	117.7	SW

1990 Jones, Haugh & Smith crew dug with the Mower County backhoe on centerline centerline of north-south-east-west roads and uncovered a 3/4" diameter x 12" pipe 2 feet deep. Continued digging and found a 5"x6"x18" pointed field stone in a nest of small stones at a depth of 3.0 feet in virgin soil. Placed 5/8" diameter capped iron on south side of stone and 5/8" diameter iron at road surface.

Corner found is in agreement with 1938 records from John Nielson and fits road centerlines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

SW COR SEC 7 T103N - R18W
NW COR. SEC. 18 T103N - R18W

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 13, Township 103N, Range 19W, 5th P.M.

STATE OF MINNESOTA, County of FREEBORN


At the corner location shown on the sketch:

☐ On 8-24-90 (DATE) found a 3"Ø x 12" pipe over a 5"x 6"x 18" pointed field stone in a nest of stones in virgin soil.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-24-90 (DATE) placed a 5/8"Ø iron capped (13807) over monument found.

SKETCH OF REFERENCE TIES

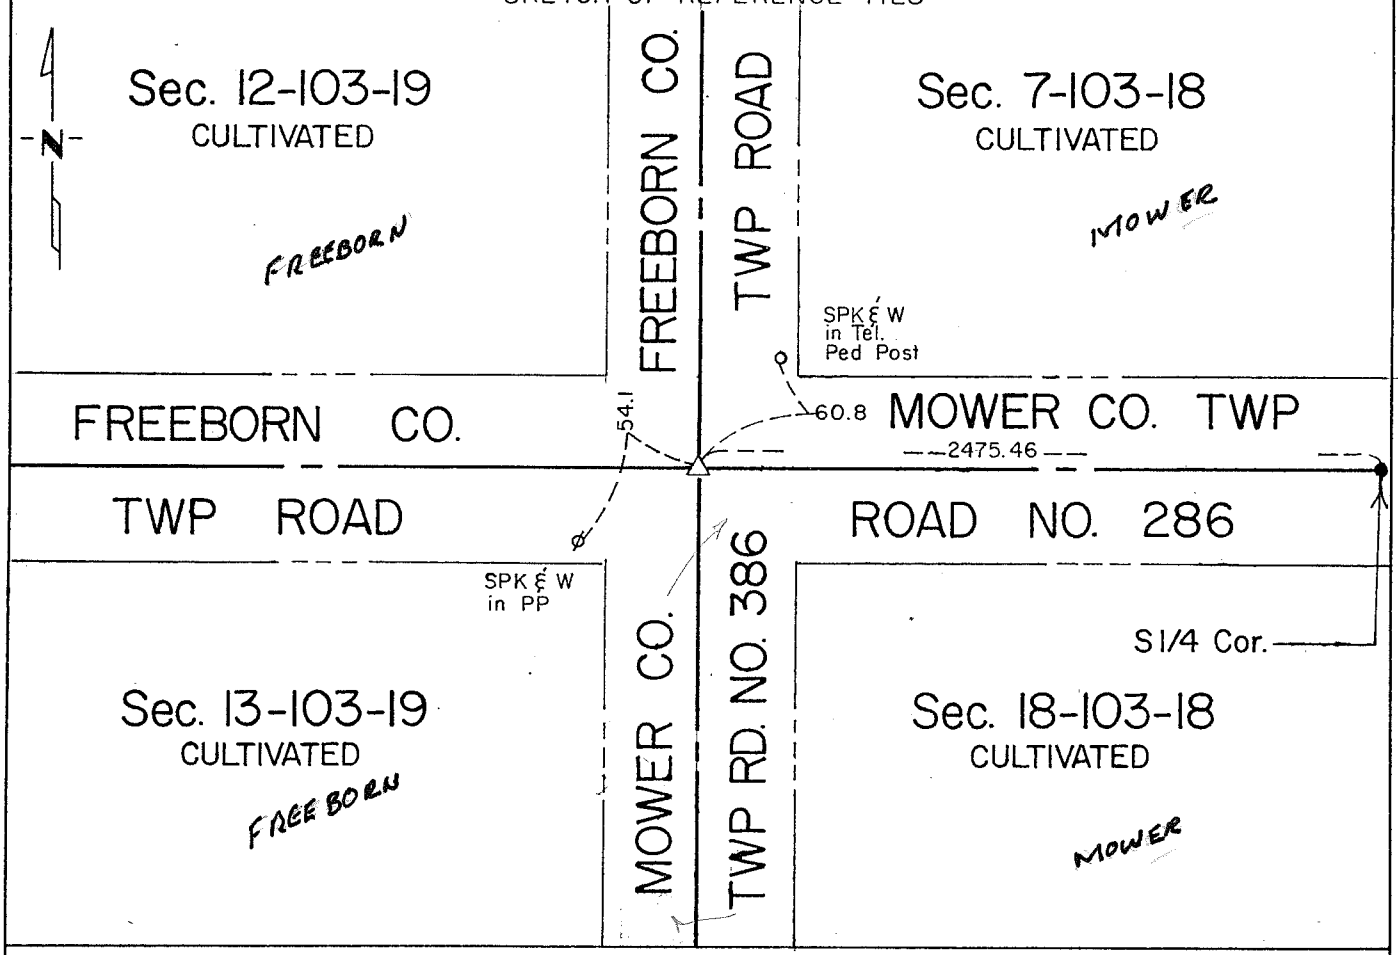

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 13-103-19

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post. The following ties were taken:

10"	Burr Oak	N 35° W	88 links	(58.08 feet)
10"	Burr Oak	N 43° E	79 links	(52.14 feet)
12"	Burr Oak	S 88° E	78 links	(51.48 feet)
10"	Burr Oak	S 37° W	158 links	(104.28 feet)

The following were contacted for section corner information:

Freeborn County Engineering Department
Mower County Engineering Department
Mower County Recorder's Office

1938 John Nielsen, Freeborn County Highway Department, uncovered a stone in approximate center of intersection. Placed gas pipe above stone. The following ties were taken:

Spk & W in Power pole	40.7	SE
Spk & W in Telephone pole	73.8	ENE
NE cor of school house (porch)	101.1	WSW
SE cor of school house (Main Bldg)	117.7	SW

1990 Jones, Haugh & Smith crew dug with the Mower County backhoe on centerline centerline of north-south-east-west roads and uncovered a 3/4" diameter x 12" pipe 2 feet deep. Continued digging and found a 5"x6"x18" pointed field stone in a nest of small stones at a depth of 3.0 feet in virgin soil. Placed 5/8" diameter capped iron on south side of stone and 5/8" diameter iron at road surface.

Corner found is in agreement with 1938 records from John Nielson and fits road centerlines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 7, Township 103 Range 18, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5-18-94 (DATE) found nothing

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-20-94 (DATE) placed a Cast iron monument at intersection of fence N-S and county road centerline

SKETCH OF REFERENCE TIES

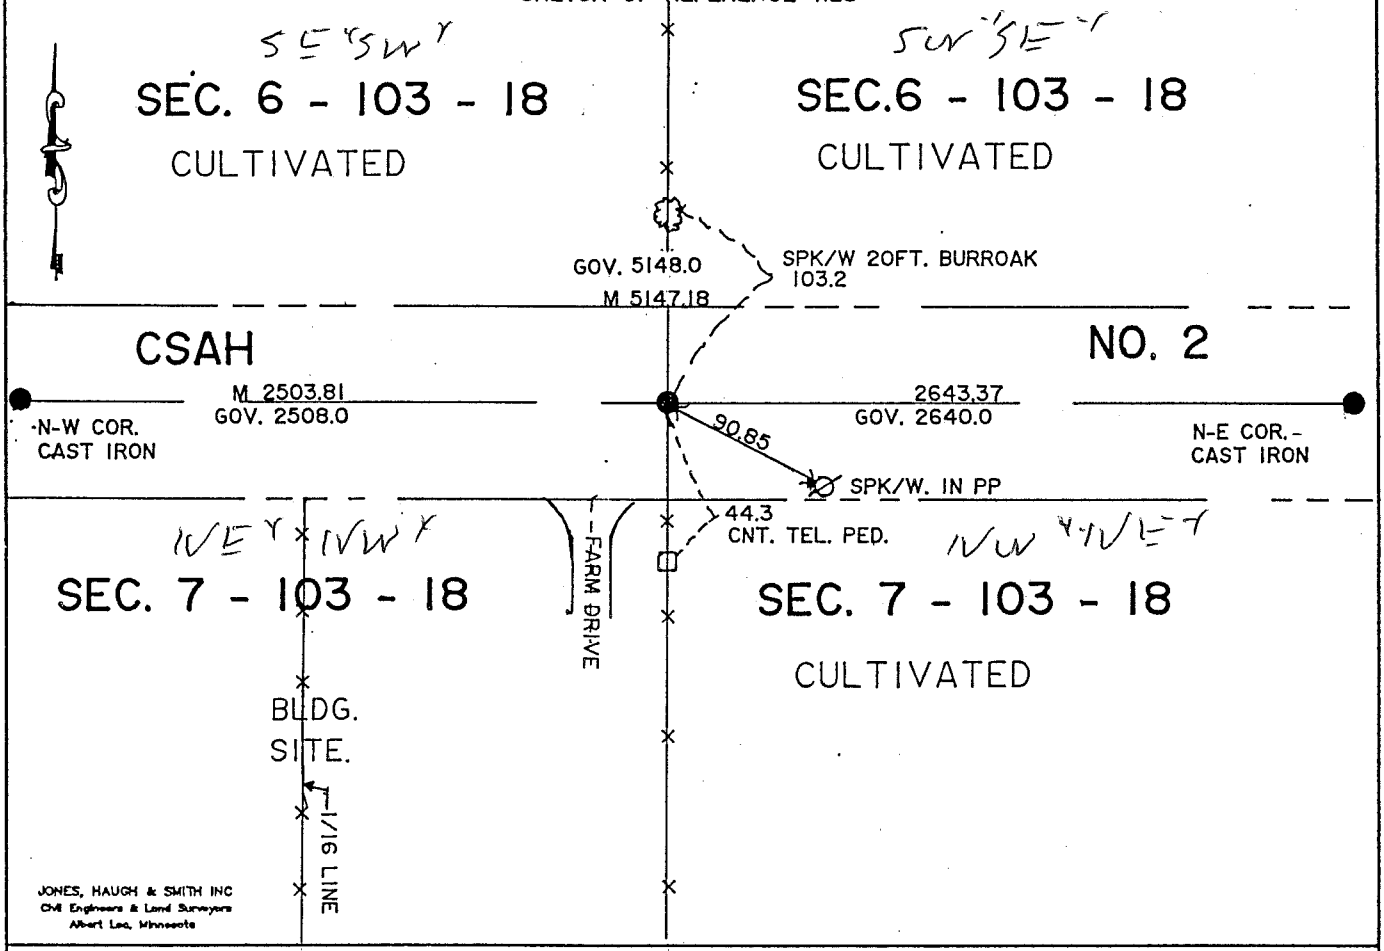

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A.M. on the 21 day of June A.D., 1994

COUNTY RECORDER Charles Engan

By Marlene Manton, Deputy

DOCUMENT NO. 430121

Book 83 Misc Pg 483

M.H.D. FORM NO. 2105

BOOK 83 PAGE 483

STATEMENT OF EVIDENCE

N 1/4 cor 7-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and charred stake and a trench with a mound of earth.

16" Burr Oak	S 12°30' E	67 links (44.22 feet)
14" Burr Oak	N 68° W	60 links (39.6 feet)

The following were contacted for section corner information:

Mower County Engineering Department

The following information was obtained to support evidence of the original public land survey corner or a perpetuation thereof:

1885 Clausen field notes show a government post at the corner.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated a trench with a backhoe and found no evidence of the original public land survey corner.

The location of the intersection of the fence lines north and south and county road centerline agrees with the 1/16th line fence in the NW 1/4. The position also agrees with the distance found by Clausen on the north line of the NW 1/4.

The intersection of occupation lines are accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 83 PAGE 484

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 7, Township 103 Range 18, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5-18-94 (DATE) found a CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-20-94 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

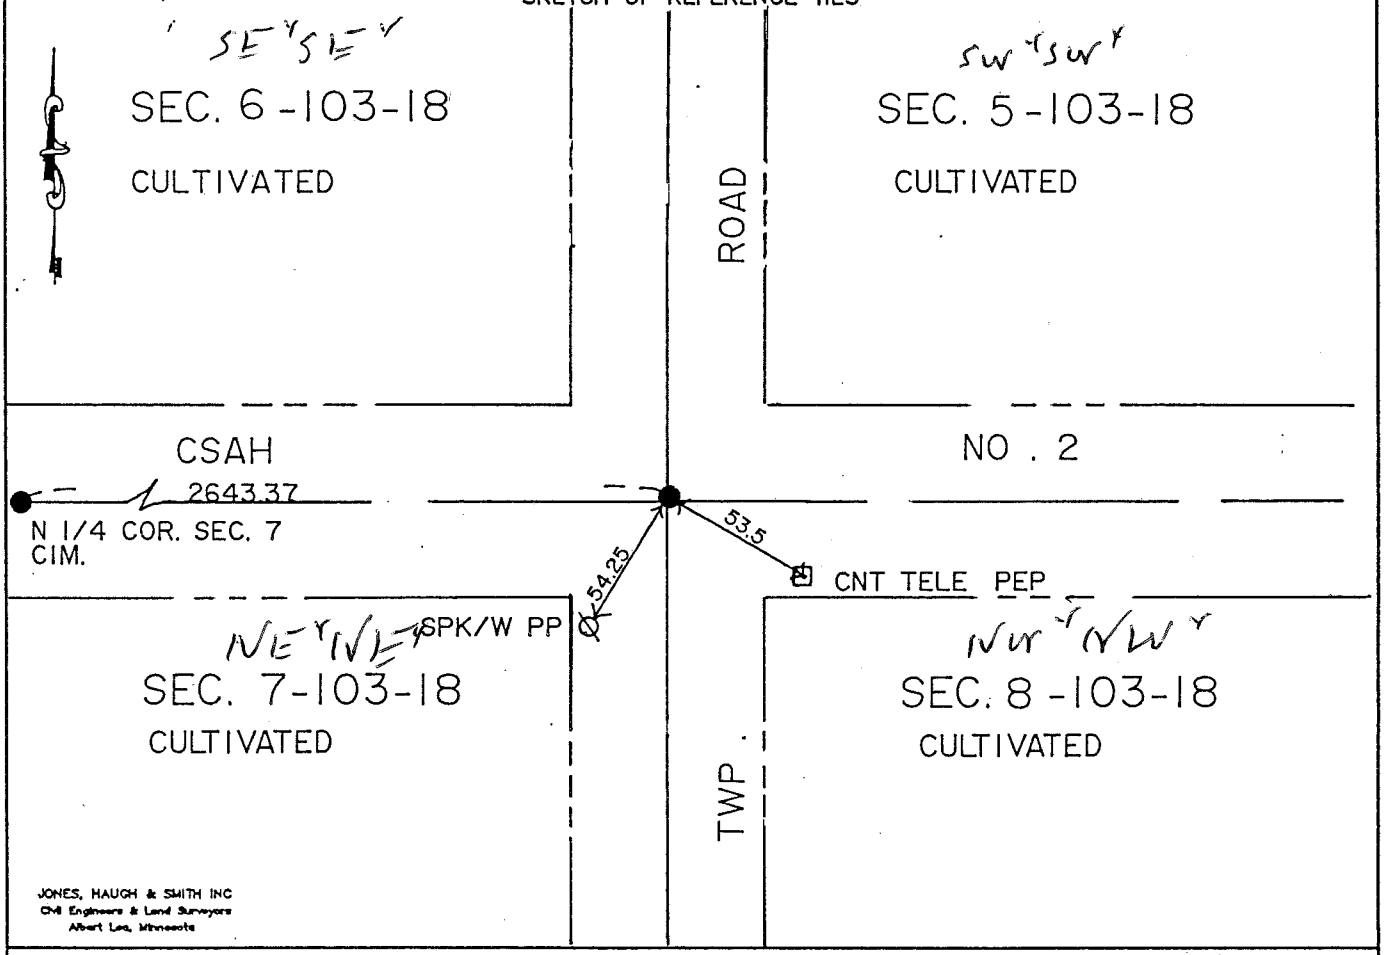

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

BOOK 83 PAGE 481

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A.M. on the 21 day of June A.D., 1994

COUNTY RECORDER Charles Enger

By Marlene Martin, Deputy

DOCUMENT NO. 400120

Book 83 Misc Page 481

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE cor 7-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and charred stake and a trench with a mound of earth.

8" Burr Oak	S 71° W	785 links (518.1 feet)
10" Burr Oak	S 12° E	360 links (237.6 feet)

The following were contacted for section corner information:

Mower County Engineering Department

The following information was obtained to support evidence of the original public land survey corner or a perpetuation thereof:

1945 Mower County Highway Department grading plans show concrete monument inplace.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated a trench with a backhoe and found the concrete monument over a 4" diameter wood post.

The concrete monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 83 PAGE 482

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 7, Township 103N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-24-90 (DATE) found a 4"x6"x4' charred wood post 5' below road surface in virgin soil. on ℄ of E-W roads.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-24-90 (DATE) placed a 5/8"Ø iron capped 13807 over monument found.

SKETCH OF REFERENCE TIES

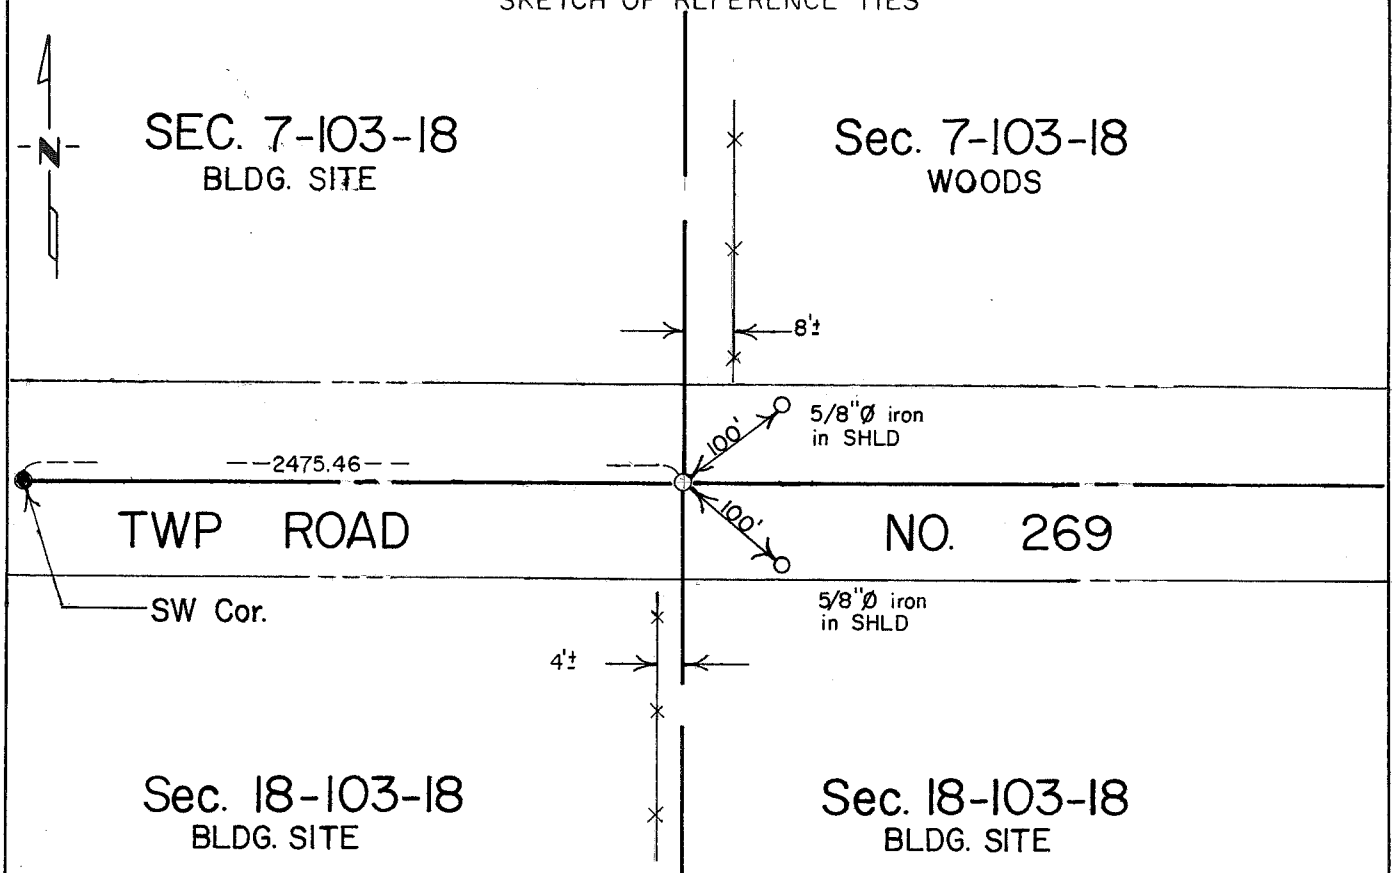

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 7-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post. The following ties were taken:

7"	Burr Oak	S 67° W	170 links	(112.20 feet)
6"	Burr Oak	N 37° E	102 links	(67.32 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew dug with the Mower County backhoe on centerline of east-west road a 20'x7'x6' deep hole and uncovered a 4"x6"x4' long charred post five feet deep in virgin soil. 8 feet west of fence north and 4 feet east of fence south. Placed a 5/8" diameter iron capped (13807) over post on road surface.

Corner found fits road centerlines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW 1/4 Corner of Section 9, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/14/2002 (DATE) placed a 5/8" X 16" IRON

SKETCH OF REFERENCE TIES

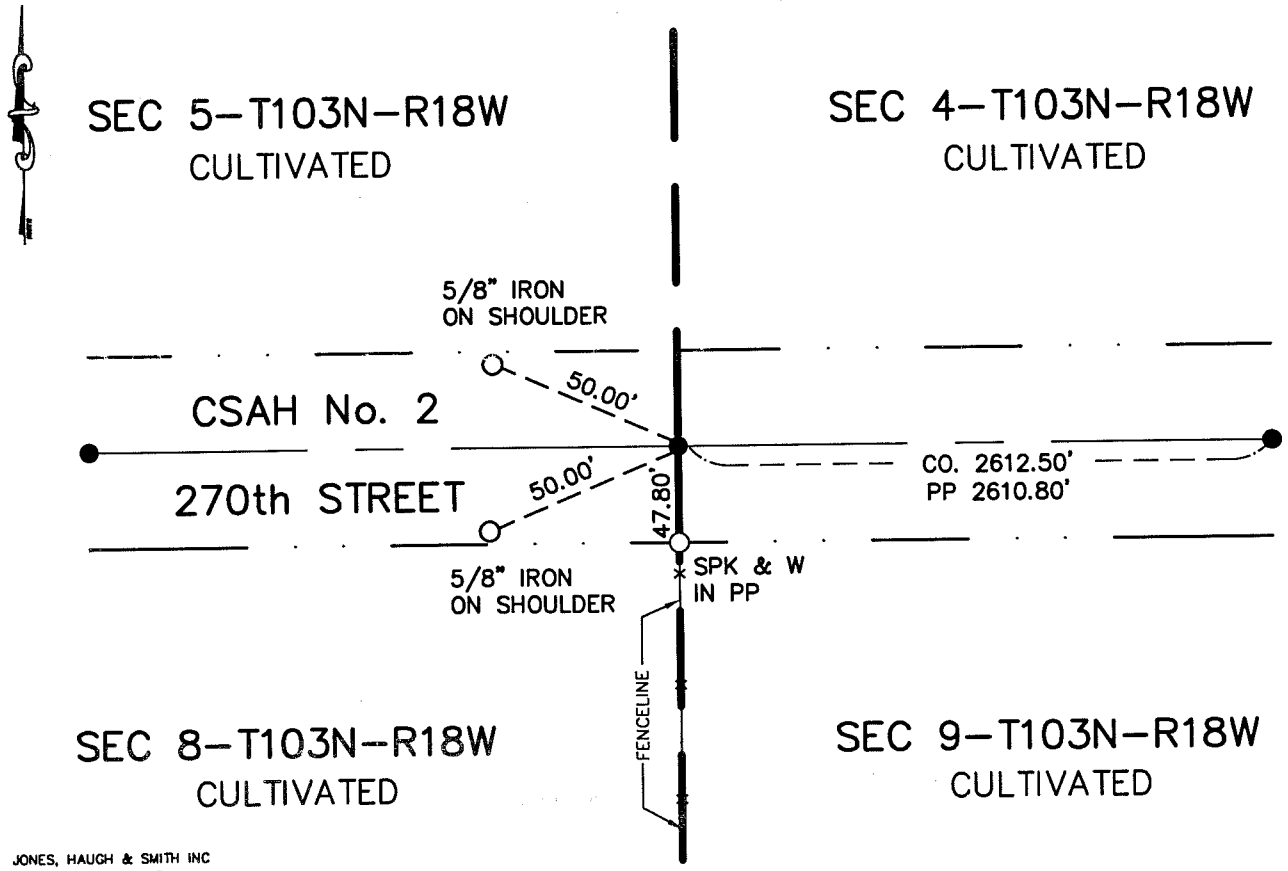

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-1-02 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

NW Cor Sec 9-103-18

Deputy Surveyor William I. Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe and found no evidence of corner at this location. C.S.A.H. No. 2 road plan shows a corner and station at this location but does not state what was in place. Jones Haugh and Smith crew set 5/8" capped 13807 on centerline of road in line with fence south.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 9, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/14/2002 (DATE) placed a 5/8" X 16" IRON CAPPED

SKETCH OF REFERENCE TIES

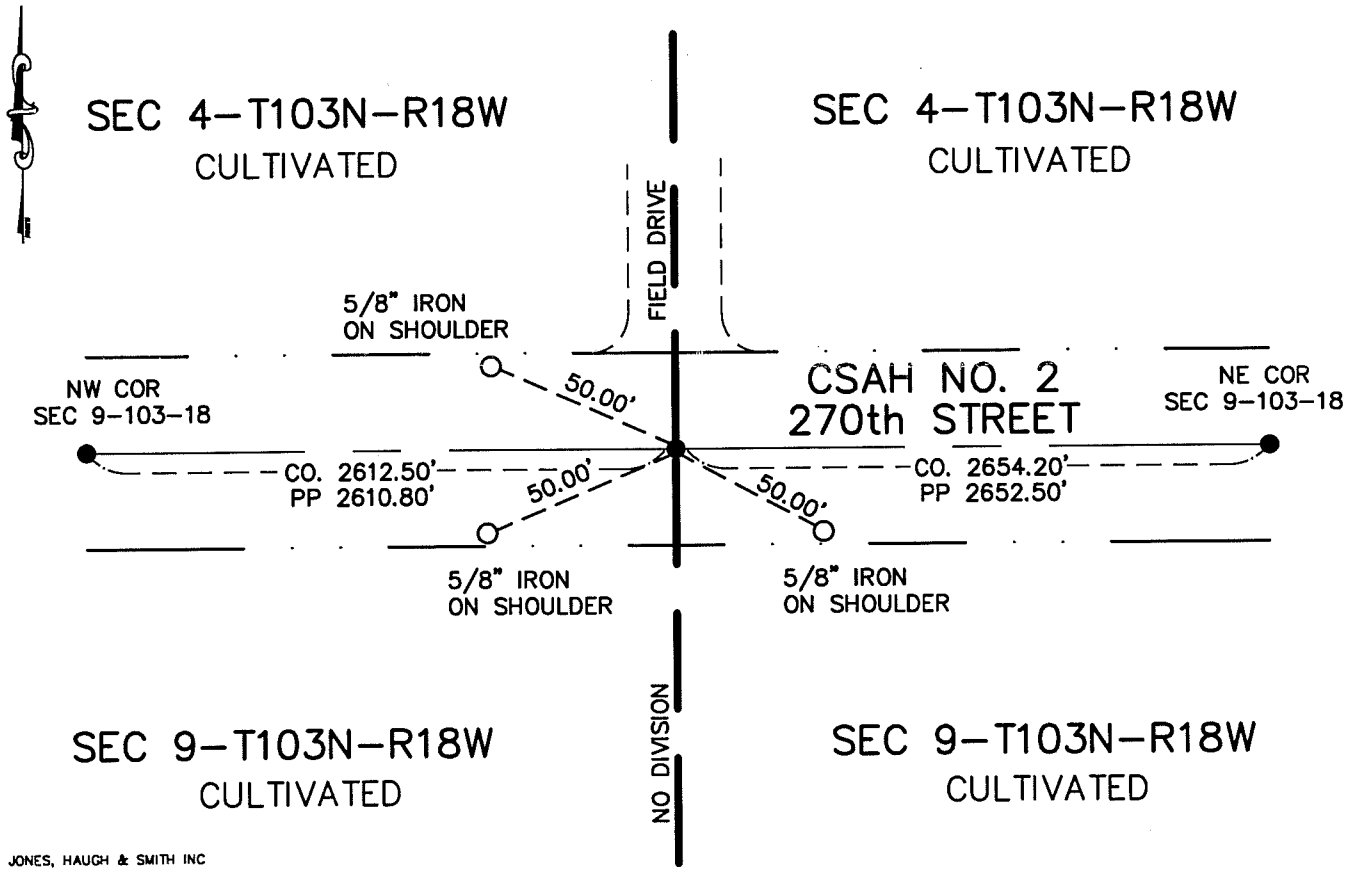

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 11-1-02
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

N1/4 Cor Sec 9-103-18

Deputy Surveyor William I. Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe found no evidence of PLS corner at this location. The 1924 C.S.A.H. No. 2 road plan showed no information of a corner at this location. 1940 C.S.A.H. No. 2 road plan showed a station on a fenceline to south at a distance of 2654.20 feet west of the northeast corner of Section 9. We measured the distance between the northeast and northwest section corners and found 5262.60 feet verses County Plan of 5266.70 feet. We proportioned the mile to county distance and set the corner at a distance of 2652.50 feet west of the northeast corner of Section 9.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

P100 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 9, Township 103 N, Range 18 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On SEPT. 15, 1978 (DATE) placed a RAILROAD SPIKE WITH PUNCH HOLE.

SKETCH OF REFERENCE TIES

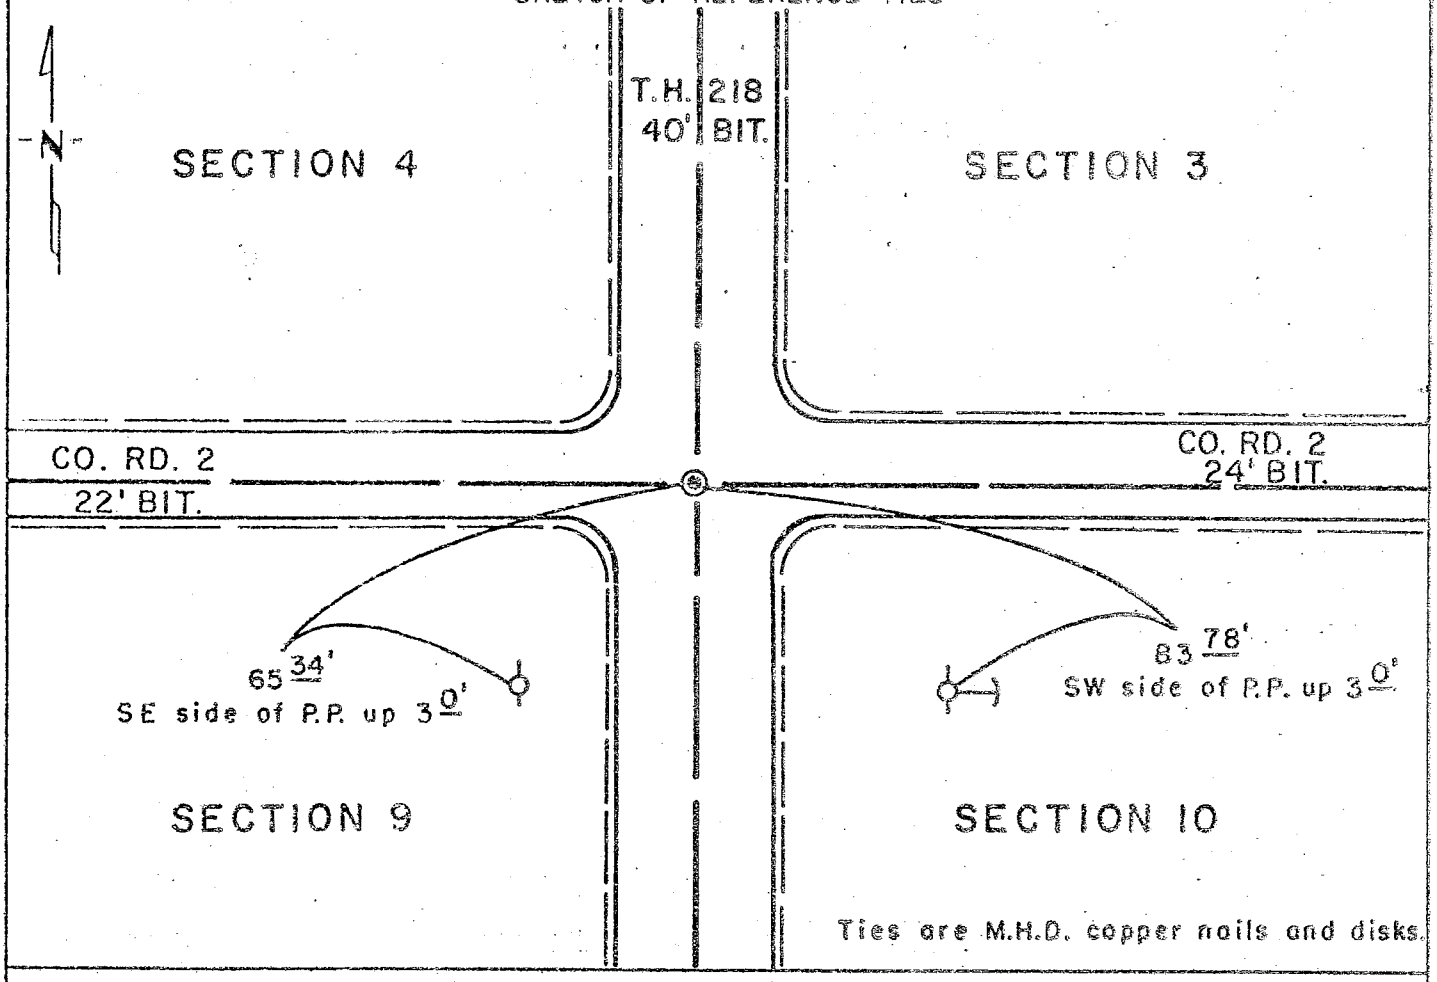

Ties are M.H.D. copper nails and disks.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan 10/25/78
SIGNATURE DATE

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P.M. on the 25 day of OCTOBER A.D., 19 78

County Recorder CHARLES ENGER

By DOROTHY JOHNSON, Deputy

DOCUMENT NO. 336624
Book 47 of Misc. Page 169

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER OF SECTION 9, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5th P.M.

AUGUST, 1854 — William I. Anderson, Deputy Surveyor, set a post, deposited charred stake, made mound with trench and pits during the original Public Land Survey.

1926 — Minnesota Highway Department placed P.I. 1079+17.1 at the intersection of the crossroads.

1978 — Minnesota Department of Transportation electronically re-established P.I. 1079+17.1 between perpetuated P.I. 1026+18.2 and P.I. 1132+40.3.

An analysis of the record and survey data indicates that P.I. 1079+17.1 is in agreement with lines of occupation of long standing. It istherefore, accepted as marking the Public Land Survey Corner.

For details of the electronic survey data, contact the Minnesota Department of Transportation, Surveying and Mapping Section, Rochester District Office.

TIE BOOK p. 100 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 9, Township 103 N, Range 18 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On SEPT. 15, 1978 (DATE) placed a RAILROAD SPIKE WITH PUNCH HOLE.

SKETCH OF REFERENCE TIES

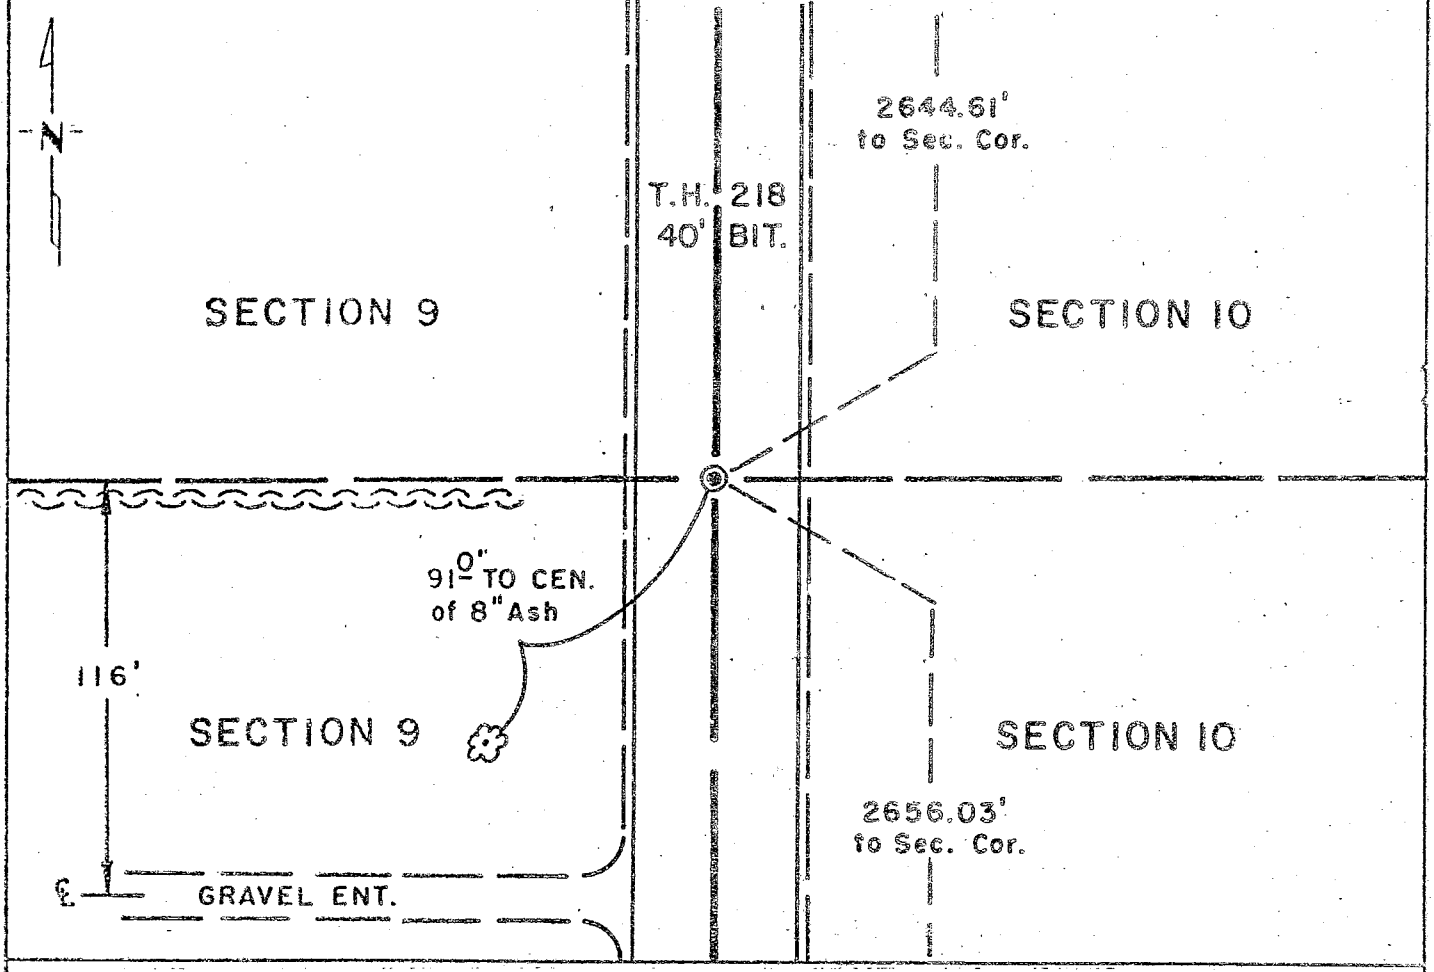

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan 10/25/78
SIGNATURE DATE

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P.M. on the 25 day of OCTOBER A.D., 19 78

County Recorder CHARLES ENGER

By DOROTHY JOHNSON, Deputy

DOCUMENT NO. 336625
Book 47 of Misc. Page 171

MHD FORM NO. 2105

Statement of Evidence:

EAST QUARTER CORNER SECTION 9, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5th P.M.

AUGUST, 1854 — William I. Anderson, Deputy Surveyor, set a post at the quarter corner during the original Public Land Survey.

1926 — Minnesota Highway Department referenced an east-west fence to a centerline P.O.T. by station and angle.

MAY,6, 1953 — L. H. Edison, Land Surveyor, used this corner for a plat recorded in Book of Plats, page 15 in the County Recorders Office.

An analysis of the record and survey data indicates that the monumented north line of the recorded plat is in agreement with the 1926 occupation lines. The corner was set at the intersection of the monumented plat line and the centerline of T.H. 218 and is accepted as marking the Public Land Survey Corner.

For details of the electronic survey data, contact the Minnesota Department of Transporation, Surveying and Mapping Section, Rochester District Office.

"H" TIC Book P. 100 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 10, Township 103 N, Range 18 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On AUGUST 16, 1978 (DATE) found a 3/4 INCH INSIDE DIAMETER IRON PIPE, DOWN 1.6 FEET.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On SEPT. 13, 1978 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT 0.1 FEET BELOW SURFACE OF ROAD.

SKETCH OF REFERENCE TIES

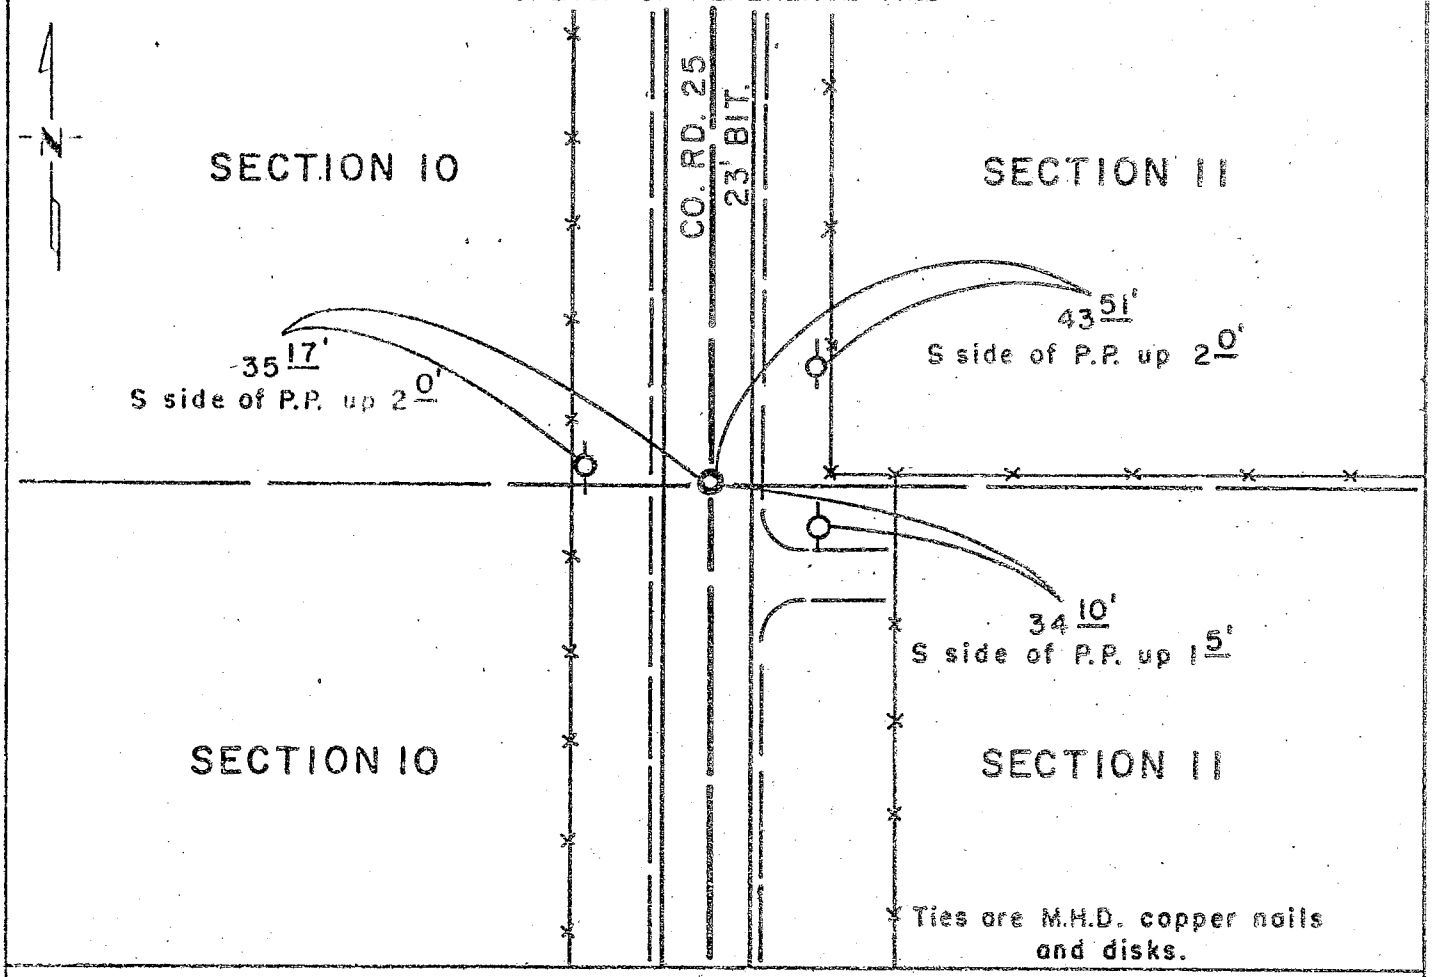

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan (SIGNATURE) 10/25/78 (DATE)

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P.M. on the 25 day of OCTOBER A.D., 1978

County Recorder CHARLES ENGER

By DOROTHY JOHNSON, Deputy

DOCUMENT NO. 336627
Book 47 of Misc. Page 175

M.H.D. FORM NO. 2105

Statement of Evidence:

EAST QUARTER CORNER OF SECTION 10, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5th P.M.

AUGUST, 1854 — William I. Anderson, Deputy Surveyor, set a post at the quarter corner during the original Public Land Survey.

1958 — Mower County regrading plans for county road 25 show P.I. 106+64.5 as the quarter corner and placed a concrete monument at the location.

1978 — Minnesota Department of Transportation also found a 5/8 inch re-rod (0.2 foot down) on the centerline of the road and fenceline east. This re-rod is 1.6 feet north and 1.5 feet west of the found pipe.

An analysis of the record and survey data indicates that the re-rod is the county road P.I. and the origin of the pipe is not of record. The position of the pipe indicates it pre-exists the regrading of the county road and it is similar to adjacent monuments inplace in the late 1920's. The pipe is accepted as marking the Public Land Survey corner.

For details of the electronic survey data, contact the Minnesota Department of Transportation, Surveying and Mapping Section, Rochester District Office.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 10, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/06/1995 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/06/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

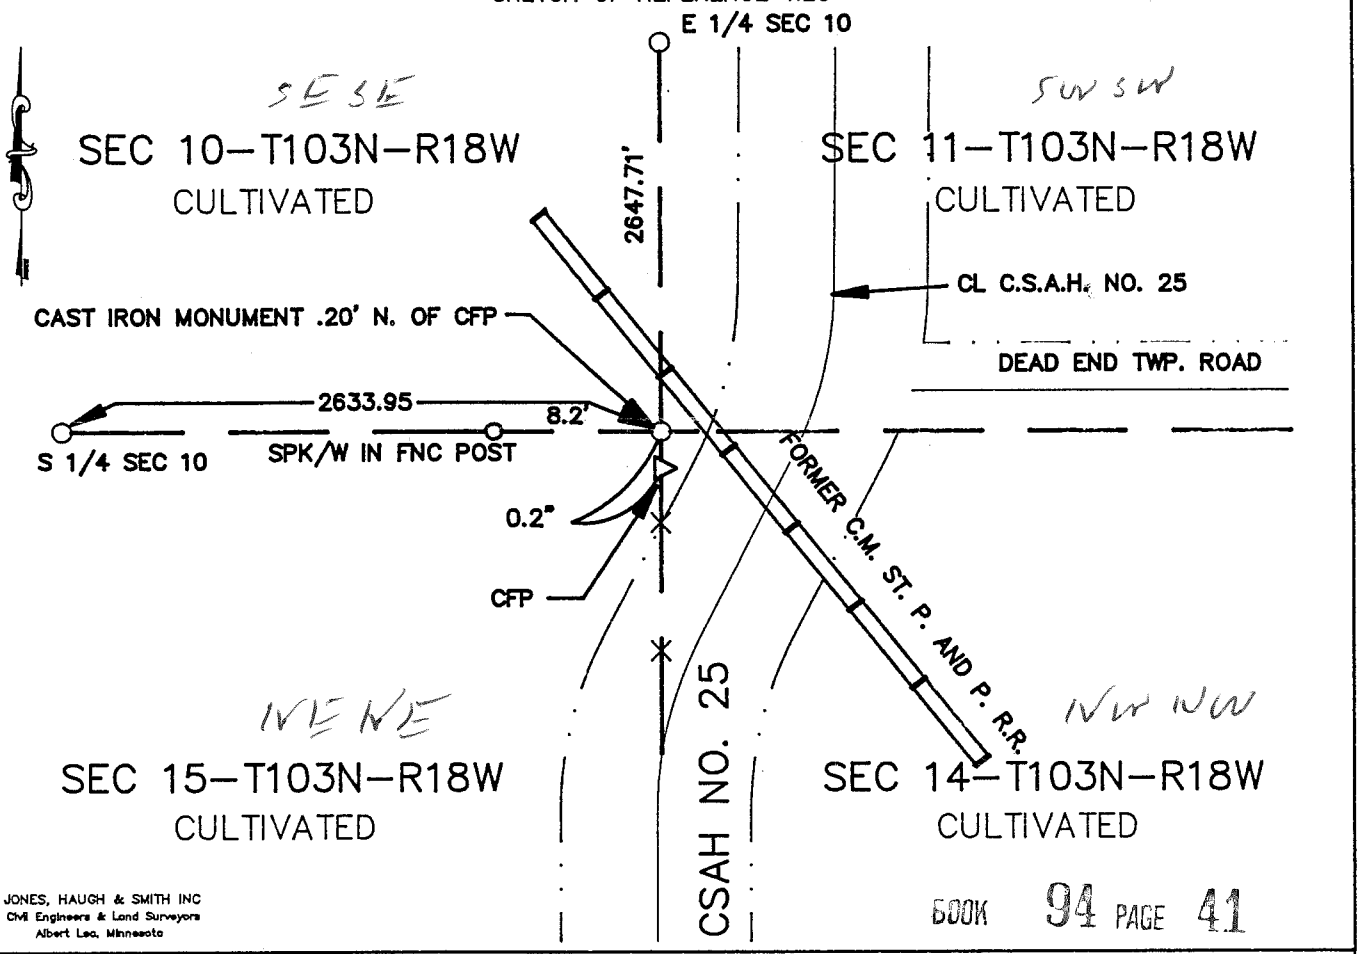

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 41

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-17-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 5 P .M. on the 23 day of Jan A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450689

M.H.D. FORM NO. 2105

Book 94 Misc Page 41

SE Cor SEC 10-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Highway Department CSAH #25 road plans show a corner at this location.

1992 Jones Haugh and Smith crew set a 5/8" iron 0.2' north of CFP.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a 5/8" iron .20' north of fence corner post. Iron fits CL alignment of CSAH No. 25 and fence line west and east. Placed a cast iron monument at ground level on top or 5/8" iron set in 1992.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 10, Township 103N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-6-90 found A GROUP OF STONES AND STAKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed 3/4" REBAR AND COUNTY CAP OVER STONES AND STAKE

SKETCH OF REFERENCE TIES

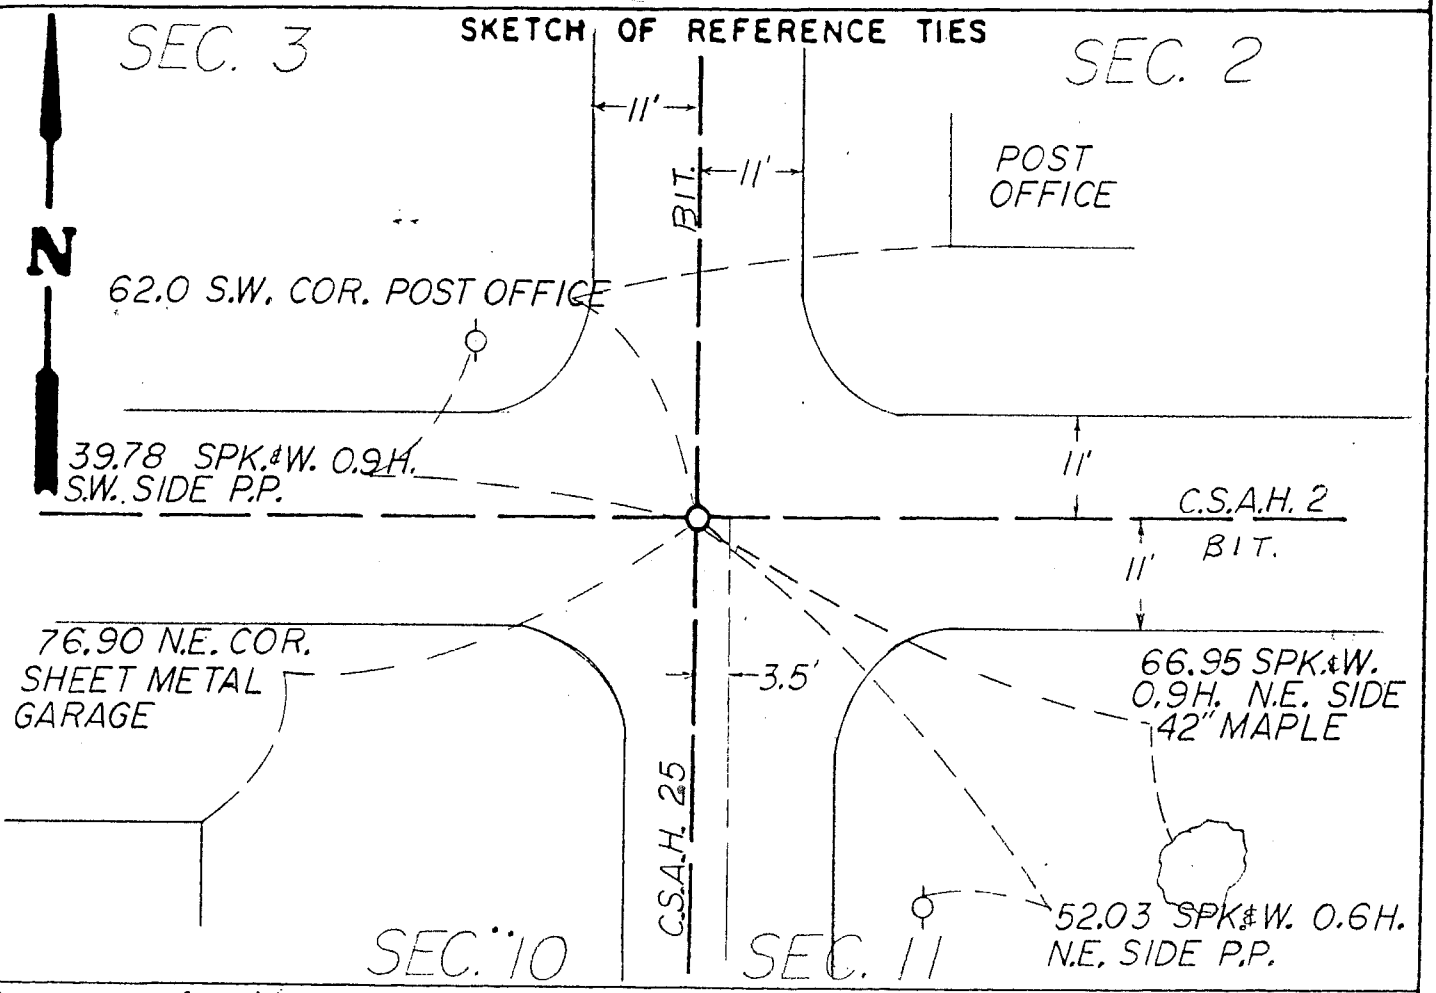

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHEAST CORNER SECTION 10, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5TH P.M.

Aug., 1854	William J. Anderson, Deputy Surveyor, set a post at the corner, raised mound with trench and pits, and deposited charred stake as per instructions.
1935	County Engineers Plans show a stone and iron pin inplace.
1964	Jones & Haugh survey crew found a 1/2 inch pin.
1977	Jones & Haugh found 1/2" pipe at the intersection of centerlines of County Road 25 and 2.
1978	Minnesota Department of Transportation found a 3/8 inch rebar and a 1-1/2 inch pipe, and used the pipe.
August, 1981	Zenk Read Trygstad & Associates Survey Crew found 3/8 inch Rerod.
July 6, 1990	Zenk Read Trygstad & Associates excavated a trench 2 feet West to 6 feet East of Centerline from Centerline to 4 feet South by 5.5 feet deep. A groups of three stones was found with wood pieces in the center 5.7 feet below the surface. A 1-1/2 inch by 6 inch pipe, a 3/4 inch rebar and a 1-1/4 inch pipe were found above the wood and stone. A 1.1 foot H by 0.8 foot by 1.7 foot sandstone was found on the Southwest side of the pipes. A 3/8 inch rebar and 1/2 inch eyepin were found on the North side of the 1-1/4 inch pipe. A spike and washer was found on the surface over the iron pin. A 1-1/2 inch pipe driven in a 4 inch x 6 inch well casing was found 3.5 feet East of the stones. An analysis of the record data gives no indication of the origin of the stones and stake. The many monuments found above them indicate this location was used and preserved as the corner for many years. The stake is accepted as marking the location of the original Public Land Survey Corner.

TIE BOOK P. 100 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 10, Township 103 N, Range 18 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On AUGUST 15, 1978 (DATE) found a SPIKE WITH TIN DISC DOWN 0.2 FEET.

☐ left monument as found, ☒ lowered monument, ☐ removed monument (explain)

☒ On SEPT. 13, 1978 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT 0.1 FEET BELOW THE SURFACE OF THE ROAD.

SKETCH OF REFERENCE TIES

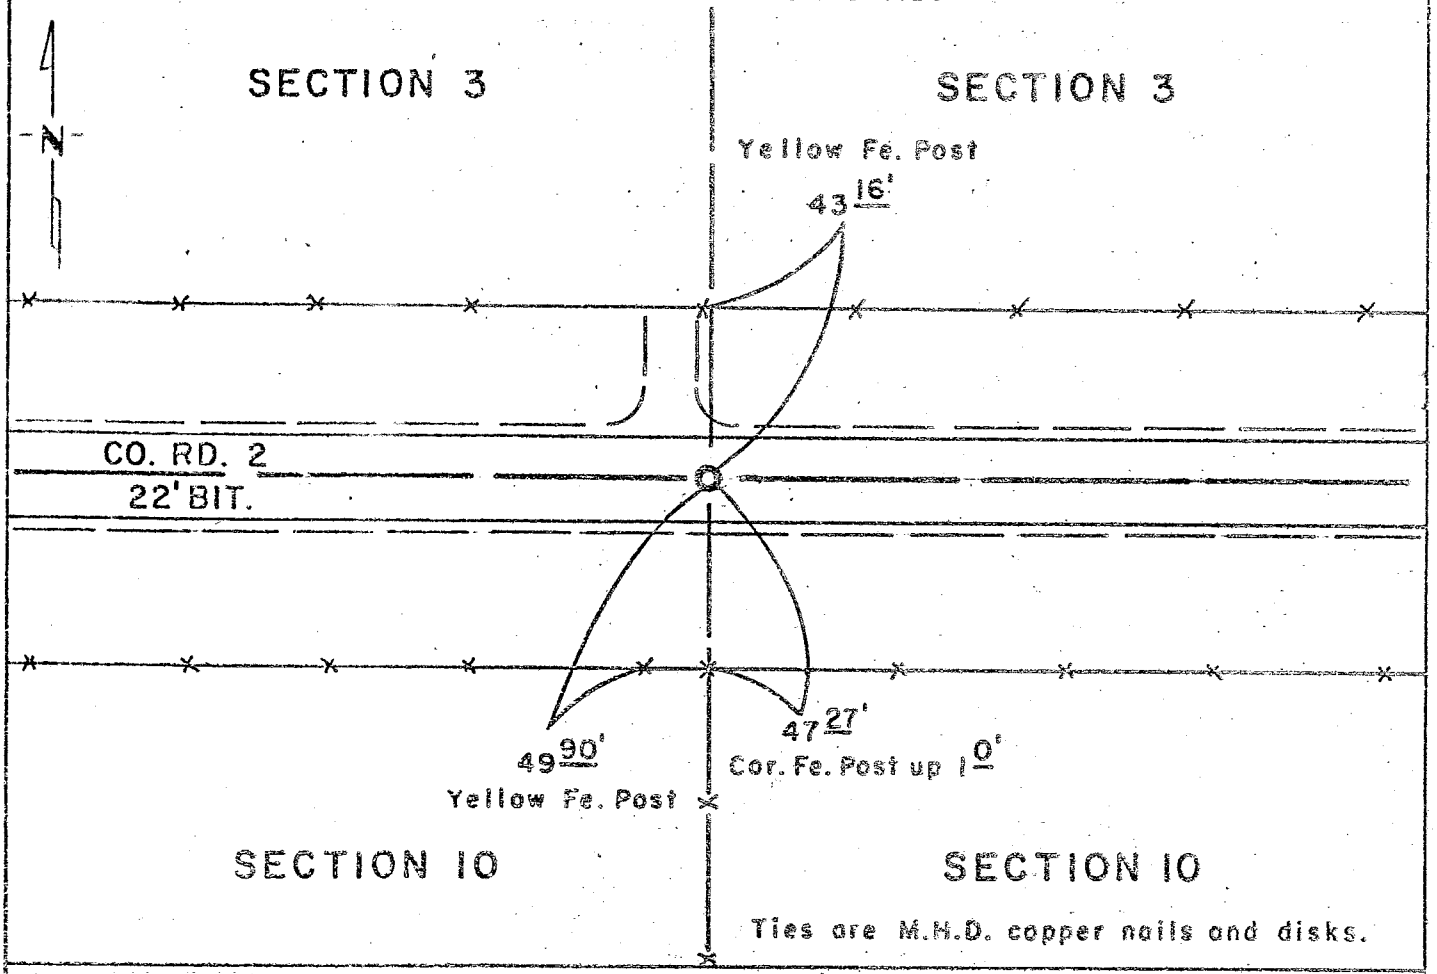

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan (SIGNATURE) 10/25/78 (DATE)

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P.M. on the 25 day of OCTOBER A.D., 1978

County Recorder CHARLES ENGER

By DOROTHY JOHNSON, Deputy

DOCUMENT NO. 336626
Book 47 of Misc. Page 173

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTH QUARTER CORNER OF SECTION 10, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5thP.M.

AUGUST, 1854 — William I. Anderson, Deputy Surveyor, set a post at the quarter corner, deposited charred stake, made mound with trench and pits during the original Public Land Survey.

1940 — Mower County Highway Department's 1940 road plans show the corner at the intersection of the east-west road and north-south fence lines. No monument is indicated.

1978 — Minnesota Department of Transportation recovered a spike and disc at the 1940 occupation lines.

An analysis of the record and survey data indicates that the 1940 intersection is in harmony with adjacent occupation lines and interior lines of occupation in Section 10. It is accepted as marking the Public Land Survey Corner.

For details of the electronic survey data, contact the Minnesota Department of Transportation, Surveying and Mapping Section, Rochester District Office.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 13, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/26/1996 (DATE) found a 5/8" IRON PIN

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/26/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

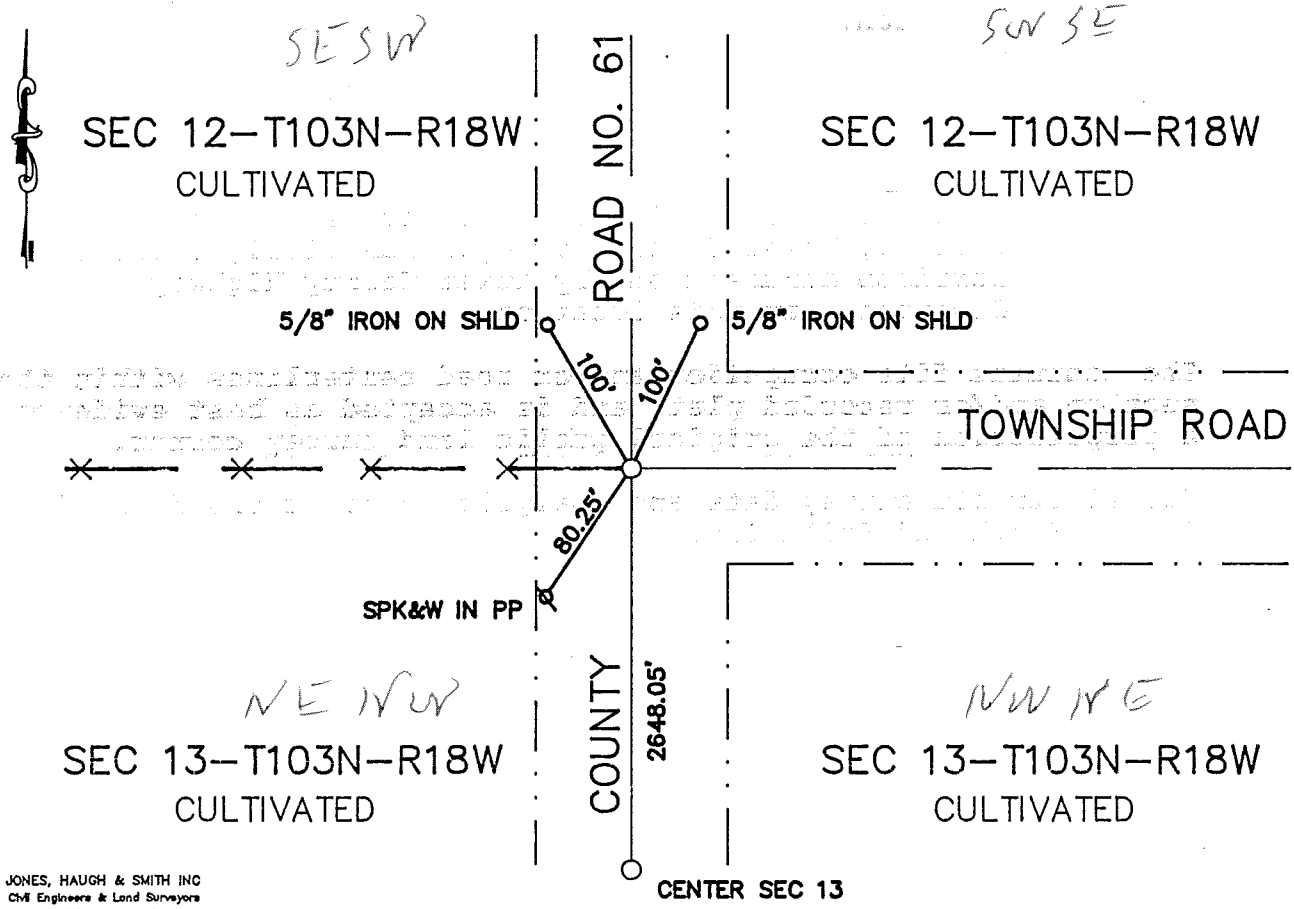

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-19-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 18 day of March A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Lyon, Deputy

DOCUMENT NO. 451746

M.H.D. FORM NO. 2105 BOOK 94 PAGE 374

Book 94 Misc Page 374

N 1/4 Cor SEC 13-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1991 Jones Haugh and Smith crew located a cast iron monument at this location.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a 5/8" iron pin on the CL of County Road No. 61 N-S and CL of township road east. Placed a cast iron monument on 5/8" found.

The monument fits occupation and/or road centerlines within the section and/or recorded plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 13, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 7/12/1994 (DATE) found a SPIKE & WASHER ON STRAIGHT LINE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8/26/1999 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

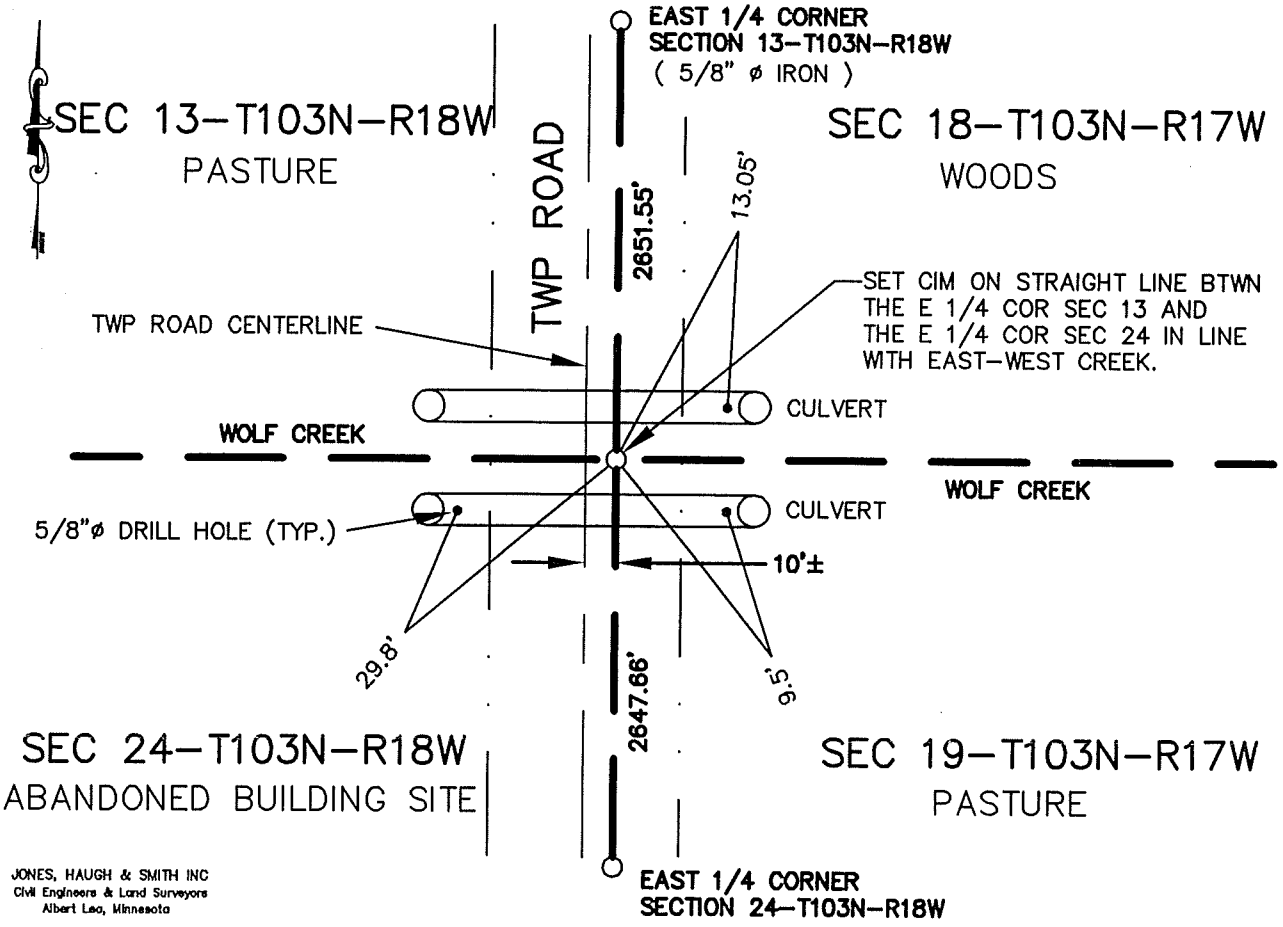

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 9-16-99
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Cor SEC 13-103-18

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post with a mound of earth and trench was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 John Schulte, Mower County Surveyor RLS 13807, placed a spike and washer in the deck of a bridge at the location of the corner. The corner is on CL of the E-W creek. The corner was set on a straight line between the E 1/4 corner section 13 and the E 1/4 corner section 24. It also lies in line with fence lines extended from the east and west.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Aug. 1999 Corner destroyed installing new culvert during road construction. Jones, Haugh & Smith crew re-set corner using electronic data from previous survey. Set 5/8"x16" iron with cast iron monument.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 13, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/12/94 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/12/94 (DATE) placed a SPIKE & WASHER

SKETCH OF REFERENCE TIES

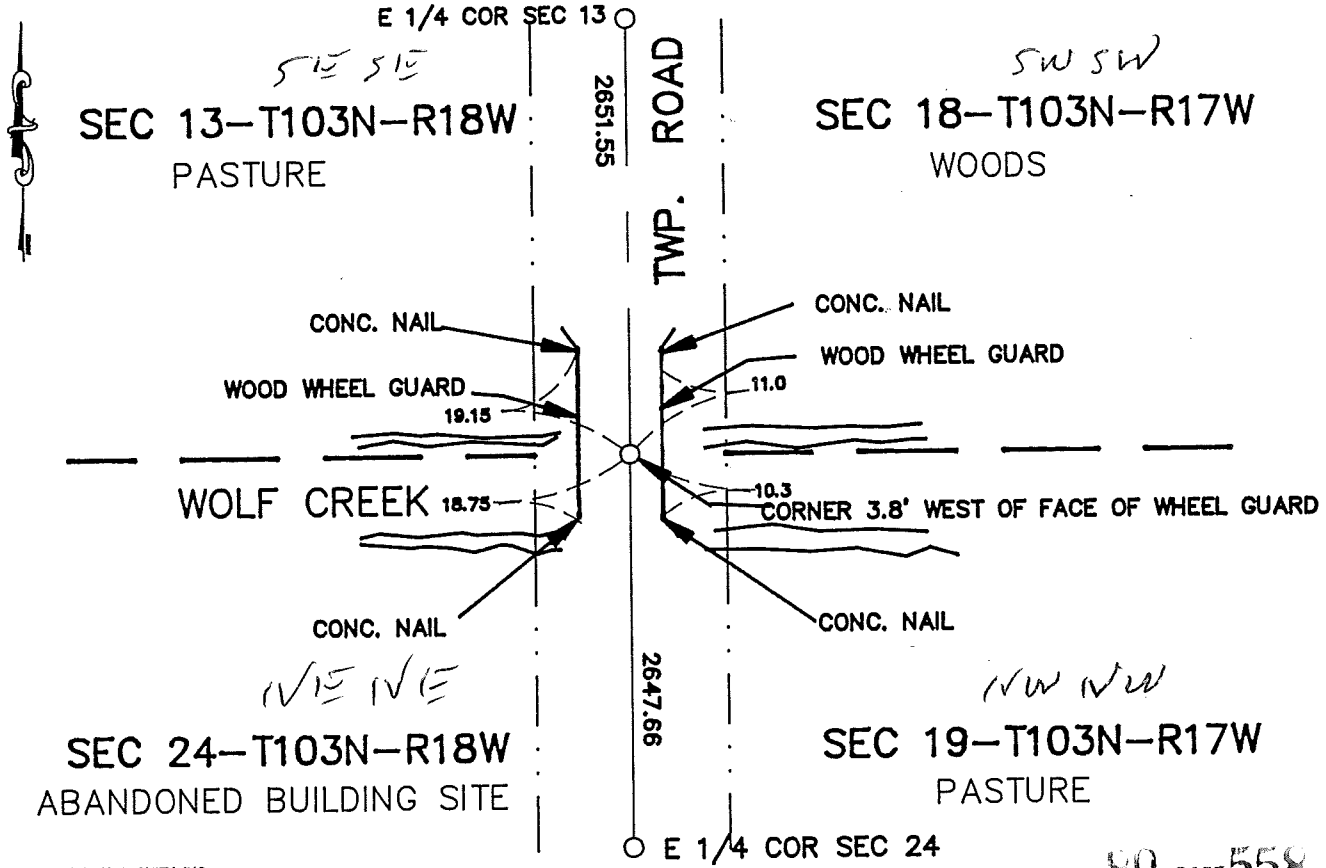

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 89 PAGE 558

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-27-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 2 day of Jan A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 441691

M.H.D. FORM NO. 2105

Book 89 Misc Page 558

SE Cor SEC 13-103-18

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post with a mound of earth and trench was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 John Schulte, Mower County Surveyor RLS 13807, placed a spike and washer in the deck of a bridge at the location of the corner. The corner is on CL of the E-W creek. The corner was set on a straight line between the E 1/4 corner section 13 and the E 1/4 corner section 24. It also lies in line with fence lines extended from the east and west.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 89 PAGE 559

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER Corner of Section 13, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/26/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/26/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

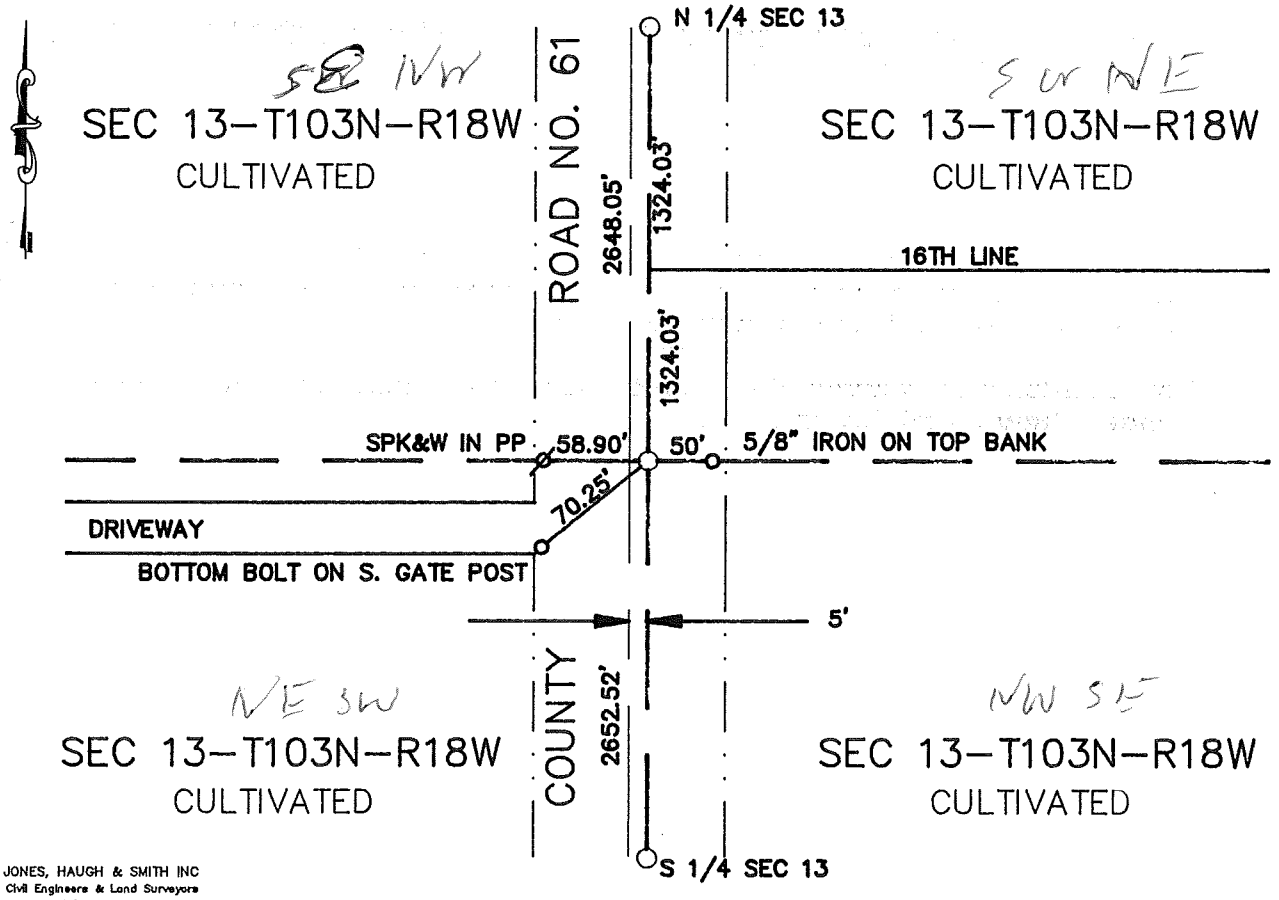

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-22-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 23 day of Apr A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 452560

M.H.D. FORM NO. 2105 BOOK 95 PAGE 55 Book 95 Misc Page 55

Center SEC 13-103-18

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set corner by using distance from section breakdown sheet. Placed a cast iron monument at road surface. Corner fits lire fence east and is 5' east of CL. The corner is set at the intersection of the N-S and E-W quarter section lines.

The monument fits occupation and/or road centerlines within the section and/or recorded plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 15, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/11/1995 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – (DATE) placed a –

SKETCH OF REFERENCE TIES

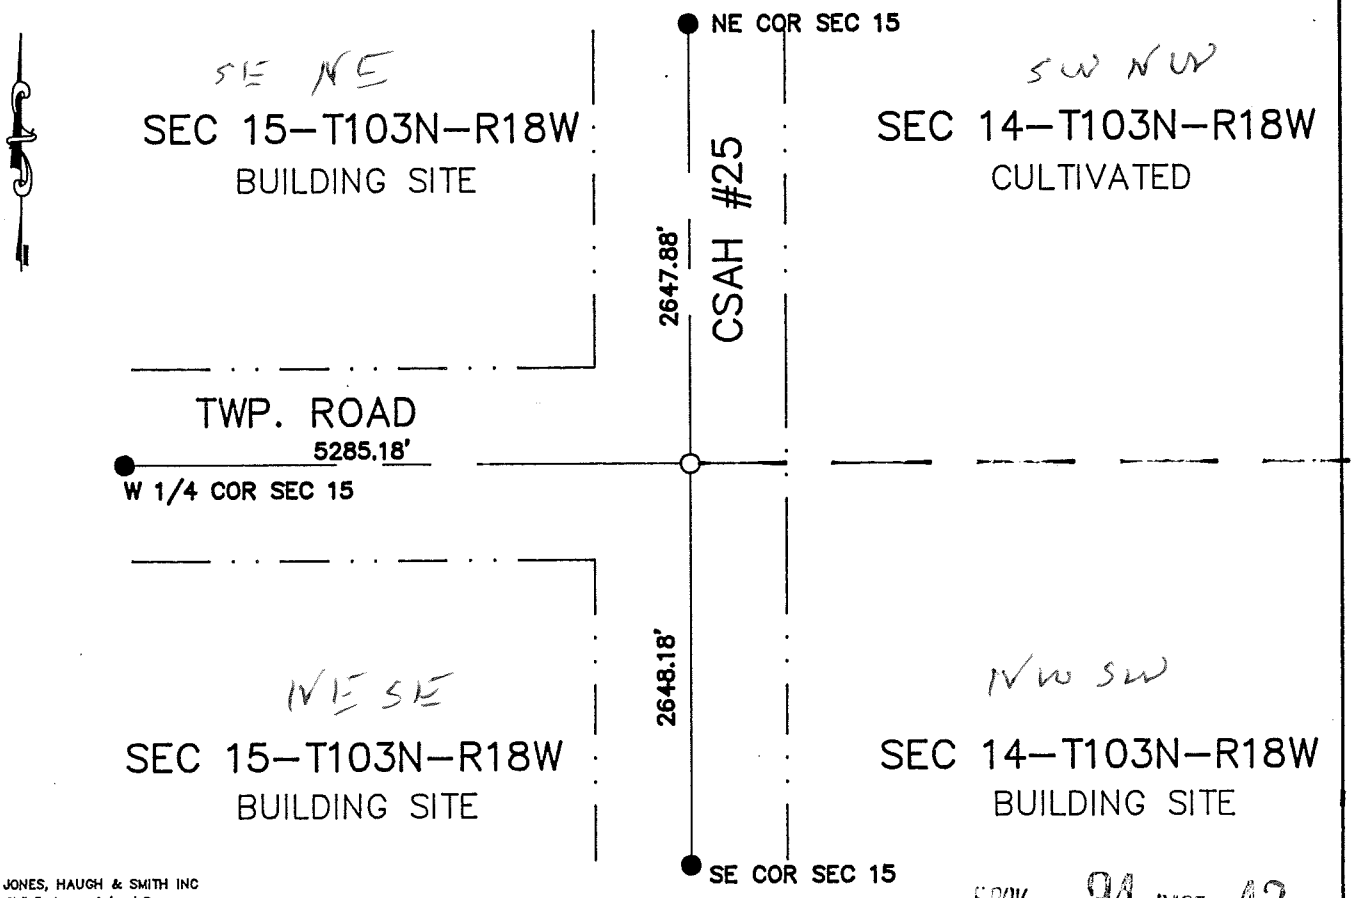

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 43

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-17-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 5 p .M. on the 23 day of Jan A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 450690

M.H.D. FORM NO. 2105

Book 94 Misc Page 43

E 1/4 Cor SEC 15-103-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Highway Department book A shows a corner at this location and CSAH #25 R/W plans also shows a corner at this location.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered corner. Found 5/8" iron on centerline N-S road and the centerline of the road west in agreement with Mower County records and Highway plans and previous surveys for over the past 40 years in this area.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 15, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/11/1995 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – (DATE) placed a –

SKETCH OF REFERENCE TIES

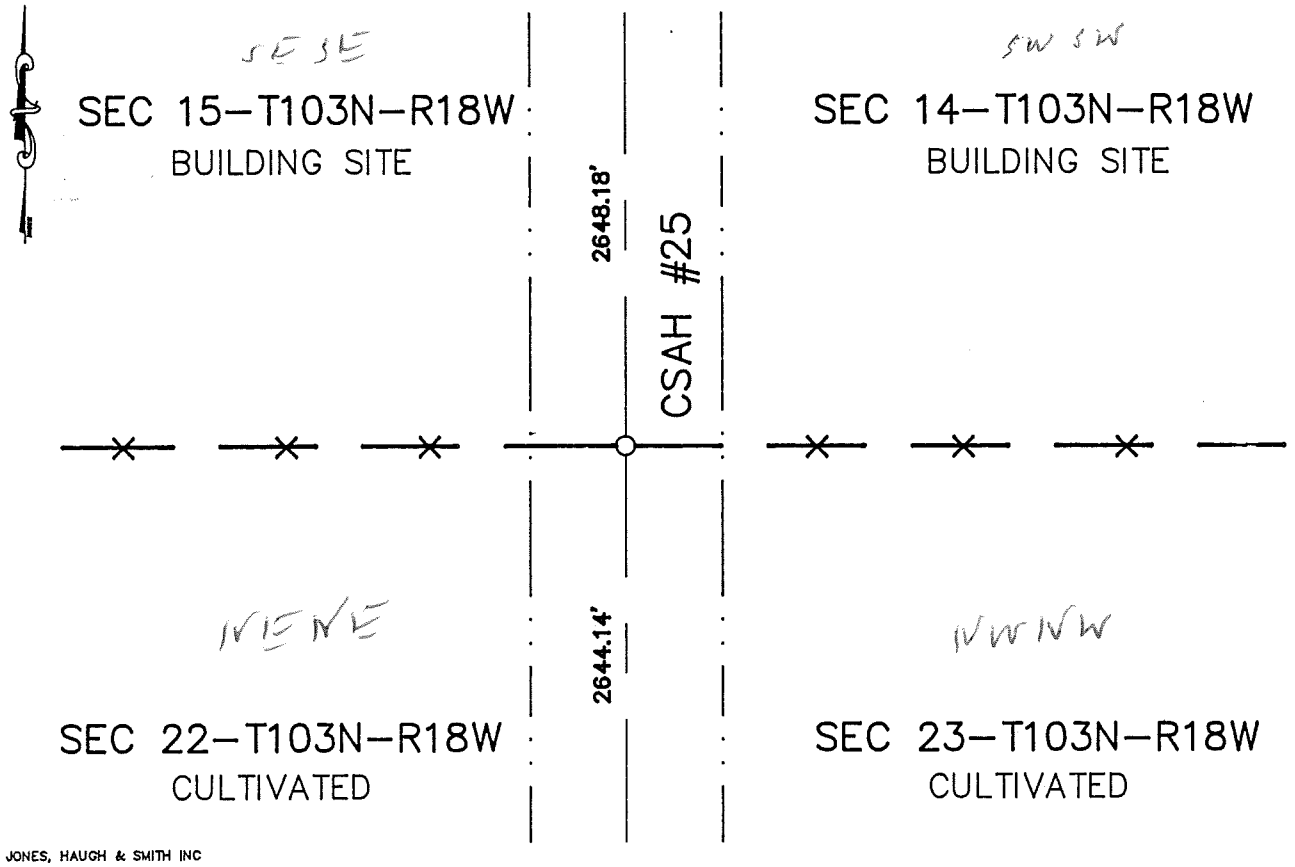

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-17-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p.m. on the 18 day of Oct A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 448648

BOOK 93 PAGE 62

M.H.D. FORM NO. 2105

Book 93 Misc Page 62

SE Cor SEC 15-103-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered corner. Found 5/8" iron on centerline N-S road that agrees with Mower County records and Hwy plans.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

"K" TIE BOOK Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 15, Township 103 N, Range 18 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On AUGUST 17, 1978 (DATE) found a REMAINS OF OLD CORNER POST DOWN 1.0 FEET.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On SEPT. 14, 1978 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT OVER POST.

SKETCH OF REFERENCE TIES

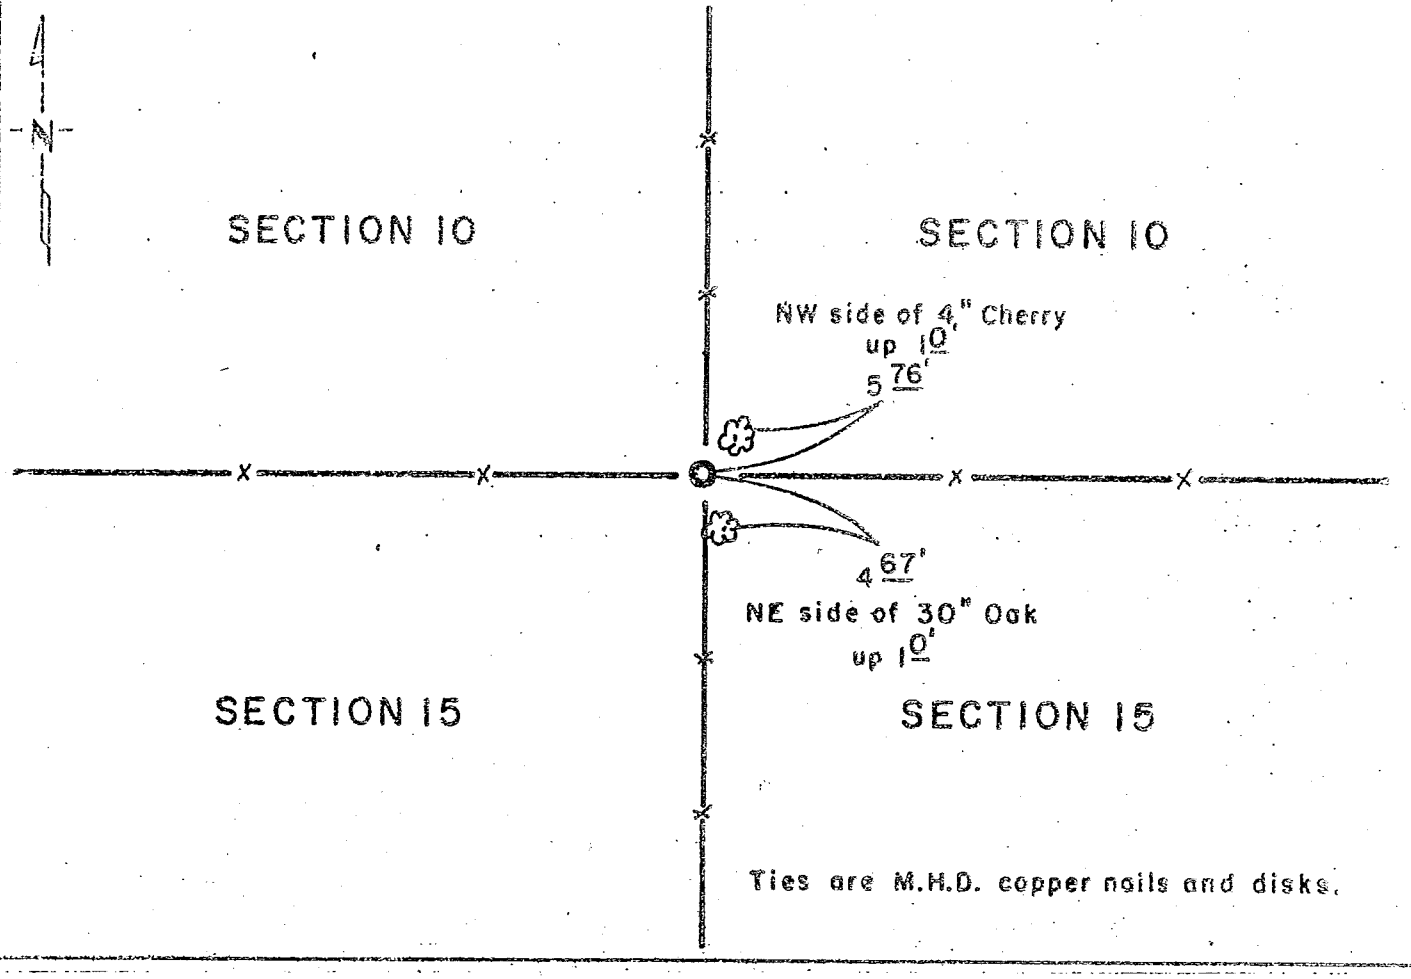

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan (SIGNATURE) 10/25/78 (DATE)

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P.M. on the 25 day of OCTOBER A.D., 19 78

County Recorder CHARLES ENGER

By DOROTHY JOHNSON, Deputy

DOCUMENT NO. 336628
Book 47 of Misc. Page 177

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTH QUARTER CORNER SECTION 15, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5th P.M.

AUGUST 1854 — William I. Anderson, Deputy Surveyor, set a post at the quarter corner during the Original Public Land Survey Corner.

1926 — Minnesota Highway Department tied an east-west fence line to the paving centerline by station and angle.

1978 — Minnesota Department of Transportation searched the area, found no monument, but found a stump of old corner fence post.

No records were found perpetuating this corner.

An analysis of the survey data indicates that the post stump is in agreement with interior occupation of Section 10 and the occupied south line of the southwest quarter of Section 10 for over 50 years. The post stump is accepted as marking the Public Land Corner.

For details of the electronic survey data, contact the Minnesota Department of Transportation, Surveying and Mapping Section, Rochester District Office.

TIC BOOK P 100 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 16, Township 103 N, Range 18 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On AUGUST 15, 1978 (DATE) found a 3/4 INCH IRON PIN FLUSH (SET FROM TIES AUGUST 31, 1977)

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

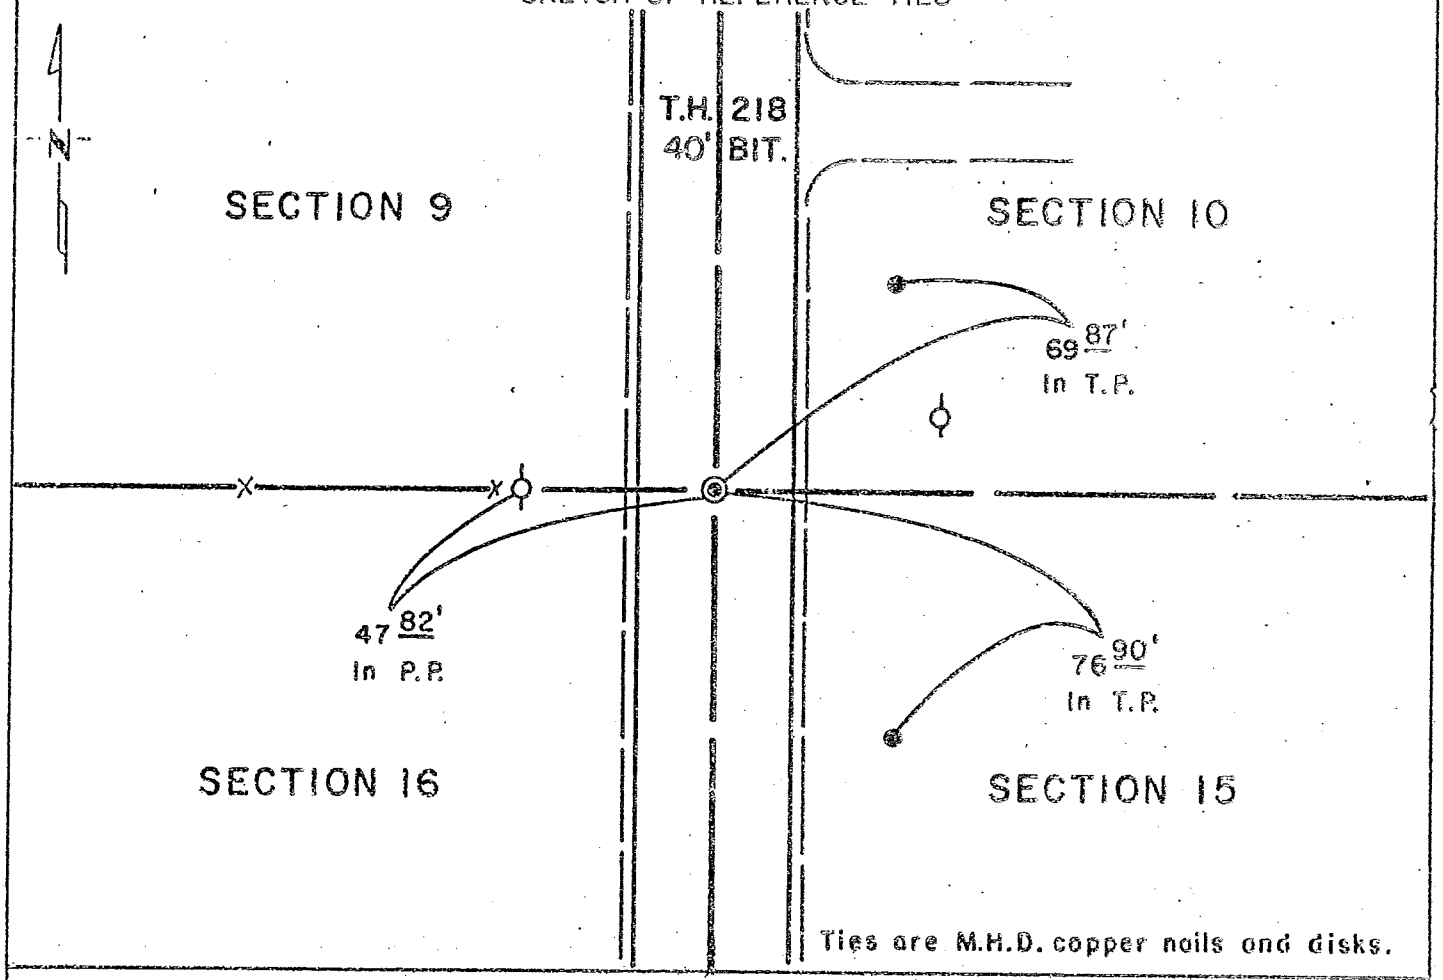

Ties are M.H.D. copper nails and disks.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan (SIGNATURE) 10/25/78 (DATE)

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P.M. on the 25 day of OCTOBER A.D., 19 78

County Recorder CHARLES ENGER

By DOROTHY JOHNSON, Deputy

DOCUMENT NO. 336629
Book 47 of Misc. page 179

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER OF SECTION 16, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5th P.M.

AUGUST, 1854 — William I. Anderson, Deputy Surveyor, set a post at the corner during the original Public Land Survey.

1926 — Minnesota Highway Department placed P.I. 1026+18.2 at the intersection of the North-South road and East-West fence line.

1969 — Minnesota Highway Department placed an 3/4 inch iron pin in the Bituminous Surface to perpetuate the P.I.

An analysis of the record and survey data indicates that the iron pin is the perpetuation of the 1926 occupation lines and has been accepted as the corner for over 50 years. The iron pin is accepted as marking the Public Land Survey Corner.

For details of the electronic survey data, contact the Minnesota Department of Transportation, Surveying and Mapping Section, Rochester District Office.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 17, Township T103N Range R18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/08/1994 (DATE) found a 10" X 14" HI STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/08/1994 (DATE) placed a 5/8 IRON

SKETCH OF REFERENCE TIES

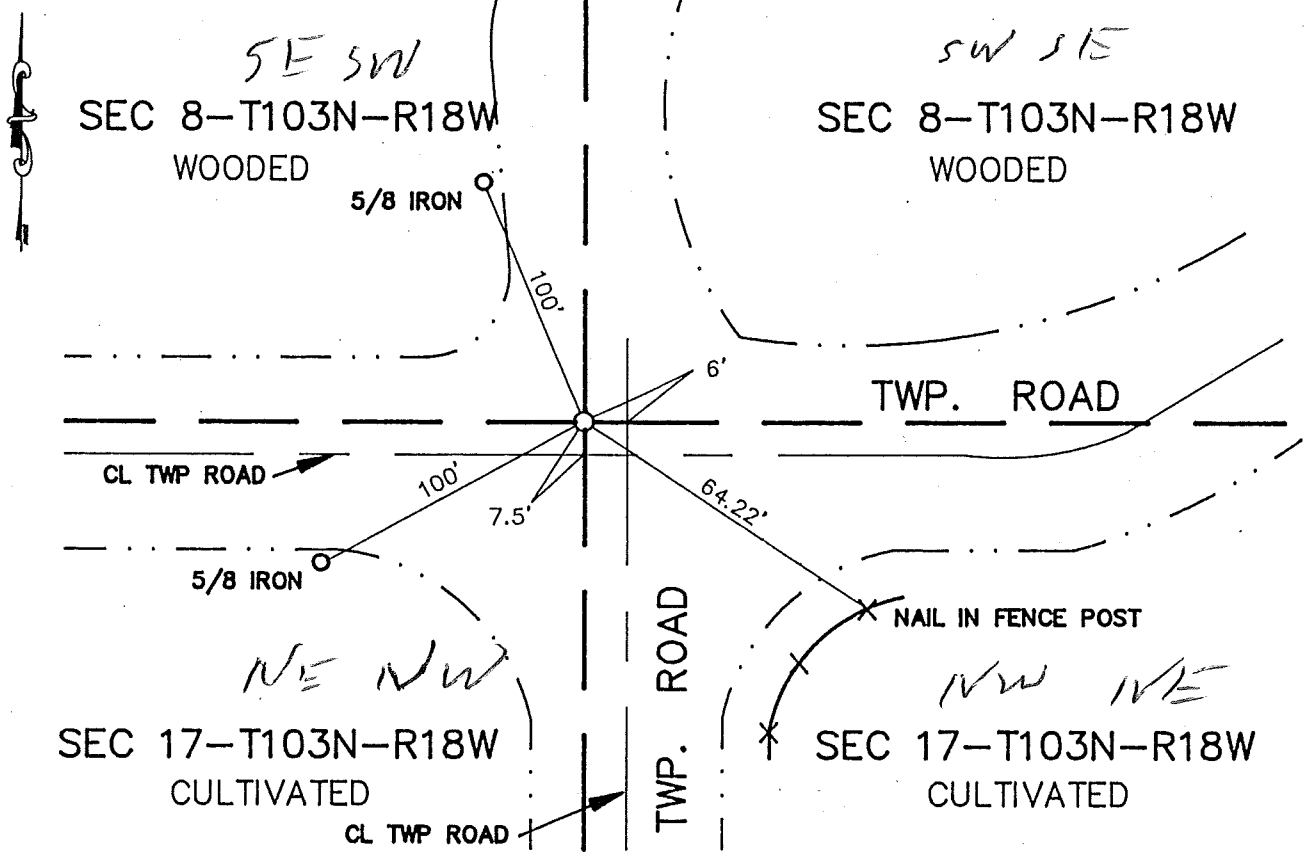

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 88 PAGE 149

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-14-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 21 day of Aug A.D., 19 95

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 438801

M.H.D. FORM NO. 2105

Book 88 Misc Page 149

N 1/4 Cor SEC 17-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL intersection of twp. roads. Excavated a 12' X 12' X 4.5' deep hole in which a 10" X 14" pointed stone was found. The stone was found 2' deep, point up. It fits the occupation to the west and south.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 17, Township 103N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-18-93 (DATE) found a 8"x12"x16" POINTED FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-21-93 (DATE) placed a CIM OVER MONUMENT FOUND

SKETCH OF REFERENCE TIES

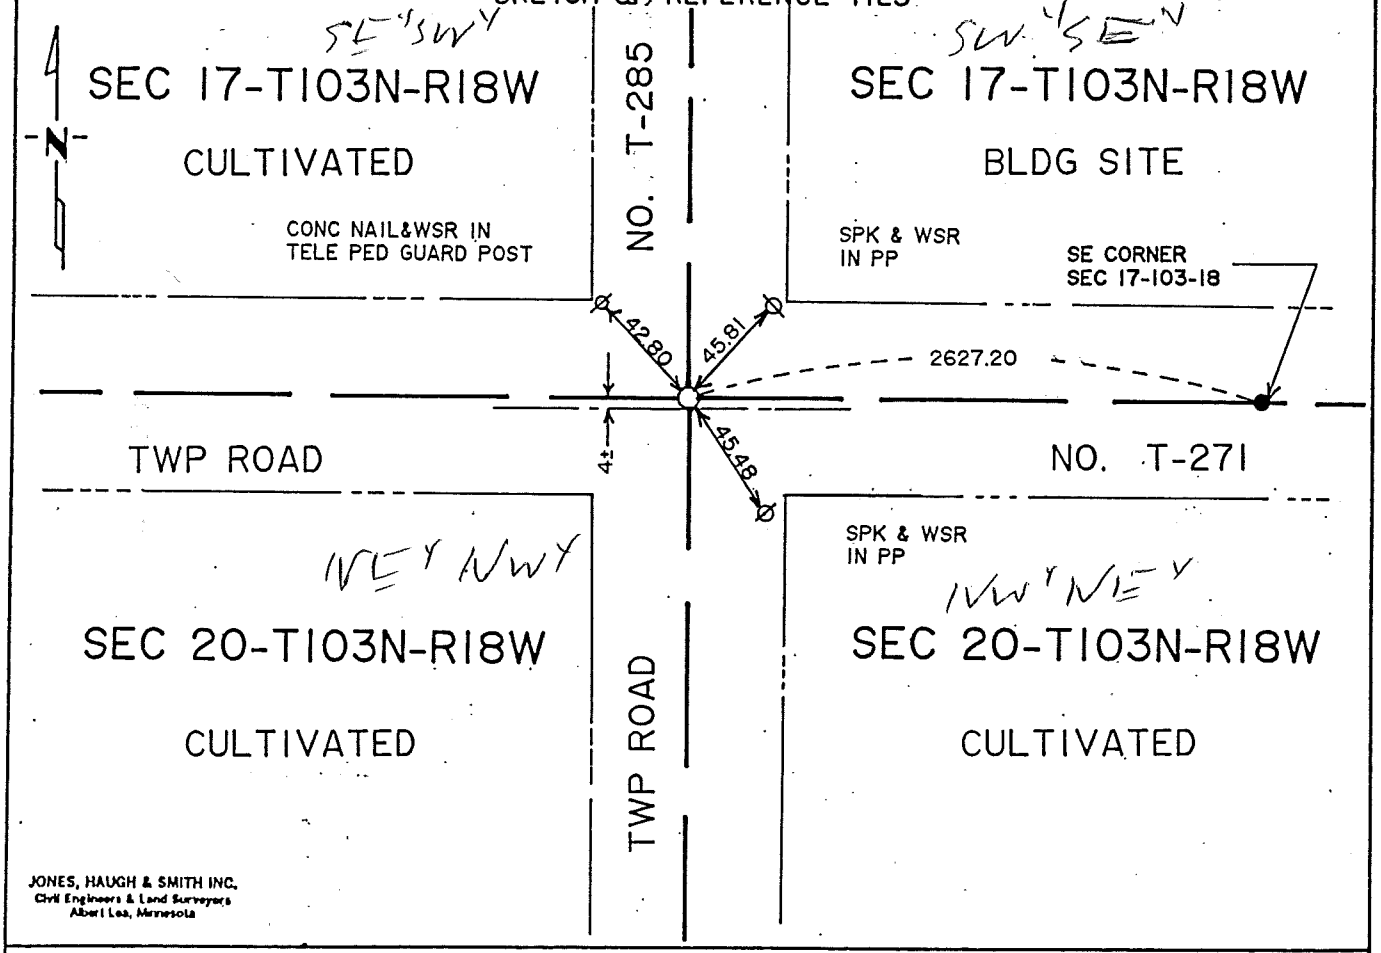

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-9-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 17 day of June A.D., 1993

COUNTY RECORDER Orlando Enger

By Marlene Martin, Deputy

DOCUMENT NO. 421535

Bk 79 Misc. Pg. 582

M.H.D. FORM NO. 2105

BOOK 79 PAGE 582

STATEMENT OF EVIDENCE

S 1/4 Cor Sec 17-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

7" Burr Oak	S 18° W	194 links (128.04 ft)
12" Burr Oak	N 27° W	412 links (273.02 ft)

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1885 Clausen, Mower County Surveyor, notes indicate a government post at this corner.

1955 Mower County Highway Dept Book 1, indicates a stone inplace 2627.20 feet between the southwest and southeast corner of this section. The following ties were taken:
57.0' SE to Burr Oak
87.5' SE to cor of school house
65.6' NE to second Maple tree

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 5'x3'x12' hole on the centerline centerline of north-south township road and east-west township road. We found an 8"x12"x16" pointed stone with old lath placed on north and south side. The stone found rested in virgin soil and was four feet north of the centerline of the east-west township road. Therefore we left monument inplace and set a cast iron monument near road surface above stone monument found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 583

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 17, Township 103N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-18-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-27-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

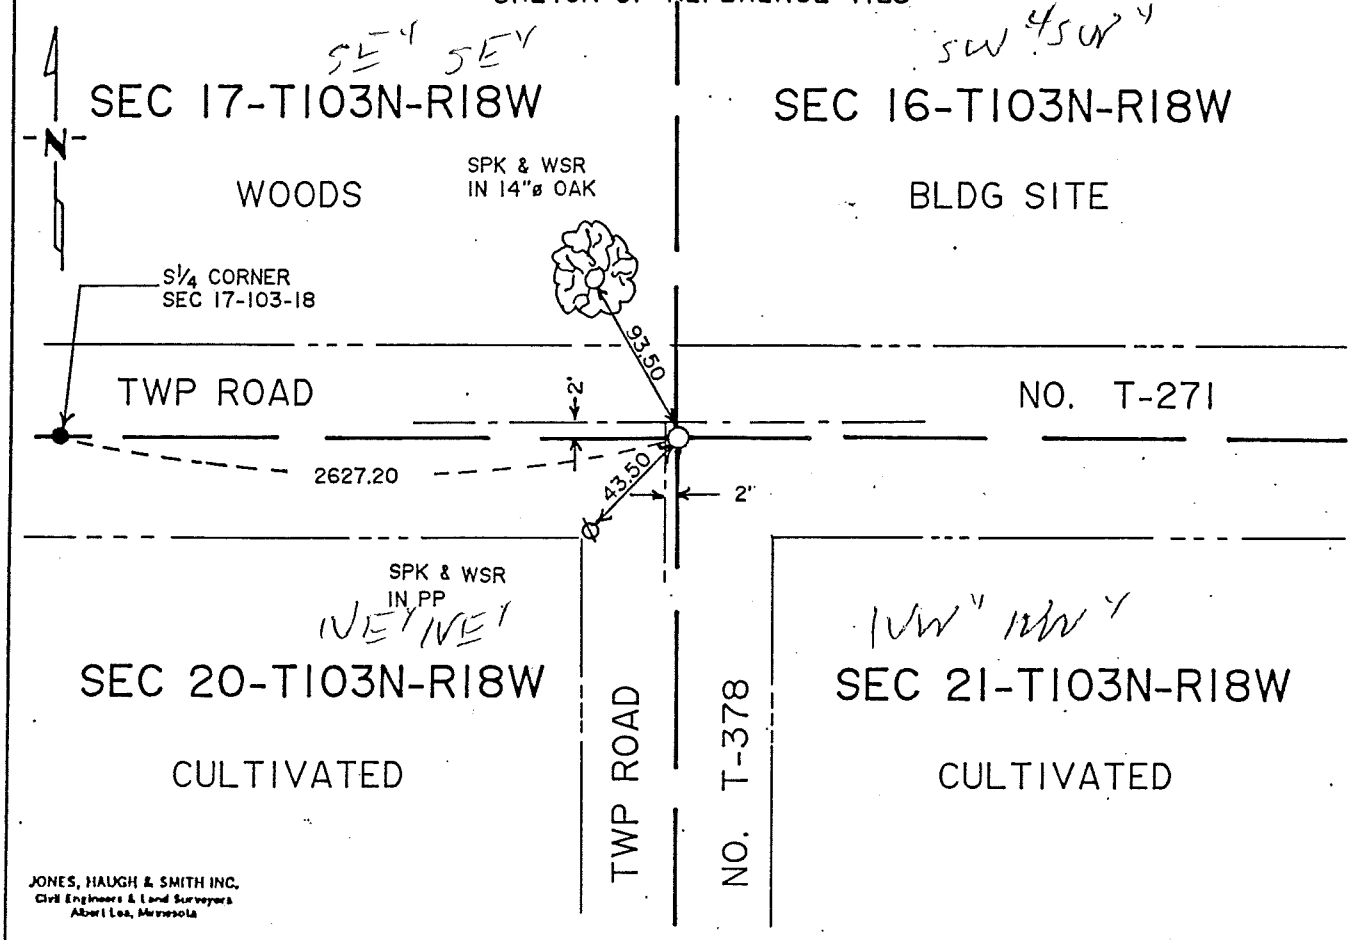

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-9-93

Registration No. 13007

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 17 day of June A.D., 19 93

COUNTY RECORDER Edwards Enoch

By Marlene Martin, Deputy

DOCUMENT NO. 421536

Bk 79 Misc. Pg. 584

M.H.D. FORM NO. 2105

BOOK 79 PAGE 584

STATEMENT OF EVIDENCE

SE cor Sec 17-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

10" Burr Oak	S 69° W	70 links (46.20 ft)
8" Burr Oak	N 43° W	185 links (122.10 ft)
8" Burr Oak	N 41° E	140 links (92.40 ft)
7" Burr Oak	S 18° E	265 links (174.90 ft)

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1885 Clausen, Mower County Surveyor, notes indicate a government post at this corner.

1950 Mower County Highway Dept Book 1, indicates an iron stake inplace, south 254.4 feet east of the southwest corner of this section or 2627.20 feet east of the S 1/4 corner of said section. The following ties were taken:

124.0' East to 6" Burr Oak
87.0' NW to blaze in Burr Oak
107.5' NW to blaze in Burr Oak

1979 Jones, Haugh & Smith Inc crew did not find ties to corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 4'x4'x20' hole on the centerline centerline of township road and found no evidence of iron stake noted in Book 1 of the Mower County Highway Dept. We also dug to virgin soil and found no evidence of the original public land survey corner. Therefore we set section corner using a distance of 2627.20 feet from the S 1/4 corner of Section 17 noted in Book 1 of Mower County Highway Dept which fits location of existing centerlines of east-west and south township roads.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 585

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 20, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/07/1995 (DATE) found a FENCE LINE INTERSECTION

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/07/1995 (DATE) placed a 5/8 IRON CAPPED RLS 13807

SKETCH OF REFERENCE TIES

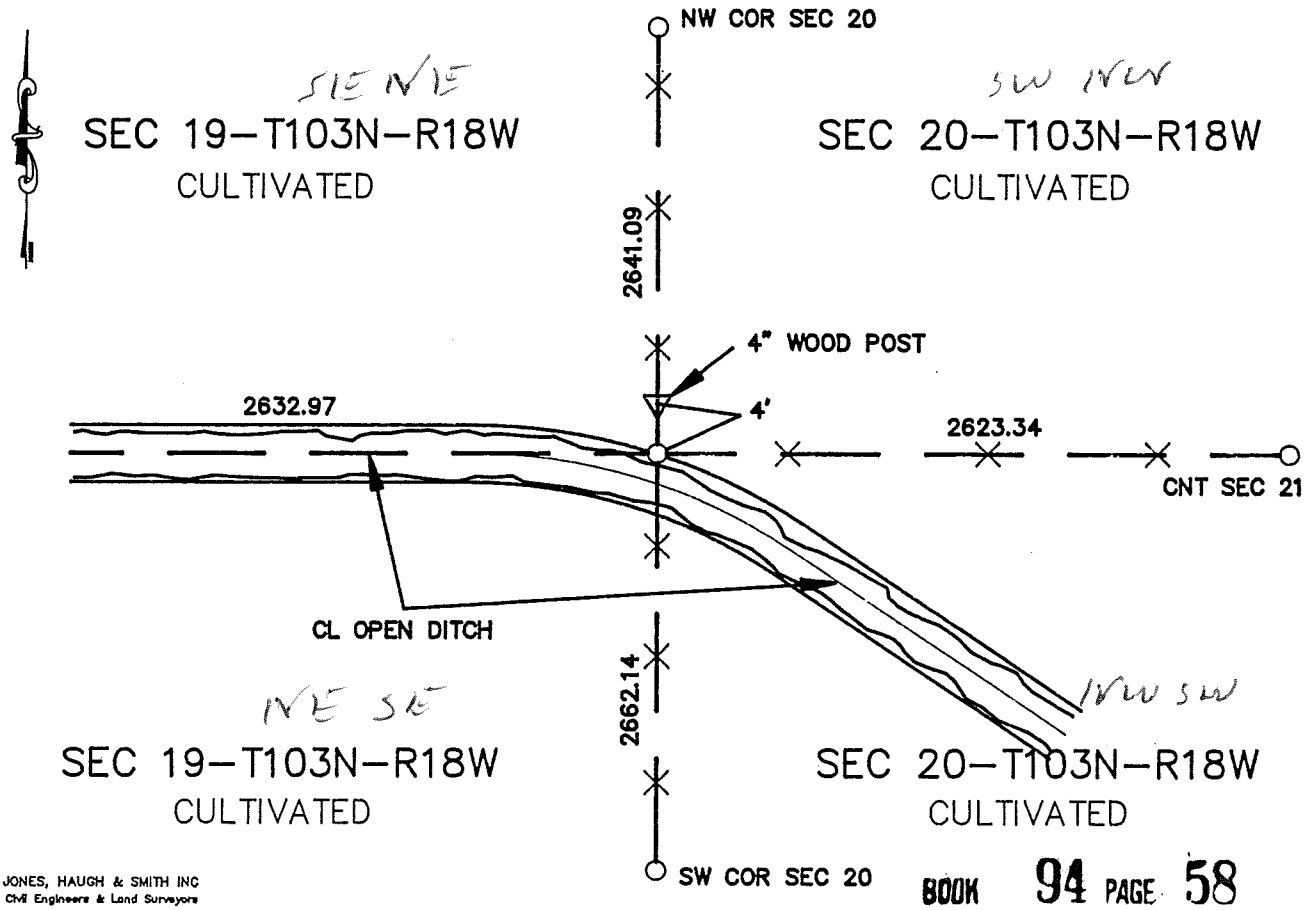

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 58

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-27-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 28 day of Jan A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 450760

M.H.D. FORM NO. 2105

Book 94 Misc Page 58

W 1/4 Cor SEC 20-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807 set a 5/8 iron capped RLS 13807 in line with fence lines north, south and east, and in line with the CL of the open ditch to the west.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 19, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/11/1995 (DATE) found a 1/2" IRON PIN

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/11/1995 (DATE) placed a –

SKETCH OF REFERENCE TIES

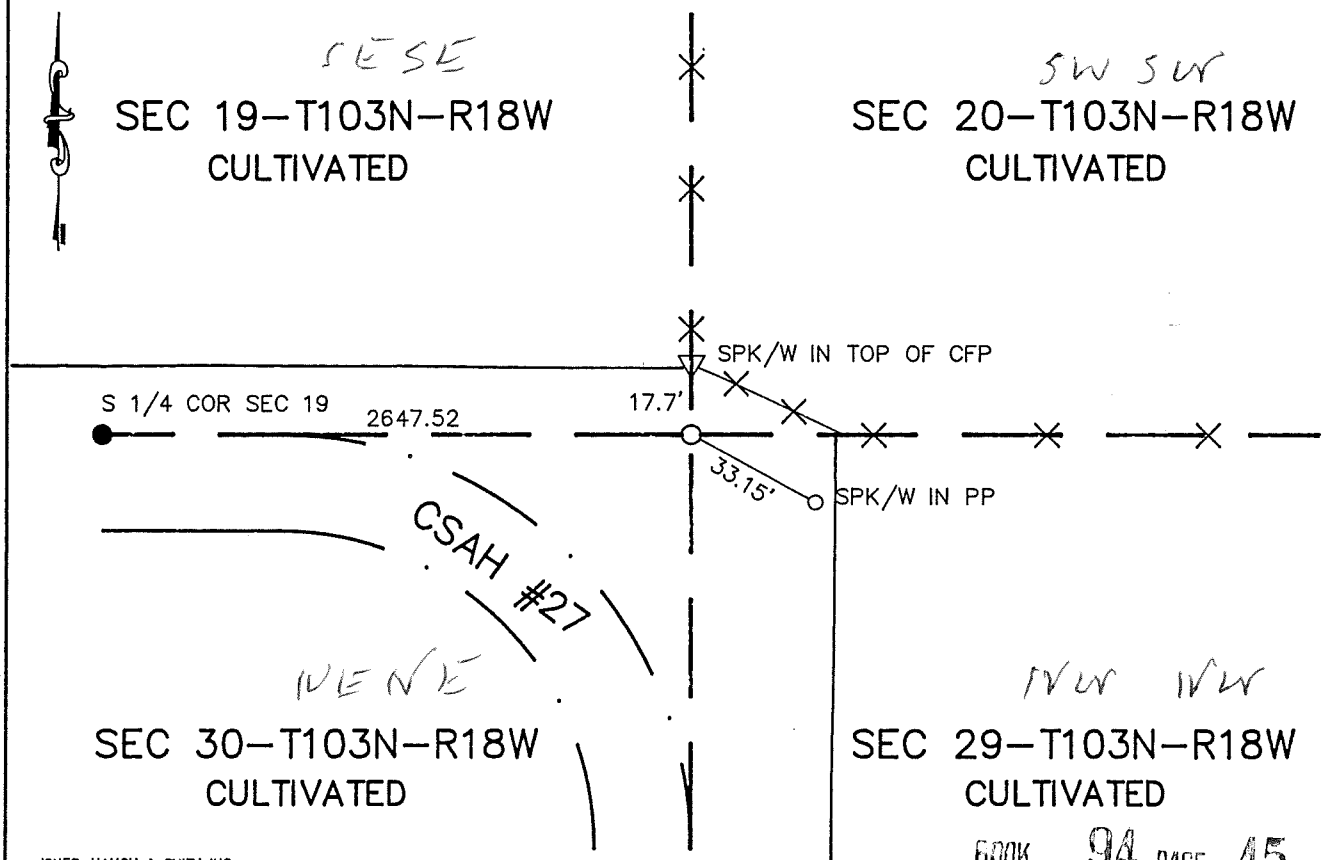

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 45

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ 1-17-97 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 5 P.M. on the 23 day of Jan A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Lewis, Deputy

DOCUMENT NO. 450691

M.H.D. FORM NO. 2105

Book 94 Misc Page 45

SE Cor SEC 19-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Book "A" shows a corner at this location and CSAH #27 R/W plans also show a corner at this location.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a concrete monument with a 1/2" iron pin in accordance with Mower County Highway Department notes and C.S.A.H. #27 grading plan.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

P 50, "A"

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 19, Township 103N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-1-91 (DATE) found a concrete monument with a 1/2"Ø iron in center. Monument is 2' South of 3/4"Ø iron found on C of E-W road.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-1-91 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

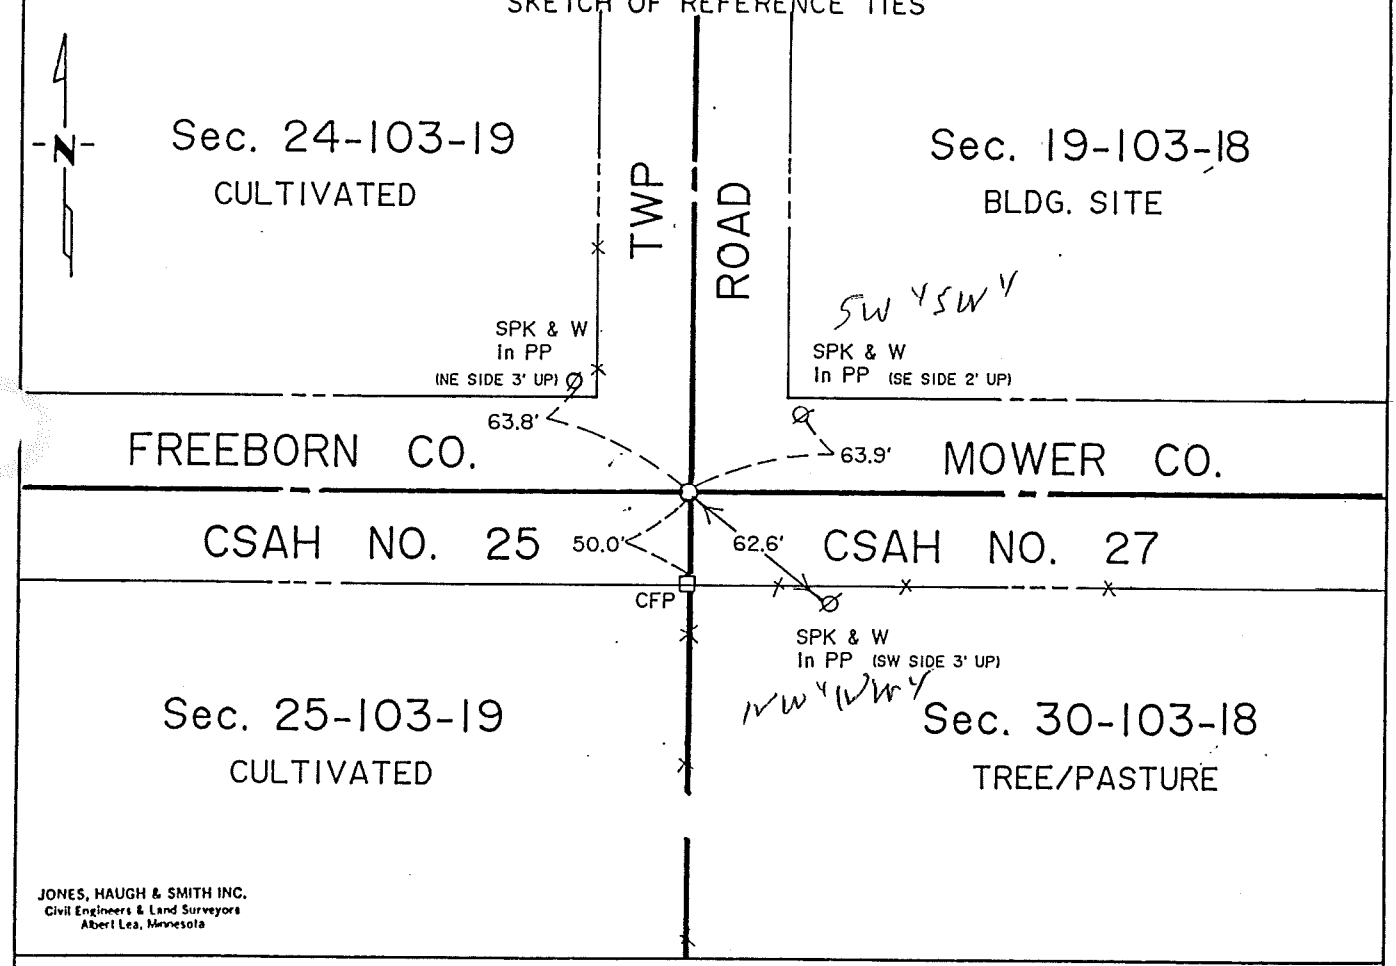

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-30-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 4 day of May A.D., 1993

COUNTY RECORDER Claudia Engan

By Marlene M Martin, Deputy

DOCUMENT NO. 420484

Bk 79 Misc Pg 334

BOOK 79 PAGE 334

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 19-103-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show corner was marked with a wood post. The following ties were taken:

12" Burr Oak	N 5° W	50 links (33.0 ft)
12" Burr Oak	N 64° E	72 links (47.52 ft)
12" Burr Oak	S 52° E	54 links (35.64 ft)
10" Burr Oak	S 5° W	89 links (58.74 ft)

The following were contacted for section corner information:
Freeborn Co Recorder's Office Freeborn Co Engineering Dept

1930 Book A of the Mower County Engineers Office show the following ties were taken:

22.1' south to CFP	49.8' SW to Ash Tree
39.0' NW to CFP	26.8' NE to Burr Oak Tree

1967 Jones Engineering crew uncovered an iron pin in concrete.

1969 Freeborn County employee, George Murphy, located corner and the following ties were taken:

Spk & W in CFP	92.4' NE	Spk & W in CFP	47.4' NW
Spk & W in PP	34.3' S		

1972 Jones & Haugh crew placed a 5/8" diameter iron 0.5 feet deep on centerline of north-east-west road in line with fence south. The following ties were taken:

Spk & W in PP	63.2' NE	Spk & W in guy post	62.0' SE
Spk & W in CP	61.4' NW		

1974 Jones & Haugh crew found a 5/8" diameter iron on centerline of north-east-west road in line with fence south. The following ties were taken:

Spk & W in east side PP	62.1' NE	Spk & W in PP	64.0'
Spk & W in guy pole	61.8' NW		
5/8" dia iron in fence	52.0' S		

1982 Jones, Haugh & Smith Inc crew found a 3/4" diameter iron flush with road surface on centerline of east-west-north roads. The following ties were taken:

Spk & W in SE side PP	61.80' NW
Spk & W in SE side PP	61.50' NE

1991 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with the Freeborn County backhoe and uncovered a concrete monument with a 1/2" diameter iron in center. Monument is two feet south of 3/4" diameter iron found on centerline of east-west road. Therefore we accepted concrete monument found as best evidence of the perpetuation of the original public land survey corner. We set a cast iron monument near road surface above the 1/2" diameter iron in concrete. The cast iron monument fits occupation and road centerlines within the section.

BOOK 79 PAGE 335

Jones & Haugh

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 19, Township 103 Range 18, 5TH P.M.

STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch:

☐ On 8-15-94 (DATE) found a 2'x1/2" ROD 1.5' BELOW ROAD SURFACE, IN OLD ROAD BED.


☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-15-94 (DATE) placed a CAST IRON MON. AT ROAD SURFACE

SKETCH OF REFERENCE TIES

SE SW & SW SE

SEC. 19-T103N-18W

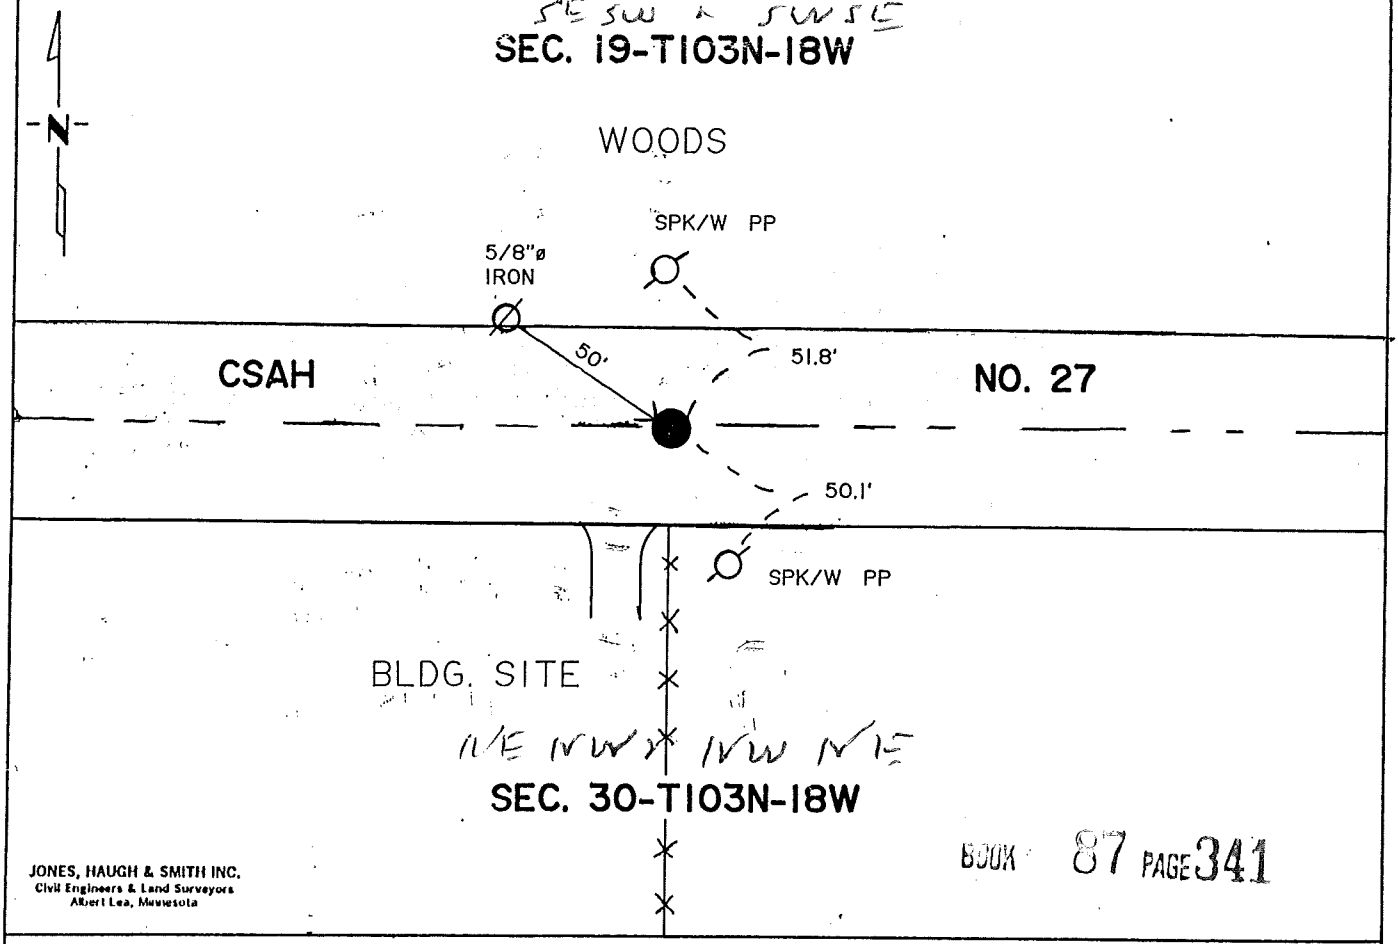

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 87 PAGE 341

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 6-12-95
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 19 day of June A.D., 19 95

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 437348

Book 87 Misc Page 341

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 Cor SEC 19-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones, Haugh and Smith crew, under direction of John Schulte, Mower Co. Surveyor RLS 13807 dug with county backhoe on center of road an in line with a fence to the south. Found a 2' X 1/2" iron rod 1.5' below the road surface, in the old road bed. Continued digging and found no further evidence of original PLS corner. Accepted iron as best evidence of a perpetuation of the original corner. Placed a 5/8 iron with CIM over the iron, at the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 19, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/03/1990 (DATE) found a 1' SQX4' LONG IRON BAR AND SET A 5/8" IRON OVER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 04/03/1996 (DATE) placed a CAST IRON MONUMENT ON 5/8" IRON

SKETCH OF REFERENCE TIES

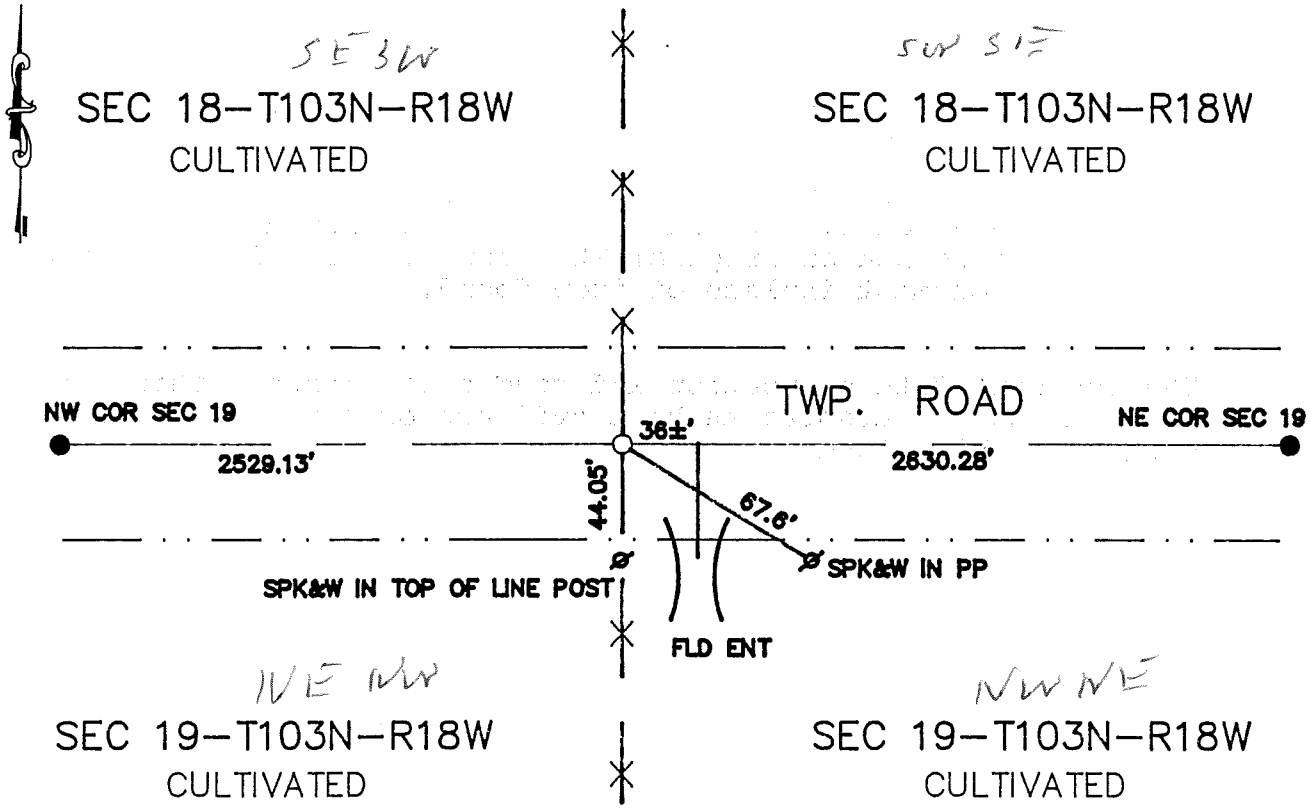

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-31-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 p .M. on the 3 day of Jan A.D., 1997

COUNTY RECORDER Charles J. Enger

By Susan M. Lewis, Deputy

DOCUMENT NO. 450254

M.H.D. FORM NO. 2105 BOOK 93 PAGE 490

BK 93 Page 490 Misc

N 1/4 Cor SEC 19-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1990	Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and in line with line fence N-S. Located a 1"x4' long iron 2' below the road surface. Placed a 5/8" iron over iron found capped #13807.
1996	Jones Haugh and Smith crew placed a cast iron monument over 5/8" found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 21, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/16/1995 (DATE) found a IRON CAPPED 11009

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/16/1995 (DATE) placed a –

SKETCH OF REFERENCE TIES

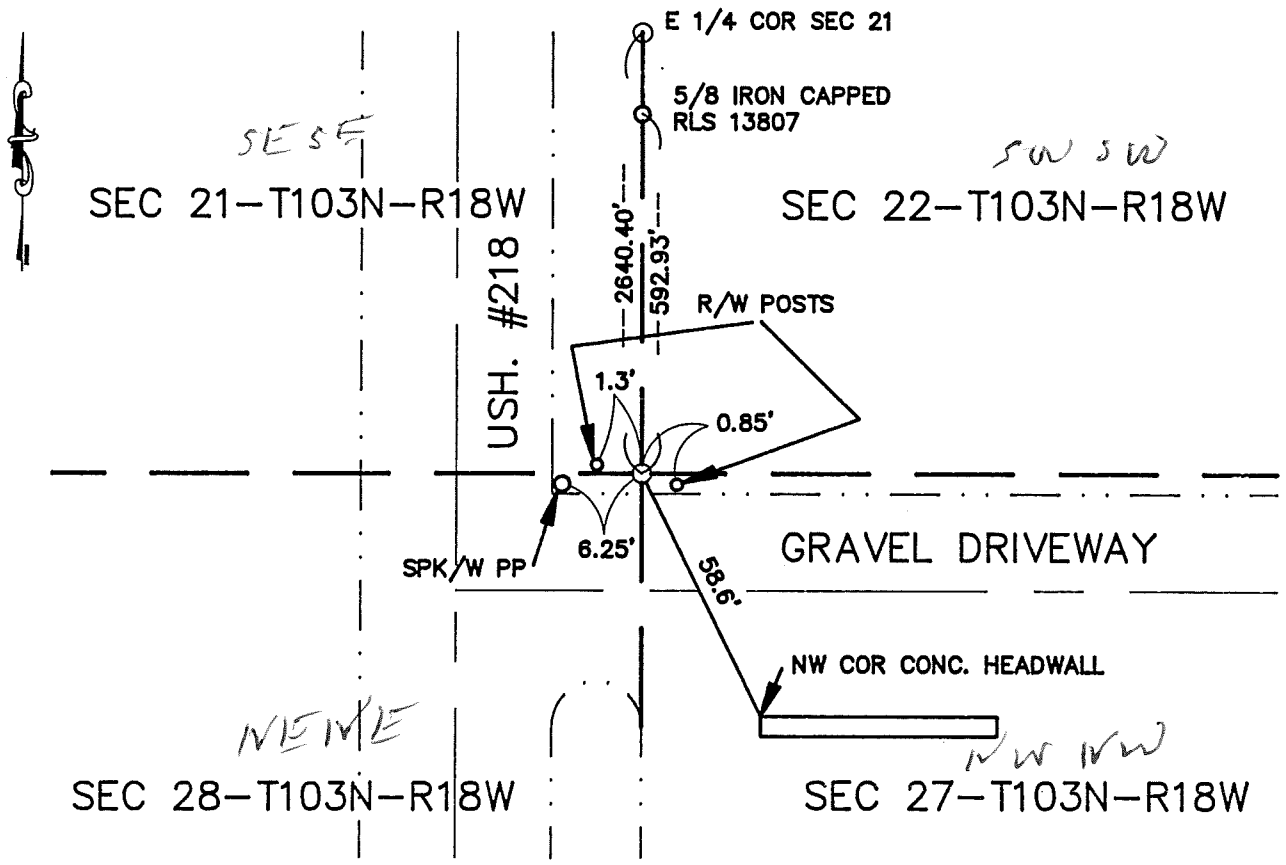

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 94 PAGE 62

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-27-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 28 day of Jan A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 450762

M.H.D. FORM NO. 2105

Book 94 Misc Page 62

SE Cor SEC 21-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

MnDOT R/W plans for TH 218 show a monument at this location.

Plat of Austin Ind. Service Center show a corner at this location.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807 found an iron set by Ron Olson cap #11009. Corner is in agreement with existing plats and monuments in the area, as well as with MHD and JHS location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 21, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/07/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/07/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

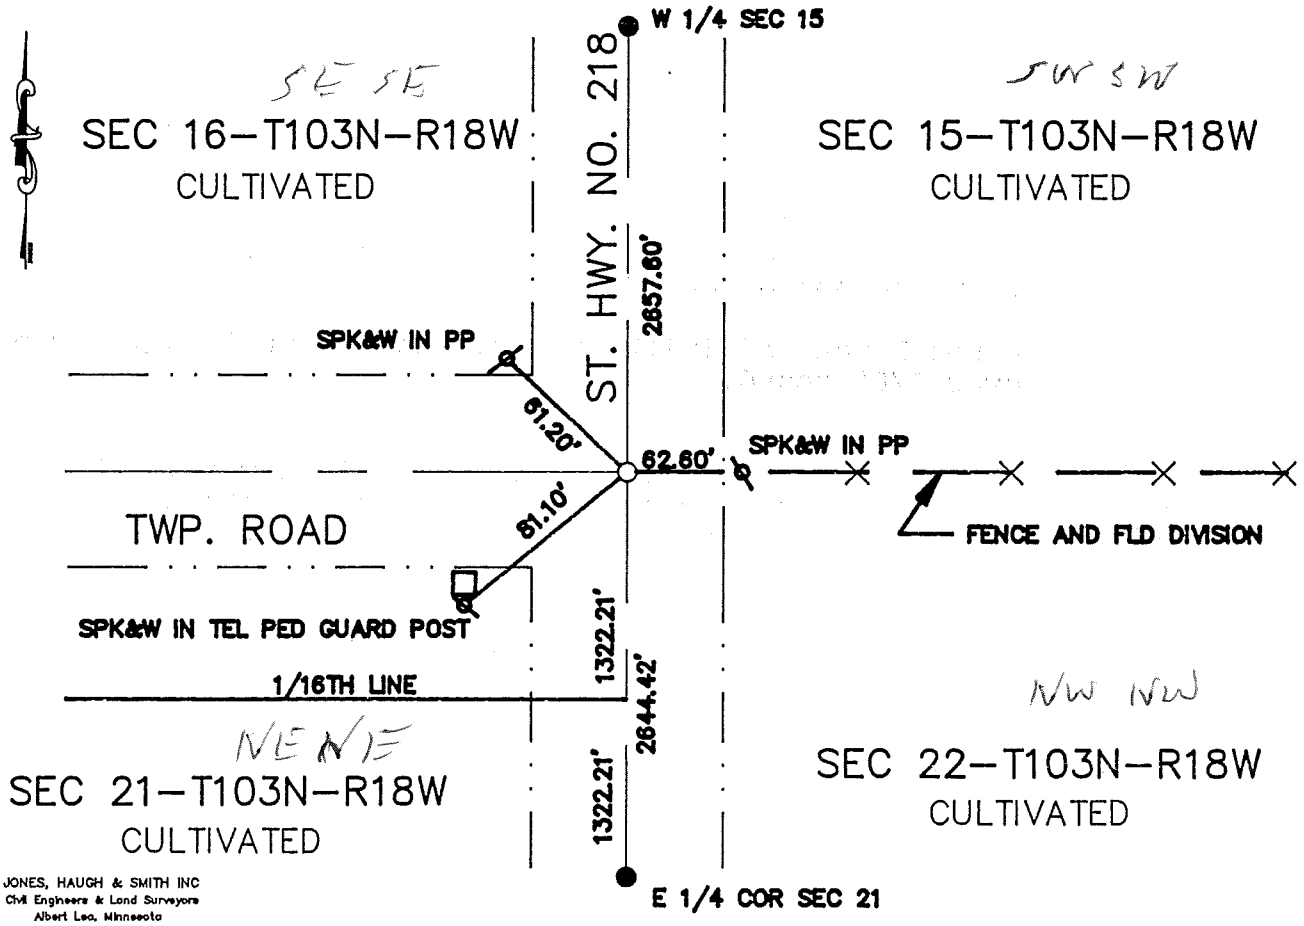

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE 12-31-96 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 3 day of Jan A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 450255

M.H.D. FORM NO. 2105

BOOK 93 PAGE 492 Book 93 Misc Page 492

NE Cor SEC 21-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set cast iron monument on a straight line between the W 1/4 corner of section of 15 and E 1/4 of section 21. Fits CL of S.T.H. No. 218 and CL of township road west and field division east.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 21, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/07/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/07/1995 (DATE) placed a 5/8 IRON CAPPED RLS 13807

SKETCH OF REFERENCE TIES

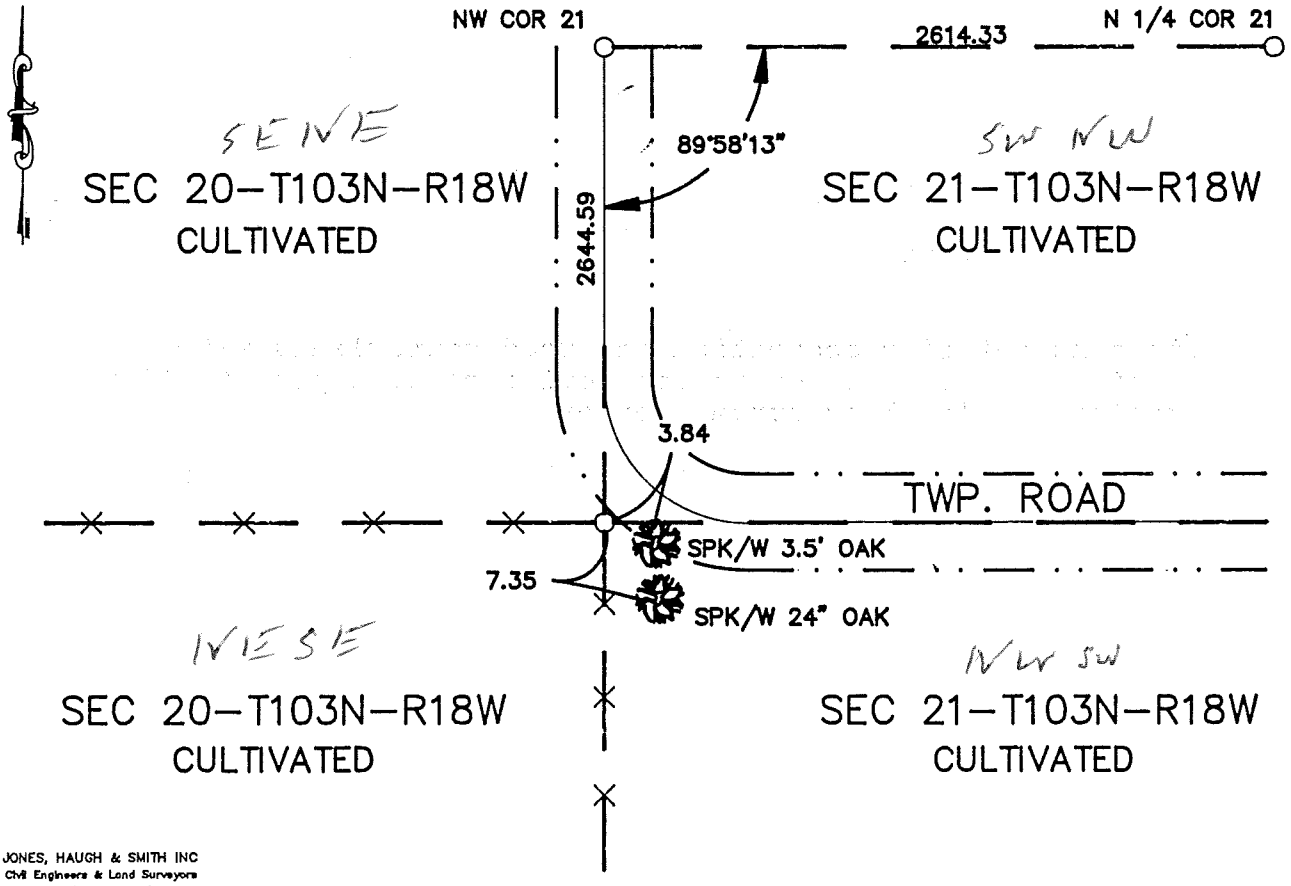

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-31-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p.M. on the 6 day of Jan A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 450279

M.H.D. FORM NO. 2105 BOOK 93 PAGE 496

Book 93 Misc Page 496

W 1/4 Cor SEC 21-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set a 5/8 iron capped RLS 13807 at intersection of fence lines south and west, and in line with the road centerline to the north and east.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 21, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/21/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/07/1995 (DATE) placed a CAPPED 5/8 IRON

SKETCH OF REFERENCE TIES

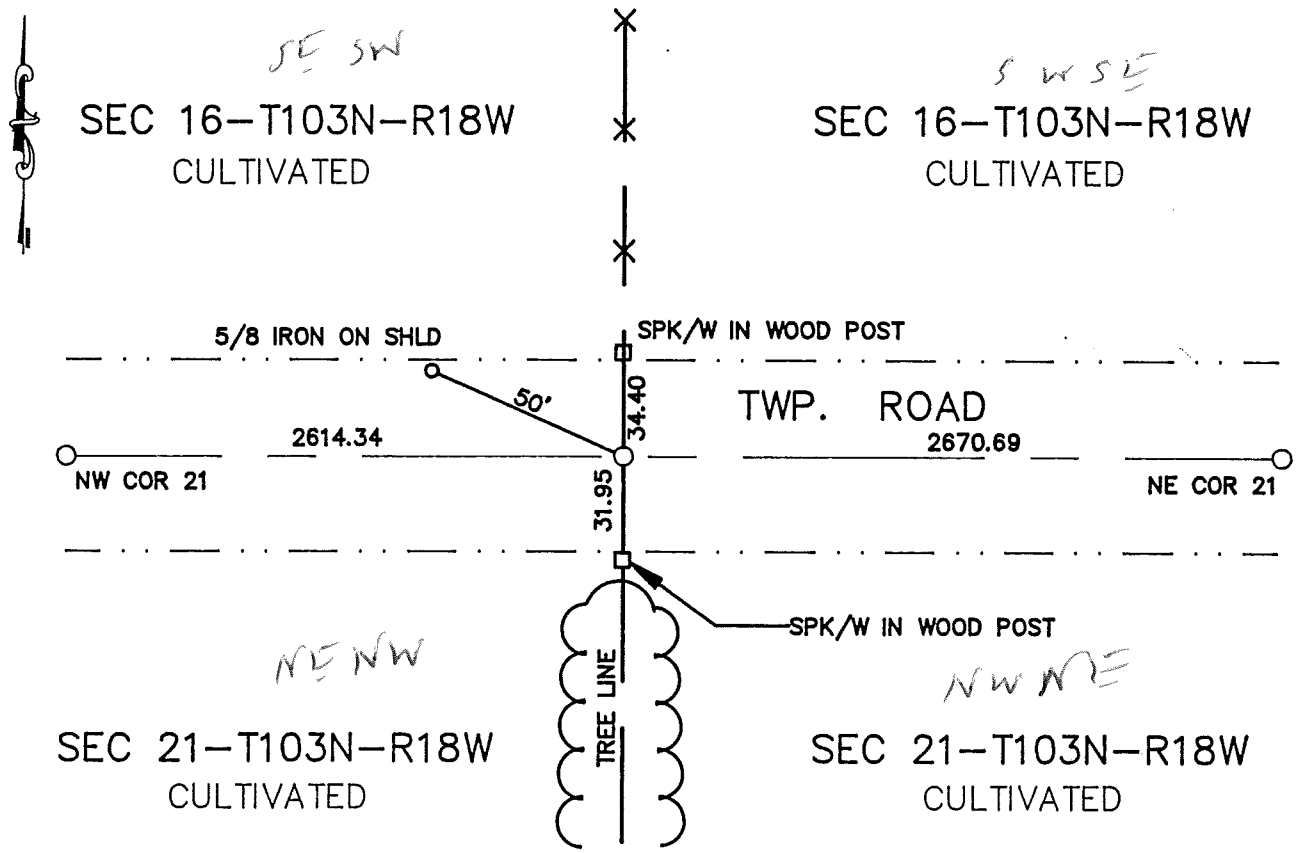

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-17-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 18 day of Oct A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 418649

BOOK 93 PAGE 64

M.H.D. FORM NO. 2105

Book 93 Misc Page 64

N 1/4 Cor SEC 21-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

11/21/1995	Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and in line with line fence N-S. Uncovered a 5" plastic drain tile. Continued digging to virgin soil and found no other evidence of original PLS corner.
12/07/1995	Jones Haugh and Smith crew placed a 5/8" iron capped #13807 on the CL of township road in line with line fence north and tree line south.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 21, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/07/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/07/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

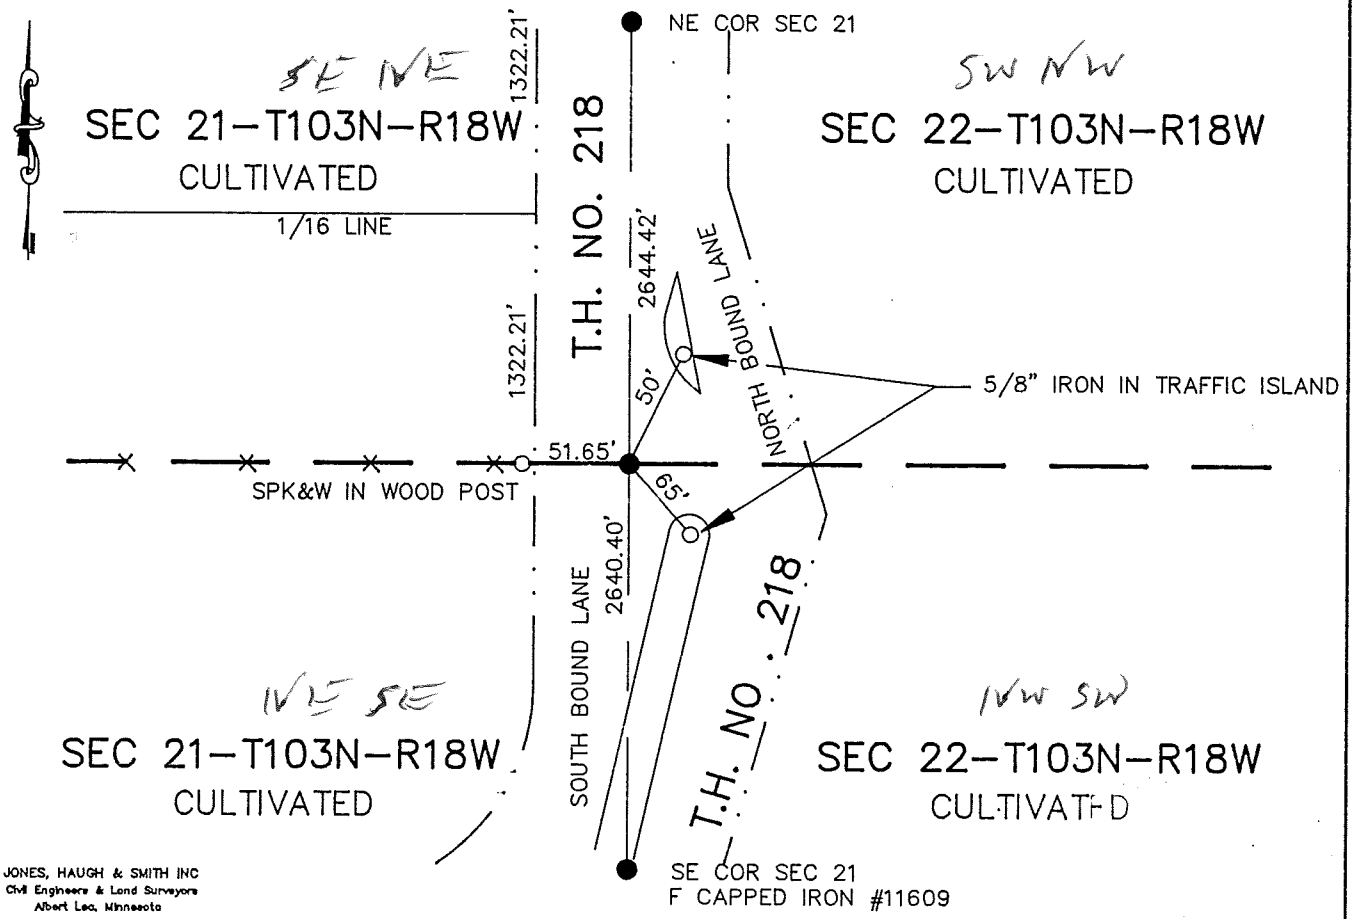

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 94 PAGE 60

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-27-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 28 day of Jan A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 450761

M.H.D. FORM NO. 2105

Book 94 Misc Page 60

E 1/4 Cor SEC 21-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

MHD R/W map for Hwy. #218 does not show a monument at this location.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, placed a 5/8"x16" iron on a straight line between the NE and SE section corners. Corner fits original CL of S.T.H. No. 218 and is in line with fence line west. Corner also fits C.E. Milner's distance of 2640.40' north from SE corner of section 21 as shown on plat of Austin Ind. Service Center.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 22, Township T103N Range R18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/08/1994 (DATE) found a FENCE INTERSECTION

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/08/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

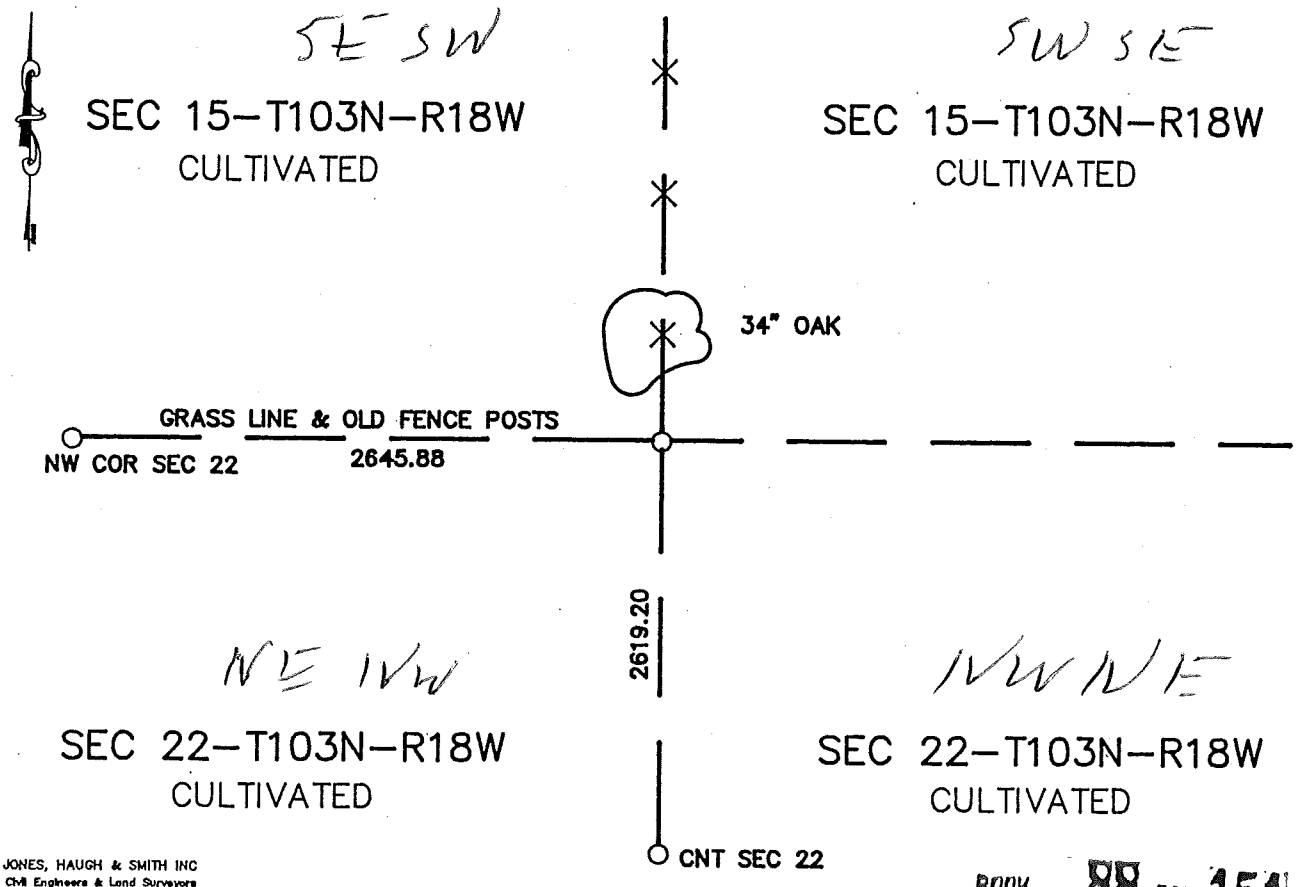

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 88 PAGE 151

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-14-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 21 day of Aug A.D., 19 95

COUNTY RECORDER Charles Engen

By Susan M Davis, Deputy

DOCUMENT NO. 438802

M.H.D. FORM NO. 2105

Book 88 Misc Page 151

N 1/4 Cor SEC 22-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1880 Clausen's field notes indicate he found a government post at this location.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand in the area of the corner but found no evidence of the original government post. A CIM was set at the intersection of fences to the north and west. The corner fits the 16th fence in the SW 1/4 of sec 15 and fit the fence at the center of section 15.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 24, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 01/04/1996 (DATE) found a SPIKE OVER CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 01/04/1996 (DATE) placed a –

SKETCH OF REFERENCE TIES

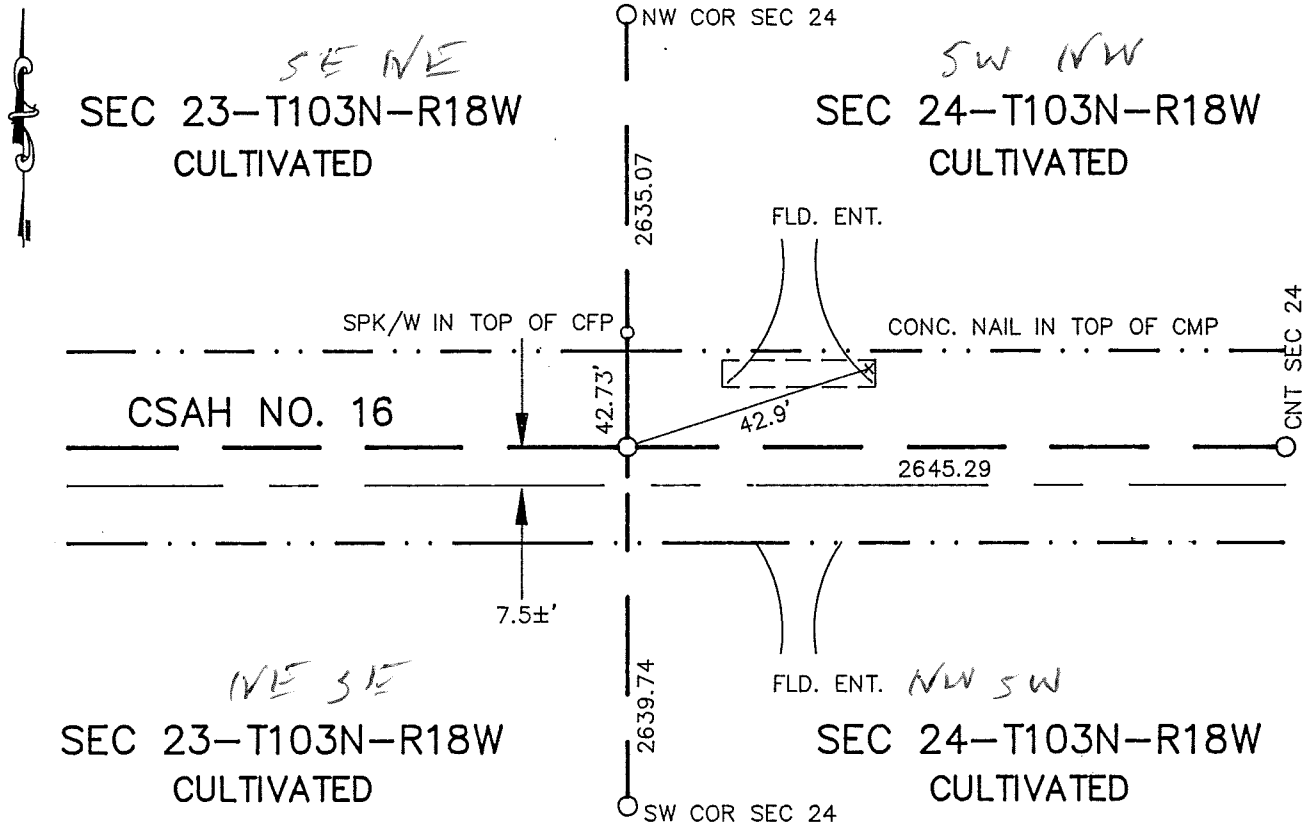

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 94 PAGE 64

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-27-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 28 day of Jan A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450763

M.H.D. FORM NO. 2105

Book 94 Misc Page 64

W 1/4 Cor SEC 24-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Highway Dept. records book "A" show a corner at this location. Mower Co. R/W plans for CSAH #46 also show a corner at this location.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a spike 0.4' below the road surface over a concrete monument, which fits ties and road grading plans by Mower County.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 24, Township 103N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-3-91 (DATE) found a cast iron monument 2.0' below road surface

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-3-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

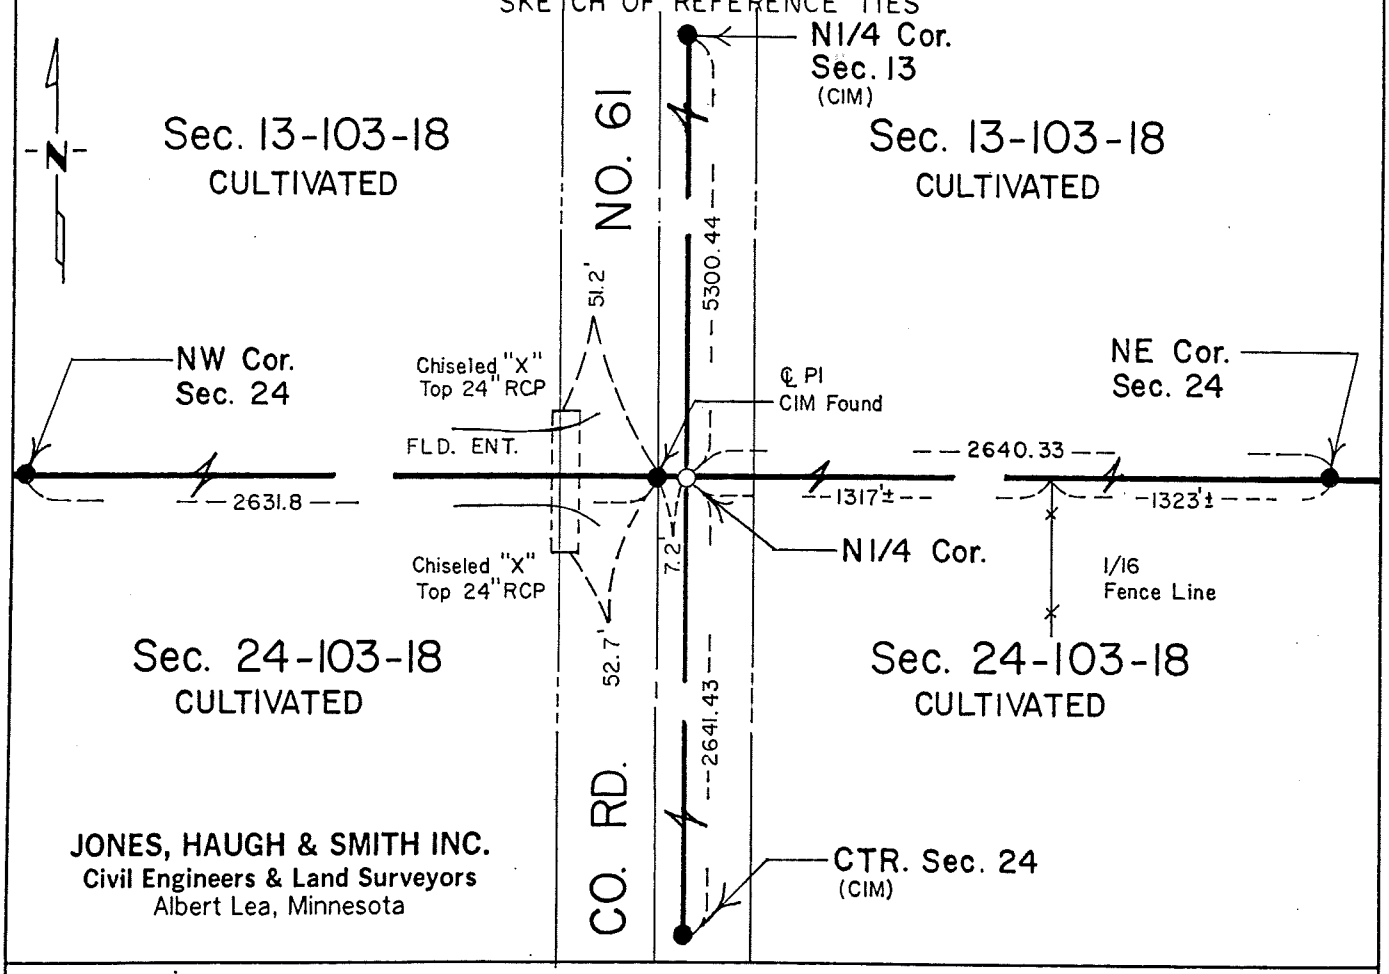

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-8-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 24-103-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

14" Black Oak	N 71° E	30 links	(19.80 ft.)
10" Black Oak	S 59° W	160 links	(105.60 ft.)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

Testimony of County Engineer indicates Ray Tucker RLS 15471, dug with backhoe for grading project on County Road No. 61 in 1988 more or less. Telephone conversation with Ray Tucker in April 1991 says no monumentation was found and he set a cast iron monument on centerline County Road in line with fence west.

1926 Grading Plan on County State Aid HIghway No. 16 shows the center section inplace and gives stationing on fence lines and 1/16 fence lines east and west.

1991 Jones, Haugh & Smith crew during survey of the old railroad property in the NE 1/4 uncovered a cast iron monument set by Ray Tucker RLS 15471 in 1988 more or less, after a complete section survey which included ties in all occupation lines, fence lines and road centerlines. It was found that the true position of 1/4 corner is 7.2 feet east of inplace cast iron monument. The position for the corner was determined by the following method and a cast iron monument was set: (1) Established northwest and northeast corners of section and ran a straight line between corners. (2) Used the S 1/4 corner of section and extended a line north through the existing center of section which is in agreement with private and public records over the last 65 years and set the 1/4 corner at the intersection with a straight line between NE & NW section corners. After researching roads within the section it was found no county roads within the section were built or intended to be built on section or 1/4 section lines.

The monument fits occupation lines within the section and is accepted as a perpetuation of the original public land survey corner. For electronic survey data analysis contact Jones, Haugh & Smith Engineering.

We then found the following distances:

N 1/4 corner to NW corner	2631.8 feet
N 1/4 corner to NE corner	2640.33 feet
N 1/4 corner to 1/16 line fence East	1317 more or less

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Center Corner of Section 24, Township 103N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 3-5-91 (DATE) found a 1"Ø x 4' long pipe

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 3-5-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

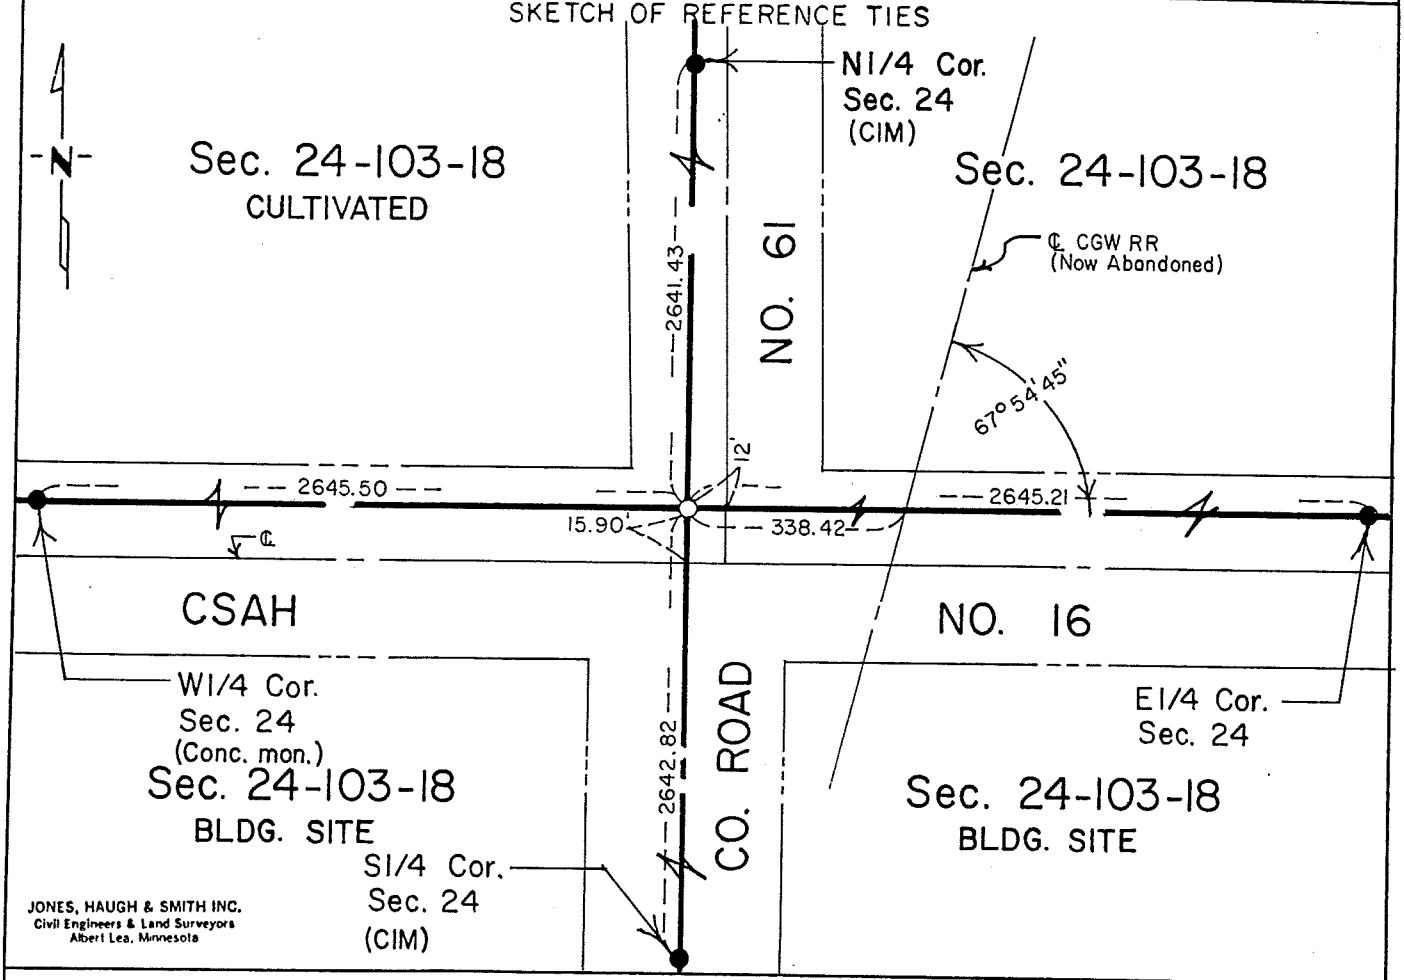

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-9-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

Center Section 24-103-18

1922 Grading Plan for County Road #16 shows a monument inplace and ties were taken.

1930 Book "A" in the office of the Mower County Engineer shows a concrete monument inplace and ties were taken.

1954 Book "A" revised, found pipe and new ties were taken.

1954 Grading Plan on County State Aid Highway #16 shows a 1" diameter pipe with location to centerlines of roads and stationing given to railroad, 1/16 line fences and 1/4 corners.

1976 Jones, Haugh and Smith crew uncovered a 1" diameter pipe and located railroad at this time.

1988 Grading Plan on County Road #62 shows a bent 1" diameter pipe occupying the center section and ties were taken.

1991 Jones, Haugh and Smith crew under the direction of John H. Schulte uncovered a 1" diameter x 4' long pipe as shown in past records. Found no evidence of concrete monument noted in 1930 records in Book "A". At this time a complete survey was done of Section 13 & 24-103-18 and it was found that the 1" diameter pipe fits all occupation and fence lines within the section and agrees with stationing on fences and railroad as shown on 1954 Grading Plan. Therefore placed cast iron monument stamped "survey marker" on road surface at the same location of the 1" pipe.

The monument found fits all occupation within the section and has been accepted as the center of section for the past 80 years by all area surveyors.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 24, Township 103 Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/06/1995 (DATE) found a 5/8" IRON CAPPED #13807

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/06/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

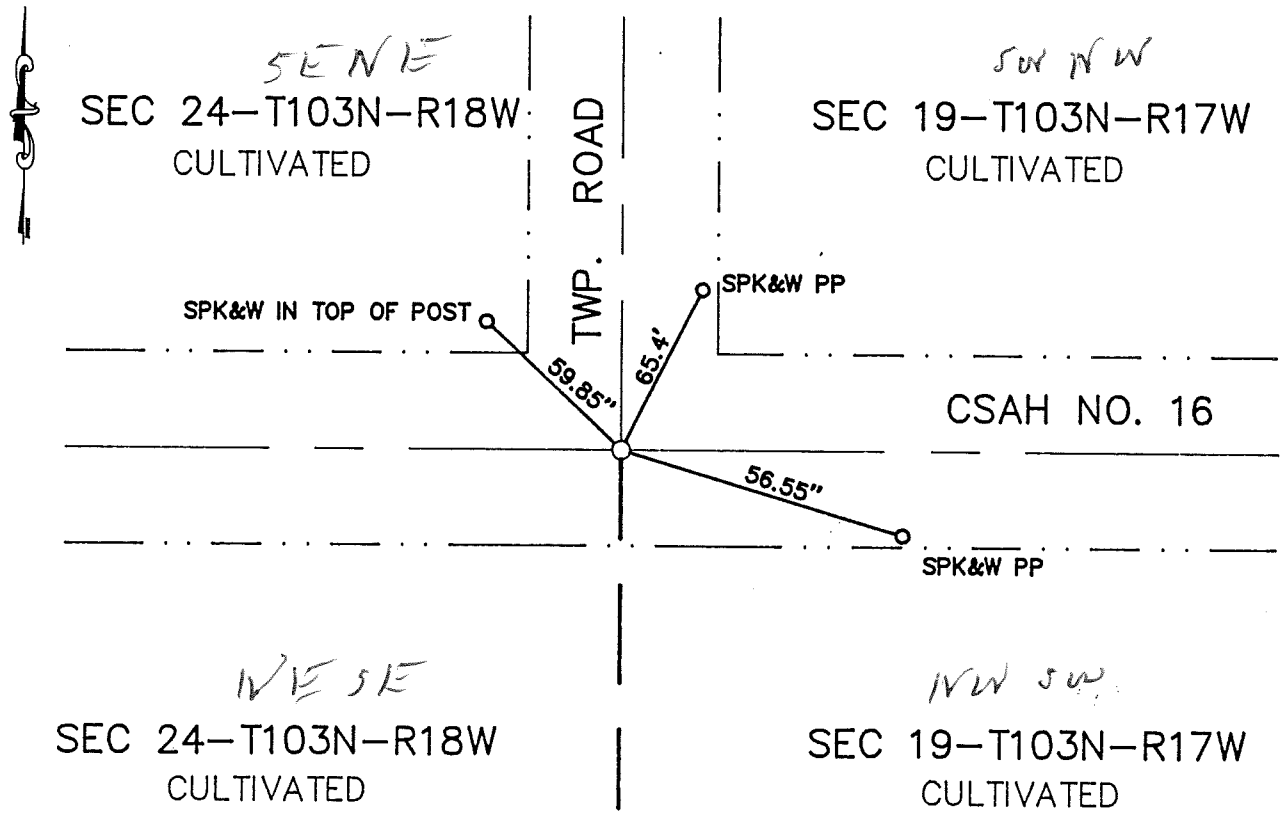

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 94 PAGE 66

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 1-27-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 28 day of Jan A.D., 19 97

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450764

M.H.D. FORM NO. 2105

Book 94 Misc Page 66

E 1/4 Cor SEC 24-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1930 Mower County Highway Department records state an iron pipe and stone inplace.

1954 Jones Haugh and Smith records state an iron pipe 12" below road surface.

1973 Jones Haugh and Smith crew found iron pipe 12" below road surface and set 5/8" iron over. Ties were taken.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the CL of C.S.A.H. No. 16 E-W and CL of township road north. Located a 5/8" iron cap #13807. Removed cap and set a cast iron monument. Monument is in agreement with the 1930, 1954, and 1973 location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 24, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 01/04/1995 (DATE) found a CAST IRON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 01/04/1995 (DATE) placed a –

SKETCH OF REFERENCE TIES

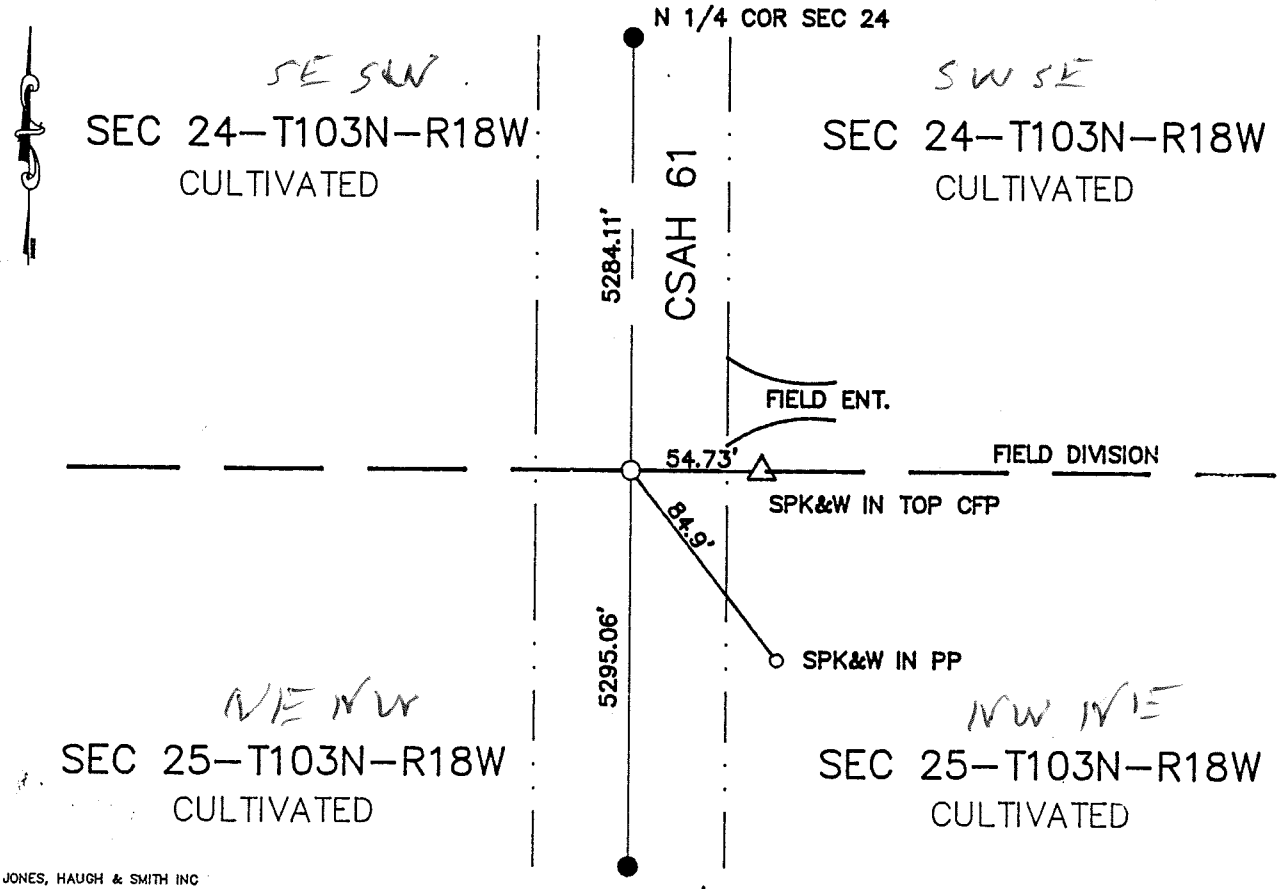

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 94 PAGE 68

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-27-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 28 day of Jan A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 450765

M.H.D. FORM NO. 2105

Book 94 Misc Page 68

S 1/4 Cor SEC 24-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1930 Mower Co. Book "A" shows a corner at this location.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a cast iron monument at the CL of CSAH No. 61 which is a perpetuation of the corner shown in Book "A".

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 26, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/09/1996 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/09/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

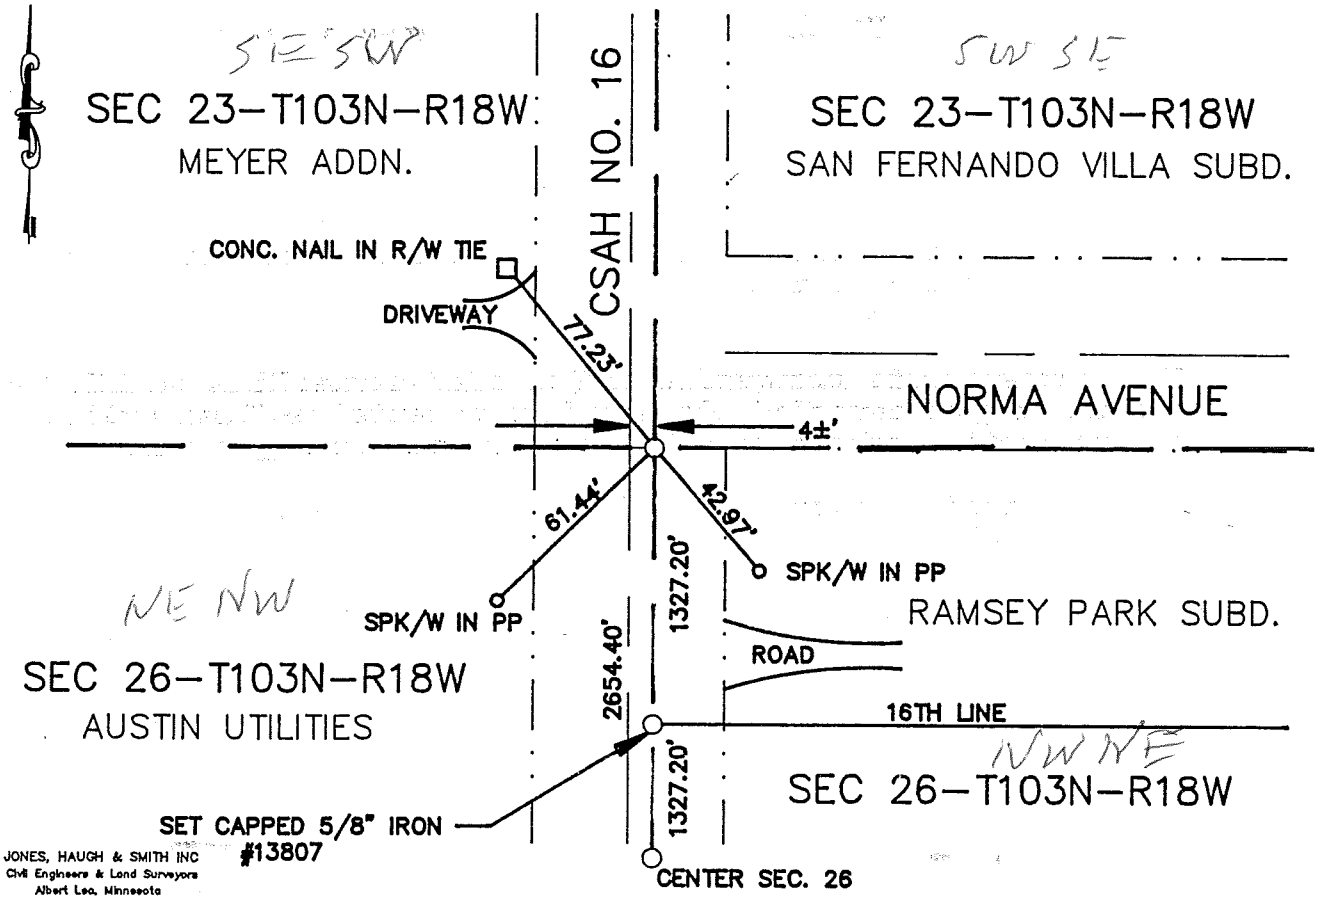

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-17-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 18 day of March A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 451747

M.H.D. FORM NO. 2105

BOOK 94 PAGE 376 Book 94 Misc Page 376

N 1/4 Cor SEC 26-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower Co. Hwy. Dept. records show a corner at this location. Plats of San Fernando Villa Subd., Meyer Addn., and Ramsey Park Addn. also show a corner at this location.

1964 Jones Haugh and Smith records state an iron pin was found.

1981 Mower County records show a 5/8" iron inplace.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a 5/8" iron 4+-' east of the CL of C.S.A.H. No. 16.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 26, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/23/1996 (DATE) found a 5/8" IRON CAPPED #13807

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/23/1996 (DATE) placed a –

SKETCH OF REFERENCE TIES

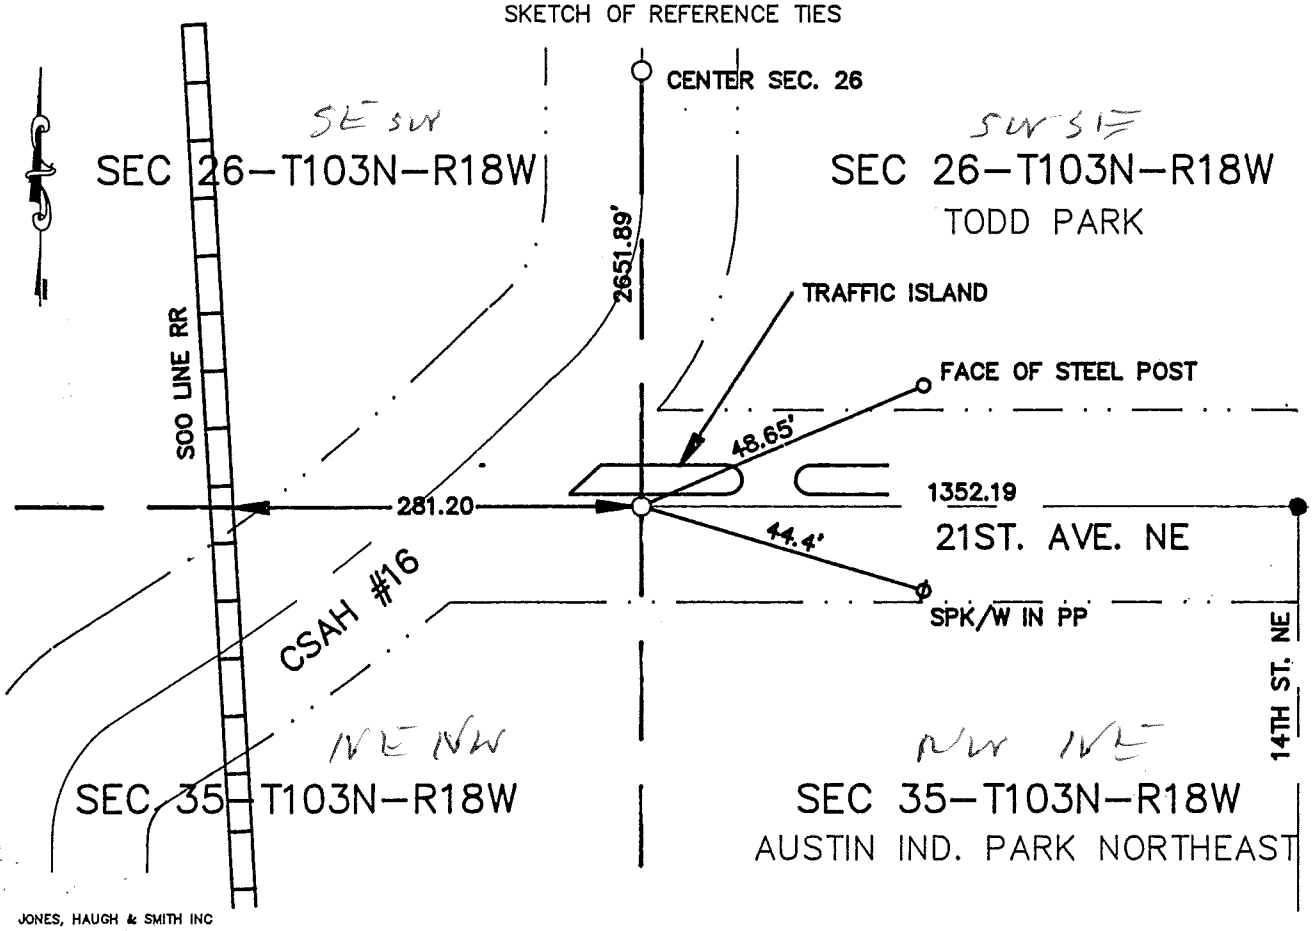

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 94 PAGE 72

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-27-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 28 day of Jan A.D., 19 97

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450767

M.H.D. FORM NO. 2105

Book 94 Misc Page 72

S 1/4 Cor SEC 26-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Highway Department records show a stone monument inplace.

1965 Jones Haugh and Smith crew located a field stone with a drill hole and took ties.

1981 Jones Haugh and Smith crew found a capped 5/8" iron located in curb and gutter in agreement with 1981 ties.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located corner south of curb at gutter surface. Found a capped 5/8" iron cap #13807.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER Corner of Section 26, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/09/1996 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/09/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

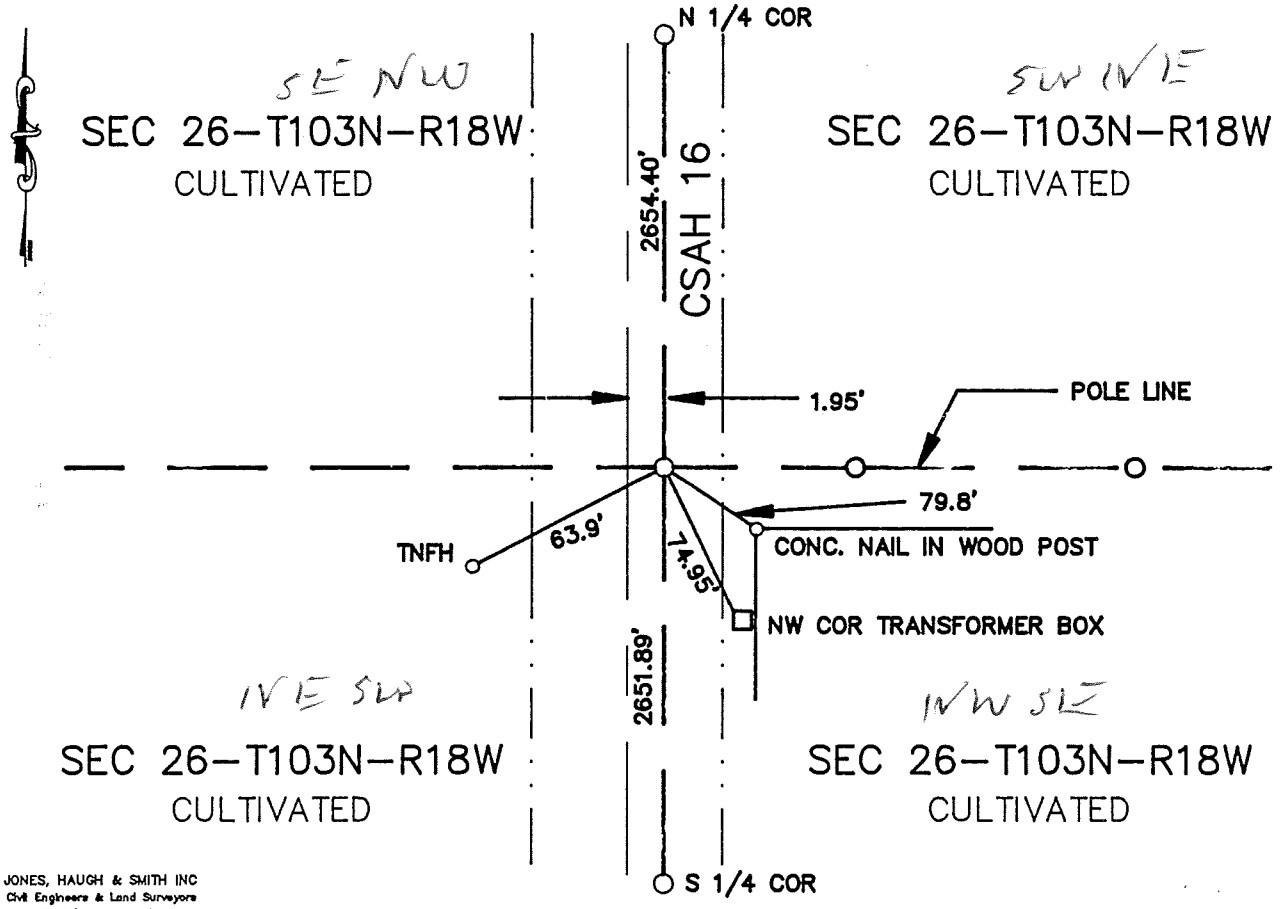

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 94 PAGE 70

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

1-29-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 28 day of Jan A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 450766

M.H.D. FORM NO. 2105

Book 94 Misc Page 70

Center SEC 26-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1964 Plats of Ramsey Subdivision and plat of outlots 37 to 31 show a monument at this location.

1964 Jones Haugh and Smith records state that an iron pin was found at this location. Ties were taken.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a 5/8" iron pin in agreement with the position shown in subdivision plats, and position used by surveyors Clausen, White, and Jordahl. Monument was accepted as best evidence of the original PLS corner and a cast iron monument was placed over it.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 29, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/10/1995 (DATE) found a FENCE INTERSECTION

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/10/1995 (DATE) placed a 5/8 IRON CAPPED RLS 13807

SKETCH OF REFERENCE TIES

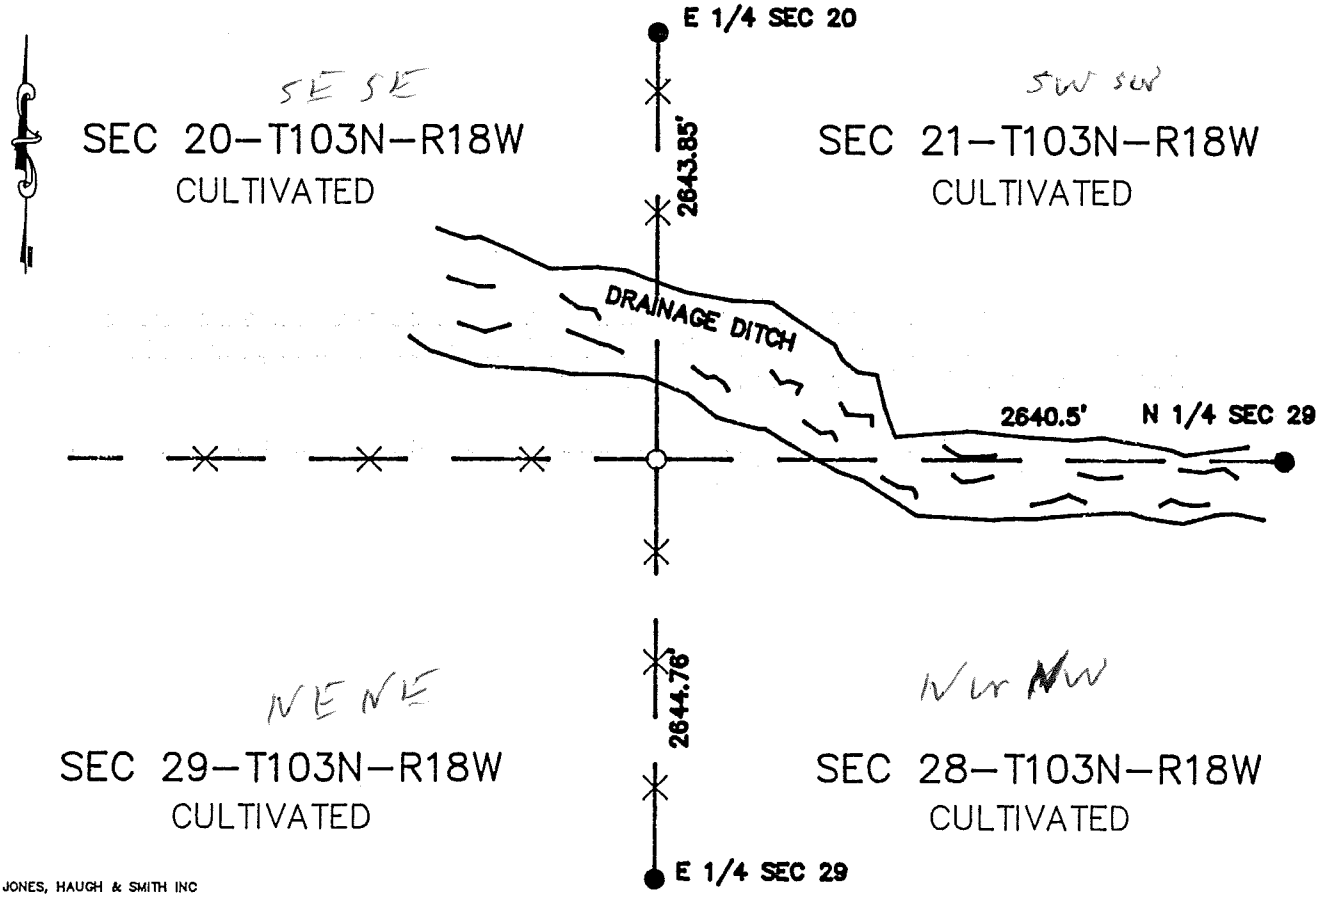

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-31-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 6 day of Jan A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 450230

M.H.D. FORM NO. 2105 BOOK 93 PAGE 498 BK 93 Misc Page 498

NE Cor SEC 29-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set a 5/8" iron at intersection of fence lines N-S-W and CL ditch to east.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 30, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/09/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/09/1995 (DATE) placed a 5/8 IRON CAPPED RLS 13807

SKETCH OF REFERENCE TIES

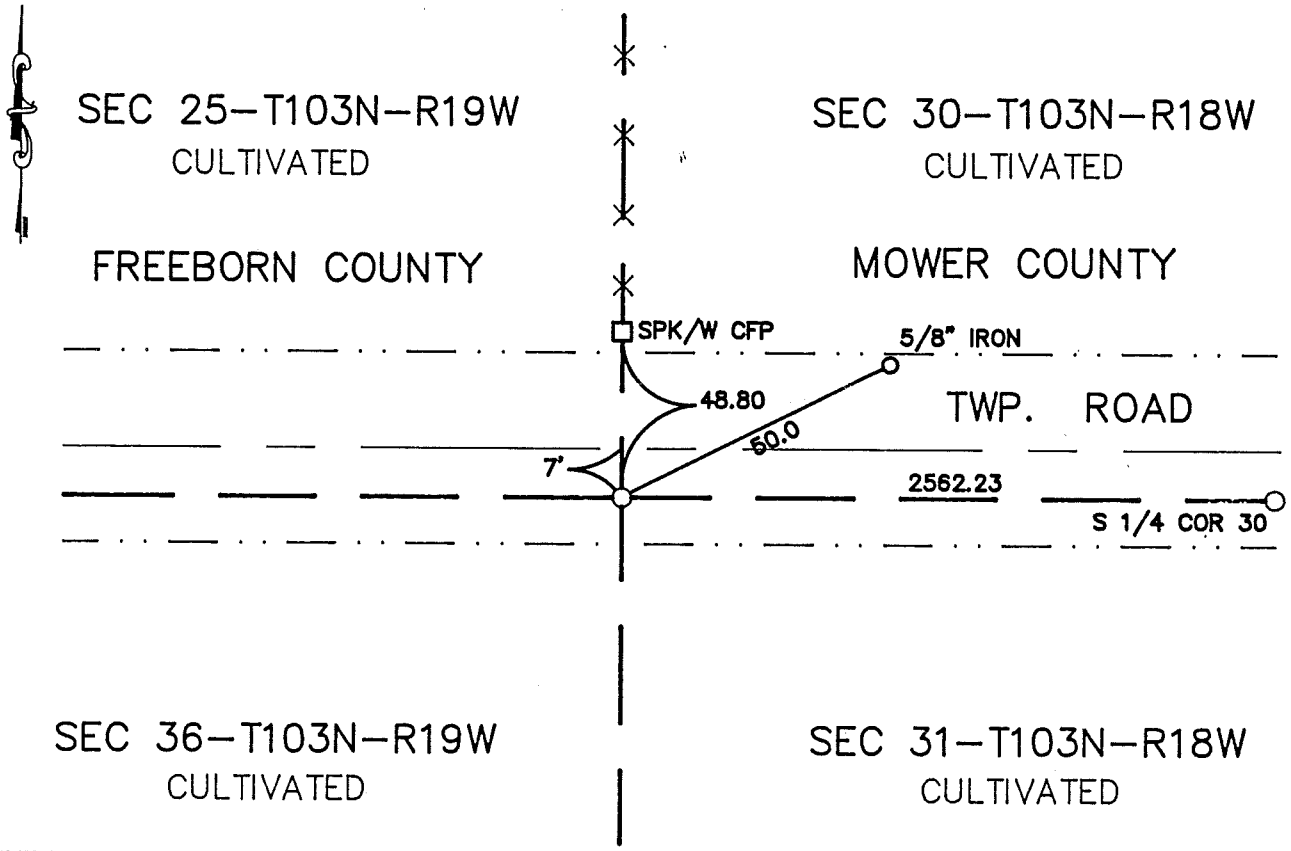

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 118

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-30-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 4 day of Feb A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 450940

M.H.D. FORM NO. 2105

Book 94 Misc Page 118

SW Cor SEC 30-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at location of corner as established from previous surveys. No evidence of the original PLS corner was found, and a 5/8 iron capped RLS 13807 was set and computed position using section breakdown information from previous surveys done in the four adjacent sections.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 30, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/10/1995 (DATE) placed a 5/8" IRON

SKETCH OF REFERENCE TIES

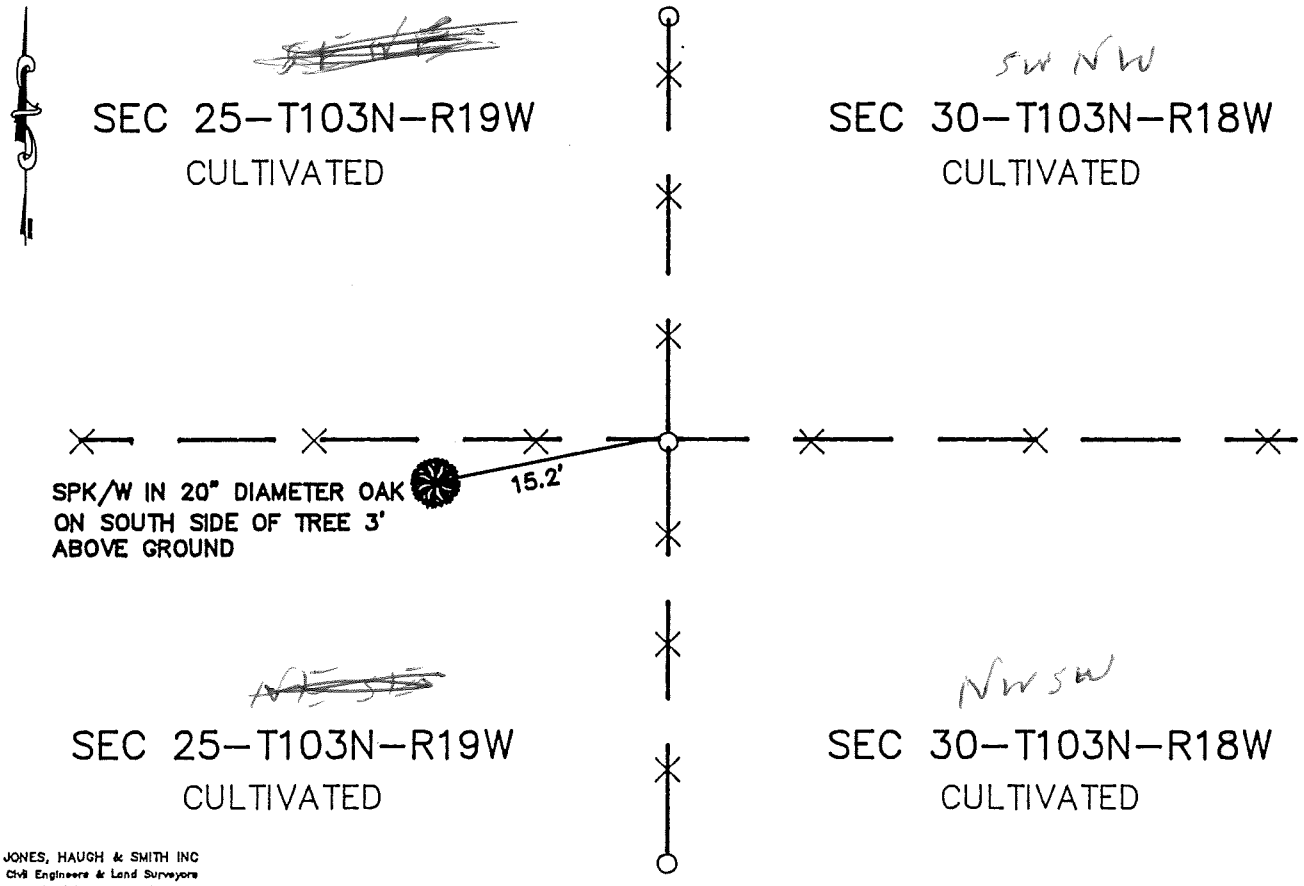

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 10-17-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 18 day of Oct A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 448651

BOOK 93 PAGE 66

M.H.D. FORM NO. 2105

Book 93 Misc Page 66

W 1/4 Cor SEC 30-103-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, placed a 5/8" iron at intersection of fence lines E-W and south, 5/8" iron is on south side of E-W fence line.

No evidence of corner fence post shot by DRR was found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 31, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/27/1995 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/27/1995 (DATE) placed a –

SKETCH OF REFERENCE TIES

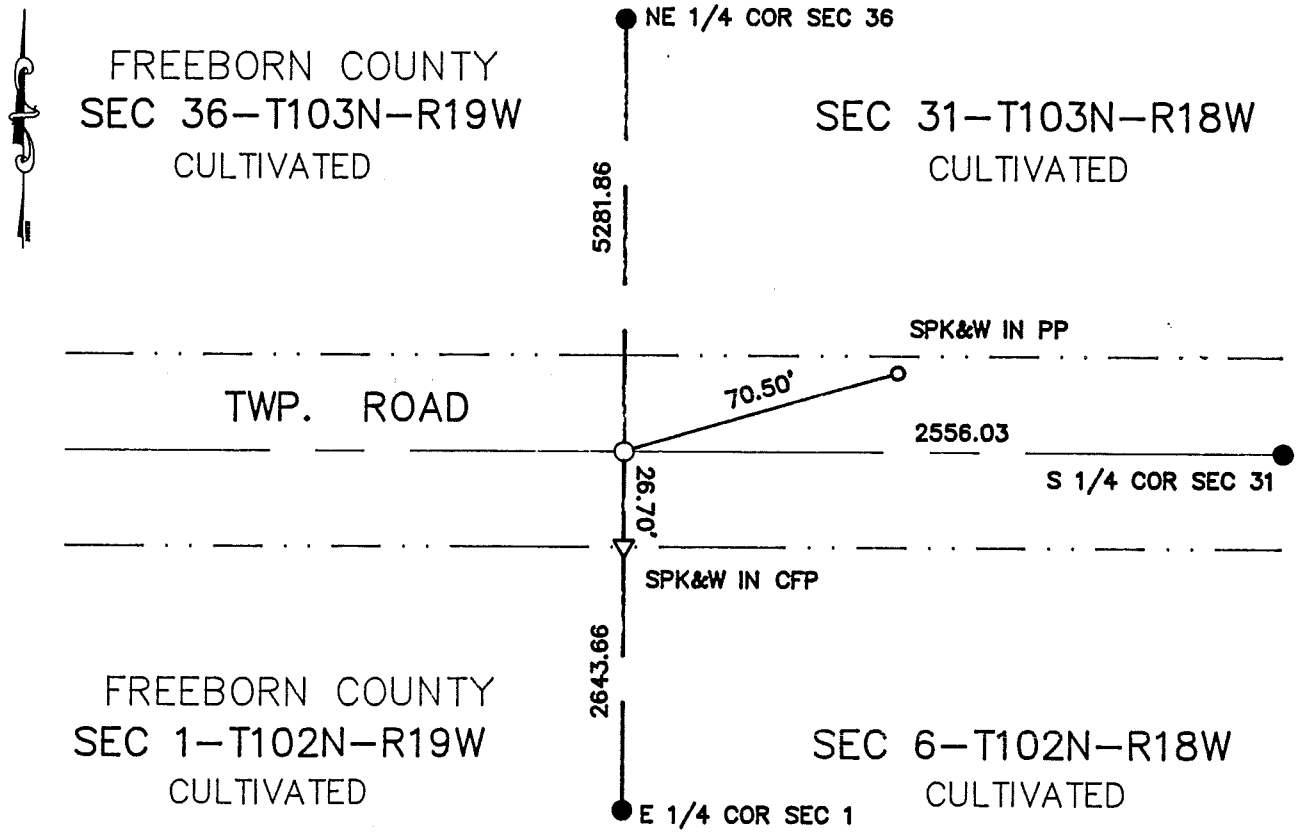

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 120

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-30-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 4 day of Feb A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450941

M.H.D. FORM NO. 2105

Book 94 Misc Page 120

SW Cor SEC 31-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located corner in agreement with Jones Haugh and Smith Freeborn County records.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 31, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/27/1995 (DATE) placed a 5/8" IRON

SKETCH OF REFERENCE TIES

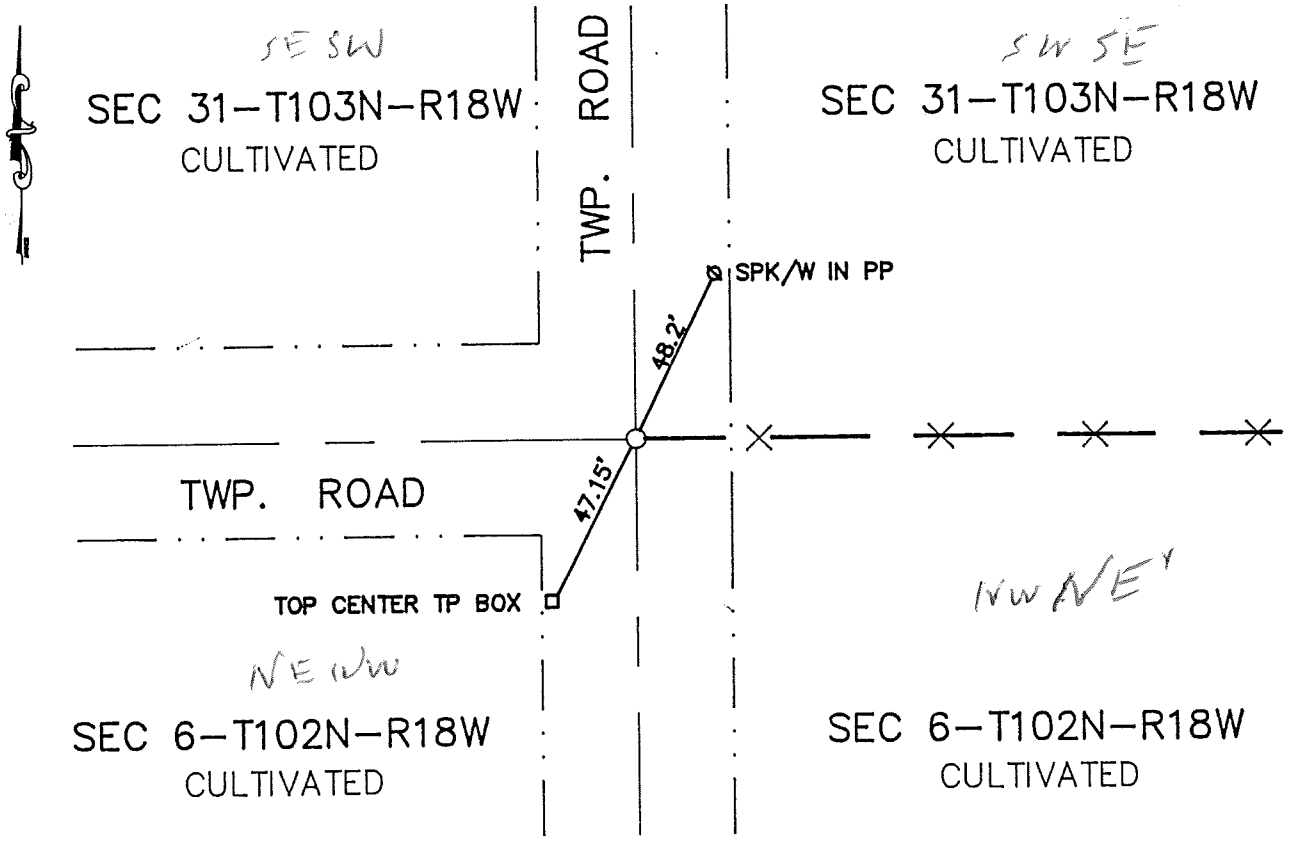

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-17-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 18 day of Oct A.D., 19 96

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 448651

BOOK 93 PAGE 68

M.H.D. FORM NO. 2105

Book 93 Misc Page 68

S 1/4 Cor SEC 31-103-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1978 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set this corner using 1/16 corner to north and N 1/4 corner and extended this line south.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe and found no evidence of PLS corner. Reset 5/8" iron in location established in 1978.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 31, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/27/1995 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/27/1995 (DATE) placed a 5/8" IRON CAPPED #13807

SKETCH OF REFERENCE TIES

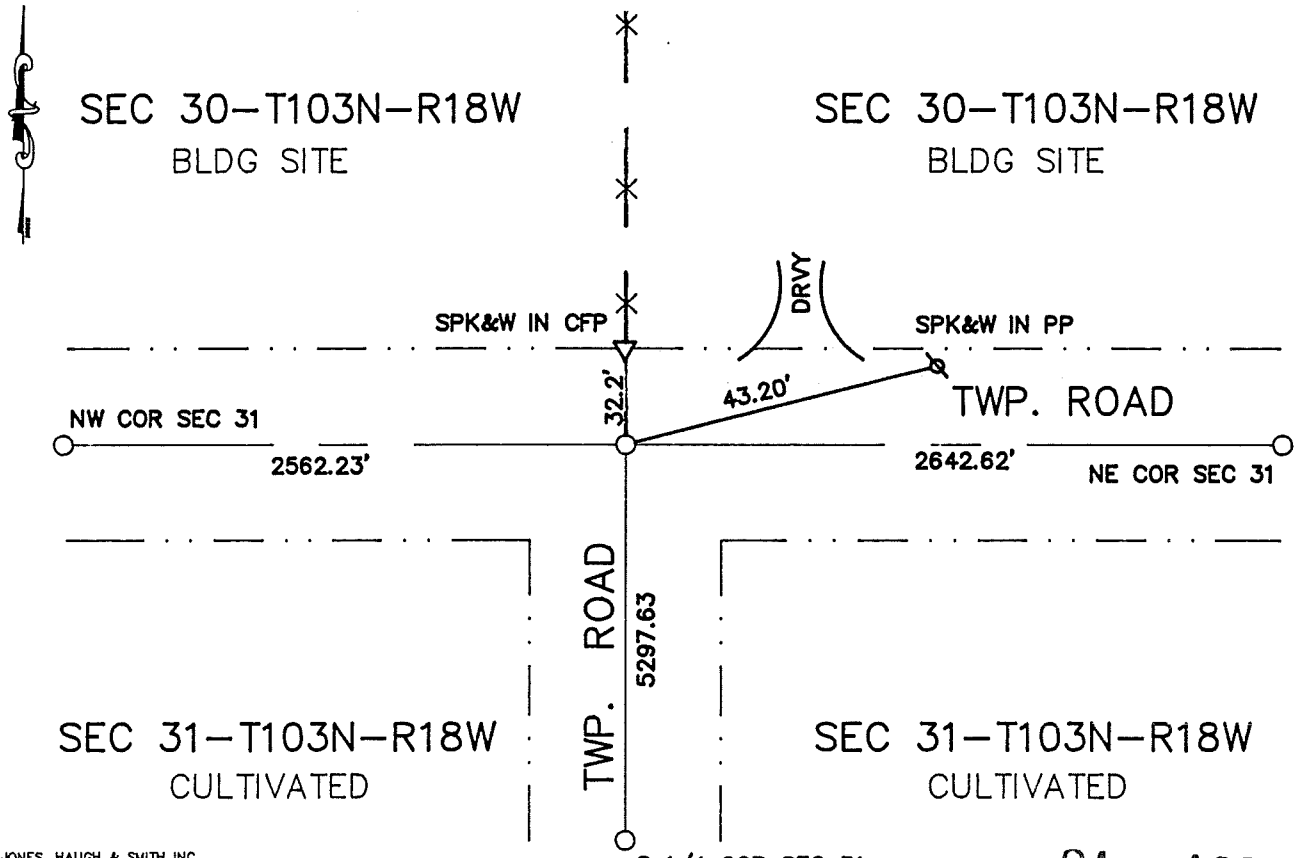

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 122

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-30-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 4 day of Feb A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M Davis, Deputy

DOCUMENT NO. 450942

M.H.D. FORM NO. 2105

Book 94 Misc Page 122

N 1/4 Cor SEC 31-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1981 Jones Haugh and Smith crew dug a 10'X6'X7.5' deep excavation found a monument in agreement with Mower County road plans and ties and JHS records.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a 5/8" iron in agreement with 1981 records.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 31, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/27/1995 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/27/1995 (DATE) placed a 5/8" IRON CAPPED #13807

SKETCH OF REFERENCE TIES

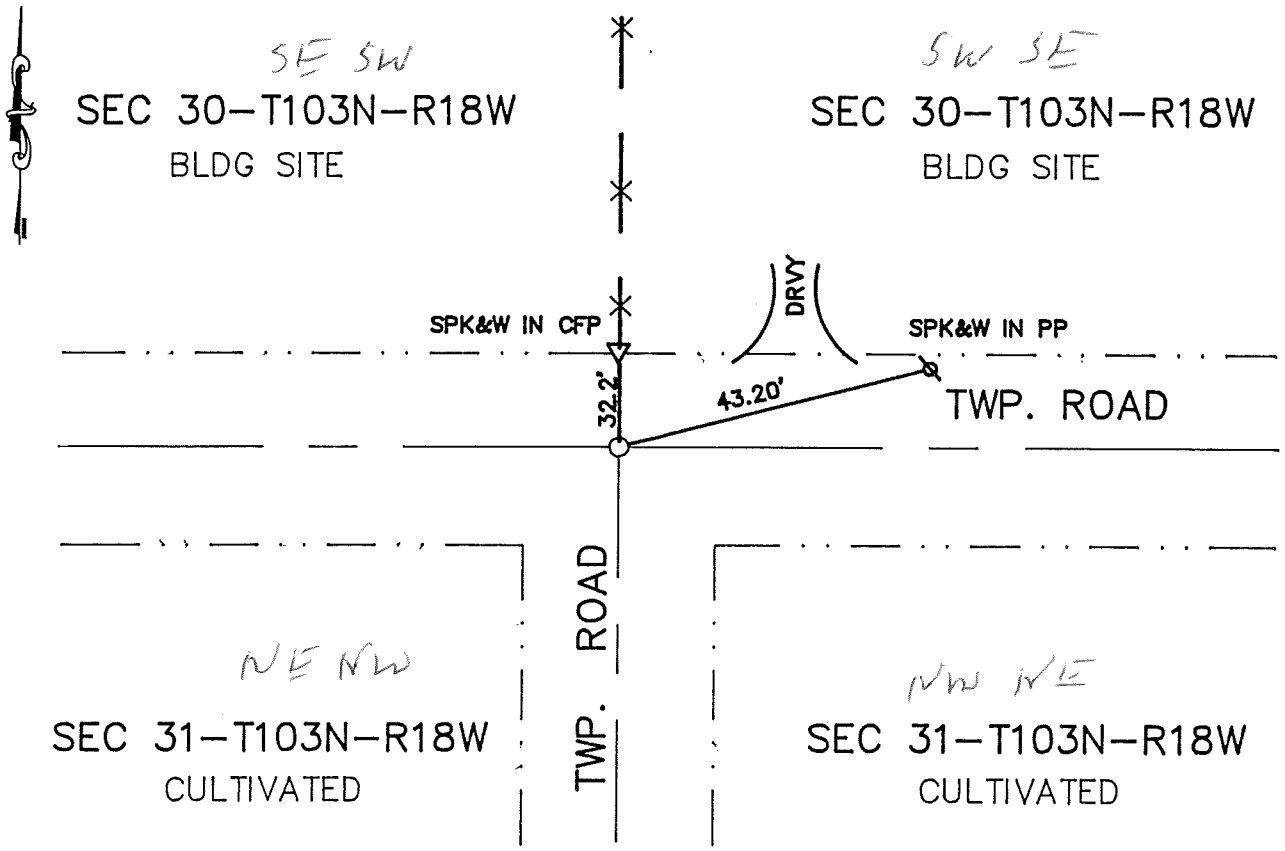

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-17-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 18 day of Oct A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 448852

BOOK 93 PAGE 70

M.H.D. FORM NO. 2105

Book 93 Misc Page 70

N 1/4 Cor SEC 31-103-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1981 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, excavated with backhoe and found monument in agreement with Mower County records and ties and Jones Haugh and Smith records.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found monument in agreement with 1981 records and set 5/8" capped RLS 13807 iron.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 32, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/27/1995 (DATE) found a MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/27/195 (DATE) placed a –

SKETCH OF REFERENCE TIES

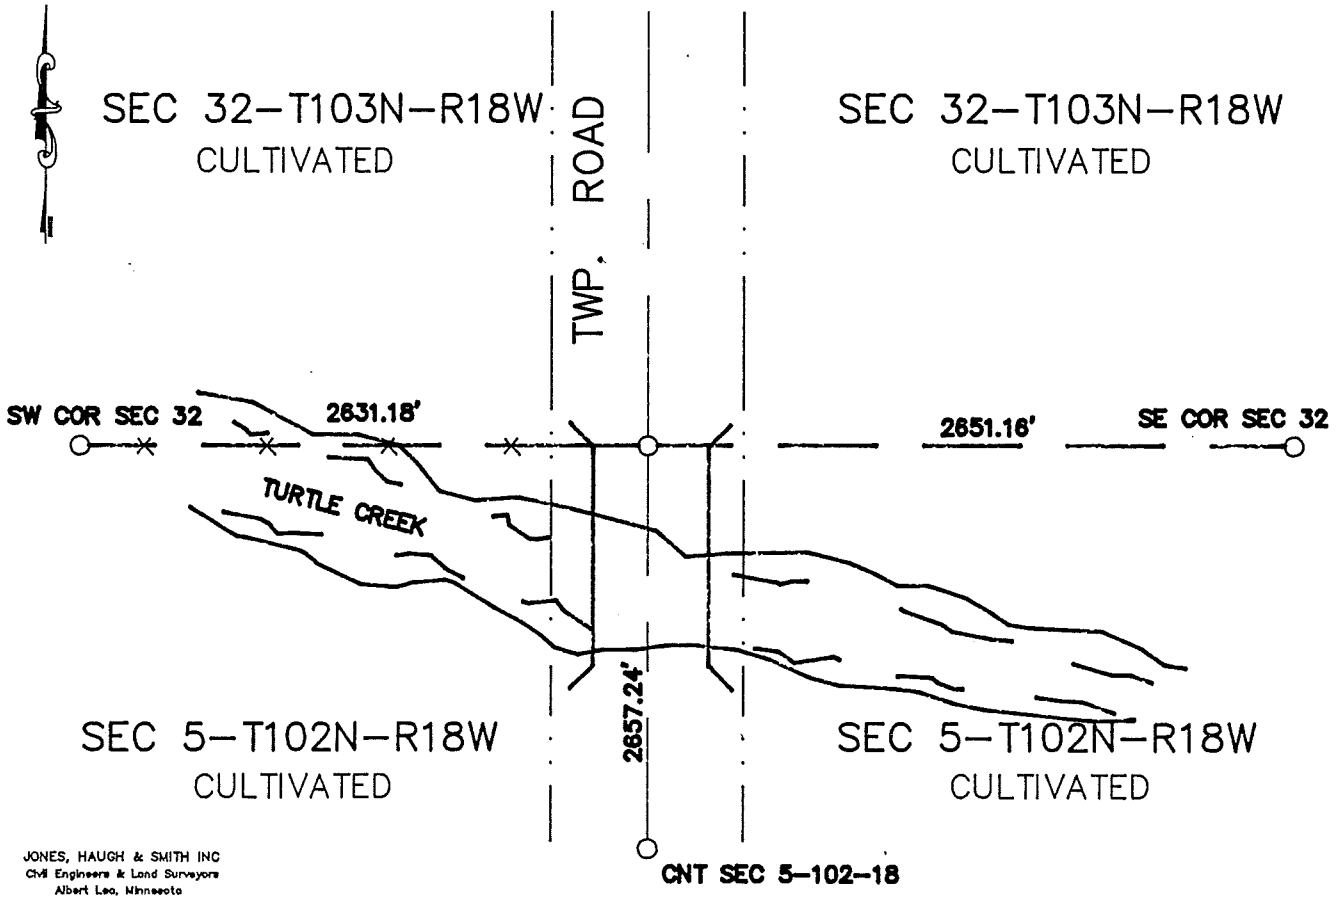

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 94 PAGE 132

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-30-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 4 day of Feb A.D., 1997

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 450947

M.H.D. FORM NO. 2105

Book 94 Misc Page 132

S 1/4 Cor SEC 32-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set this corner by extending the line between the center of section 5-102-18 and the S 1/4 corner of section 5-102-18 to intersect a straight line between the NW corner and the NE corner of section 5. This location fits existing surveys in the N 1/2 of section 5 and plats of OLS in the S 1/2 of section 32. Set a cast iron monument in the north end of bridge deck.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 32, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 01/04/1995 (DATE) found a OAK TREE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 01/04/1995 (DATE) placed a –

SKETCH OF REFERENCE TIES

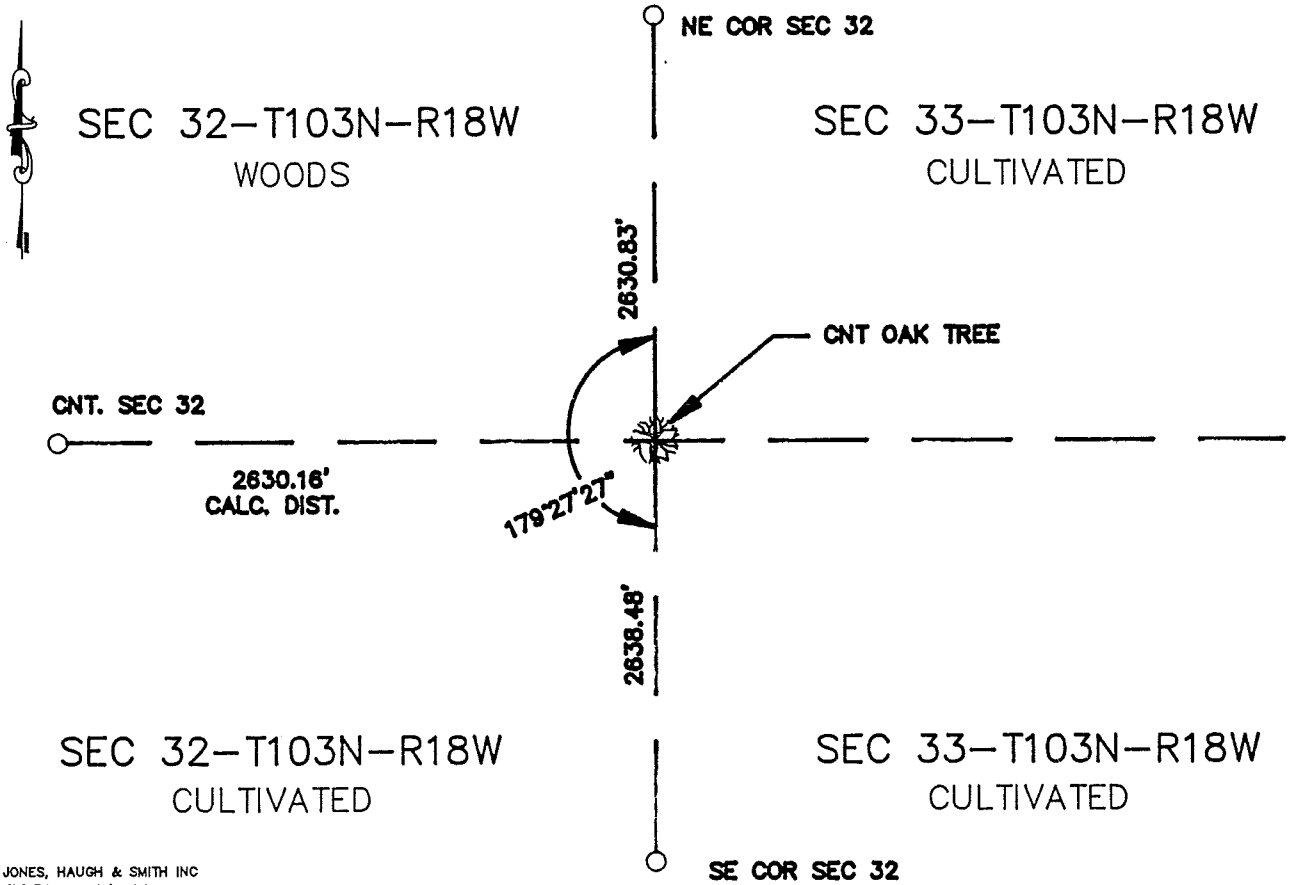

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 94 PAGE 130

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-30-97 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 4 day of Feb A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450946

M.H.D. FORM NO. 2105

Book 94 Misc Page 130

E 1/4 Cor SEC 32-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located corner on NE side of 36" oak tree. Location is in agreement with C.E. Milner's records and JHS records. Used Milner's angle and distance from the SE corner of the SE 1/4 for this position.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 32, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/07/1988 (DATE) found a 5/8" ø IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/07/1988 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

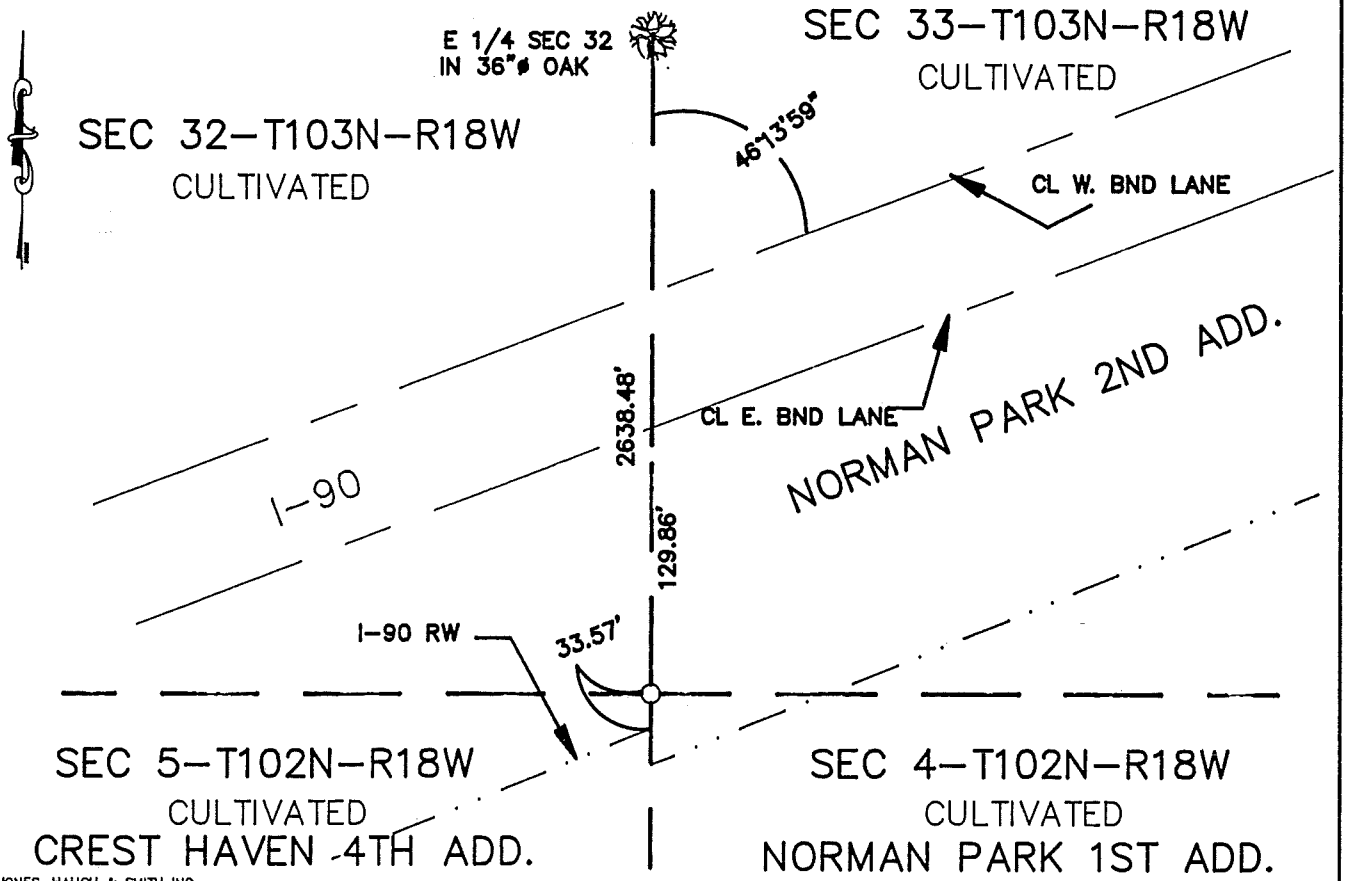

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 94 PAGE 126

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-30-97 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 4 day of Feb A.D., 1997

COUNTY RECORDER Charles Evgen

By Susan M Davis, Deputy

DOCUMENT NO. 450944

M.H.D. FORM NO. 2105

Book 94 Misc Page 126

SE Cor SEC 32-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1950+- Plat of Norman Park 1st and Norman Park 2nd addition by surveyor Milner show this corner.

1960+- TH #90 R/W map show a location for this corner.

1967 Harold Haugh reset iron monument using Milner's information from the existing subdivision plats and MNDOT TH #90 R/W map.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located corner and set a cast iron head on 5/8" iron monument found.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 32, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On — (DATE) found a FIELD STONE 2' BELOW ROAD SURFACE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/27/1995 (DATE) placed a 5/8" CAPPED IRON OVER STONE

SKETCH OF REFERENCE TIES

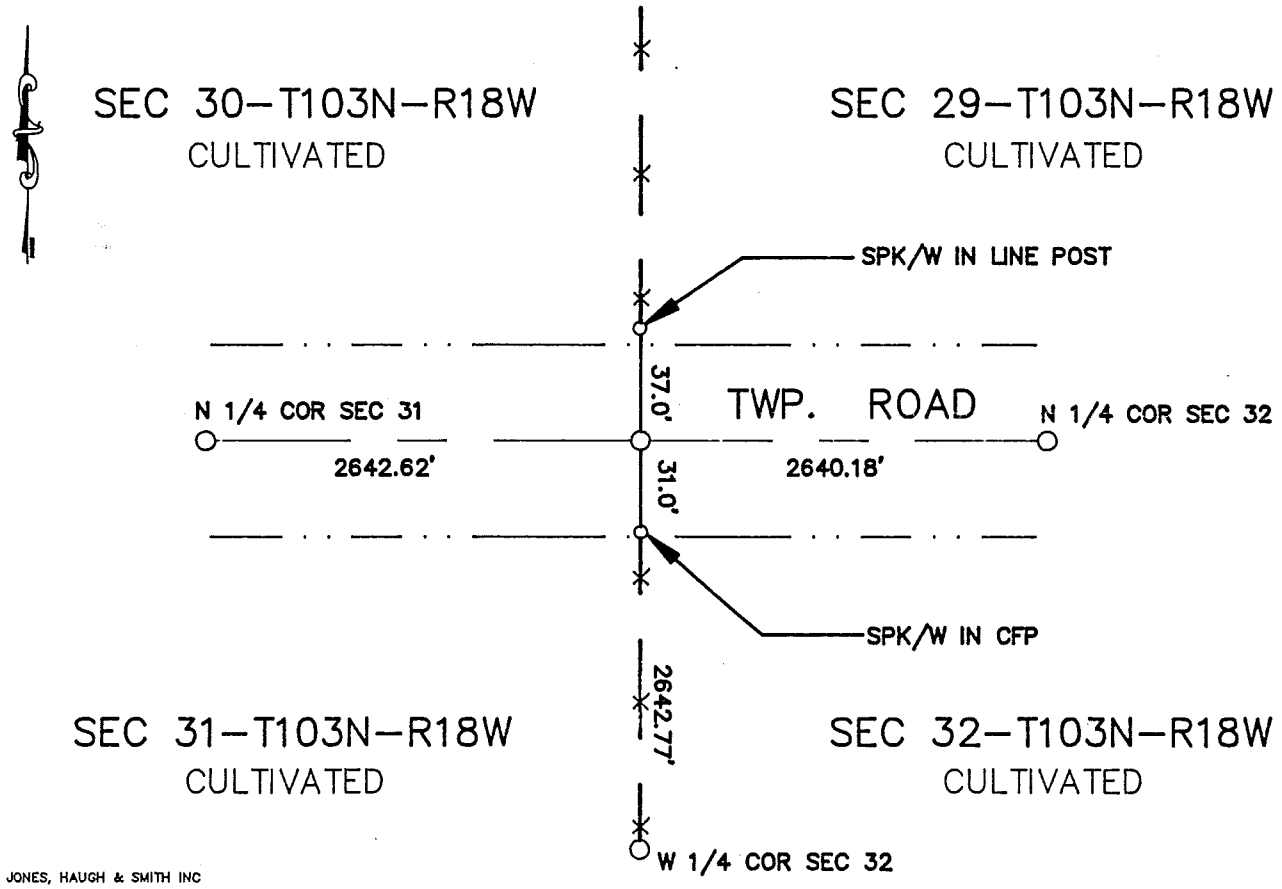

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 94 PAGE 128

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 1-30-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 4 day of Feb A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450945

M.H.D. FORM NO. 2105

Book 94 Misc Page 128

NW Cor SEC 32-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Highway Department book A shows a corner at this location.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 32, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/27/1995 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/27/1995 (DATE) placed a _____

SKETCH OF REFERENCE TIES

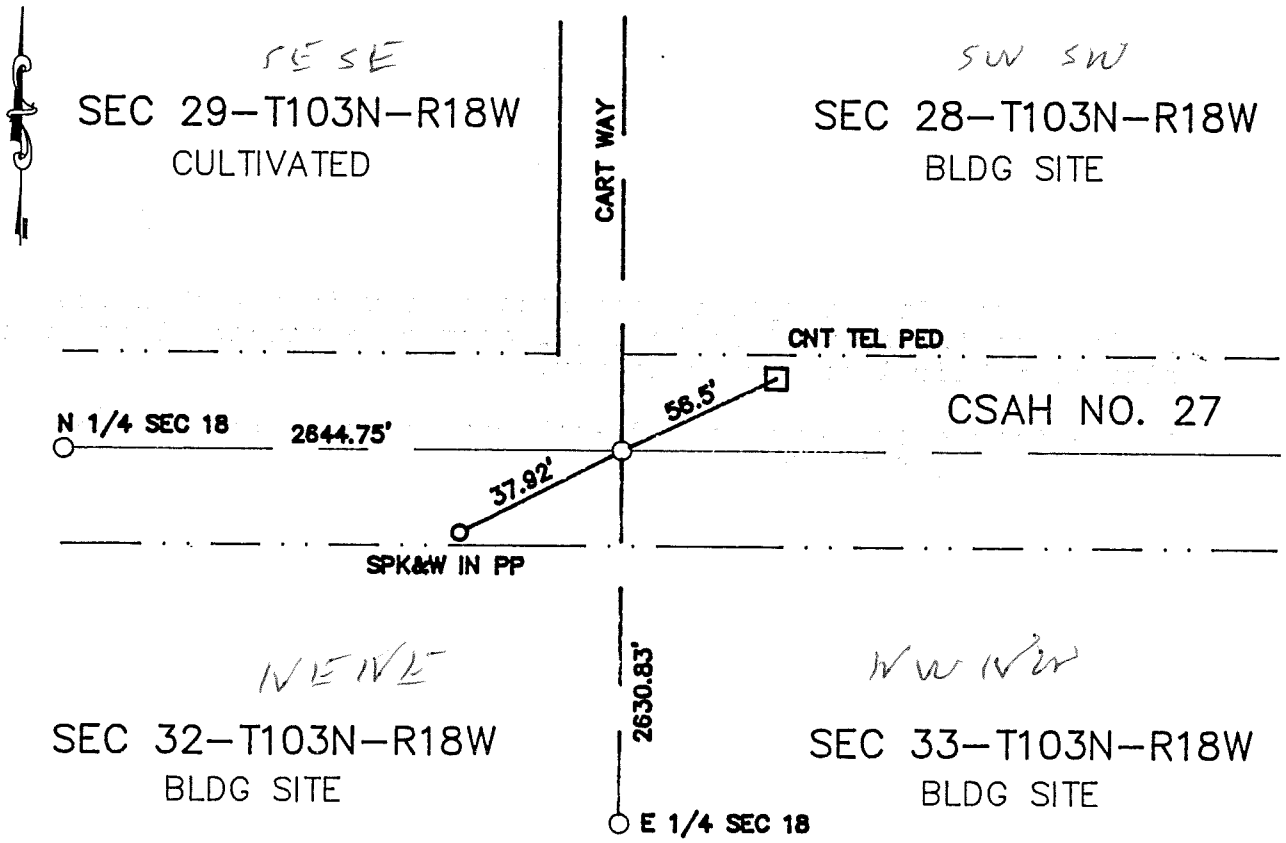

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-31-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 6 day of Jan A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450281

M.H.D. FORM NO. 2105 BOOK 93 PAGE 500

BK 93 Misc Page 500

NE Cor SEC 32-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1975 Jones Haugh and Smith crew located monument in agreement with Mower County Highway Department plans and ties.

1983 Jones Haugh and Smith crew located monument in agreement with 1975 record.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a 5/8" iron in agreement with 1975 record.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 32, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/27/1995 (DATE) found a CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/27/1995 (DATE) placed a 5/8" IRON

SKETCH OF REFERENCE TIES

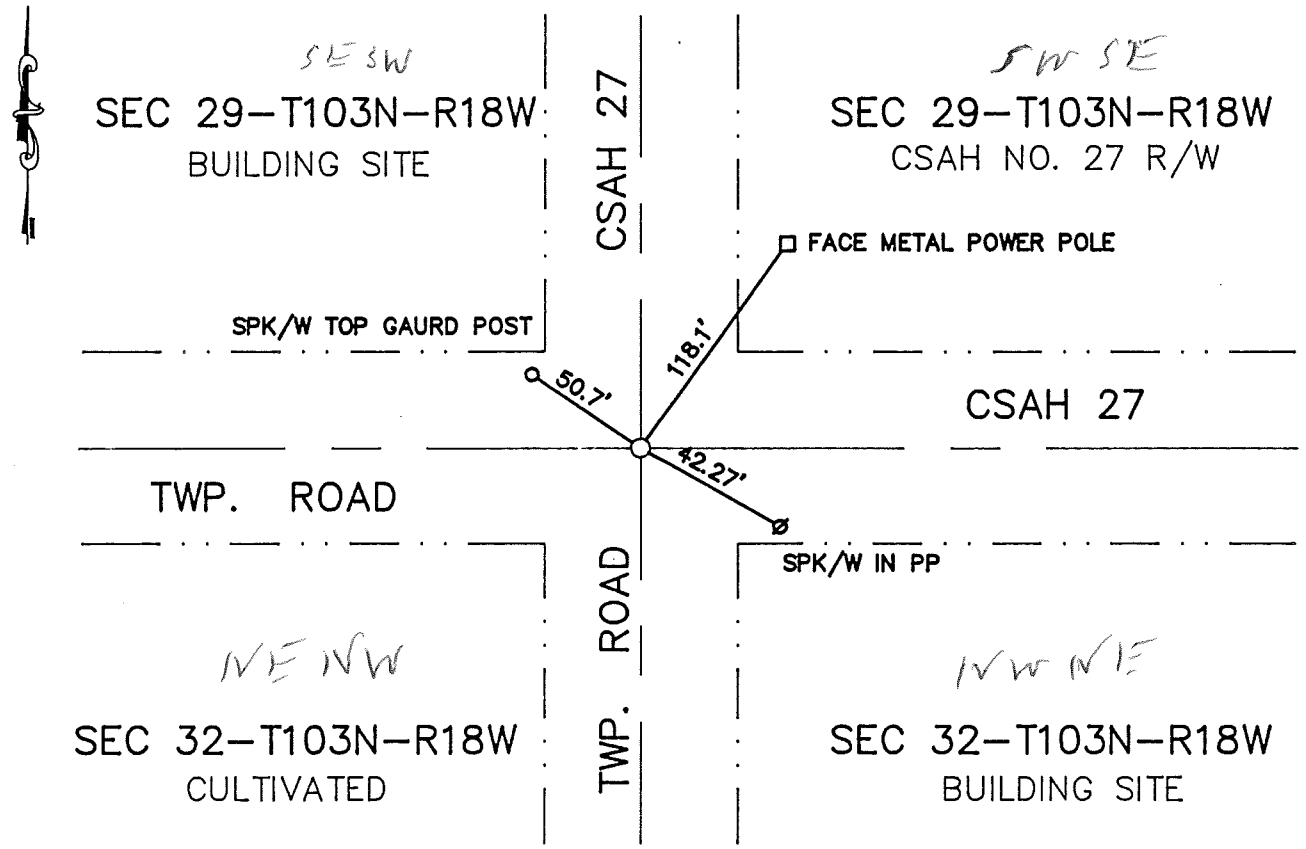

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-17-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 18 day of Oct A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 418653

M.H.D. FORM NO. 2105 BOOK 93 PAGE 72

Book 93 Misc Page 72

N 1/4 Cor SEC 32-103-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Hwy plans show a monument at this location.

1983 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found concrete monument in accordance with Mower County ties and road plans.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set 5/8" iron capped 13807, over concrete monument. In agreement with 1981 records.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 32, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 01/04/1971 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 01/04/1995 (DATE) placed a FOUND 5/8"ø IRON IN ACCEPTANCE WITH 1971 RECORD

SKETCH OF REFERENCE TIES

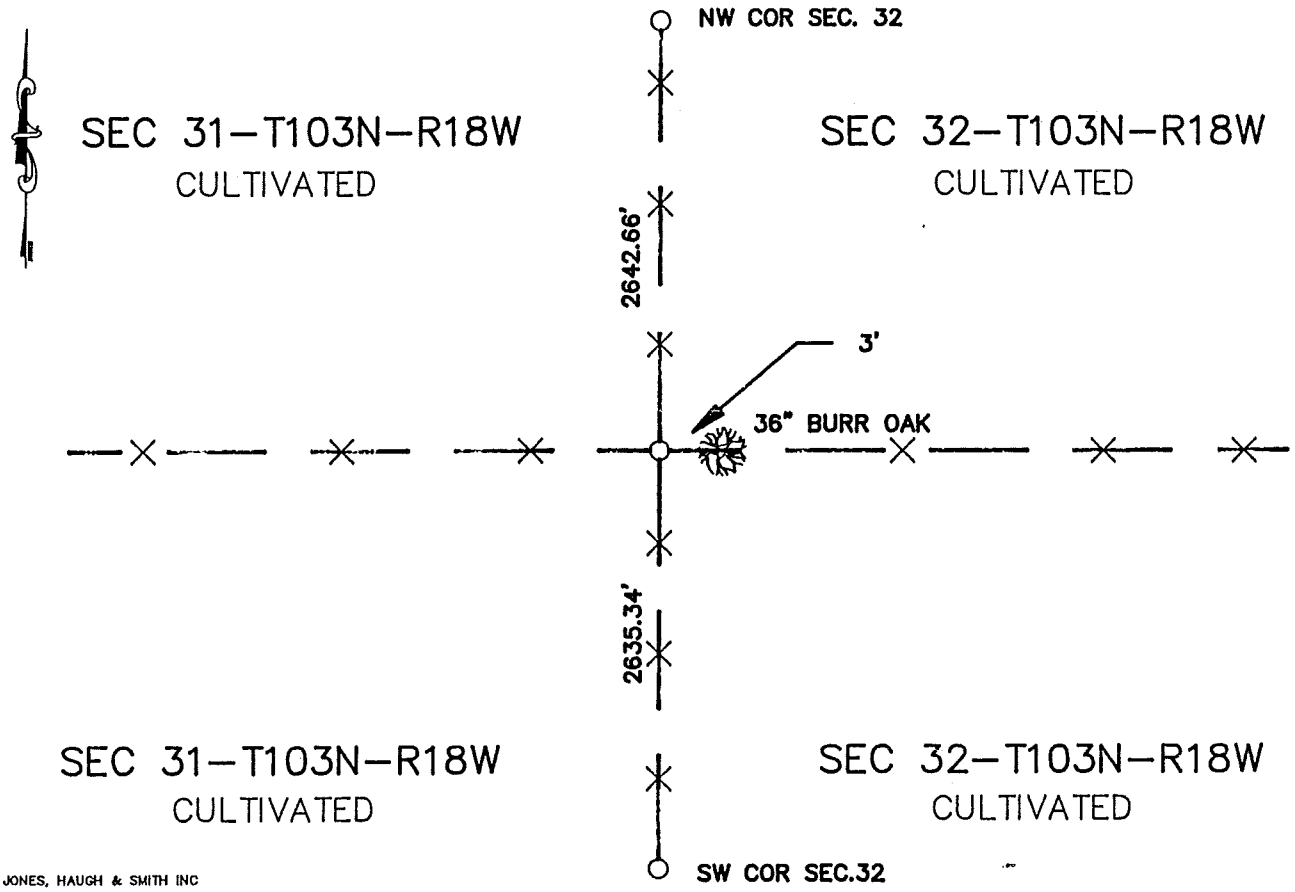

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 94 PAGE 124

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-30-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 4 day of Feb A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450943

M.H.D. FORM NO. 2105

Book 94 Misc Page 124

W 1/4 Cor SEC 32-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1971 Jones Haugh and Smith records show a monument at this location 3' west of 36" burr oak tree.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a 5/8" iron 3' west of a dead 36" burr oak in agreement with 1971 record.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

TIE BOOK
D112 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 34, Township 103N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☑ On 11-5-82 (DATE) found a concrete corner fence post footing & POINTED FLD STONE 1' SO. OF CNT OF RING.

☐ left monument as found, ☐ lowered monument, ☑ removed monument (explain)

☑ On 11-5-82 (DATE) placed a 5/8"ϕ x 24" iron in center of concrete ring 1' NO. OF POINTED FLD STONE

SKETCH OF REFERENCE TIES

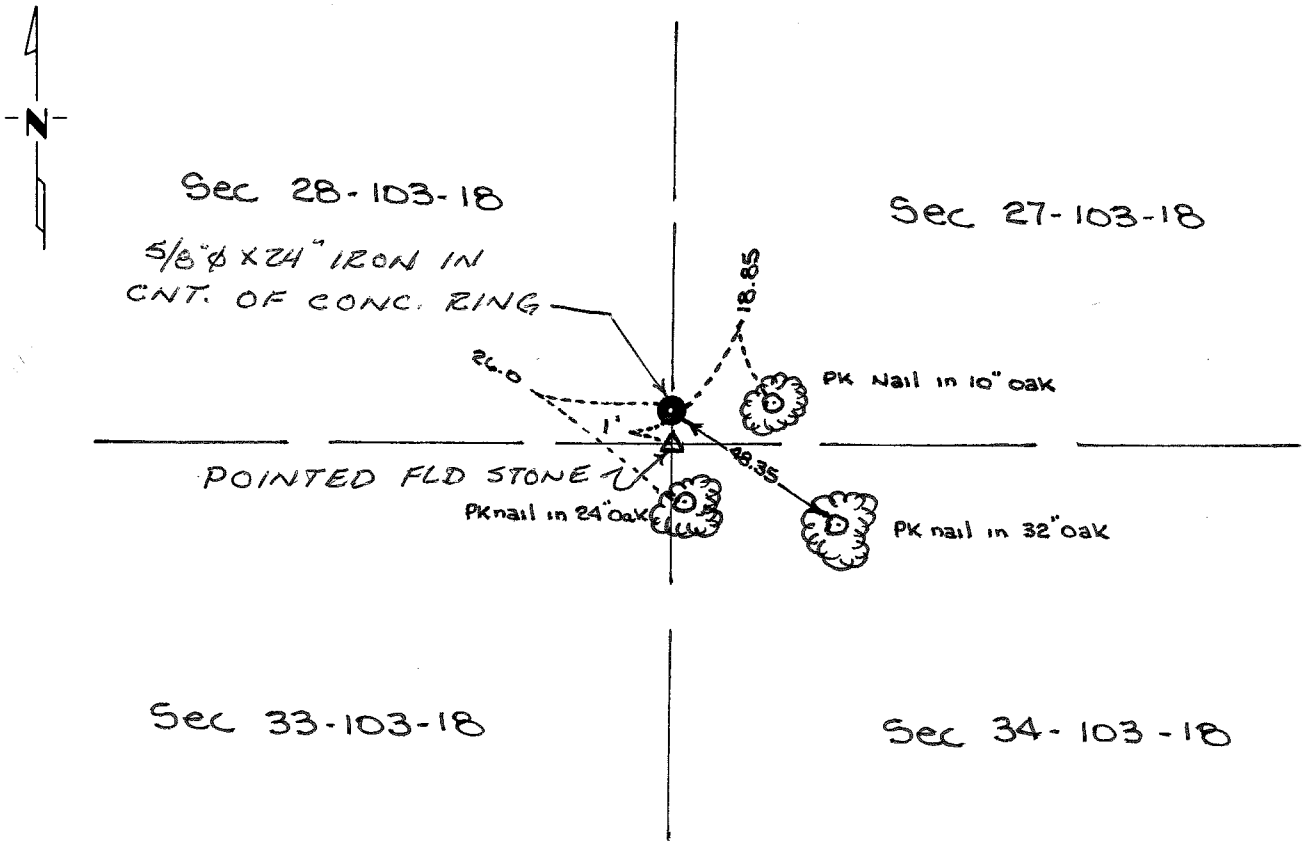

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John H. [illegible] 7-9-84
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 34-103-18

1854 Wm I. Anderson, Deputy Surveyor set wood post during public land survey.

1930 Records from Mower County tie book indicate a stone inplace at fence corner 1319.3 feet north of 1/16 corner.

1946 County grading notes show a pointed hard head 1.0 feet south of wood CFP flush with ground.

1953 E.L. Pehrson, Minnesota Highway Department, describes monument at corner as a pointed field stone flush with the surface 1.0 feet more or less. South CFP set in concrete in such a way that this stone is partly enclosed by the concrete ring.

1982 Jones, Haugh & Smith crew dug at corner location and found concrete ring and pointed field stone as described by E.L. Pehrson in 1953; and placed a 5/8"ø iron in the center of concrete ring 1.0 feet north of point of field stone.

The location and description of the pointed field stone is in agreement with the record and has been used by many local land surveyors; and is accepted as a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith.

TIE BOOK
P 112 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 34, Township 103N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☑ On 11-5-82 (DATE) found a Iron frost Pin

☐ left monument as found, ☑ lowered monument, ☐ removed monument (explain)

☐ On 11-5-82 (DATE) placed a CAST IRON MON. OVER FROST PIN

SKETCH OF REFERENCE TIES

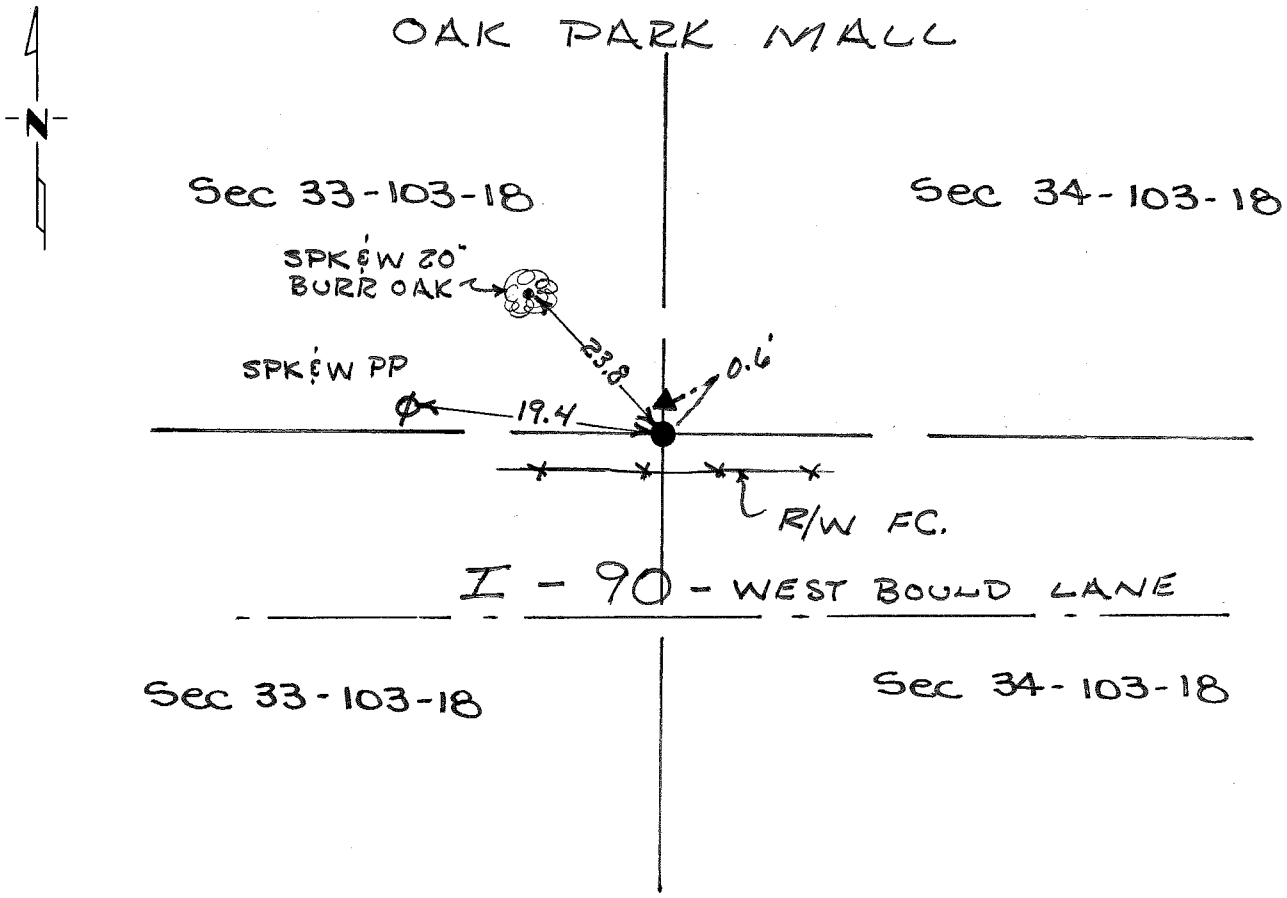

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 11-5-82 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

$W\frac{1}{4}$ corner Sec 34-103-18

1854 Wm I. Anderson, Deputy Surveyor set wood post during public land survey.

1982 Jones, Haugh & Smith Inc crew dug and found an iron frost pin at the location on the $W\frac{1}{4}$ corner. The monument found is in agreement with the following:

1. Monuments found during survey and shown on the Plat of Goebel's Addition to Austin, surveyed in 1922 by A.B. Overland, Austin City Engineer.
2. Monuments found during this survey and shown on the Plat of Nelson's 1st and 2nd Addition, surveyed in 1935 by A.C. White, County Surveyor and County Engineer.
3. Plat of Embassy Addition, surveyed in 1952 by L.H. Edison a Registered Land Surveyor.
4. The location as found by E.L. Pehrson, Project Engineer in his location of the centerline of S.P. 5011 (Trunk Highway No. 25) in 1953.
5. Testimony by residents, Otto Baudler, Richard Baudler and Bill Nelson recorded in the survey report filled by the project engineer, E.L. Pehrson.
6. Survey done in 1953 by C.E. Milner, Registered Land Surveyor, during condemnation proceedings, Mower County Clerk of District Court File No. 21958.

The corner has been accepted as a perpetuation of the original public land corner and used by many local land surveyors in Section 33-103-18 and Section 34-103-18 as evidenced by existing occupation, survey monuments, and recorded plats.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 34, Township 103, Range 18, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-10-89 (DATE) placed a 5/8"Ø iron capped (13807) used a computed position from past records

SKETCH OF REFERENCE TIES

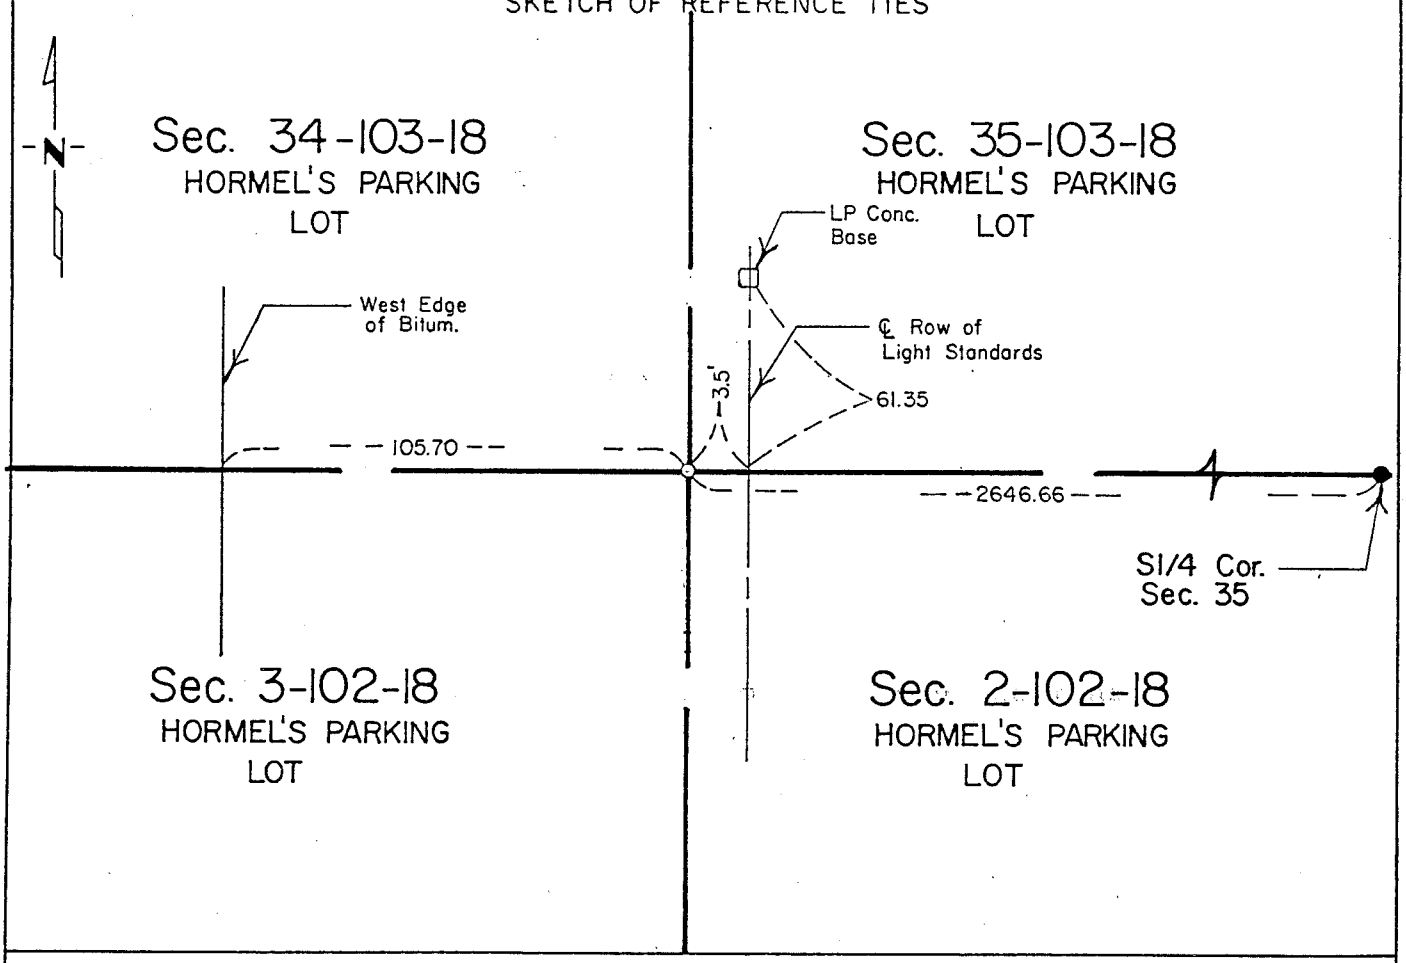

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 10-16-91 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec. 34-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a post and the following ties were taken:

10" Burr Oak	N 72° W	95 links (62.70 ft)
16" Burr Oak	S 87° E	425 links (280.50 ft)

The following were contacted for section corner information:
Mower County Engg Dept Mower County Recorders Office

1950 Minnesota Dept of Transportation uncovered corner and took ties during a survey for I-90.

1965 Jones & Haugh crew uncovered iron pin during survey on North Main Street and the following ties were taken:
NW 52.35' nail & disk in PP
SW 84.45' nail & disk in PP
ESE 261.5' to face rail post south side bridge

1979 The construction of a new Hormel Plant destroyed the original public land survey corner and any perpetuation thereof.

1988 During a survey of the railroad depot grounds for Austin HRA, Jones, Haugh & Smith crew established the position of the section corner using past private records and by monumentation within platted additions surrounding section corner. The location of corner is now located in a new parking lot of the Geo. A. Hormel Co.

1988 Jones, Haugh & Smith Inc crew uncovered corner during a survey of the County Highway Department building.

1989 Jones, Haugh & Smith Inc crew uncovered corner during a survey for new County Recycling Center.

Book 'A' in the Mower County Engineer's Office shows a 2"x2" hub was placed over an iron found inplace and the following ties were taken:
1.95' W concrete foundation of Ice House
50.0' South of NW cor of Ice House

The following Plats support evidence of a perpetuation of the original public land survey corner until the destruction of the monument in 1979 by the removal of the Hormel Co. building:

1864 Original Village of Austin
1867 Railroad Addition
1892 Hayes Addition
1896 Outlots in NW 1/4 Section 2-102-18
1918 M.N. Clausen's Outlots in SW 1/4 Section 3-102-18
1939 Herman Baudler Addition
Morgan's Addition
1963 Downtown Plaza Shopping Center

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CTR Corner of Section 36, Township 103N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-3-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

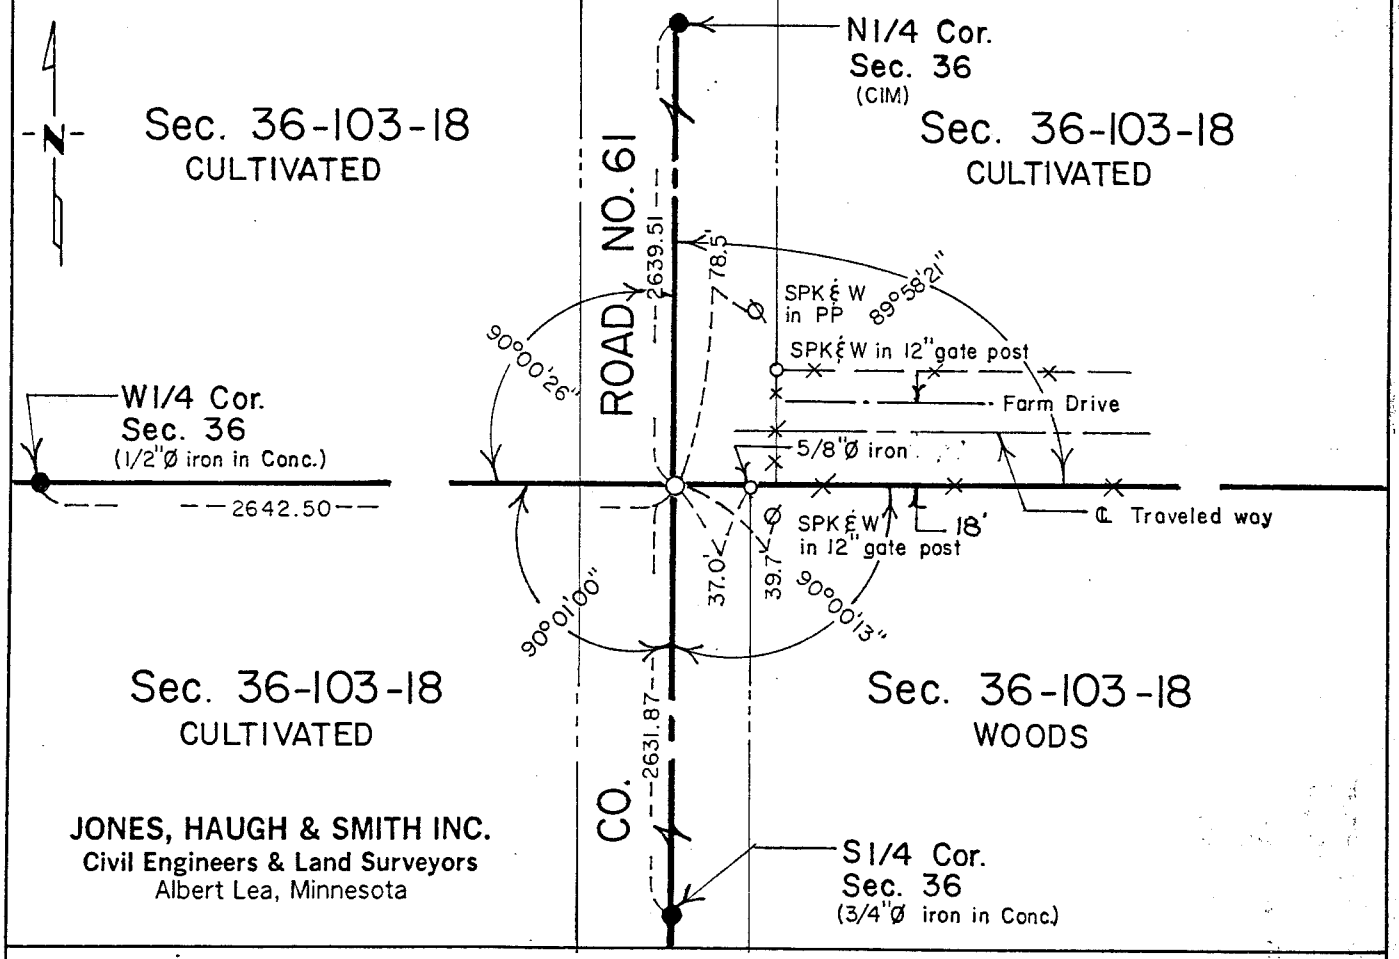

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-8-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

Center Section 36-103-18

1954 Mower County Highway Department road and grading plan shows a 1/2" diameter iron at this location.

Records from Jones, Haugh & Smith Inc. from 1960 more or less to 1983 show a 1/2" iron monument was in place and used by area surveyors for the past 30 years for surveys and plats in Section 36. The monument in place was found to be 0.55' W & 0.46' S of the intersection of 1/4 lines.

1991 Jones, Haugh & Smith Inc. crew under the direction of John H. Schulte discovered the corner was destroyed during 1988 grading project and no attempt was made to perpetuate the corner. Using private records measurements and ties of Jones, Haugh & Smith Inc. we reset a cast iron monument at same location as it was previously monumented for the past 30 years.

The monument fits occupation and road centerlines plats and surveys, and is accepted as a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 36, Township 103N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-3-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

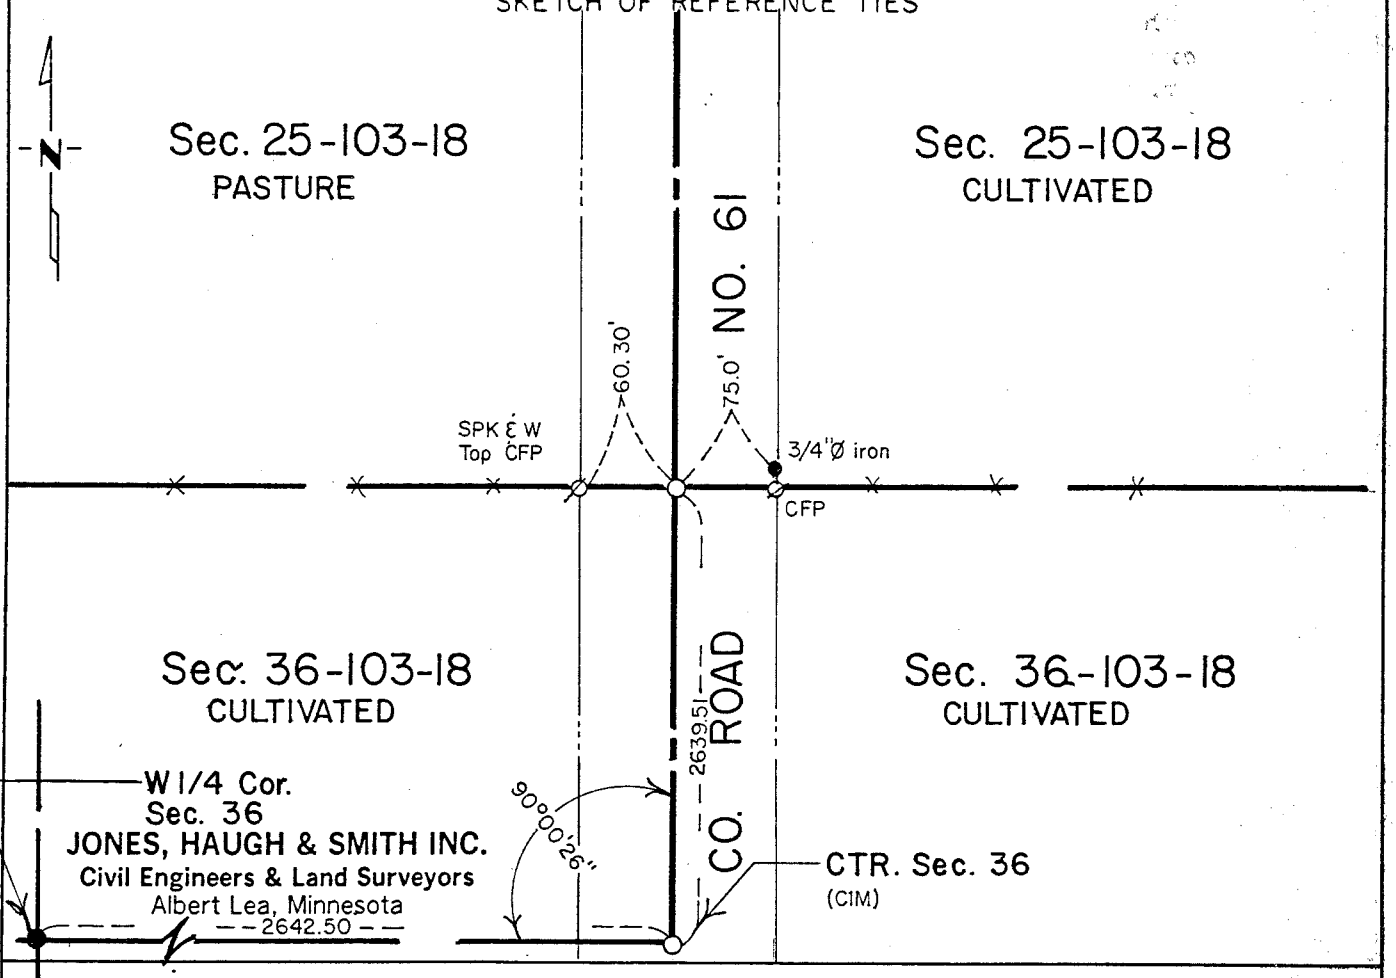

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-8-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 36-103-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench. The following ties were taken:

18" Burr Oak	S 26°E	145 links	(17.16 ft.)
18" Burr Oak	N 7°W	310 links	(204.60 ft.)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the original public land survey corner.

Record in Book "A" page 112 in the office of the Mower County Engineer. Records show corner in place and no ties were taken.

Records from Jones, Haugh & Smith Inc. show a 3/4" diameter iron in place and used for the past 40 years by all area surveyors.

1988 - Ray Tucker RLS #15471 dug with a backhoe for grading project on County Road #61. No records were kept of what was found or ties taken and all monumentation was destroyed and nothing reset.

1991 Jones, Haugh & Smith Inc. crew placed CIM over 5/8" diameter x 18" iron using private records, ties and measurements of Jones, Haugh and Smith at same location of 3/4" diameter iron which has been used for the past 40 years.

The monument fits occupation and road centerlines and past surveys within the section and is accepted as a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 36, Township 103N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 5-3-91 (DATE) found a ½" diameter iron cast in center of 5" diameter concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

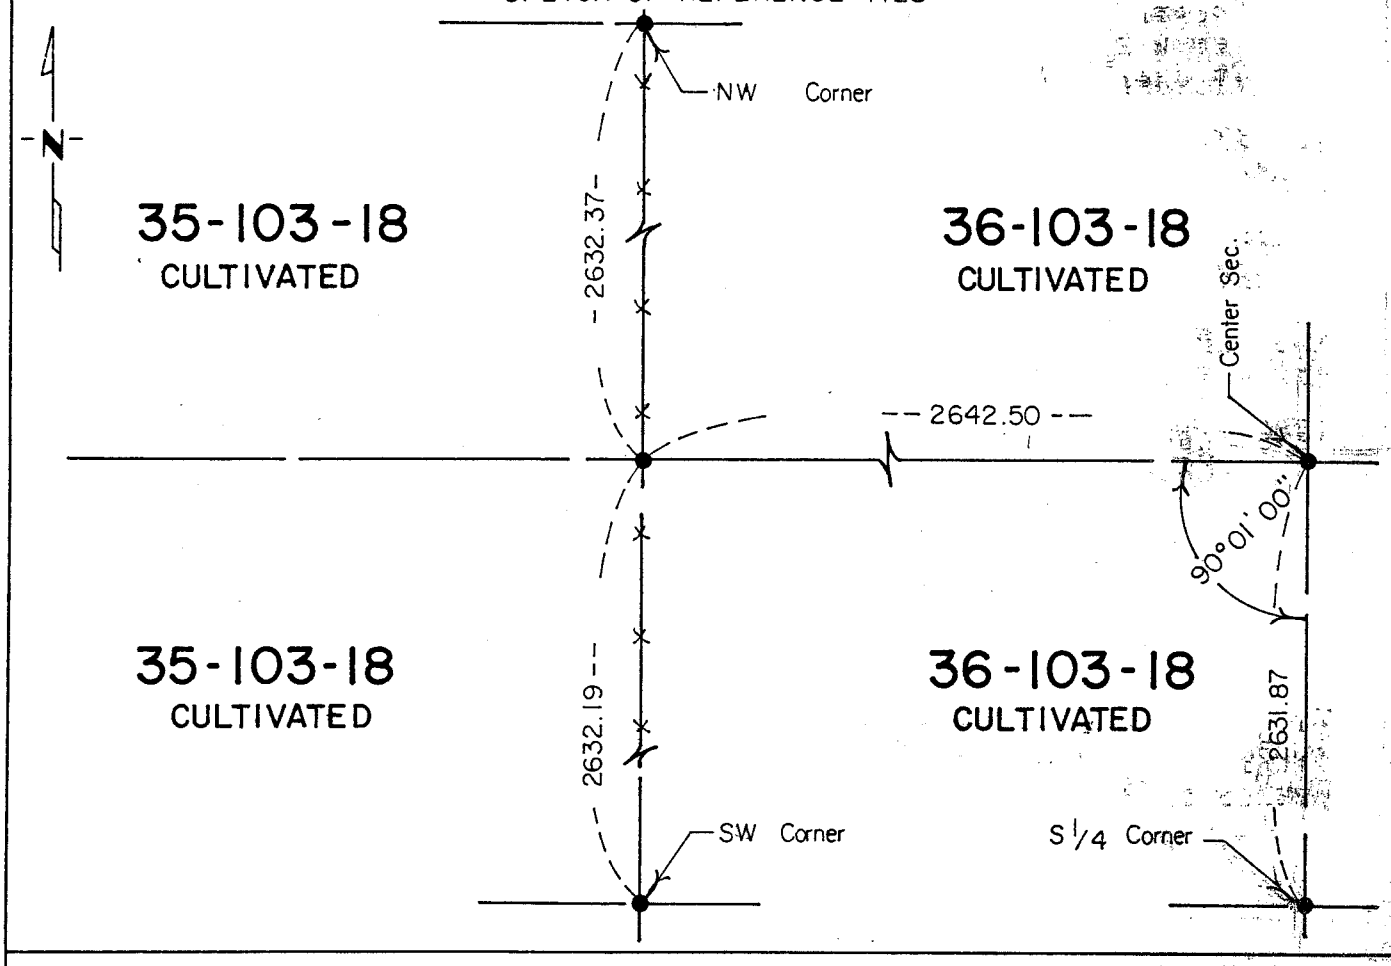

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 5-9-91 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 36-103-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1950 Recorded in Book "A" in the office of the Mower County Engineer shows a monument was found and ties taken.

1977 Jones, Haugh & Smith crew uncovered a 5" diameter concrete monument with 1/2" diameter iron cast in center during survey for Industrial Park plat.

1979 Jones, Haugh & Smith crew uncovered concrete monument during section breakdown of Section 36-103-18.

1991 Jones, Haugh & Smith Inc. crew uncovered a 5" diameter concrete monument in north-south fence. At the time of survey some difficulty was had in locating monument. An area resident covered monument with a large pile of stones and assumed he will recover after Jones, Haugh & Smith crew departs.

The monument agrees with past records and fits occupation and road centerlines and past surveys within the section and is accepted as a perpetuation of the original public land survey corner.