Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 7, Township 104N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/10/2002 (DATE) found a 5/8" IRON

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/10/2002 (DATE) placed a 5/8" X 16" IRON W/CIM

SKETCH OF REFERENCE TIES

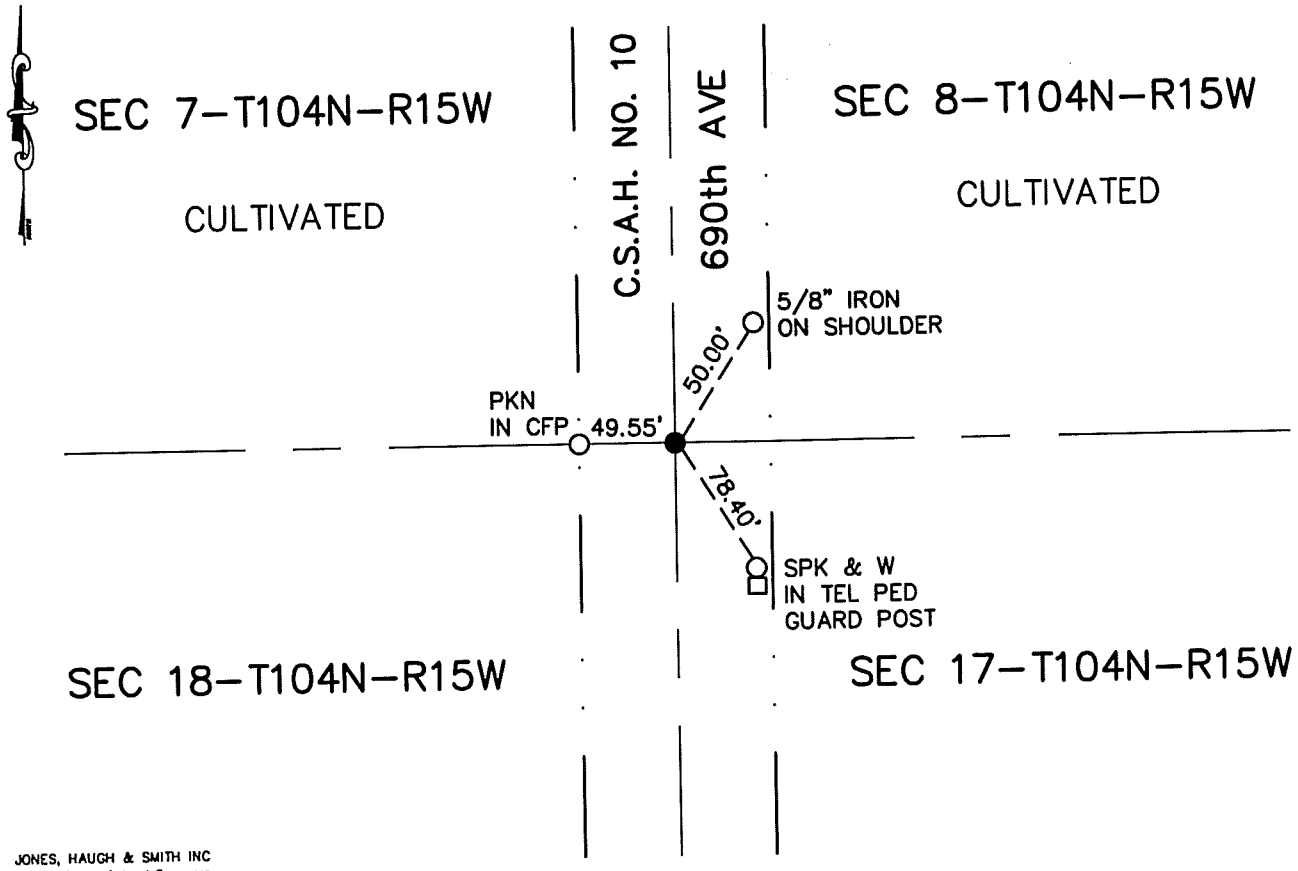

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 11-1-02
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

E1/4 Cor Sec 7-104-15

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1930 C.S.A.H. No. 10 County Road Plan shows no monument at this location.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at this location and found large spike with ribbon at 1 foot below road surface. Continued digging and found no further evidence of PLS corner. Set 5/8" monument with cast iron head at location of found spike at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 7, Township 104N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/28/2002 (DATE) found a 1" SQUARE PIPE W/CAP

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

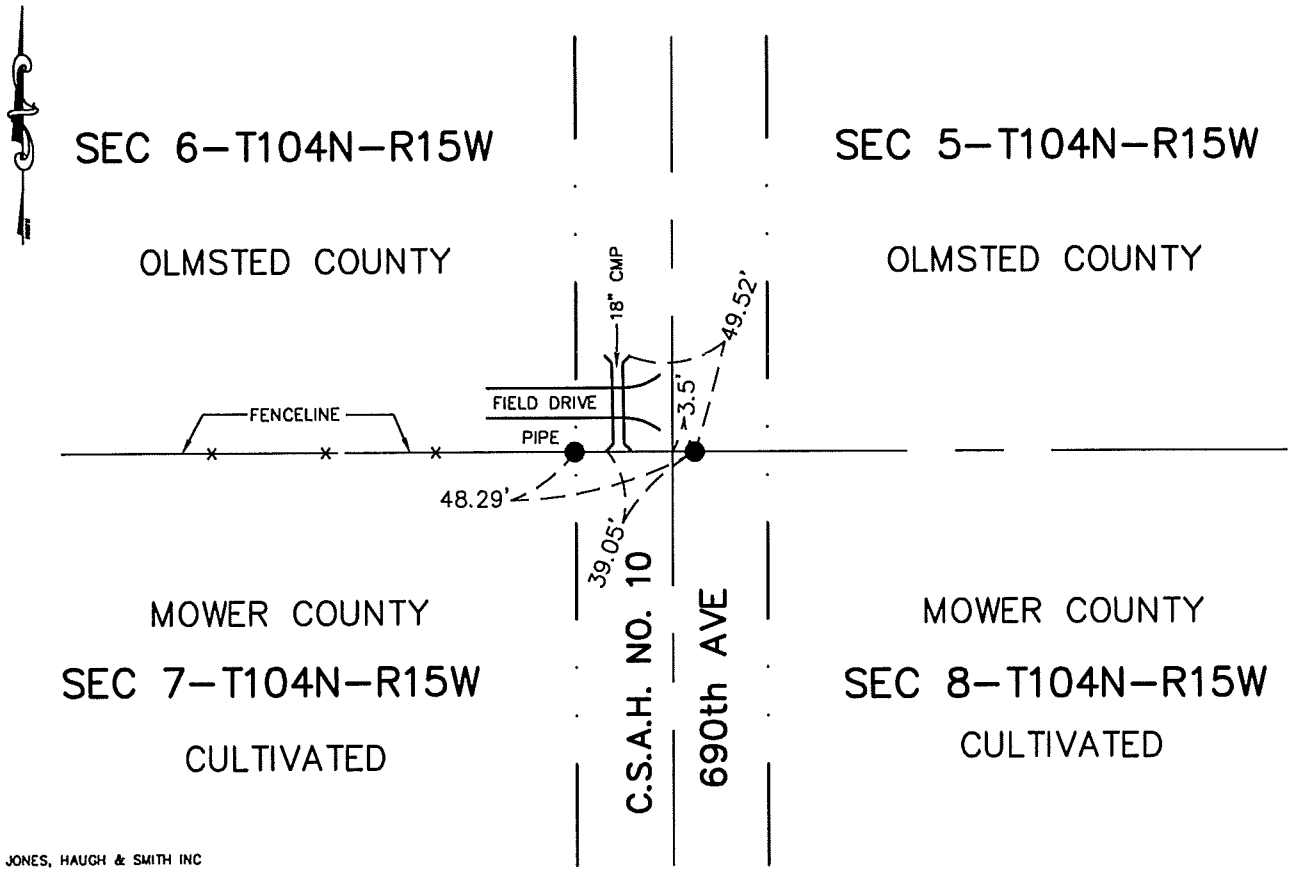

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-1-02 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

NE Cor Sec 7-104-15

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1953 County C.S.A.H. No. 10 plan shows concrete monument.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found an aluminum monument 3.5 feet east of centerline C.S.A.H. No. 10, over boulder with cross and cedar stake which is in agreement with Olmsted County Records. Accepting this location as a perpetuation of original PLS corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 7, Township 104N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/10/2002 (DATE) placed a 5/8" X 16" IRON W/CIM

SKETCH OF REFERENCE TIES

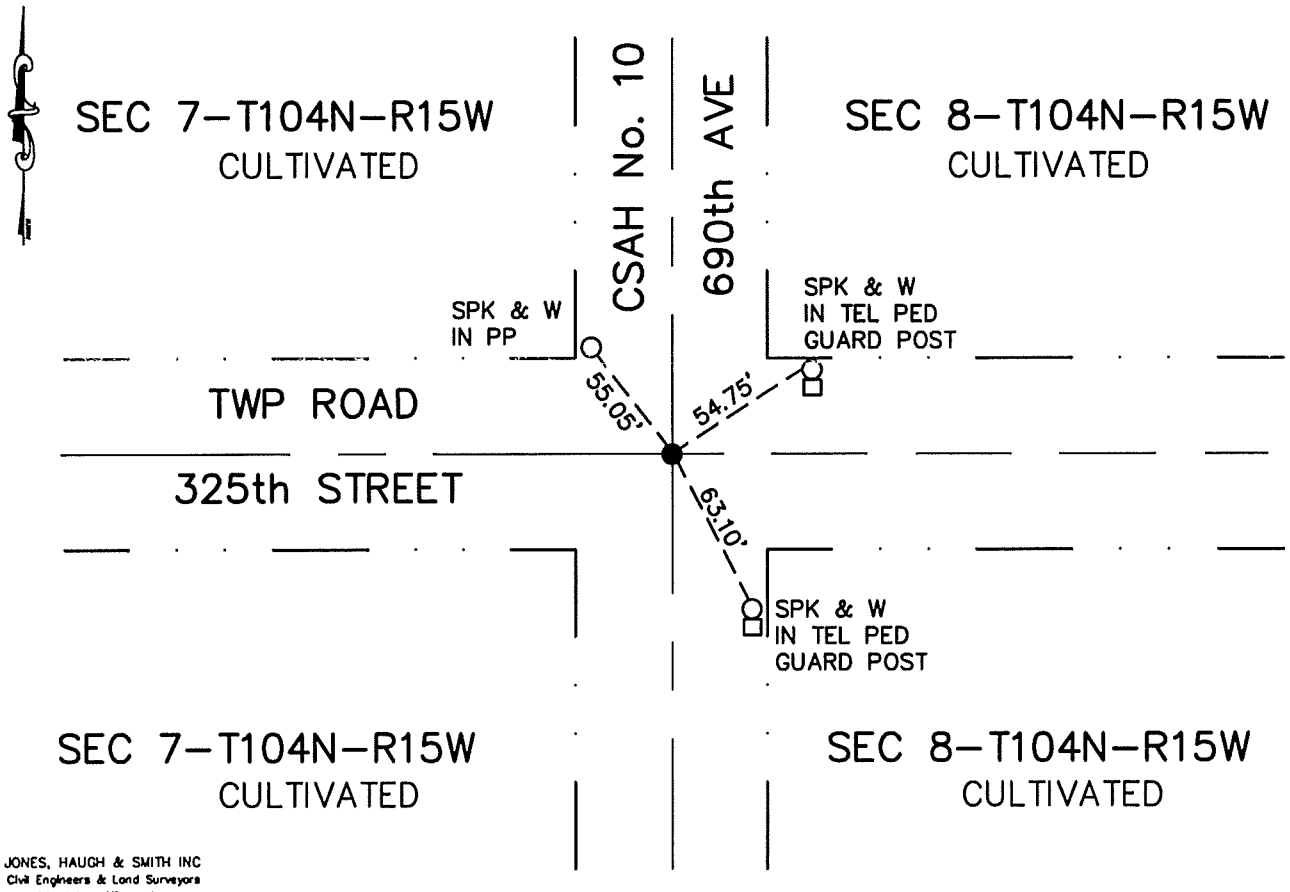

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-1-02 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E1/4 Cor Sec 7-104-15

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1930 C.S.A.H. No. 10 County Road Plan shows no monument at this location.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at this location and found large spike with ribbon at 1 foot below road surface. Continued digging and found no further evidence of PLS corner. Set 5/8" monument with cast iron head at location of found spike at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 13, Township 104N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 4-27-89 (DATE) found a 8"x8"x14" field stone 2 inches down

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-27-89 (DATE) placed a 'X' on the Stone

SKETCH OF REFERENCE TIES

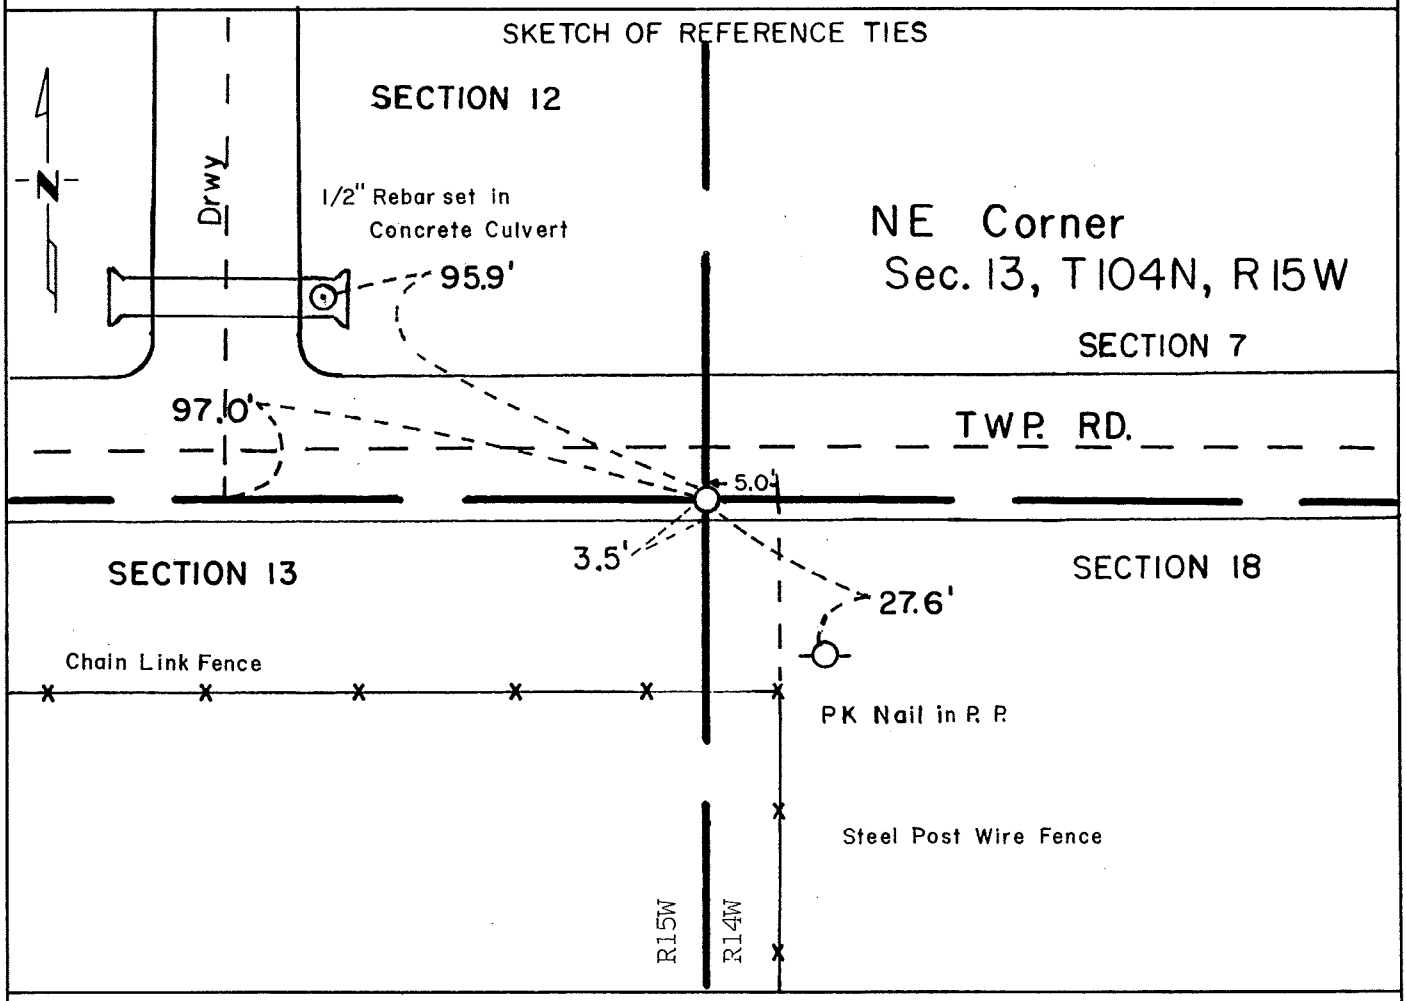

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Mark R. McGowan (SIGNATURE) 4/21/92 (DATE)

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Mower

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19__

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

MHD FORM NO. 2105

Statement of Evidence:

Northeast Corner Section 13, T104N, R15W 5th P.M.

July 1853 — John Ball, Deputy Surveyor, set a post for the Corner during the original Public Land Survey.

An undated entry (probably 1930's) in the Section Corner Tie Book at the County Engineer's Office shows a found stone at the Corner.

April 27, 1989 — Yaggy-Colby searched the area and found an 8"x14" field stone just below the road surface and 5 feet west of a fence line south.

Sept. 8, 1989 — Mn/DOT recovered the 1989 stone and stubbed it into our traverse.

An analysis of the Survey and record data indicates that the origin of the stone is not of record. However, the stone is in harmony with adjacent stones and may have marked the Corner for nearly sixty years. Therefore the stone is accepted as marking the Public Land Corner.

For details of the electronic survey, contact the Minnesota Department of Transportation's Surveys Section of the Rochester District Office.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 13, Township 104N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 3-25-81 (DATE) found a 6"x12" field stone 1 inch down (placed an chiseled 'X' on top)

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-27-89 (DATE) placed a chain ties to the stone

SKETCH OF REFERENCE TIES

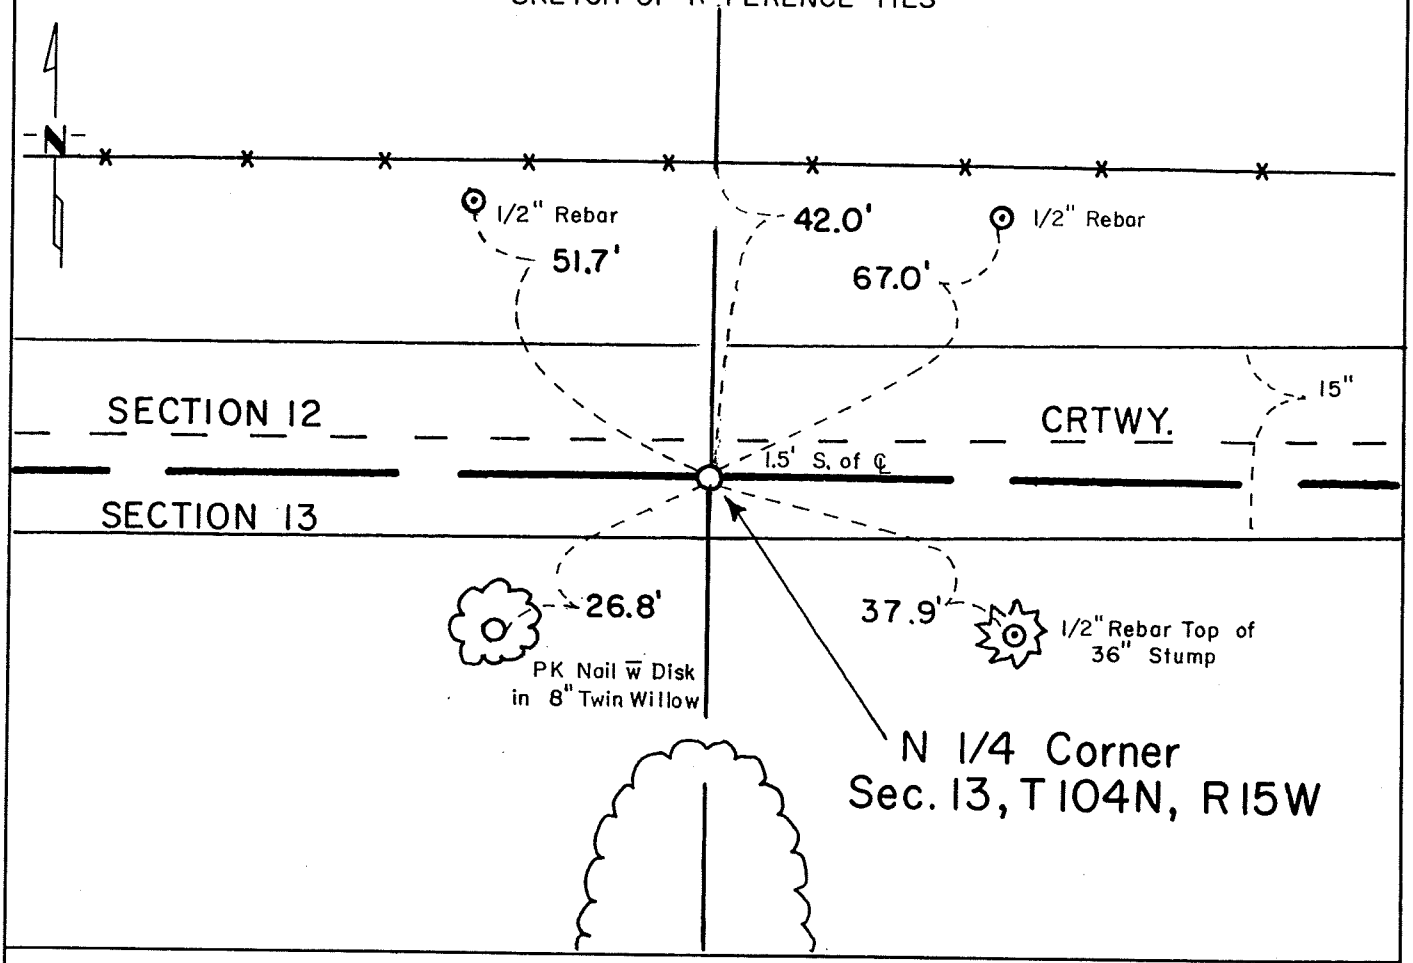

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan (SIGNATURE) 4/21/92 (DATE)

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Mower

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ___

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

North Quarter Corner Section 13, T104N, R15W 5th P.M.

August 1853	John Quigley, Deputy Surveyor, set a post for the Corner during the original Public Land Survey.
	An undated entry (probably 1930's) in the Section Corner Tie Book at the County Engineer's Office shows a stone at the Corner.
March 25, 1981	Doug Rude of Yaggy Inc. found a 6" x 12" field stone 1 1/2 foot south of the center of an unused township road and on line of a fence line south. The stone was accepted as marking the Quarter Corner. An 'X' was chiseled on the stone.
April 27, 1989	Yaggy's crew found the stone with the 'X'.
Sept. 8, 1989	Mn/DOT recovered the 1981 stone and stubbed it into our traverse.
	An analysis of the Survey and record data indicates that the origin of the stone is not of record. However, it may have marked the corner for nearly sixty years. The stone is therefore accepted as marking the public Land Corner.
	For details of the electronic survey, contact the Minnesota Department of Transportation's Surveys Section of the Rochester District Office.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 15, Township 104N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-26-91 (DATE) found ~~=~~ no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-26-91 (DATE) placed a cast iron monument 0.5' below road surface using ties from 1954 survey in BK "A" in the Co. Eng. Office.

SKETCH OF REFERENCE TIES

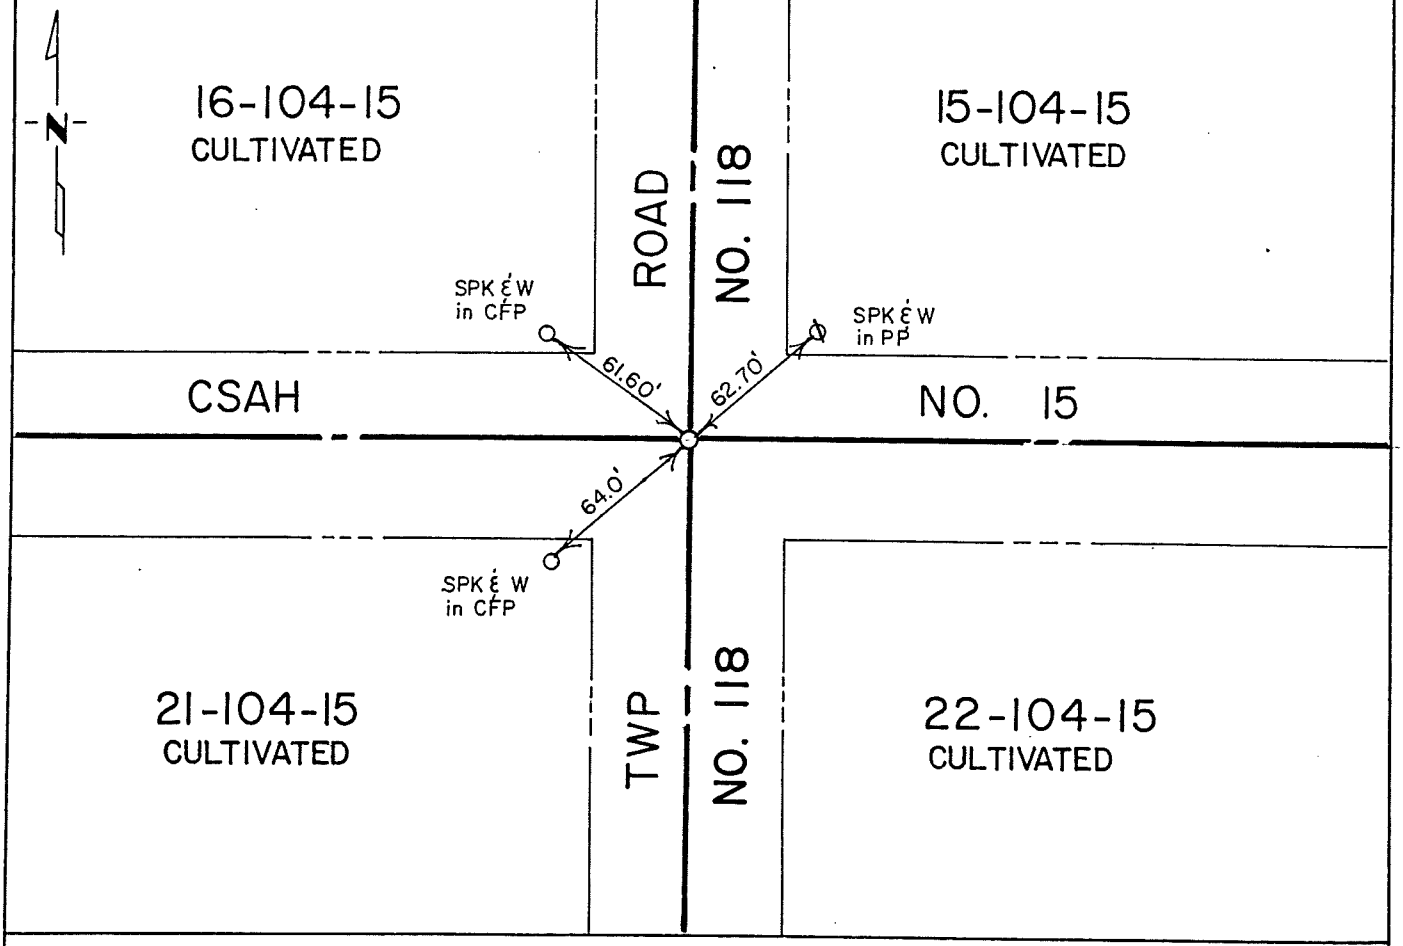

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-6-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 15-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

1941 Mower County Highway Dept uncovered a stone during survey for grading project and ties were taken.

1946 Mower County Highway Dept placed concrete monument over stone during grading project.

1954 Mower County Highway Dept uncovered concrete monument. New ties were taken;

CFP	61.50'	NW
PP	62.20'	NE

1991 Jones, Haugh & Smith crew, under the direction of John H. Schulte IV, dug with County backhoe a 4'x6'x6' deep hole and found no evidence of public land survey corner or a perpetuation thereof. Therefore established position of corner using ties taken in 1954 survey and set cast iron monument on road surface.

The monument set is in agreement with the past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 15, Township 104N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-30-1991 (DATE) found ⊕ POSITION OF CORNER TO BE IN BRIDGE DECK.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-30-1991 (DATE) placed a SPIKE & WASHER IN BRIDGE DECK.
(BRIDGE TO BE REMOVED IN 1991 PROJECT)

SKETCH OF REFERENCE TIES

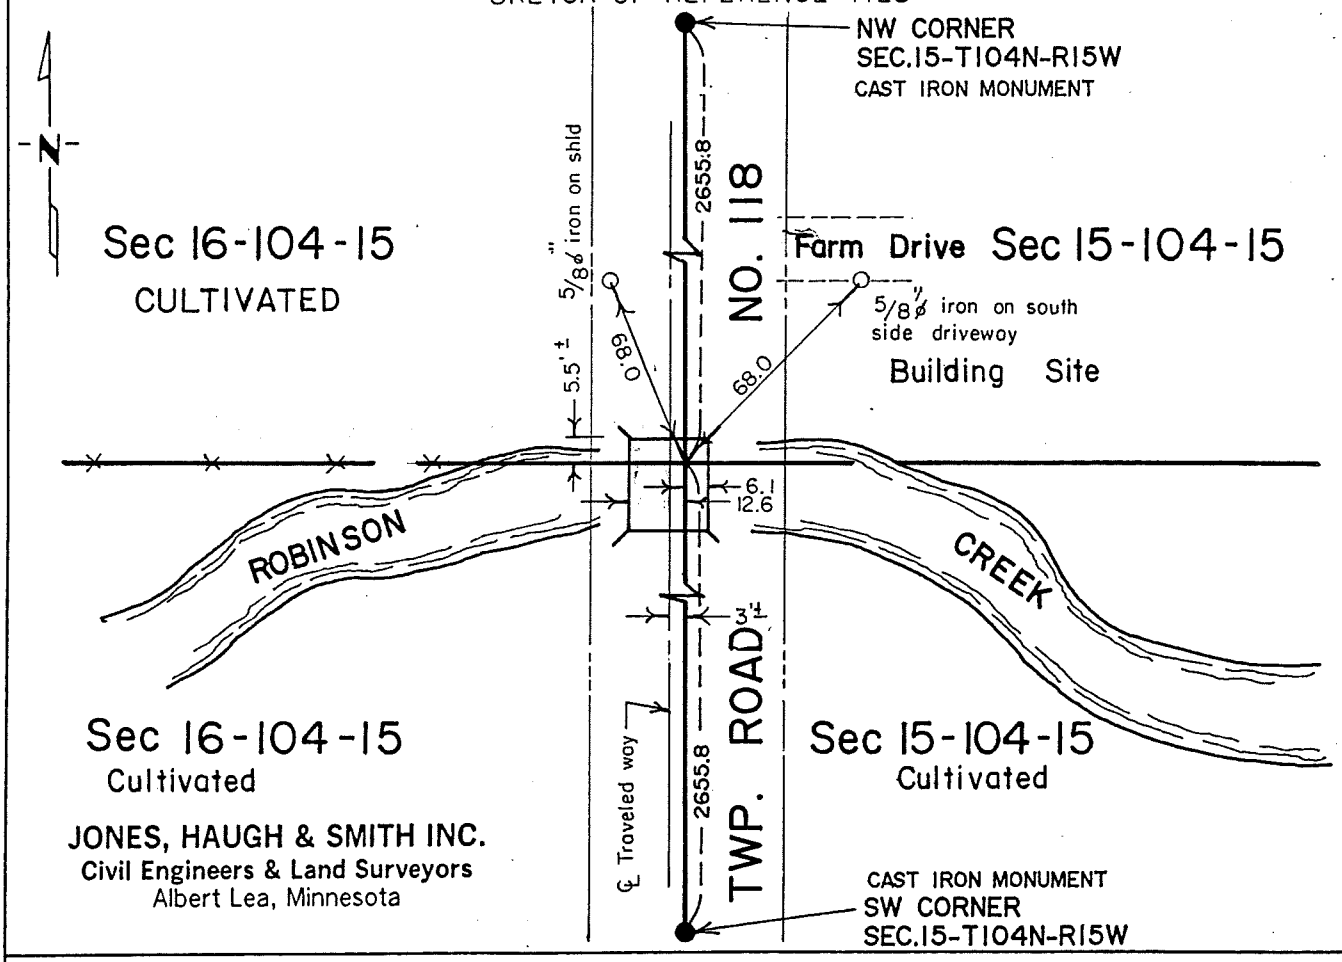

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-6-91

Registration No. _____

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 15-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith crew during a bridge project for the Mower County Highway Department determined position of corner to be in the deck of Bridge #L5062. At this time a spike and washer was set and ties were taken. Bridge is scheduled to be removed in 1991. The corner was set at the midpoint of a straight line between the northwest and southwest section corners.

The monument set fits occupation lines, fence lines and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 15, Township 104N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-25-91 (DATE) found ⊕ no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-25-91 (DATE) placed a cast iron monument on ℄ ℄ of N-S-E roads.

SKETCH OF REFERENCE TIES

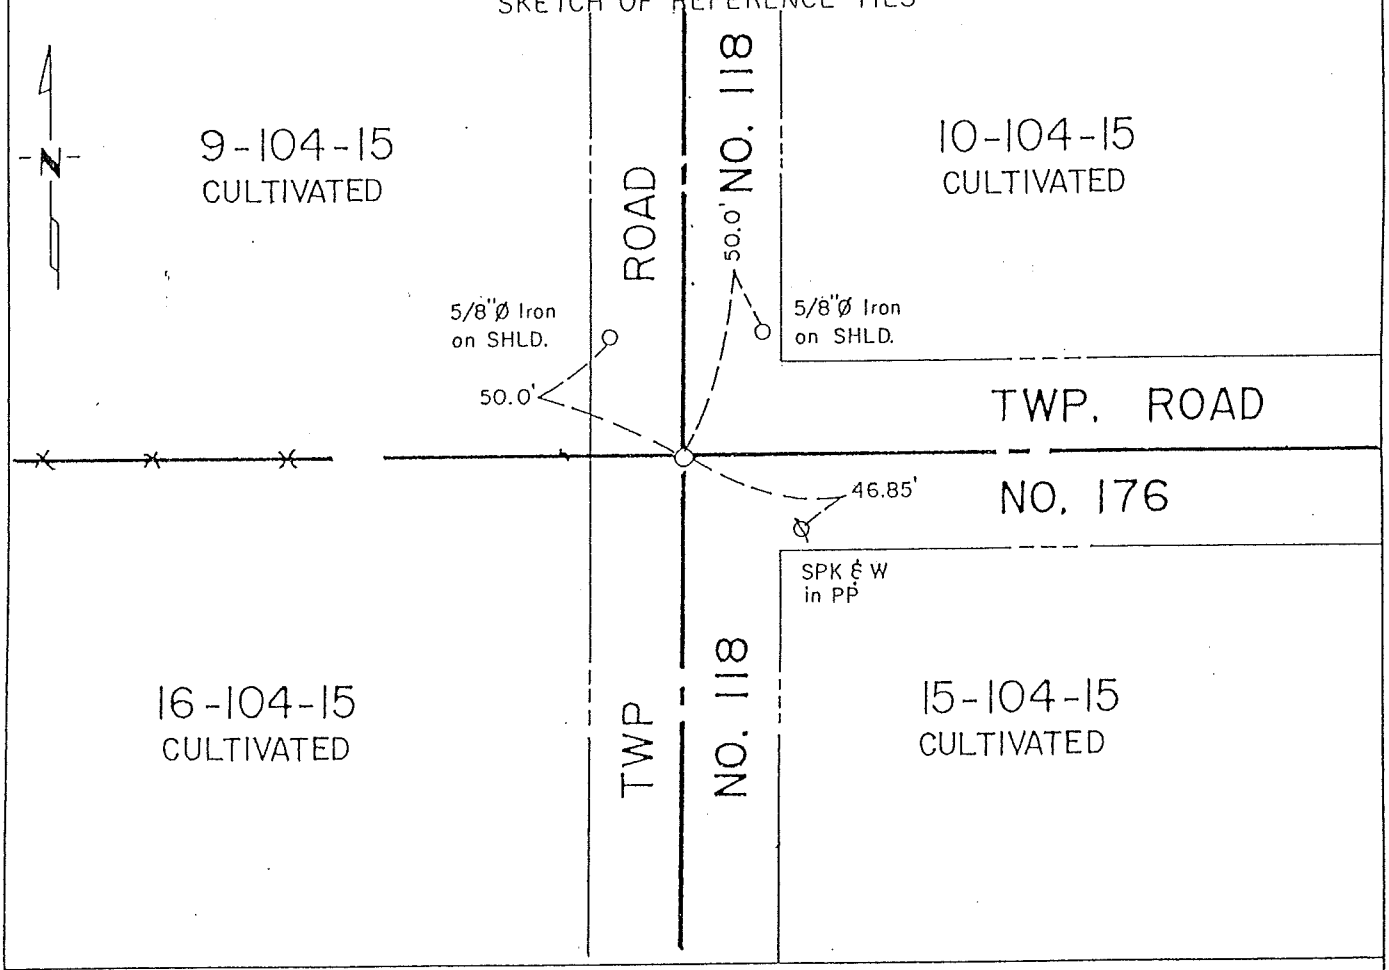

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-6-91

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 15-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith crew, under the direction of John H. Schulte IV, dug with County backhoe for Bridge Survey No. L5062. Dug a 4'x12'x5' deep hole on centerline centerline north-south-east roads and found no evidence of public land survey corner or a perpetuation thereof. Placed cast iron monument on centerline centerline of roads in line with fence west.

The monument set fits occupation lines, fence lines and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 19, Township 104N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-25-93 (DATE) found a NEST OF SMALL STONES

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-25-93 (DATE) placed a CAST IRON MONUMENT OVER STONES

SKETCH OF REFERENCE TIES

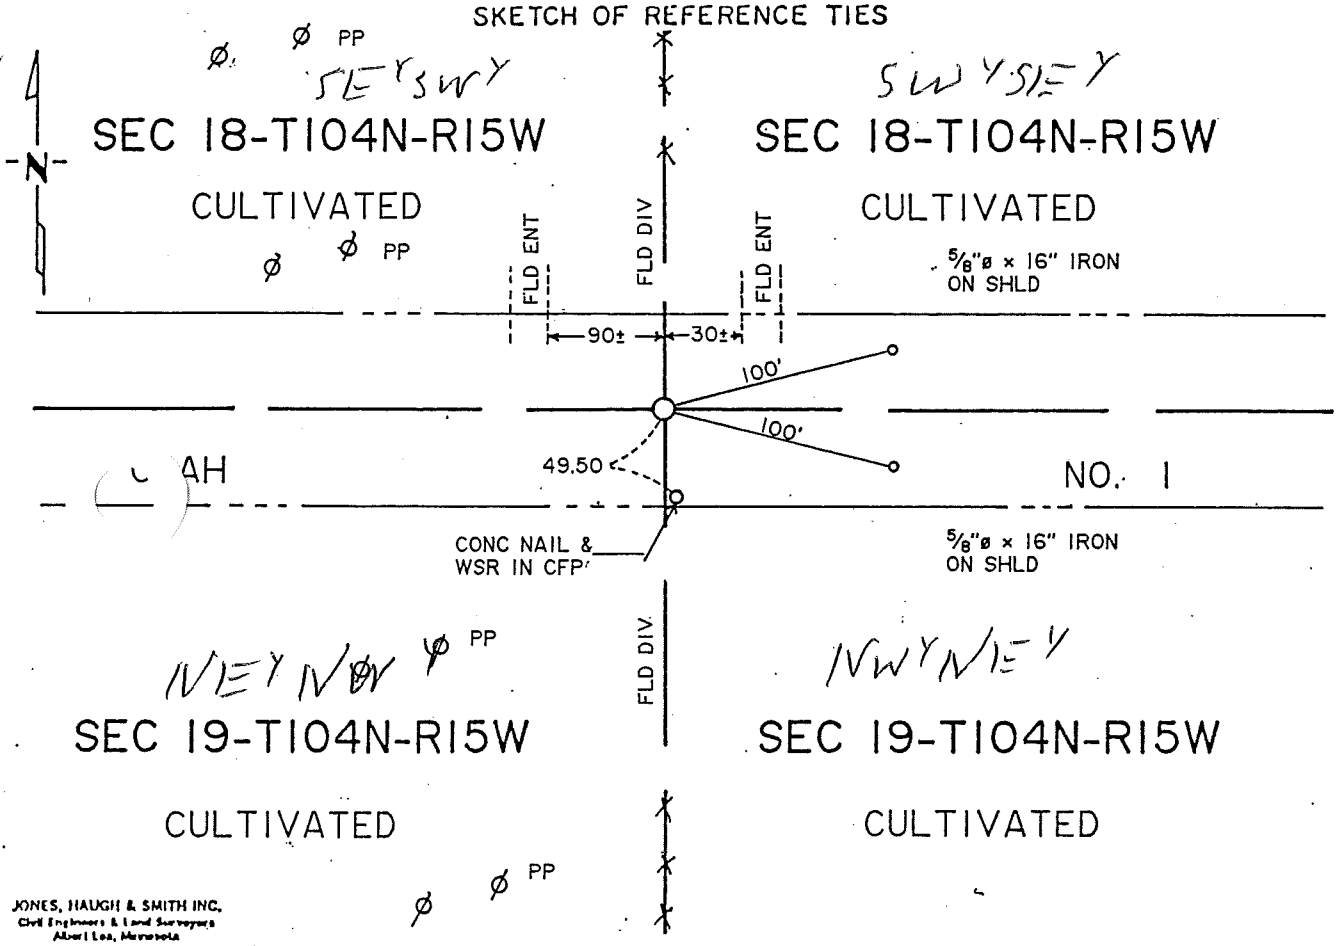

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-11-93

Registration No. 13007

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A.M. on the 21 day of June A.D., 1993

COUNTY RECORDER Edward Engel

By Marlene Martin, Deputy

DOCUMENT NO. 421597

Bk 79 Misc Pg. 598

M.H.D. FORM NO. 2105

BOOK 79 PAGE 598

STATEMENT OF EVIDENCE

N 1/4 cor Sec 19-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post and stone were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of the perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 4'x4'x8' hole on the centerline of County State Aid Highway No. 1 and north-south line with fences and field divisions. At a depth of four feet which is into virgin soil, we found a nest of small stones 20" in diameter and also in line with said line fences and field divisions. Therefore we accepted the nest of stones as the perpetuation of the original corner and set a cast iron monument near road surface above nest of stones.

The monument found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 599

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 19, Township 104N Range R15W, 5th P

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/20/1999 (DATE) found a NO EVIDENCE OF PLS CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/20/1999 (DATE) placed a CAST IRON MONUMENT .40' BELOW ROAD SURFACE

SKETCH OF REFERENCE TIES

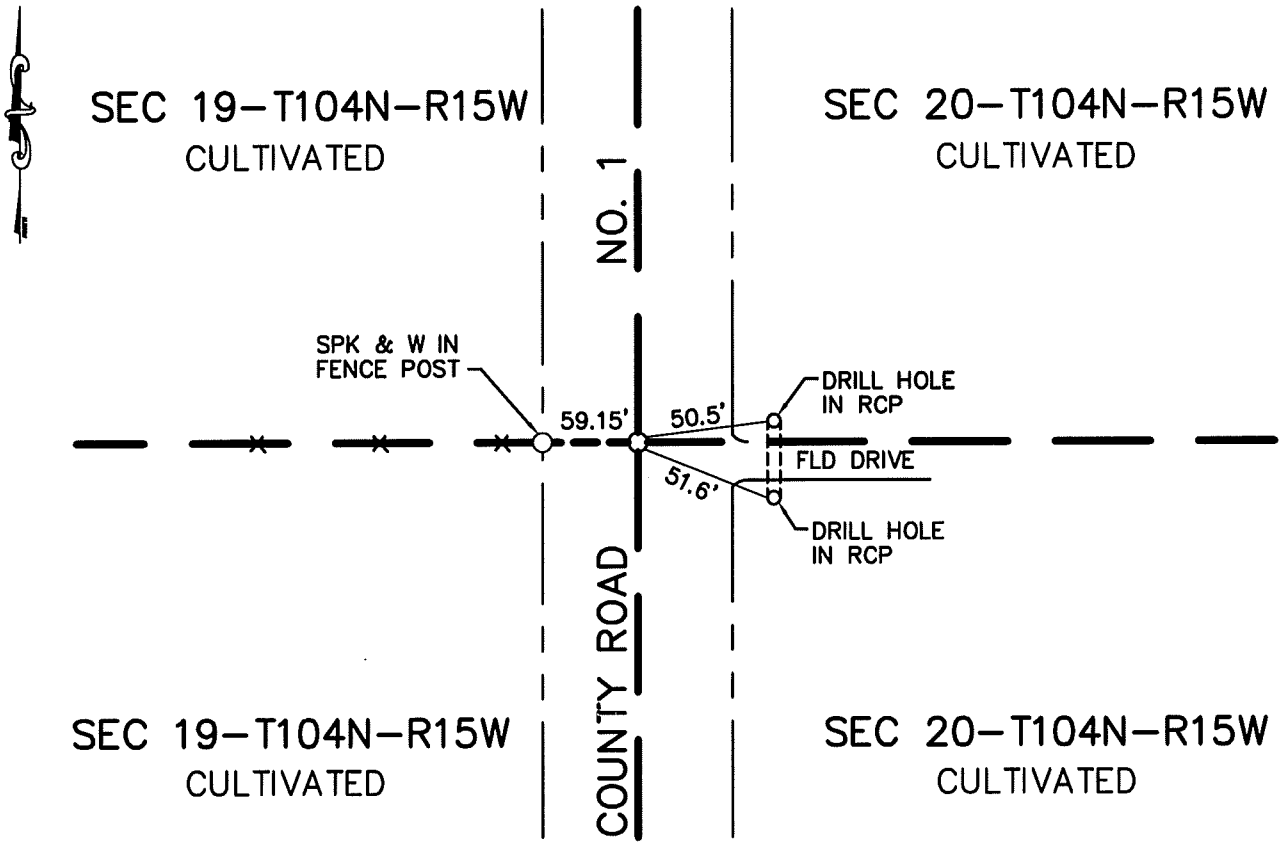

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-3-99

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Corner Section 19-104-15

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County Highway Department road plan of C.S.A.H. No. 1 shows corner to be on straight line between NE & SE corner.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe at the centerline of County Road No. 1 and in line with line fence west. Dug a 6′ x 10′ hole 2.5′ deep to virgin soil and found no evidence of PLS corner. Set corner on straight line between SE & NE, use County Road plan distance to west fence at E ¼ corner. Set corner at 2654′ from SE to E ¼ corner. Placed 5/8″ X 16″ iron with cast iron monument, .40′ below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh, and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 19, Township ~~103~~ 104, Range 15,

5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 6-13-90 found a Nothing Superceeded

☐ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☒ On 6-22-90 placed a Standard County Monument.

SKETCH OF REFERENCE TIES

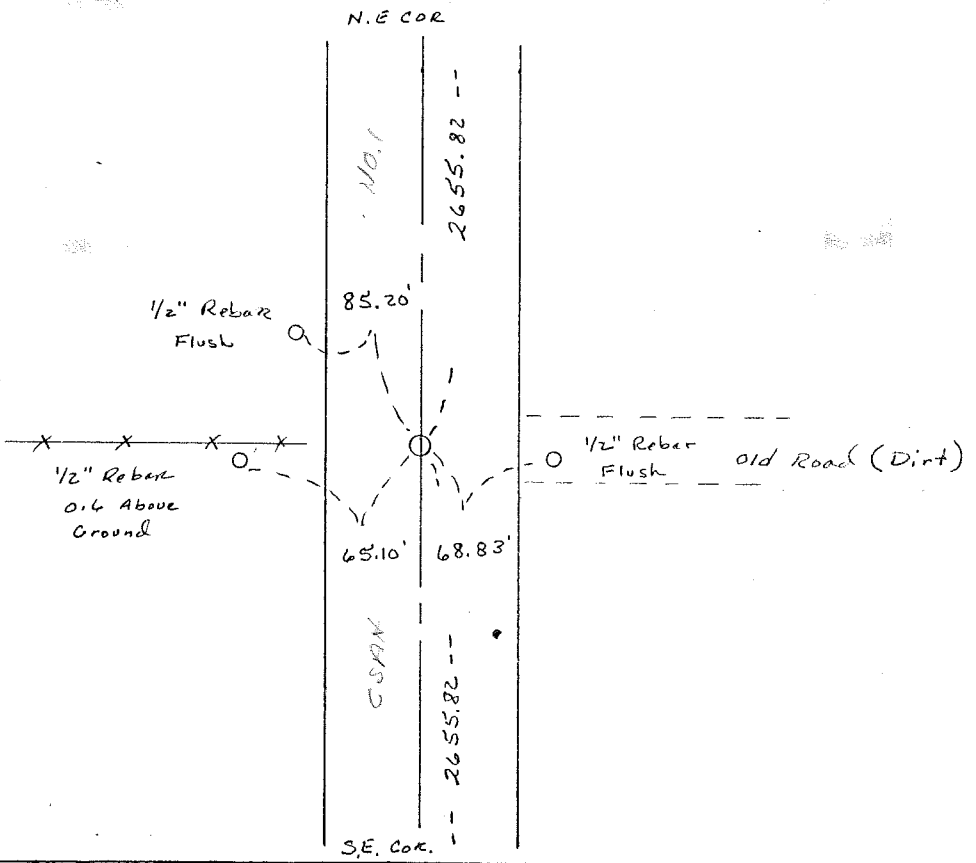

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond Tucker
Signature

6-29-90
Date

Registration No. 15471

☒ Land Surveyor, ☐ Prof. Engineer

☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

EAST QUARTER CORNER SECTION 19 - T103N - R15W

1853 - John Quigley, Deputy Surveyor, set a quarter section post, built mound level with trench per instruction drove a charred stake in center and planted osage orange seeds in SE corner during the Original Public Land Survey.

June 1990 - Tucker Land Surveying excavated this location and found nothing. Set a Standard County Monument.

The above corner agrees with the electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electronic survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 19, Township 104N Range 15W, 5th P

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/20/1999 (DATE) found a Concrete monument with iron pin

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/20/1999 (DATE) placed a Cast iron monument over monument found

SKETCH OF REFERENCE TIES

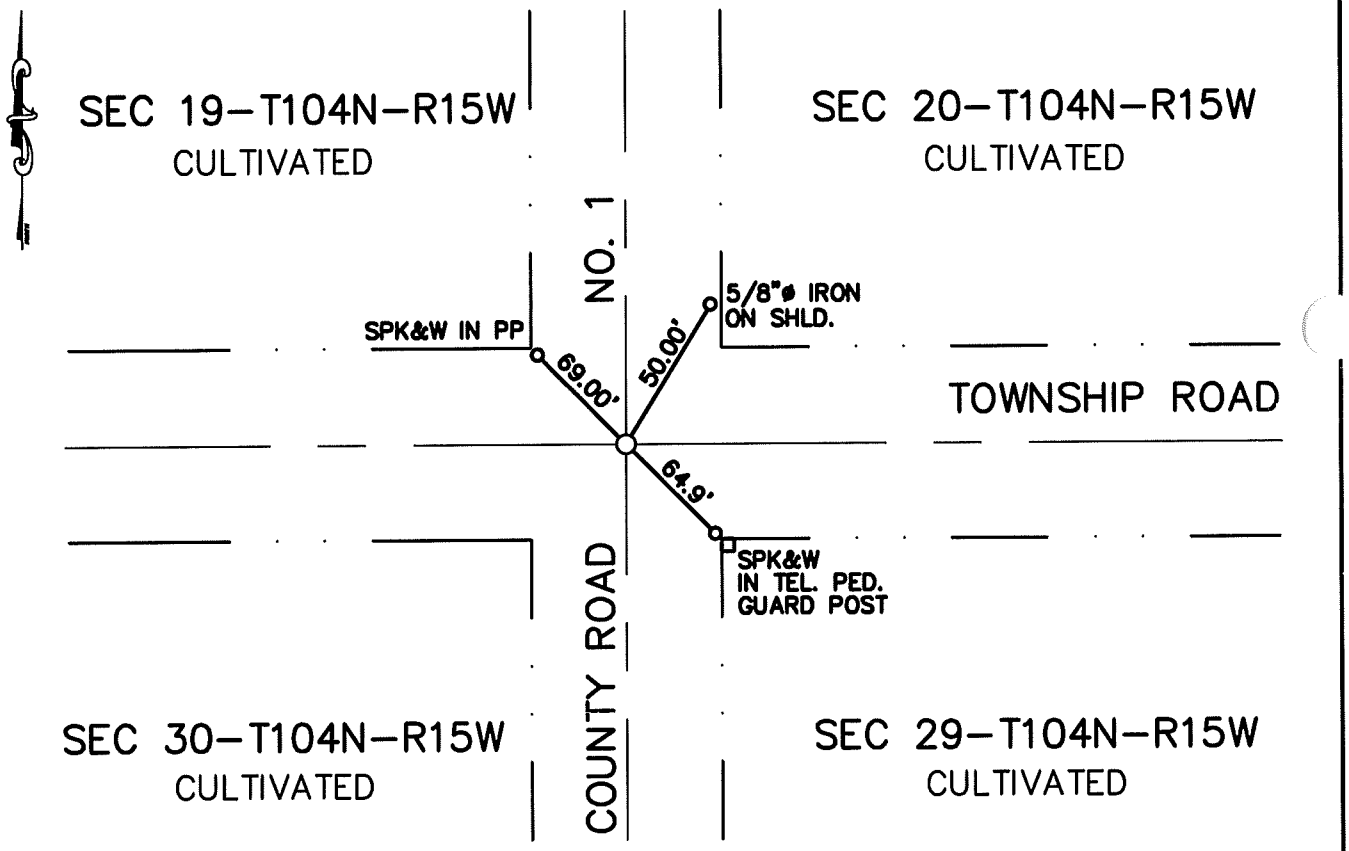

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-3-99 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Corner Section 19-104-15

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County Highway Department records state INP monument ties no longer exist.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe at the centerline of County Road No. 1 and township road east and west. Uncovered concrete monument with iron pin in center. Set capped 5/8" north side of monument - Cap No. 13807. Set 5/8" X 16" iron with cast iron monument over monument found .40'± below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh, and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 20, Township 104N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/21/1991 (DATE) found a HARRISON CAST IRON MONUMENT OVER CONCRETE MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

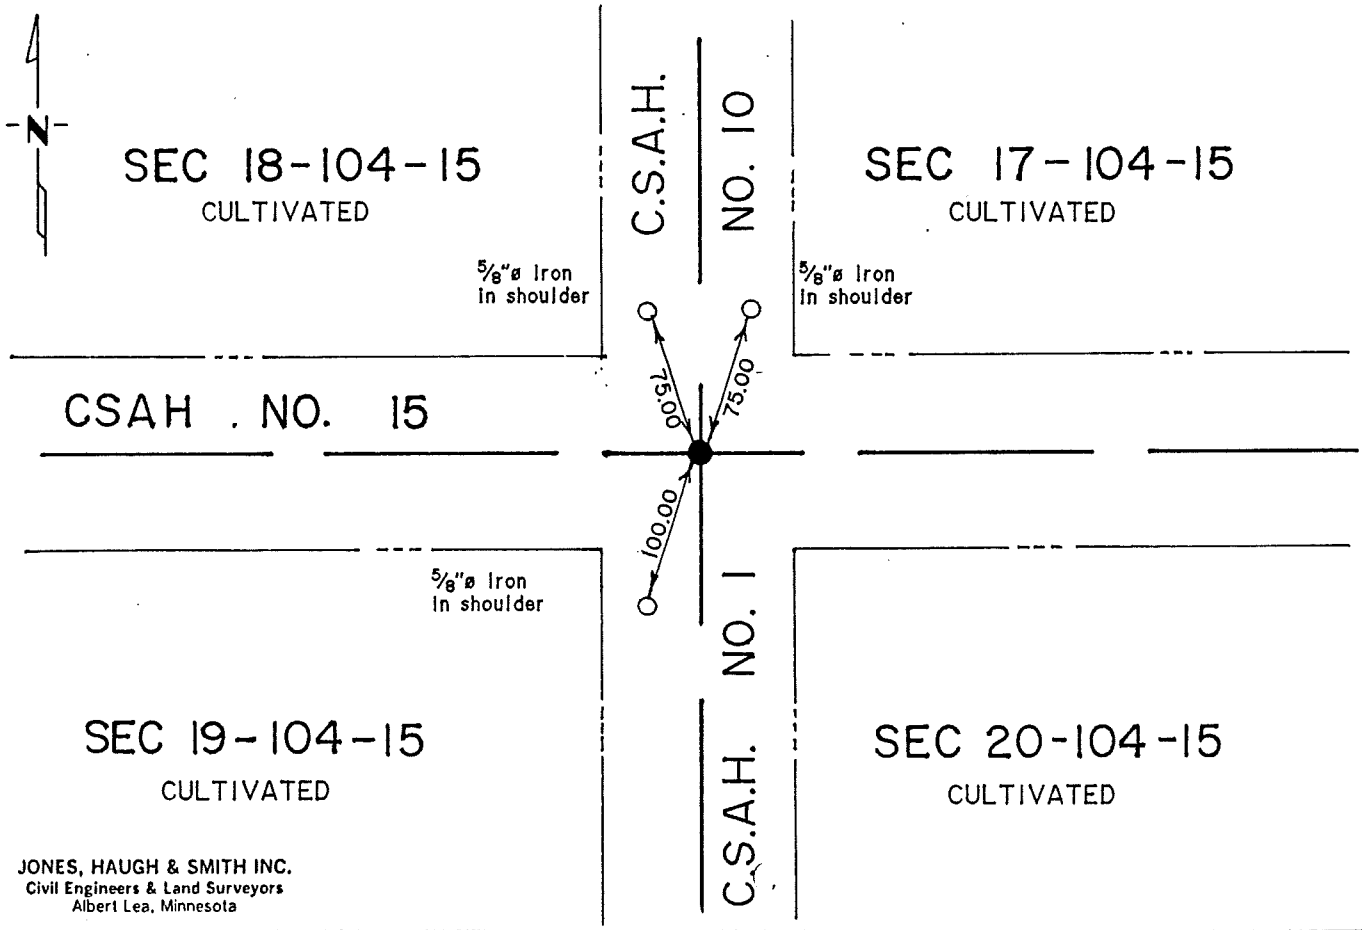

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-6-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 20-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plan shows a concrete monument inplace at Sta 291+61.5 and the following ties were taken:
37.0' SE to TP 45.5' NE to CFP

1945 Recorded in Book 'A' in the Office of the Mower County Engineer shows a monument inplace and the following ties were taken:
114.4' NE to TP
41.7' to south leg of sign
134.4' SE to TP
111.7' SW to TP
113.5' NW to CFP

1954 Mower County Grading plan shows a concrete monument inplace 18" below road surface and the following ties were taken:
114.4' NE to TP
41.7' NW to south leg sign
134.4' SE to TP

1991 Mower County Engineering Dept. informed Jones, Haugh & Smith Inc that corner has been dug in 1988 by Ray Tucker RLS #15471 for a County Grading Project on CSAH No. 1. No records were obtained from Mr. Tucker to support a perpetuation thereof.

Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe on the centerline centerline of north-south-east-west roads and uncovered a harrison cast iron monument. Assumed monument set by Ray Tucker in 1988. Removed monument and found it to be over a 5" diameter concrete monument with 1/2" diameter iron cast in center 2.5 feet deep. Reset harrison cast iron monument over concrete monument on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 20, Township 104N, Range 15 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/21/1991 (DATE) found a POINTED FIELD STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10/21/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

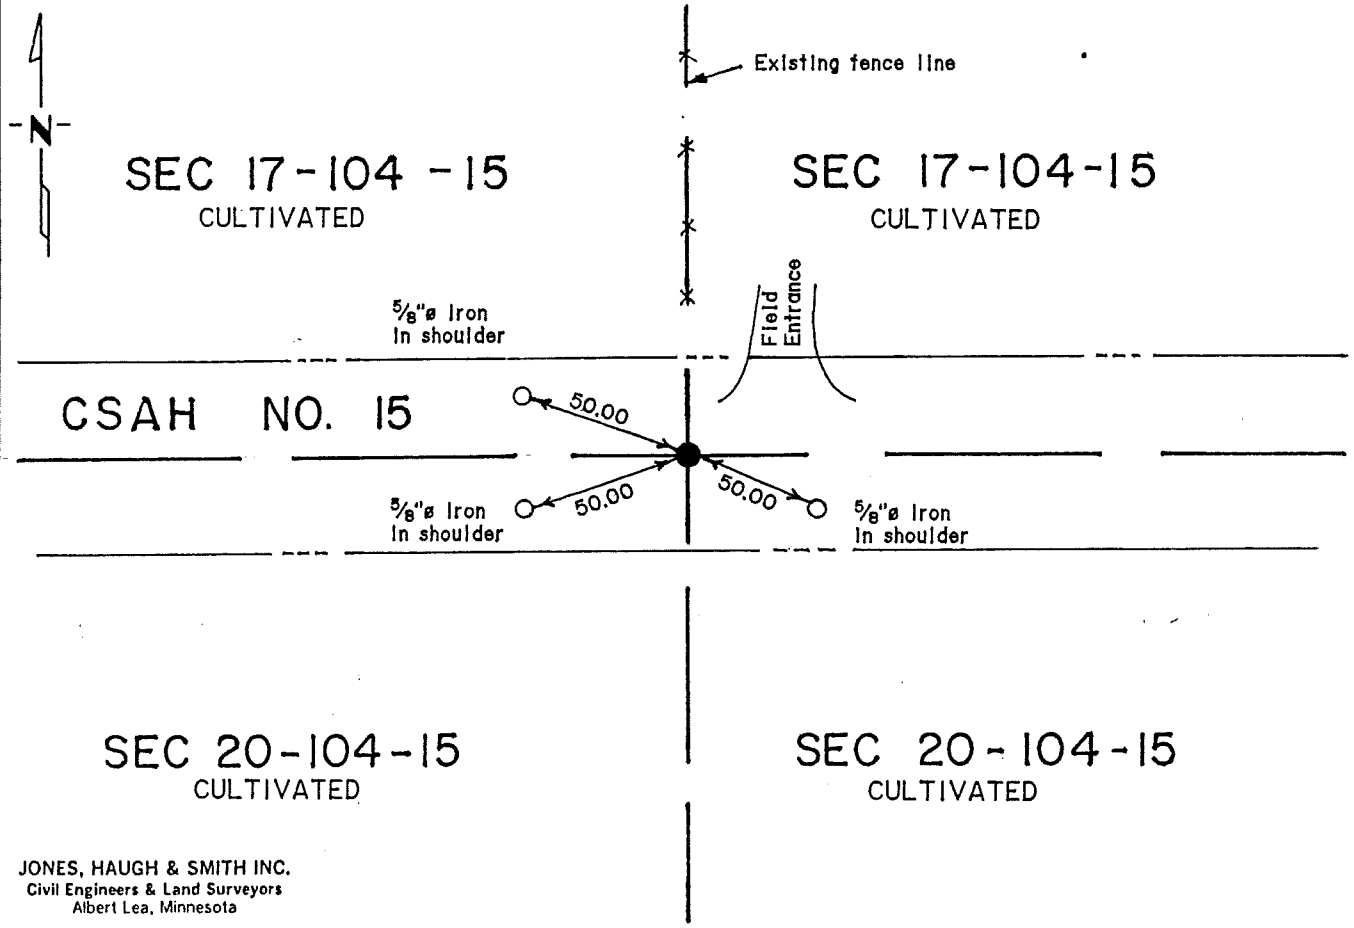

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 12-6-91
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 20-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plan shows a stone monument inplace.

1948 Mower County Grading Plan shows no evidence of 1/4 corner.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe on the centerline of east-west road in line with fence north and uncovered a triangular shaped stone over a pointed field stone 3.5 feet deep in virgin soil. Placed a 5/8" diameter iron on the west side of stones and set cast iron monument over stones on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 21, Township 104N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/21/1991 (DATE) found a 5/8"ø IRON

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10/21/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

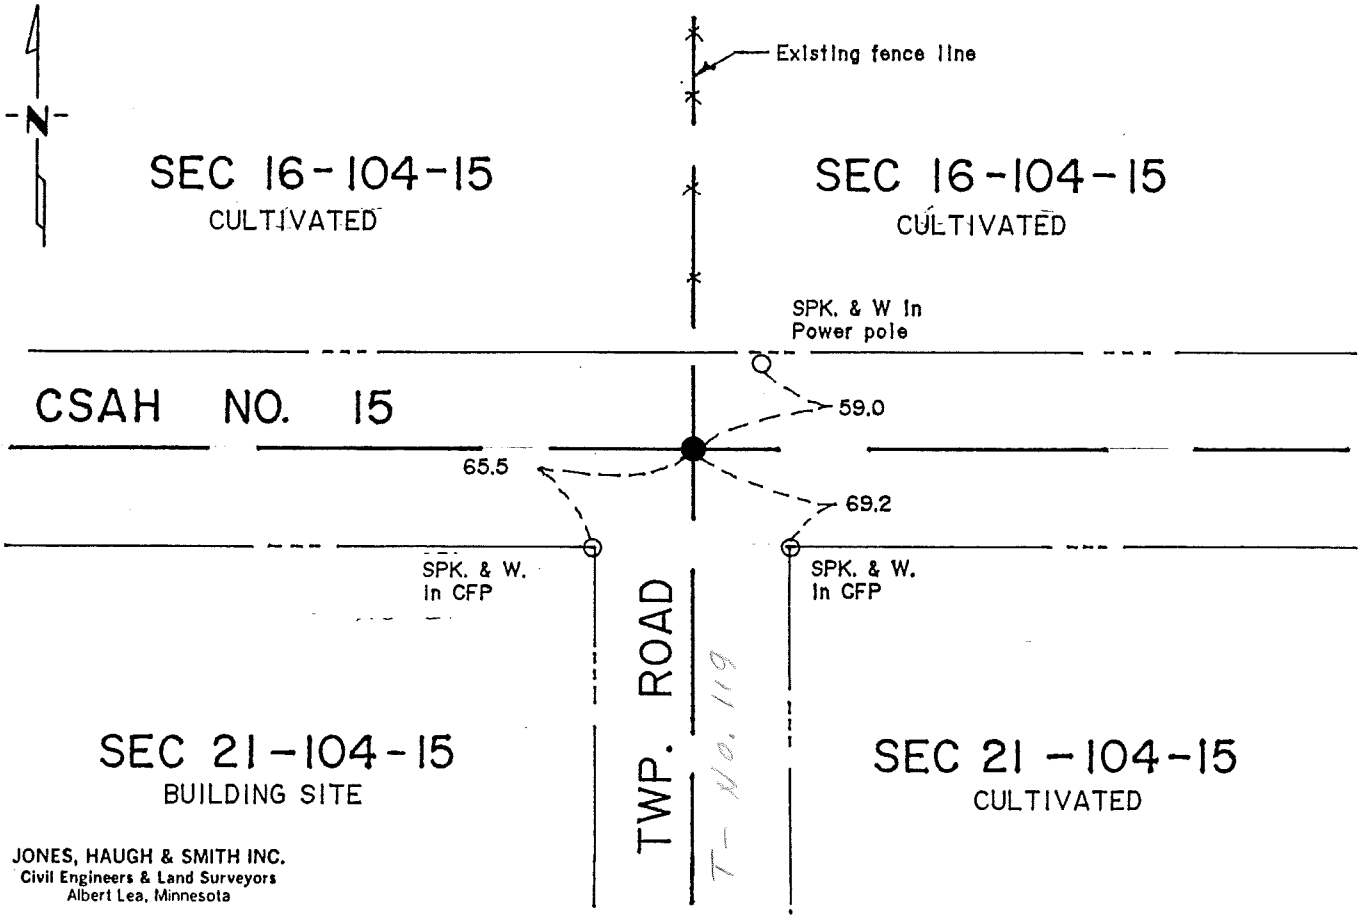

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-6-91

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 21-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe on the centerline centerline of south-east-west roads in line with fence north. Uncovered a 5/8" diameter x 24" iron 2.5 feet below road surface. Continued digging a 4'x8'x5' deep hole and found no further evidence of a perpetuation of the original public land survey corner. Accepted 5/8" diameter iron as best evidence and set cast iron monument at same location on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 21, Township 104N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10/21/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

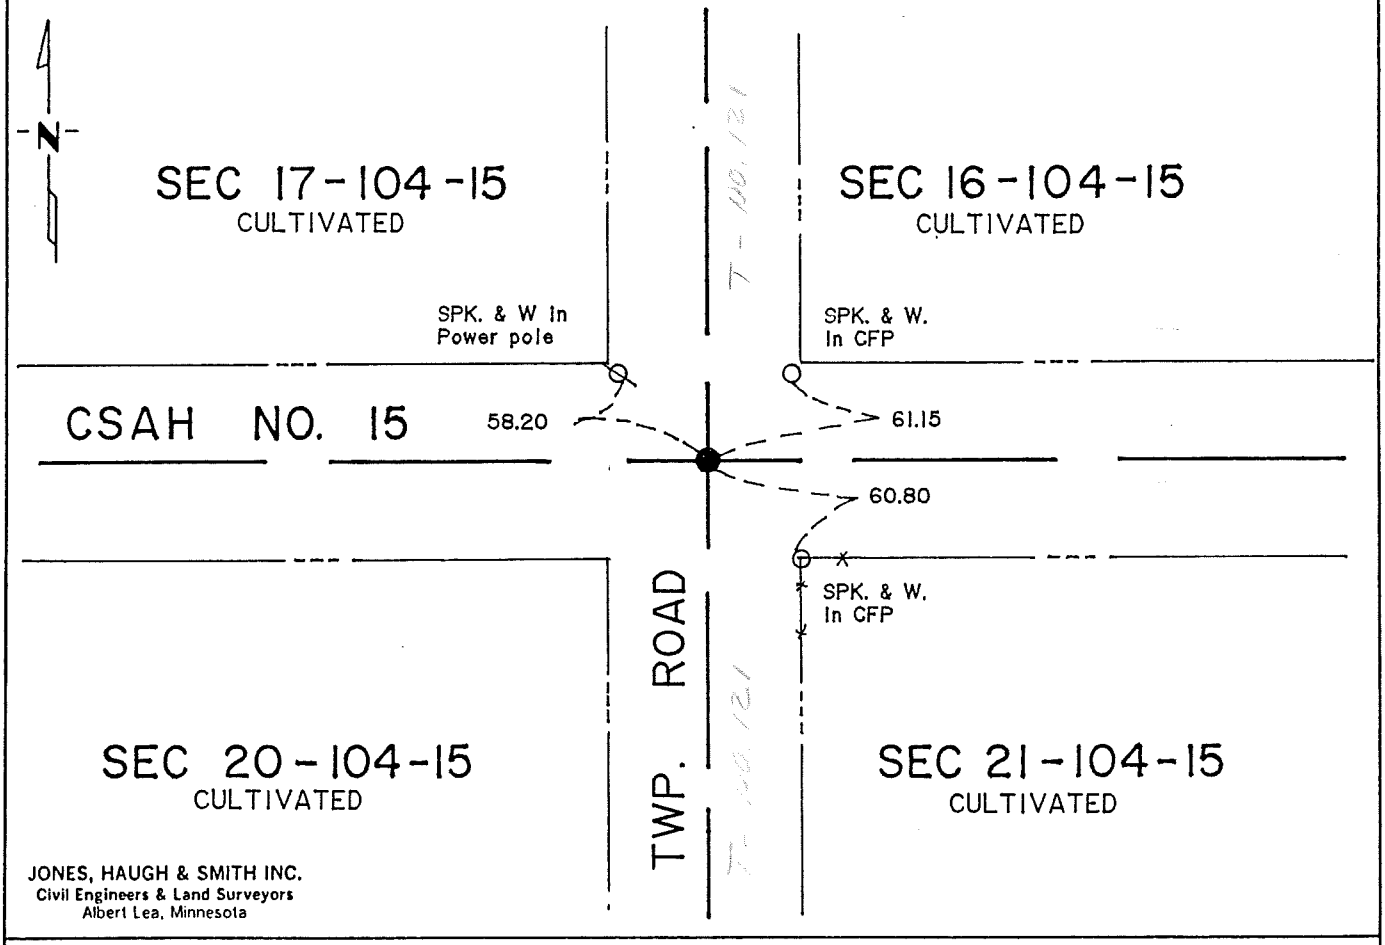

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-6-91 (DATE)

Registration No. 13809

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 21-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plan shows a stone monument inplace on centerline centerline at Sta 185+70.8 and the following ties were taken:
43.0' NE to CFP
37.7' SE to Willow tree
35.5' SW to Willow tree
38.0' NW to TP

1948 Mower County Grading Plan shows a concrete monument inplace over a pointed field stone on centerline centerline at new Sta 105+93.0 and the following ties were taken:
46.8' NE to PP
72.9' SSE to first st FP
73.0' SSW to first st FP
56.9' SW to TP

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe on the centerline centerline of north-south-east-west roads. A 5'x12'x6' deep hole was dug and no evidence of concrete monument or field stone shown on 1930 and 1948 grading plan. Accepted centerline centerline as best evidence which agrees with past records and set a cast iron monument on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 22, Township 104N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/01/96 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/01/96 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

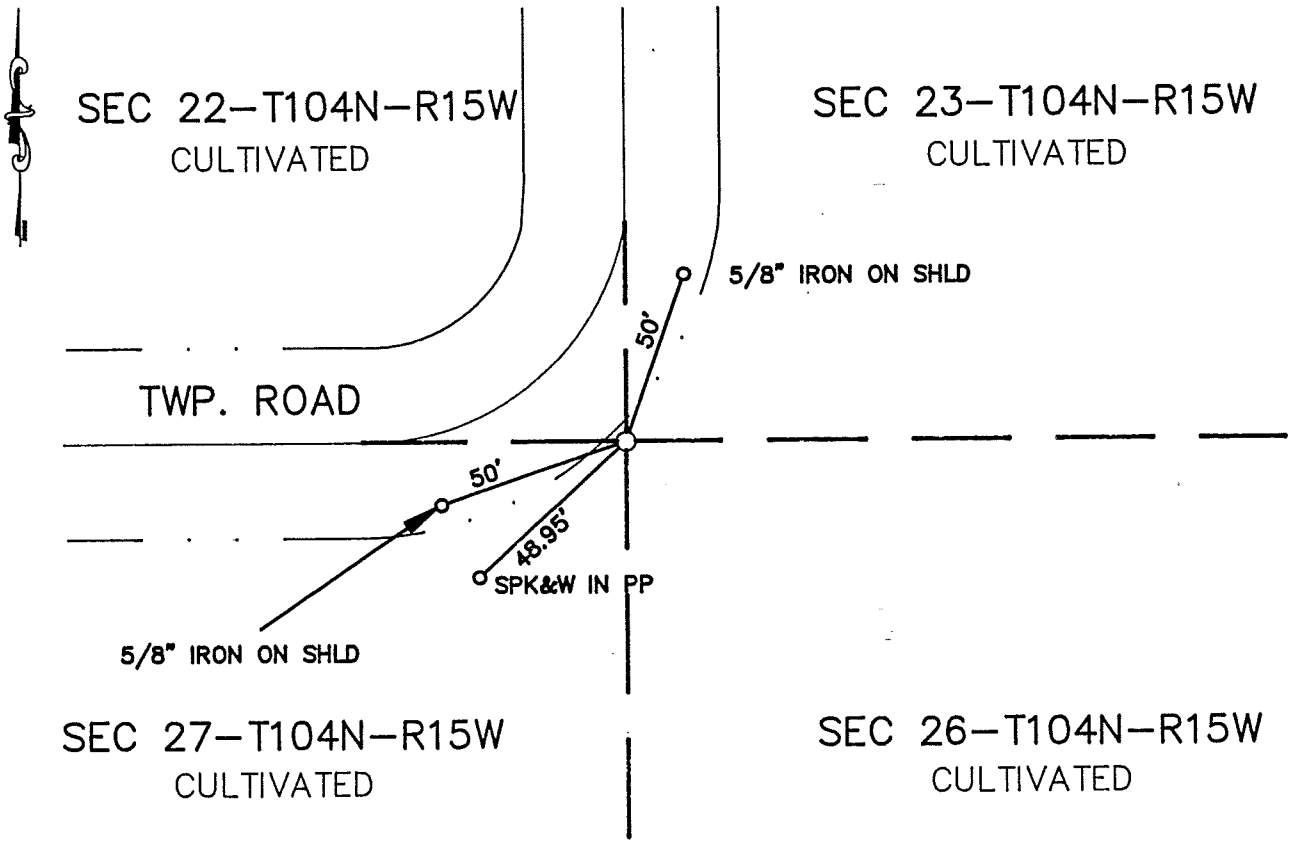

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 12 A.M. on the 23 day of June A.D., 1997

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. 454025

M.H.D. FORM NO. 2105

BOOK 95 PAGE 378

SE Cor SEC 22-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe. Located 5/8" iron 1.5' long. Dug along side of iron found, uncovered rock. Left monument as found, set 5/8"x16" iron on south side of iron found, cap no. 13807. Set 5/8"x16"iron with cast iron monument over monument found .4' below surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 22, Township 104 Range 15, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/03/1994 (DATE) found a POINTED STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/03/1994 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

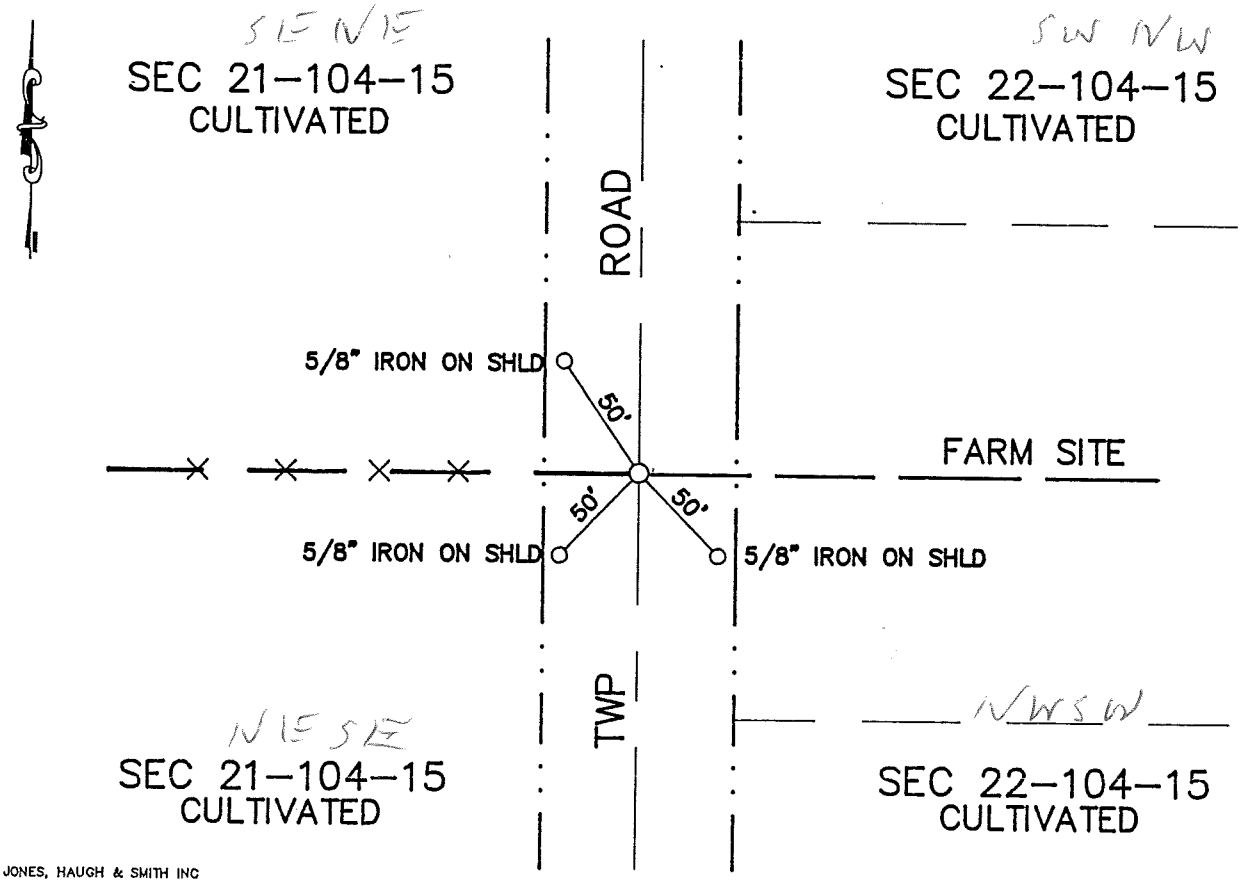

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-30-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 2 day of Feb A.D., 1996

COUNTY RECORDER Charles Engen
By Susan M. Davis, Deputy
DOCUMENT NO. 142314

M.H.D. FORM NO. 2105 BOOK 90 PAGE 162

Book 90 Misc Page 162

W 1/4 Cor SEC 22-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1930 Mower County Highway Department notes show a small pointed stone with a 5/8" iron rod above in place.

1994 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road and in line with line fence West. Uncovered a 5/8"x20" long iron, 1' below the road surface. Continued digging and found a pointed stone. Placed a 5/8" iron with an Aluminum casting over stone 4" below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 22, Township 104N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/18/1991 (DATE) found a POINTED FIELD STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10/18/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

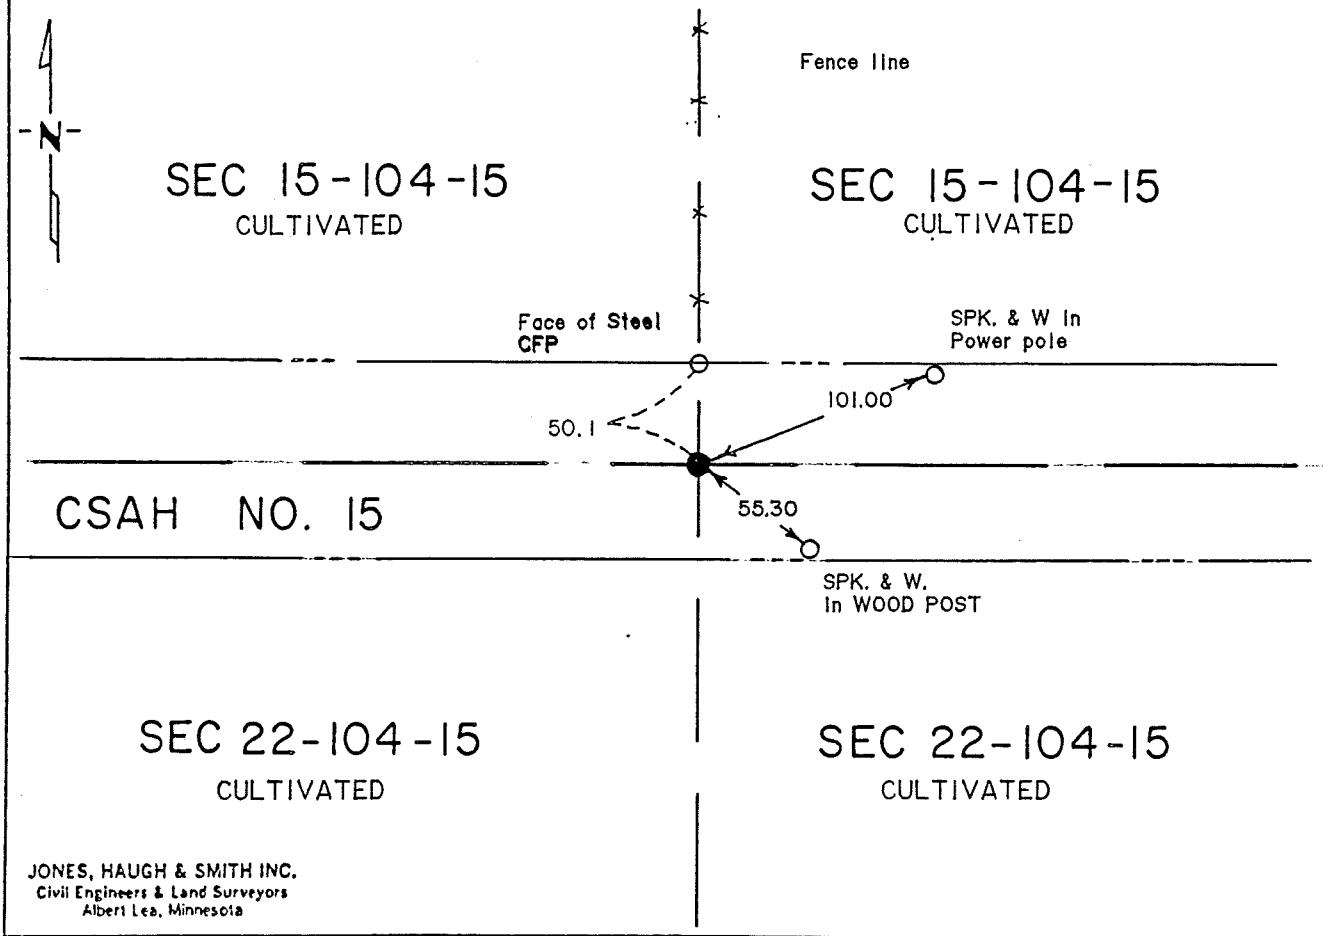

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-6-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 22-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plan shows a stone monument at Sta 159+38.4 and the following ties were taken:

Hub 50' NE	Hub 50' SE
Hub 50' SW	Hub 50' NW

1948 Mower County Grading Plan shows a stone monument at 1/4 corner and the following ties were taken:
57.5' SW to TP
77.5' N to third st. fence post
52.0' SSW to CFP

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe on the centerline of east-west roads in line with fence north and uncovered a 6"x8" pointed field stone 3 feet deep in virgin soil. Placed a 5/8" diameter iron on east side of stone and set a cast iron monument on road surface over stone.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 22, Township 104N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/03/1994 (DATE) found a 3/4" PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/03/1994 (DATE) placed a 5/8" IRON WITH ALUMINUM CASTING

SKETCH OF REFERENCE TIES

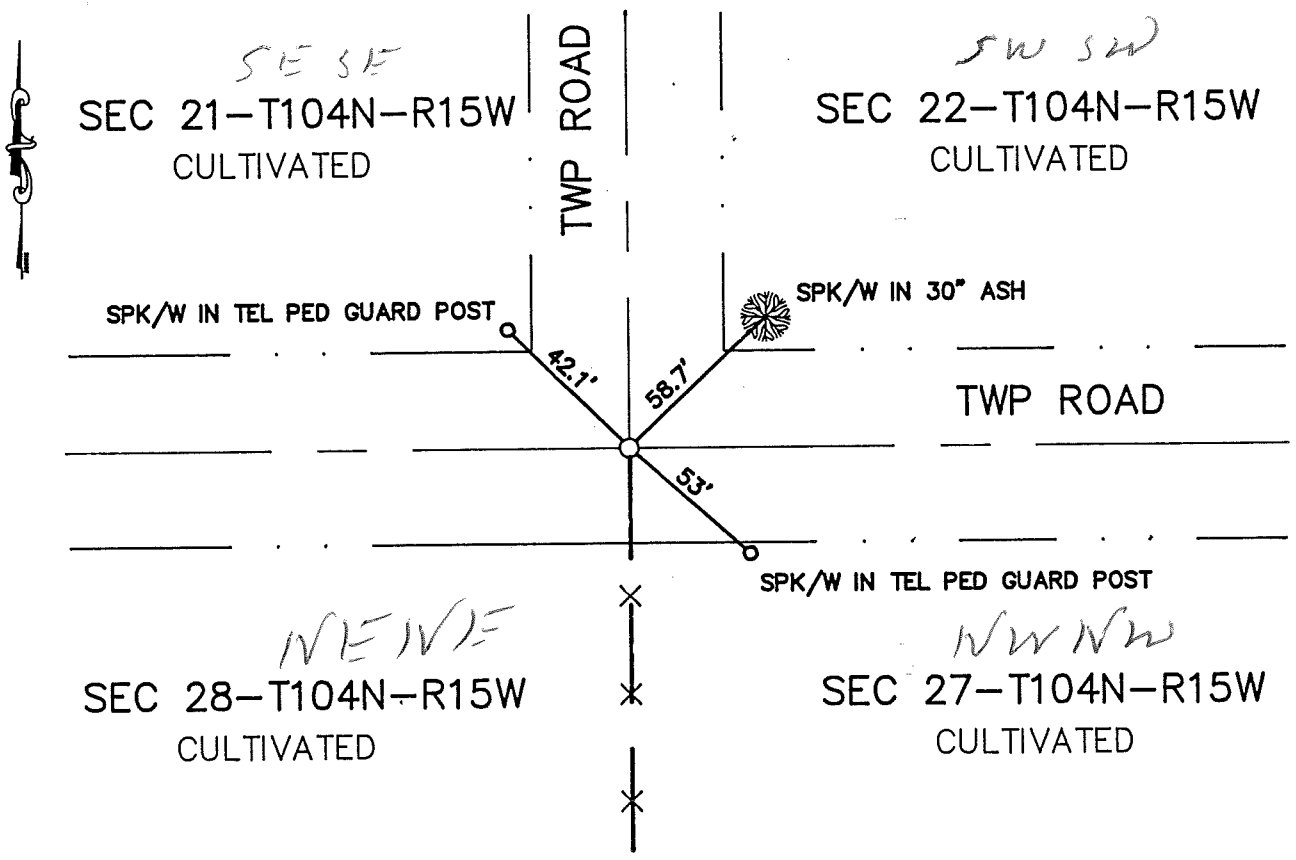

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 96 PAGE 112

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-4-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 6 day of Aug A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 455220

M.H.D. FORM NO. 2105

Book 96 Misc Page 112

SW Cor SEC 22-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1930 Mower County Surveyor records show an inplace stone and iron stake in line with fence to the south and 33' north of end fence post.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe. Found 3/4" pipe, 1.5' below road surface, on south side of stone. Continued digging, found 5/8" iron on north side of stone. Left 5/8" iron and 3/4" pipe as found. Placed a 5/8" iron with aluminum casting over stone, 4" below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 22, Township 104N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 02/18/2003 (DATE) placed a 1 1/2" X 3" IRON SPIKE

SKETCH OF REFERENCE TIES

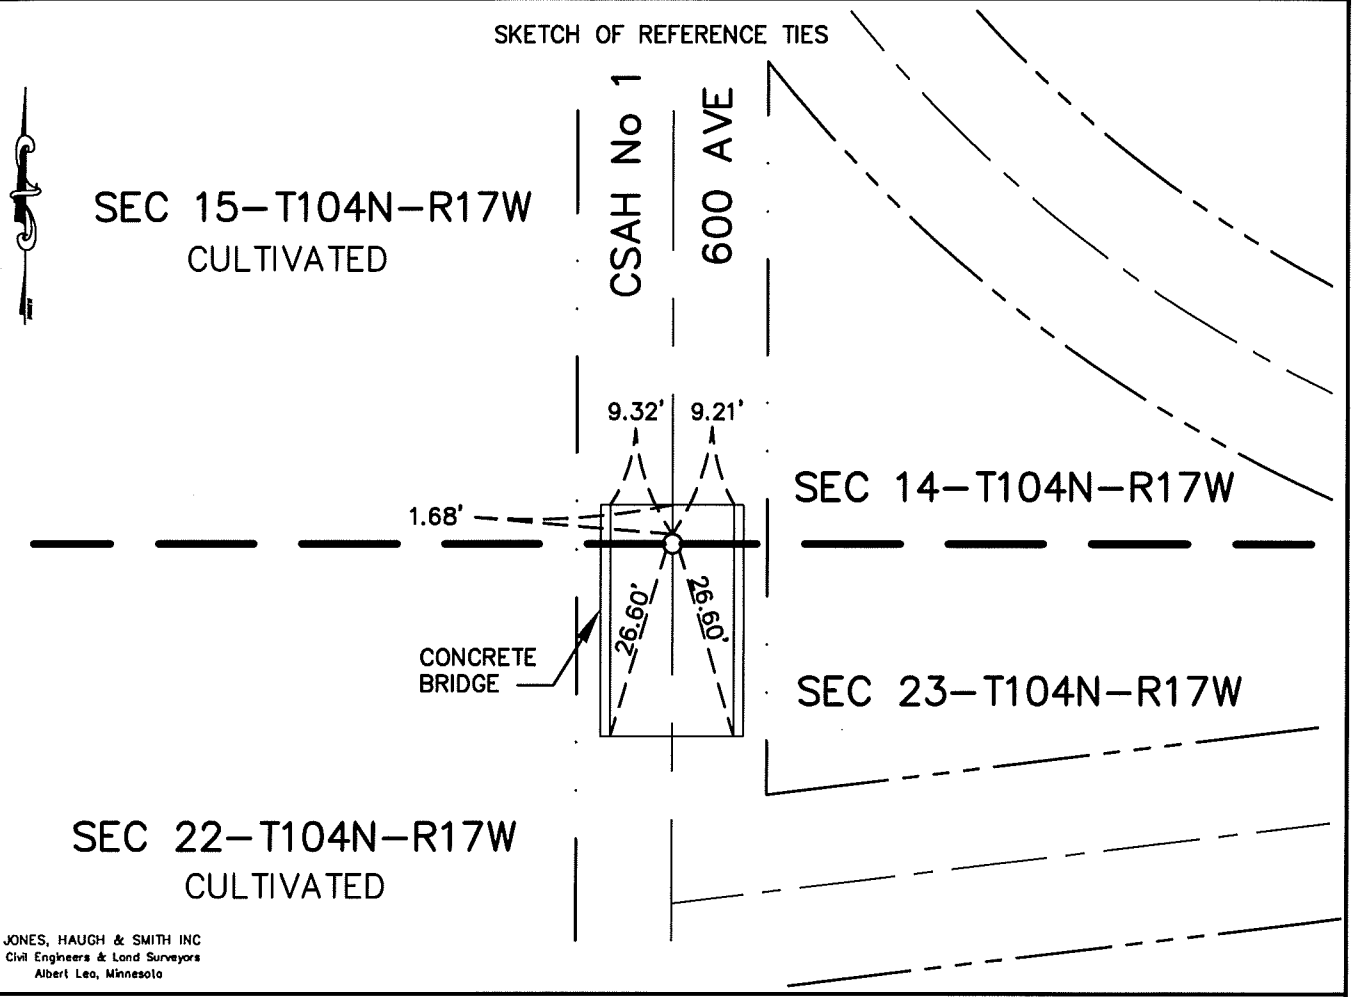

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 2-25-03 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Cor Sec 22-104-17

Deputy Surveyor John Fitzpatrick of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1928 Mower County Highway Dept. road plan shows a section corner in the bridge.

1956 Mower County surveyor's notes show a concrete monument at this location.

1956 Mower County Highway Dept. road plan shows a concrete monument inplace 1.68' South of the North end of bridge.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, used the ties shown on the 1956 Mower County Highway road plan to reset corner. Set a 1 ½" x 3" long spike in concrete bridge deck.

The monument is in agreement with previous records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 22, Township 104N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/01/1996 (DATE) found a STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/01/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

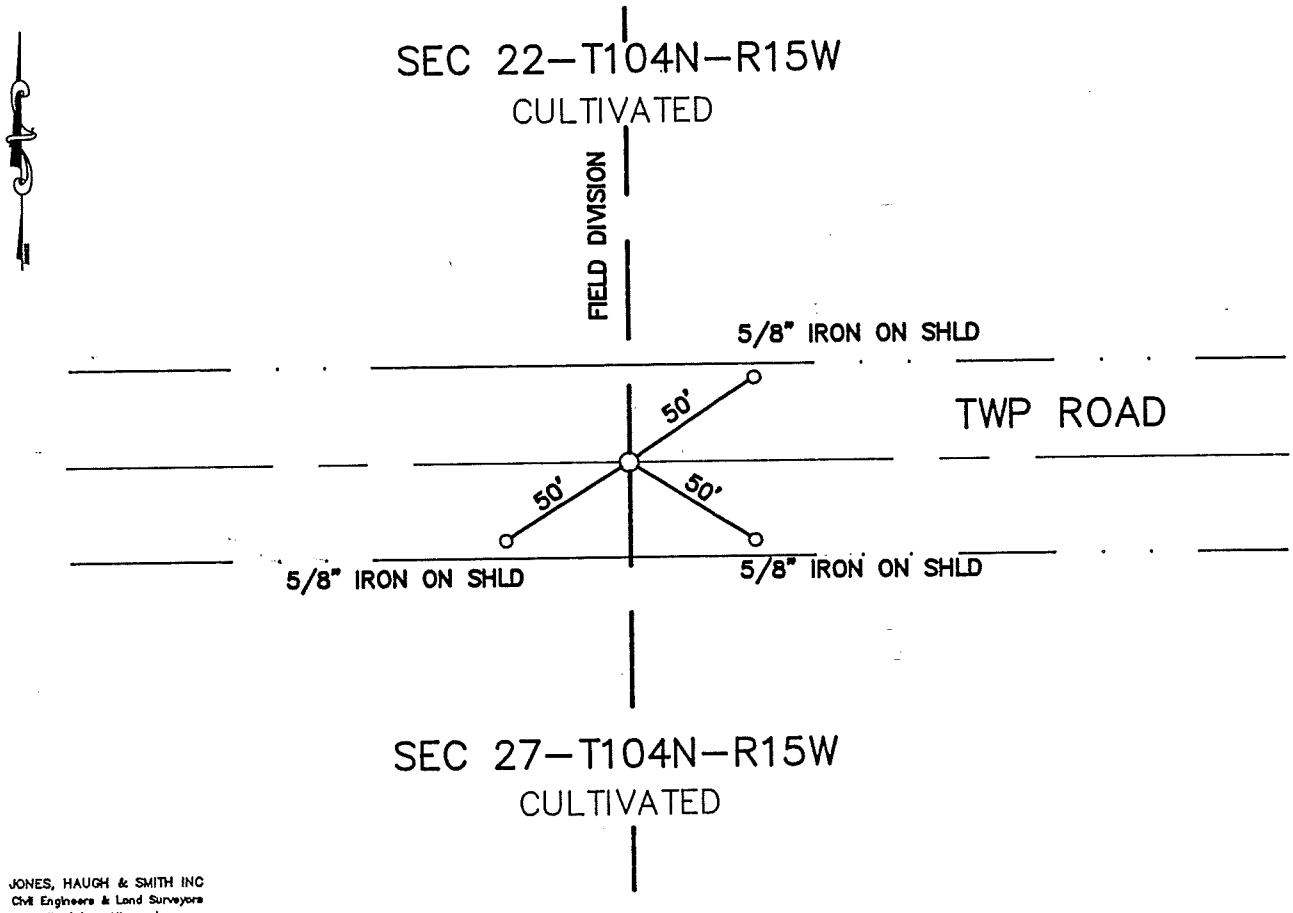

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 a .M. on the 23 day of June A.D., 1997

COUNTY RECORDER _____

By _____ Deputy

DOCUMENT NO. 454024

M.H.D. FORM NO. 2105

BOOK 95 PAGE 371

S 1/4 Cor SEC 22-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on centerline of township road and in line with field division north and line fence south. Uncovered two 1'x 1' stones 2' deep, stones fit centerline of road and fit line fence south and field division north, accepted stones as true corner. Set 5/8"x16" capped iron between stones, cap number 13807. Set 5/8"x16" iron with cast iron monument over iron 0.40' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 23, Township 104N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/18/1991 (DATE) found a 6" SQUARE STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/18/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

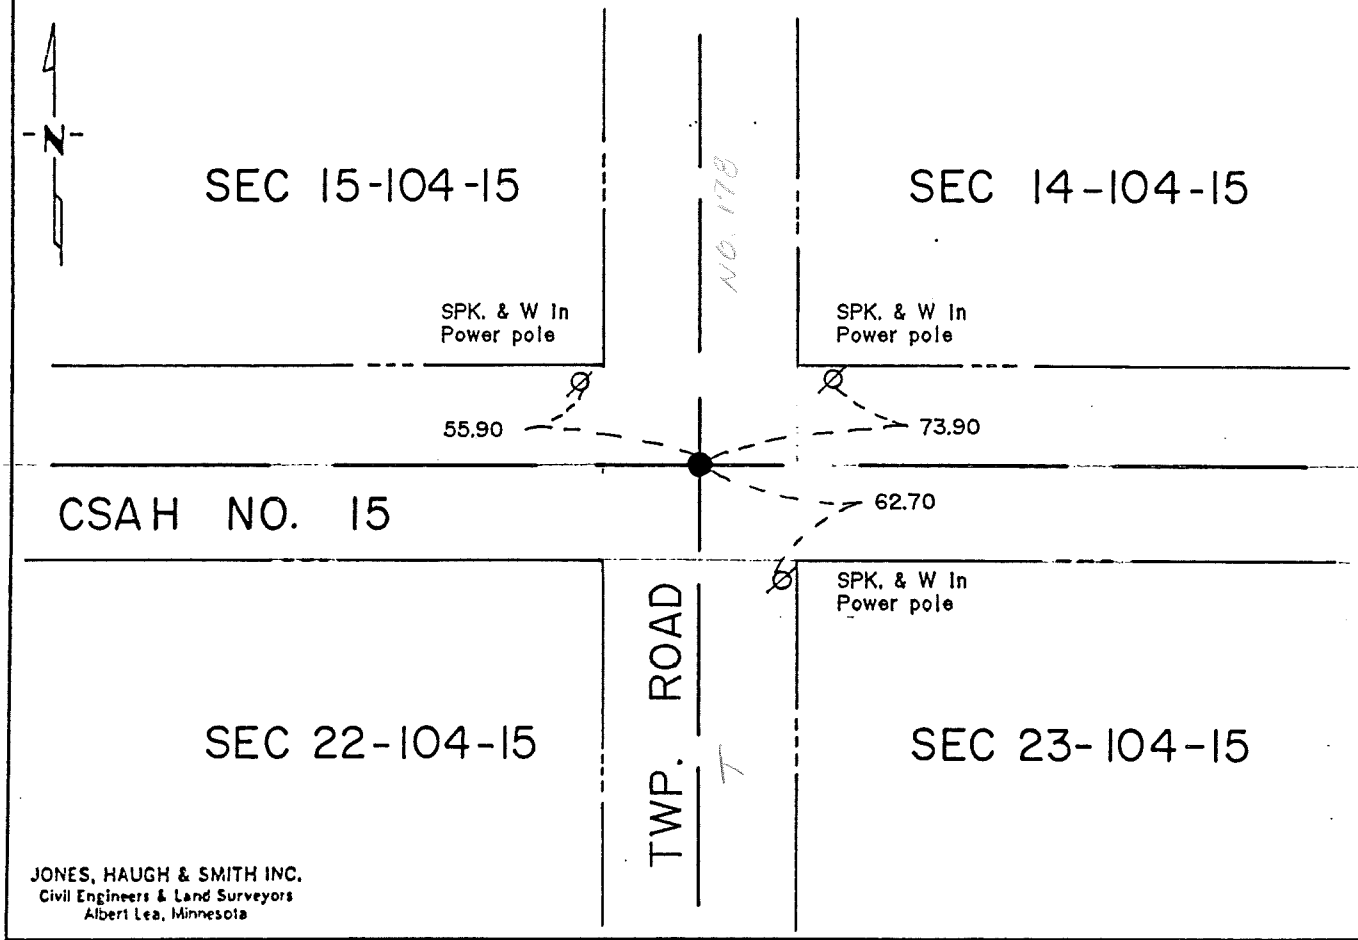

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-6-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 23-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

1940 Mower County Grading Plans show a monument found and the following ties were taken:

33.5' NE to CFP	41.2' SE to CFP
42.7' SW to CFP	44.5' SW to TP

1954 Mower County Grading Plans show a stone monument found and a concrete monument found on road surface with the following ties:
67.6' SSW to first steel fence post
81.3' NNW to third steel fence post
62.4' SW to CFP
61.4' to steel CFP

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe on the centerline centerline of north-south-east-west roads. A 4'x8'x3.5' deep hole was dug and a 6" square stone was found 3.5' deep in virgin soil. A 5/8" diameter iron was placed on the east side of stone and a cast iron monument set over stone on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 23, Township 104N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-18-91 (DATE) found a 3/4" ø x 30" long pipe

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-18-91 (DATE) placed a Cast iron monument over pipe

SKETCH OF REFERENCE TIES

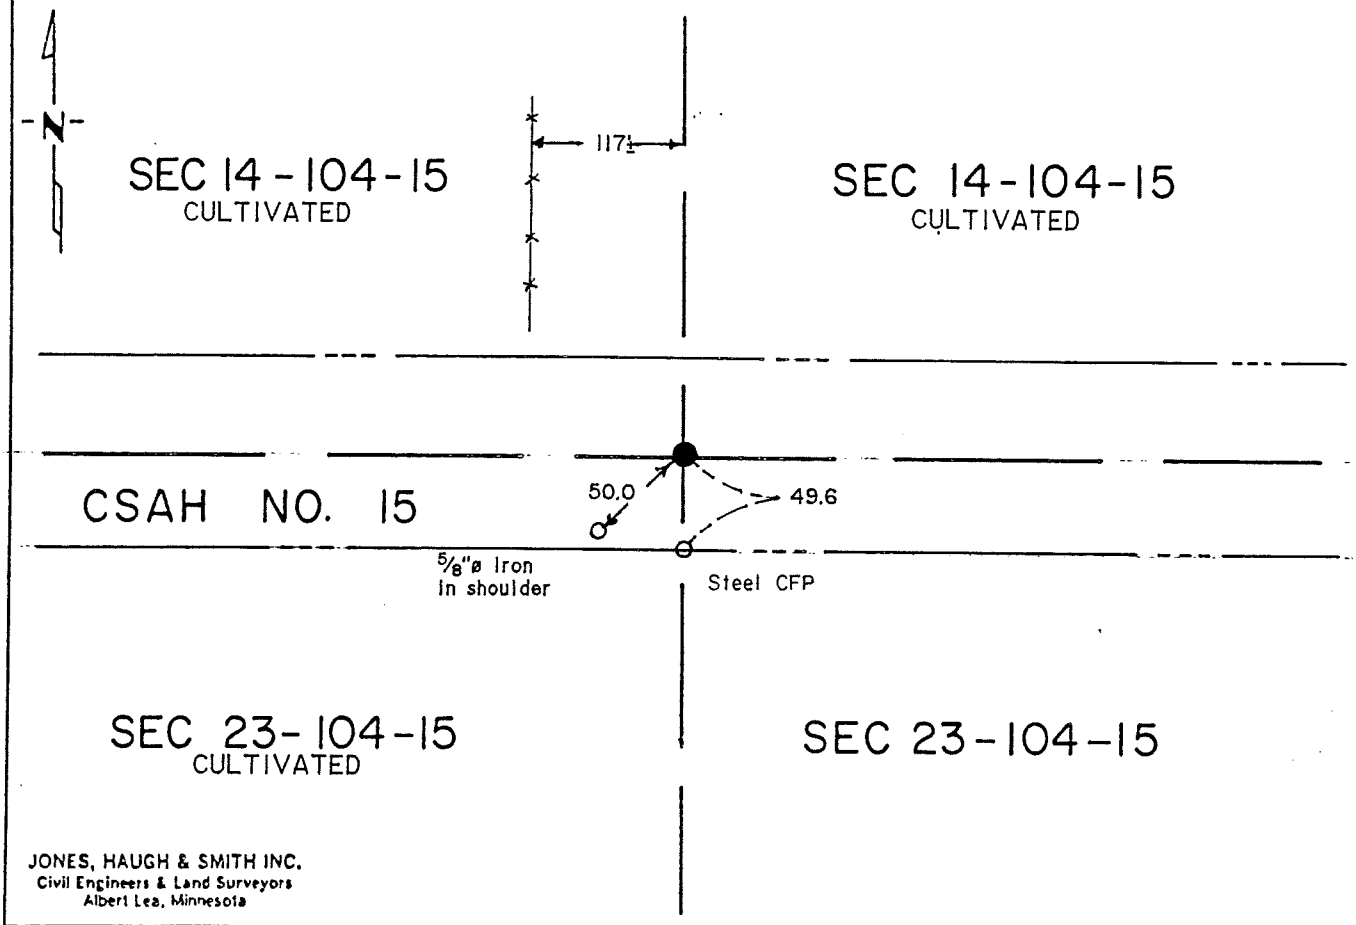

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-6-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 23-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe on the centerline of east-west roads at a position shown by resident farmer Mr. Kuhlman, who indicated 25 years ago a fence line ran north-south. Dug a 10'x6'x7' deep hole and uncovered a 3/4" diameter x 30" pipe. Continued digging and found no further evidence of public land survey corner of a perpetuation thereof. Reset cast iron monument over pipe on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 24, Township 104N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 10-24-89 (DATE) found a 1/2" x 3 feet threaded iron rod

☐ left monument as found, ☒ lowered monument, ☐ removed monument (explain)

☒ On 10-25-89 (DATE) placed a Cast Iron Disk on Telspar Tube

SKETCH OF REFERENCE TIES

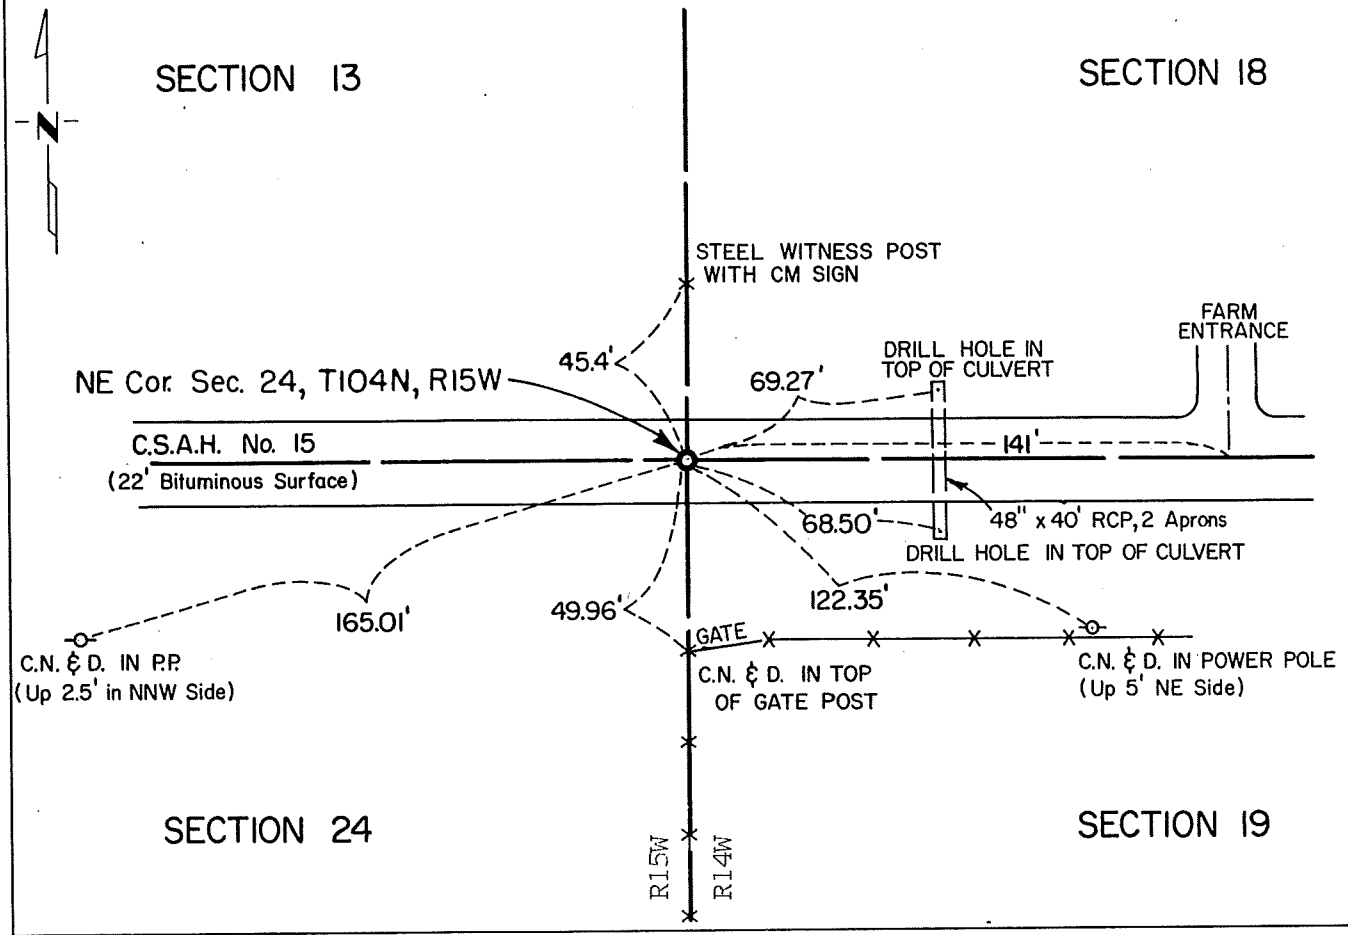

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan 4/21/92
SIGNATURE DATE

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of Mower

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 ___

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

Northeast Corner Section 24, T104N, R15W, 5th P.M.

July 1853	John Bull, Deputy Surveyor, set a post and mound for the corner during the original public Land Survey.
1954	County Highway records show a concrete monument at the corner with ties to fence posts.
1968	County highway records show a 3/4 inch iron inplace 66 feet west of a culvert.
Oct. 24, 1989	Minnesota Department of Transportation excavated an area 8 feet East-West by 3 feet North-South centered on the County road plan location. A 1/2 inch by 3 foot long threaded iron rod was found.

An analysis of the record and survey data indicate that a continuous monument history is not of record. However, the 1/2 inch iron rod monuments the corner as marked for nearly 40 years. The iron rod is therefore accepted as marking the Public Land Survey Corner.

For details of the electronic survey, contact the Minnesota Department of Transportation's Surveys Section of the Rochester District Office.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 24, Township 104N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 10-24-89 (DATE) found a 10" x 12" x 18" pointed granite stone
3 1/2 feet down

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-25-89 (DATE) placed a Cast Iron Disk on a Telspar Tube

SKETCH OF REFERENCE TIES

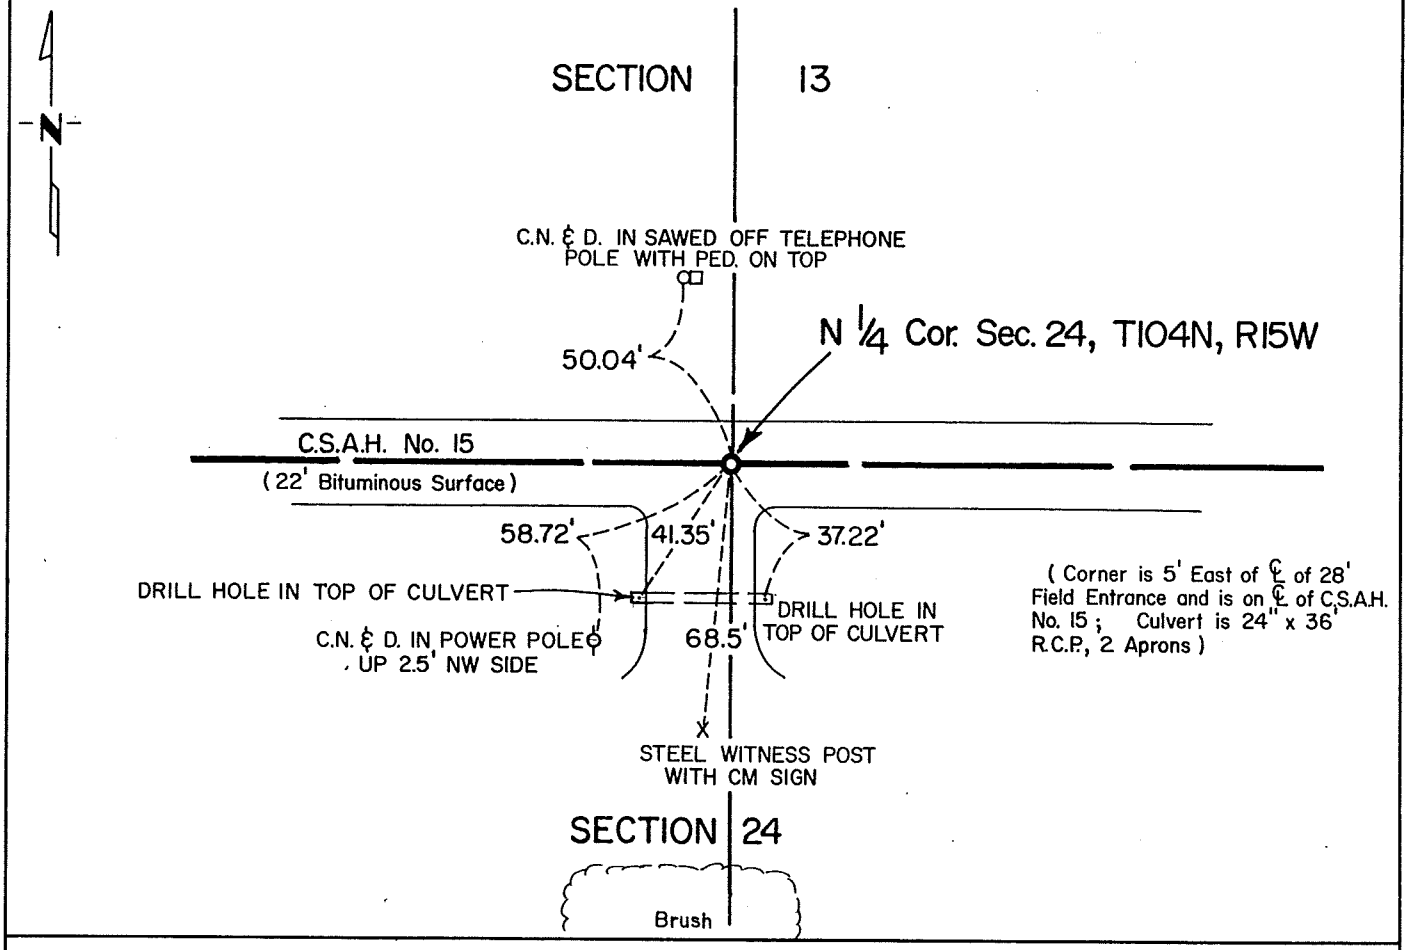

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan 4-21-92
SIGNATURE DATE

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Mower

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ___

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

North Quarter Corner Section 24, T104N, R15W, 5th P.M.

August 1853 — John Quigley, Deputy Surveyor, set a post in a mound for the corner during the original public Land Survey.

1968 — County highway plans indicate the regraded road placed fill material over the old road at the quarter corner.

October 24, 1989 — Minnesota Department of Transportation excavated an area 9 feet East-West by 4 feet North-South centered on the center of County Road 15 and brush line to South and old fence line to the North. A 10 inch by 12 inch by 18 inches high pointed granite stone was found 3 1/2 feet deep and under an old road surface.

An analysis of the record and survey data indicates that the origin of the pointed stone is not of record. However, the stone does enjoy a harmonic relationship to adjacent corner stones dating from the 1930's and to lines of occupation. The stone is accepted as marking the public Land Survey Corner.

For details of the electronic survey, contact the Minnesota Department of Transportation's Surveys Section of the Rochester District Office.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 25, Township T104N, Range R15W, ____ P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-16-94 (DATE) found a 8" x 12" ROCK 2.5' DEEP, 1' BELOW OLD ROAD BED.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-16-94 (DATE) placed a CAPPED 5/8"ø IRON ON NORTH SIDE OF ROCK.
PLACED A 5/8"ø IRON WITH CAST IRON MON. ABOVE ROCK, 4" BELOW ROAD

SKETCH OF REFERENCE TIES

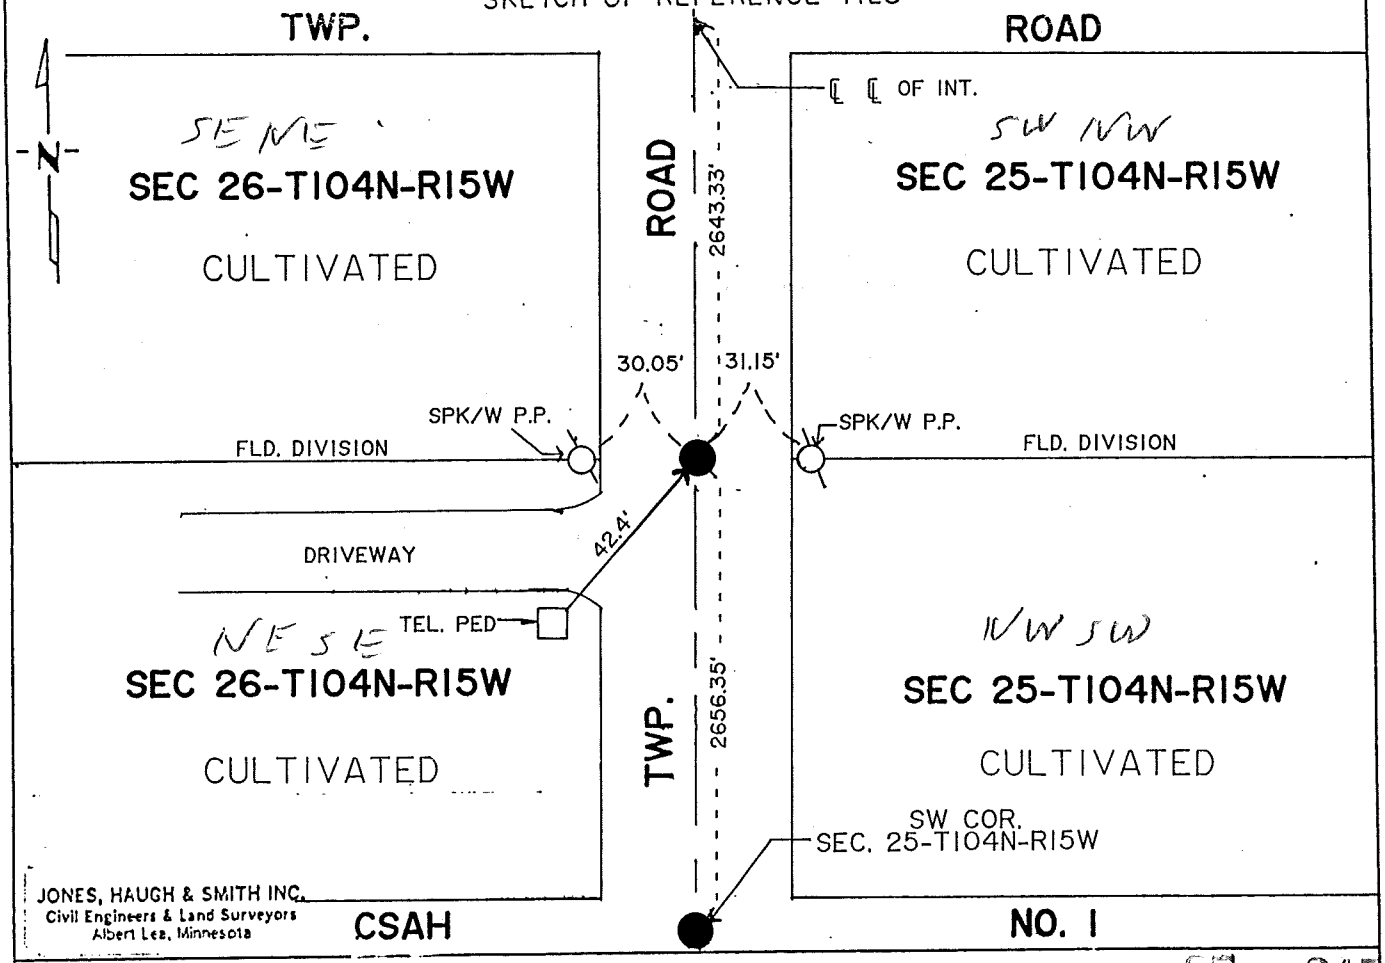

Statement of evidence relative to this corner location is on back of page. BOOK 87 PAGE 345

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-12-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 19 day of June A.D., 1995

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 437350

Book 87 Misc Page 345

M.H.D. FORM NO. 2105

W 1/4 Cor SEC 25-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones, Haugh and Smith crew, under direction of John Schulte, Mower Co. Surveyor RLS 13807, dug with county backhoe on CL Twp. road and in line with field divisions to the east and west. A 8" X 12" stone was found 2.5' deep in the old road bed. Continued digging to virgin soil and found no further evidence. Accepted stone as true corner, and placed a 5/8 iron capped RLS 13807 on the north side. A CIM was placed over the stone, 4" below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 87 PAGE 346

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 25, Township T104N, Range R15W, ____ P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-16-94 (DATE) found a 2' LONG IRON 1.5' BELOW ROAD SURFACE, IN OLD ROAD BED.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-16-94 (DATE) placed a 5/8"ø IRON WITH CAST IRON MON. OVER IRON FOUND, 4" BELOW ROAD SURFACE.

SKETCH OF REFERENCE TIES

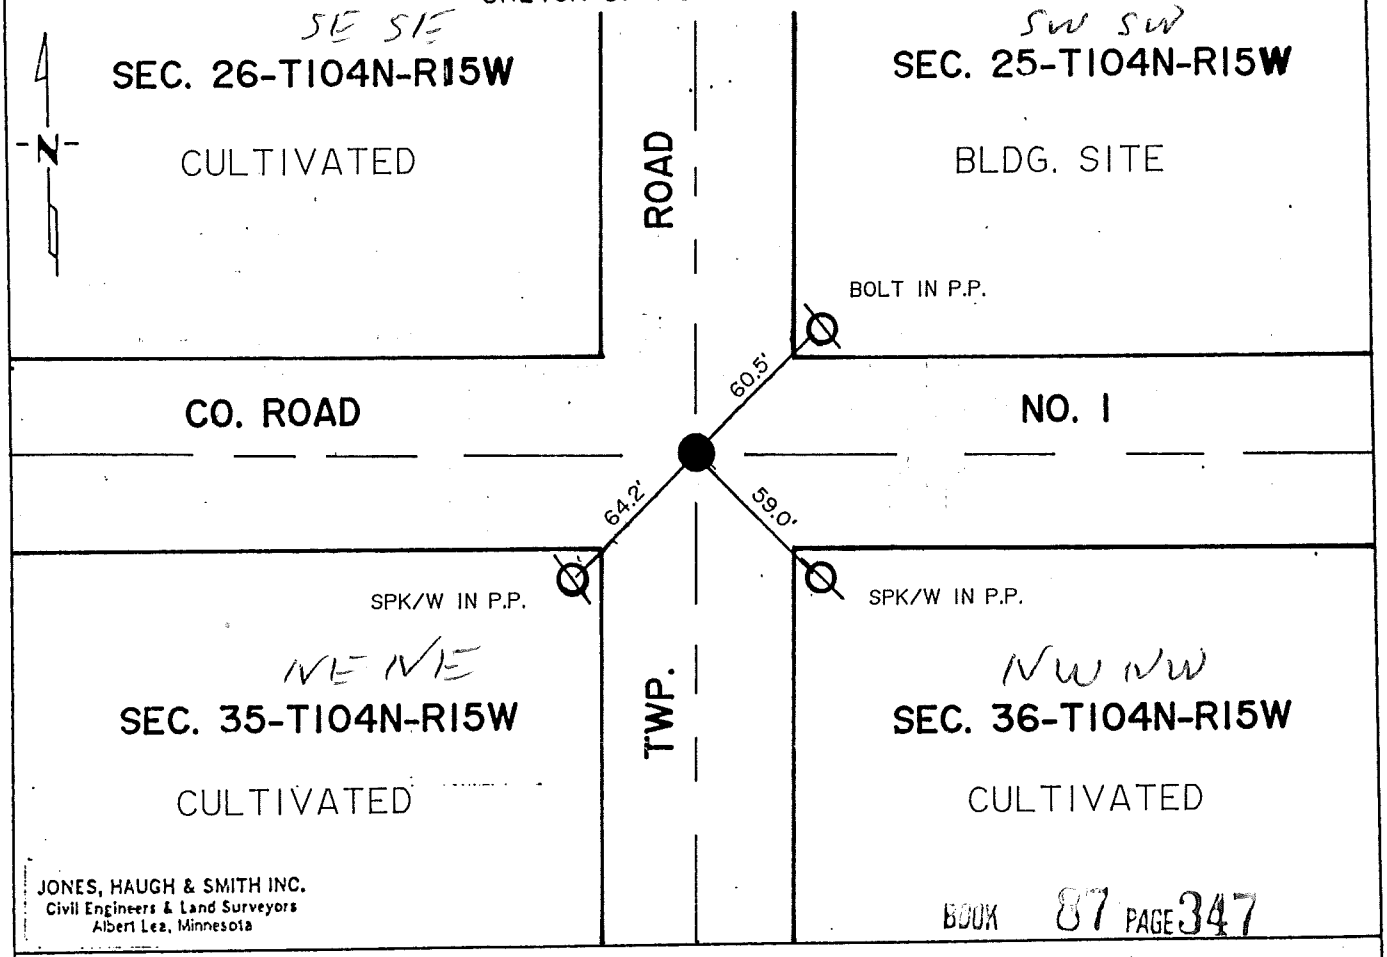

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 87 PAGE 347

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-12-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 19 day of June A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 437351

Book 87 Misc. Page 347

M.H.D. FORM NO. 2105

SW Cor SEC 25-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1941 Mower Co. Hwy. Dept. records indicate a monument in place.

1994 Jones, Haugh and Smith crew dug with county backhoe on CL CL of CSAH #1 and Twp. road. Found a 2' long iron 1.5' below road surface, in old road bed. Continued digging to virgin soil and found no further evidence. Accepted iron as true corner. Placed a CIM over the iron found, 4" below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 25, Township T104N Range R15W, ____ P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-16-94 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-16-94 (DATE) placed a 5/8"ø IRON WITH CAST IRON MON. AT SPLIT BETWEEN SE & SW COR. 4" BELOW ROAD SURFACE.

SKETCH OF REFERENCE TIES

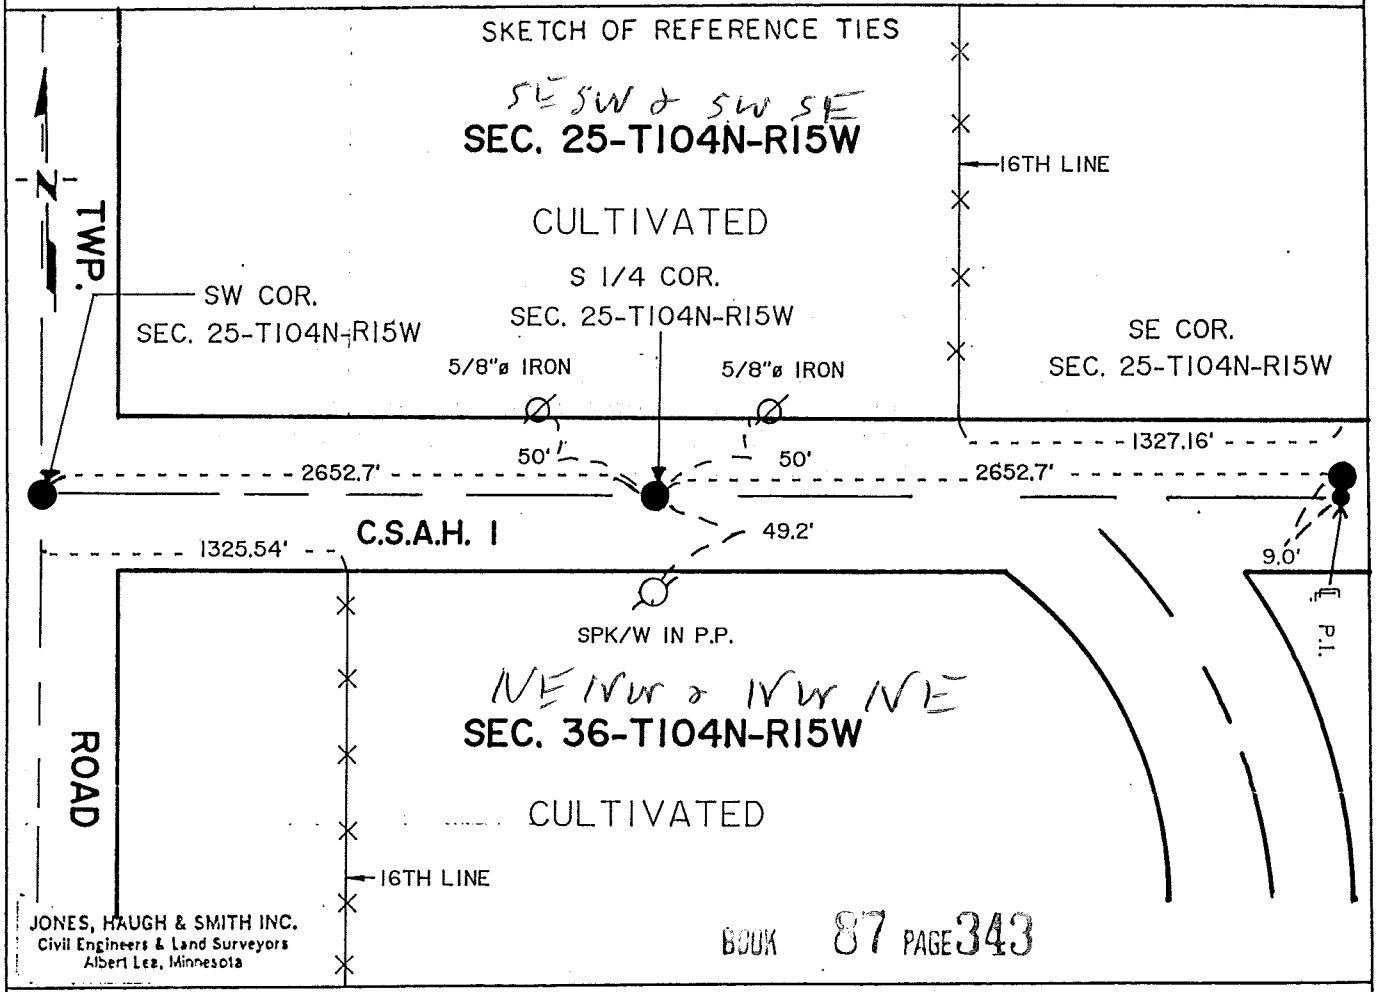

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 87 PAGE 343

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-12-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 19 day of June A.D., 19 95

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 437349

Book 87 Misc Page 343

MLP FORM NO. 2105

S 1/4 Cor SEC 25-104-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor, dug with county backhoe on CL Twp. road and at split of the mile between the SE and SW corners. The mile measured to be 5305.40, making the split 2652.70. Excavated a 6' X 12' X 4' deep hole to virgin soil. No evidence was found of the corner. Placed CIM at split between SE and SW corners, 4" below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 29, Township 104 Range 15, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-22-03 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

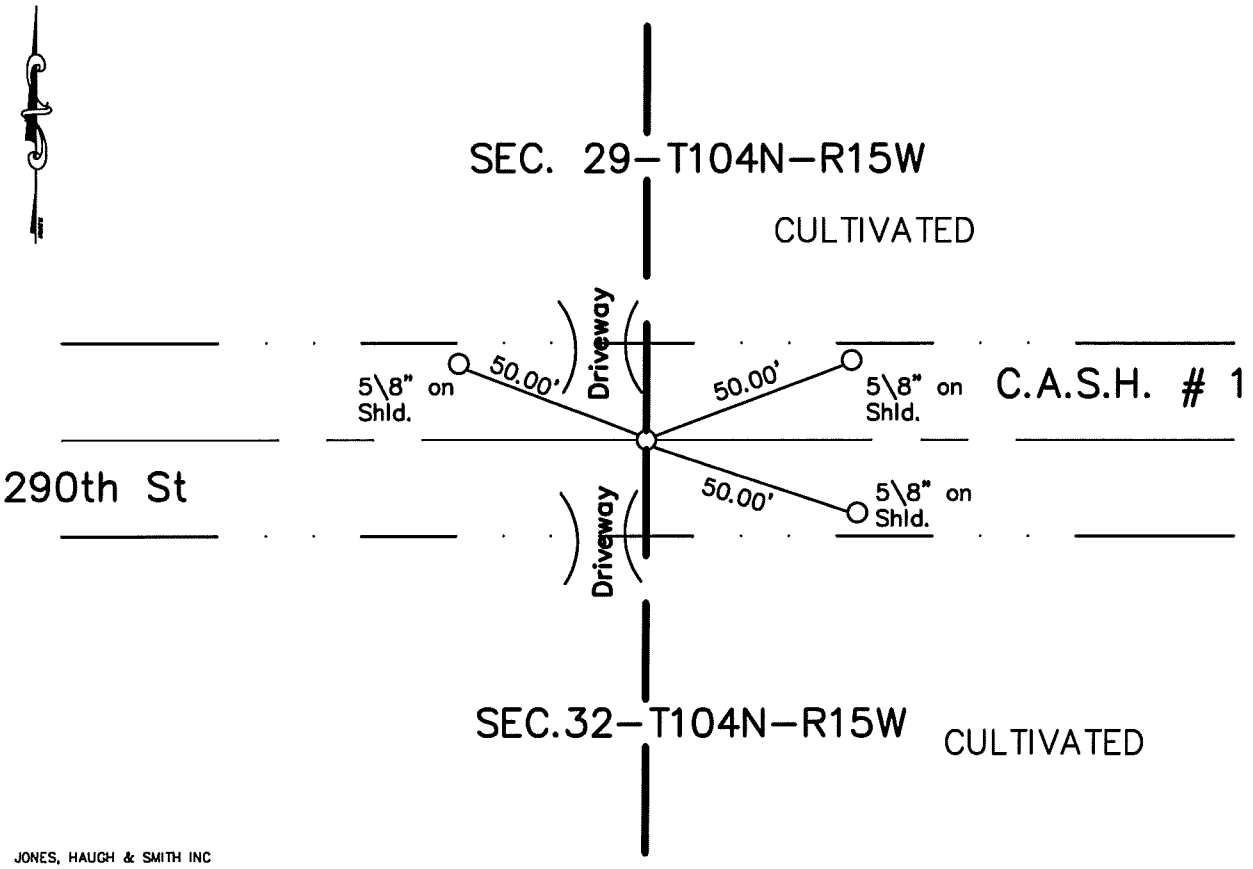

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 6-11-03 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor Sec 29-104-15

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower Co. backhoe on centerline of Co. road no. 1 and field division to the north. Dug a 4'X12' hole down to virgin soil and found no evidence of PLS corner. Set corner using obliterated methods, which will fit centerline of East-West road and existing fence lines within section.

Set 5/8" iron with cast iron monument over, six tenths below road surface.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 29, Township 104 Range 15, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5-22-03 (DATE) found a STONE WITH WOODEN STAKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-22-03 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

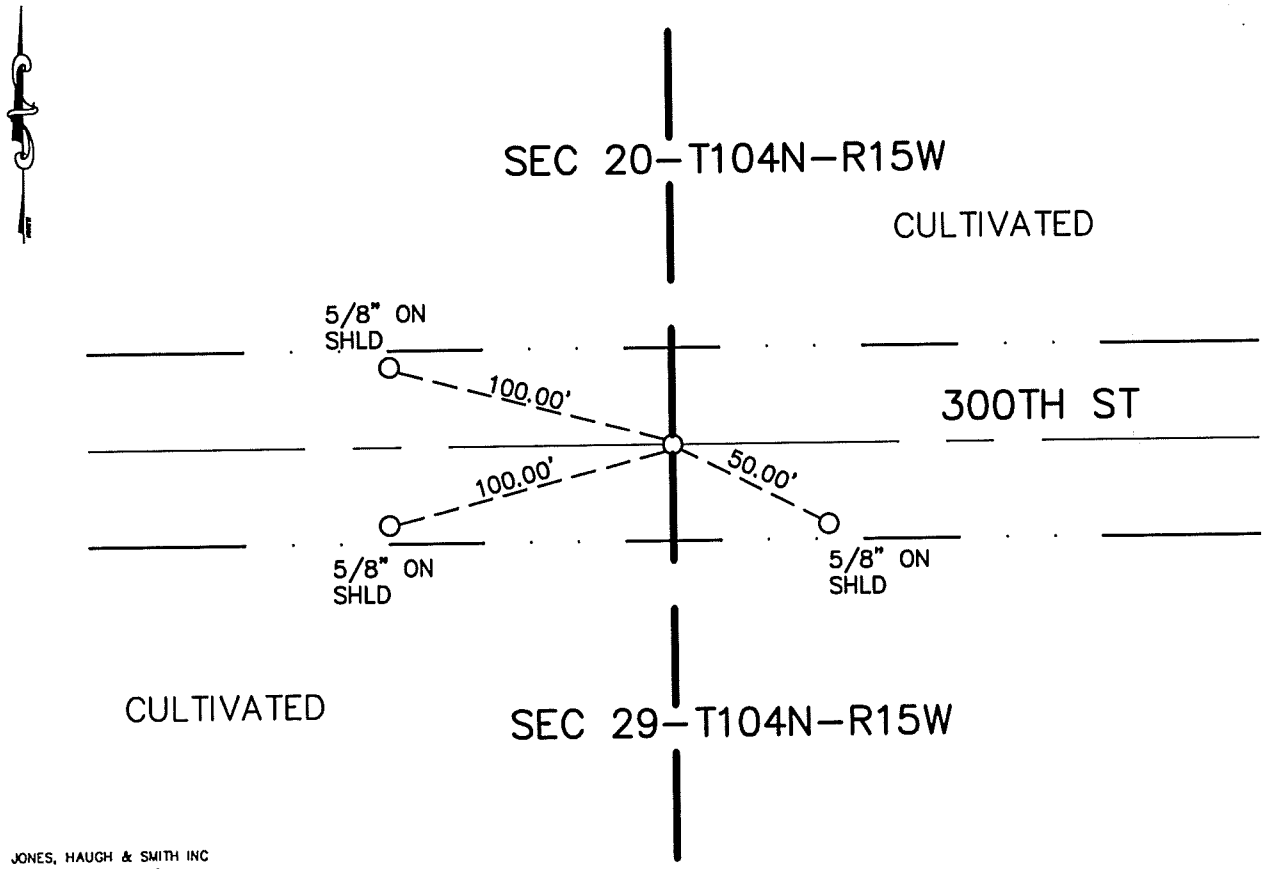

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-11-03

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Cor Sec 29-104-15

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained form the above mentioned offices.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe. Uncovered a stone with a wood stake on North side, in center of TWP road two feet deep. Set 5/8"X16" iron with cast iron monument over found stone and wood stake. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 29, Township 104 Range 15, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 4-8-03 (DATE) found a ALUM. MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

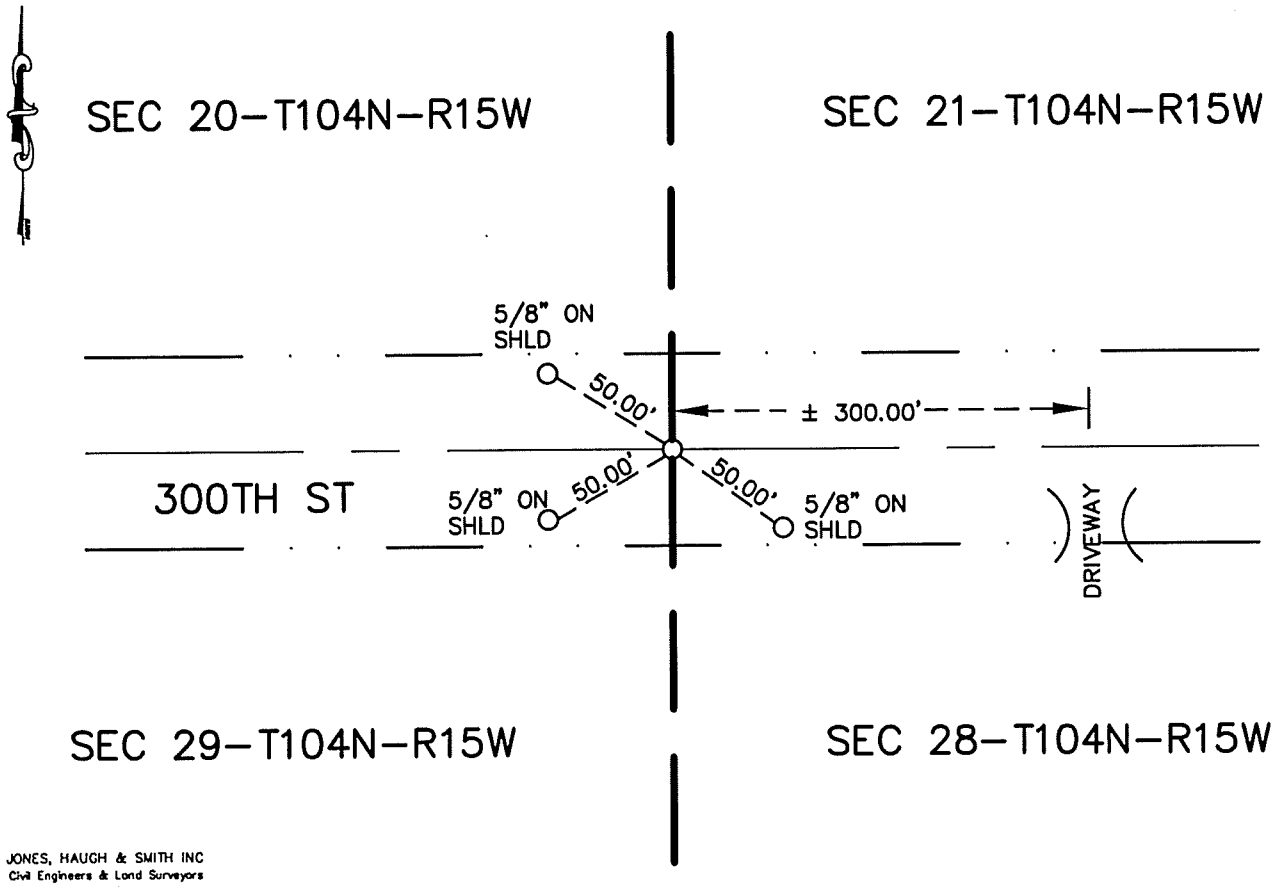

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 6-11-03 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Cor Sec 29-104-15

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder

No record of this corner was obtained form the above mentioned offices.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug at location of signal and found an aluminum monument six tenths below road surface. Survey crew was told by a local farmer that Ray Tucker RLS # 15471 had set this corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE COR Corner of Section 29, Township 104 Range 15, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5-22-03 (DATE) found a CONCRETE MONUMENT WITH IRON PIN

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-22-03 (DATE) placed a 5/8" IRON WITH CIM

SKETCH OF REFERENCE TIES

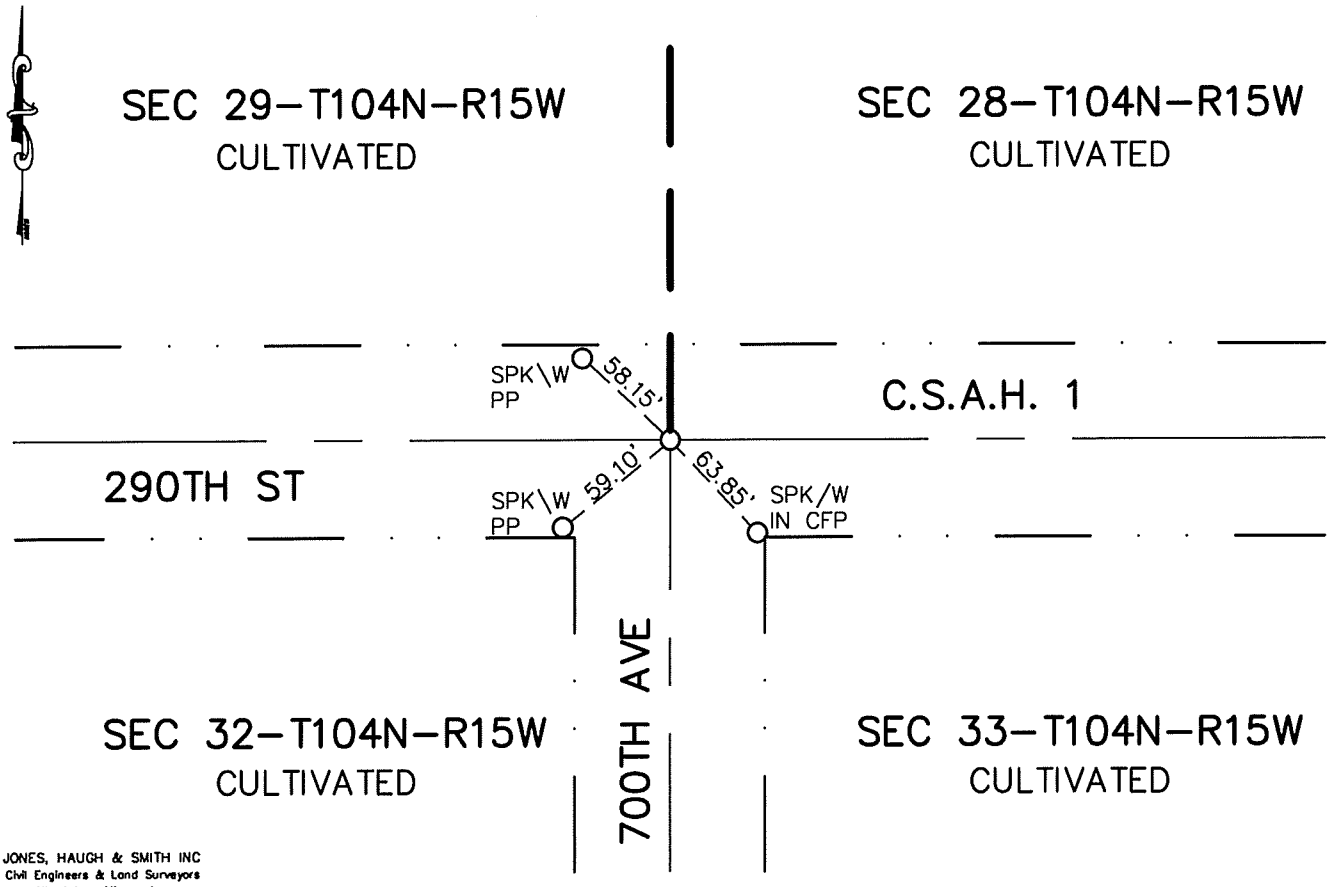

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-11-03

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Cor Sec 29-104-15

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1929 Mower County records state an in place iron pin.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe on centerline East-West road and centerline TWP. Road South. Uncovered a concrete monument with iron pin 1.5' deep. Set 5/8" iron with cast iron monument over concrete monument found.

The monument fits occupation and road centerlines within the section and is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 30, Township 104, Range 15, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 6-13-90 found a Nothing

☐ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☒ On 6-22-90 placed a Standard Concrete Monument

SKETCH OF REFERENCE TIES

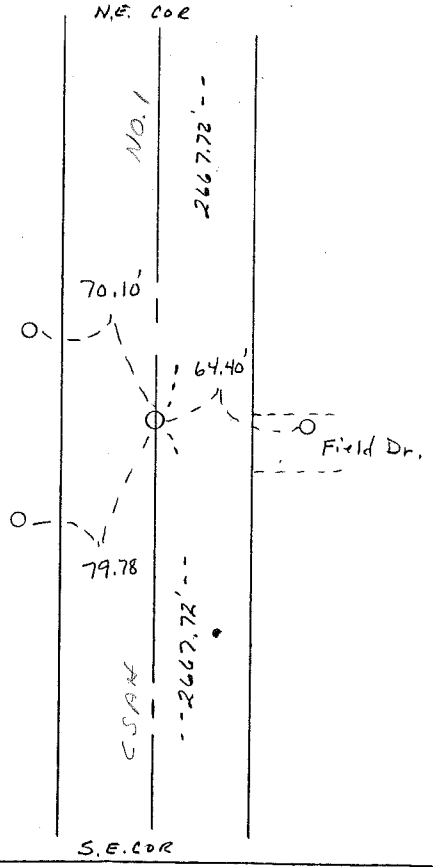

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond Tucker — Signature
6-29-90 — Date

Registration No. 15471
☒ Land Surveyor, ☐ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

EAST QUARTER CORNER SECTION 30 - T104N - R15W

1853 - John Quigley, Deputy Surveyor, set a quarter section post built mound with trench per instruction put handfull small stones in center and planted osage orange seed in SE corner during the Original Public Land Survey.

June 1990 - Tucker Land Surveying excavated this location and found nothing. Placed a Standard Concrete Monument.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electronic survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 30, Township ~~103~~ 104, Range 15,

5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 6-13-90 found a Concrete Monument 1.0' below surface on centerline of road.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☐ On _____ placed a _____

SKETCH OF REFERENCE TIES

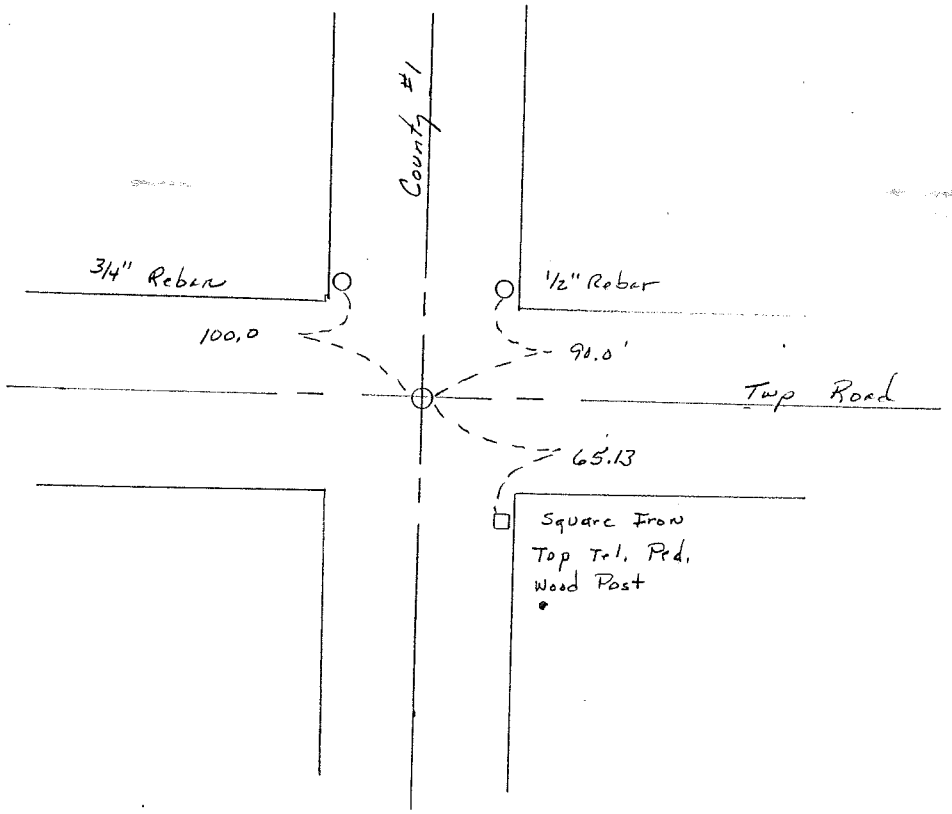

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond J. Tucker — Signature

6-29-90 — Date

Registration No. 15471

☒ Land Surveyor, ☐ Prof. Engineer

☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER SECTION 30 - T~~103~~104N - R15W

1853 - John Quigley, Deputy Surveyor, set post for corner, built mound, with trench per instructon put handfull small stones in center and planted osage orange seeds in SE corner during the Original Public Land Survey.

1949 - Mower County Highway Department notes show an inplace concrete monument.

March 1990 - Mower County Highway Department notes show an inplace concrete monument.

June 1990 - Tucker Land Surveying excavated this location and found a concrete monument 1.0 feet below on Centerline of road.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electronic survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.

TIE BOOK P. 89

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 31, Township 104N, Range 15W, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On Dec. 5, 1980 found a steel rod in concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☒ On Dec. 5, 1980 placed a cast iron Monument over concrete monument

SKETCH OF REFERENCE TIES

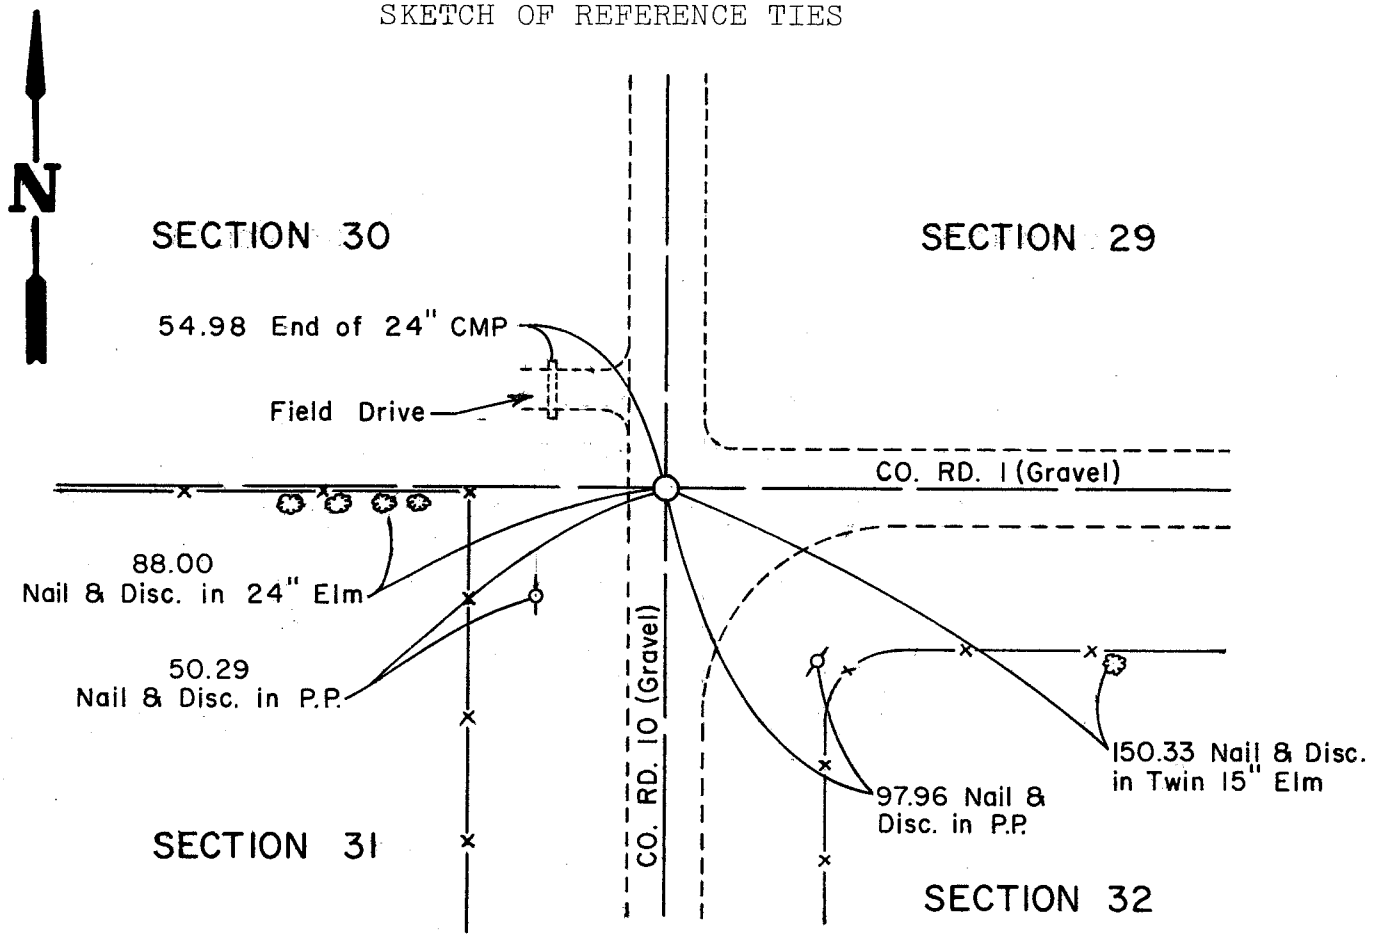

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
12-16-80 — Date

Registration No. 11009
☒ Land Surveyor, ☒ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER OF SECTION 31, TOWNSHIP 104 NORTH, RANGE 15 WEST, 5th P.M.

July, 1853 — John Quigley, Deputy Surveyor, set the corner during the original Public Land Survey.

Dexter Township, Mower County, Minnesota constructed Township roads North-South and East in the vicinity of the corner.

1930's-1940's — Mower County set concrete monuments at some corners in the county.

1952 — Mower County obtained control to the North-South road and constructed a county road. An iron pin in a concrete monument was found at the corner.

December 5, 1980

Ronald J. Olson, Registered Land Surveyor, searched the area with a magnetic locater. An excavation was made with the cooperation of the County Engineer and an iron rod in concrete was found 4 feet below the surface. The distance to the Southeast Corner of Section 31 was measured electronically. The measurement agrees within 1 foot of the distance measured in 1952.

The concrete monument has been perpetuated as the corner for over 30 years and is accepted as marking the corner of the Public Land Survey.

For additional details, contact Zenk Engineering, Inc., Albert Lea, Minnesota.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 36, Township 104N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-27-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-30-93 (DATE) placed a 5/8"ø x 16" IRON

SKETCH OF REFERENCE TIES

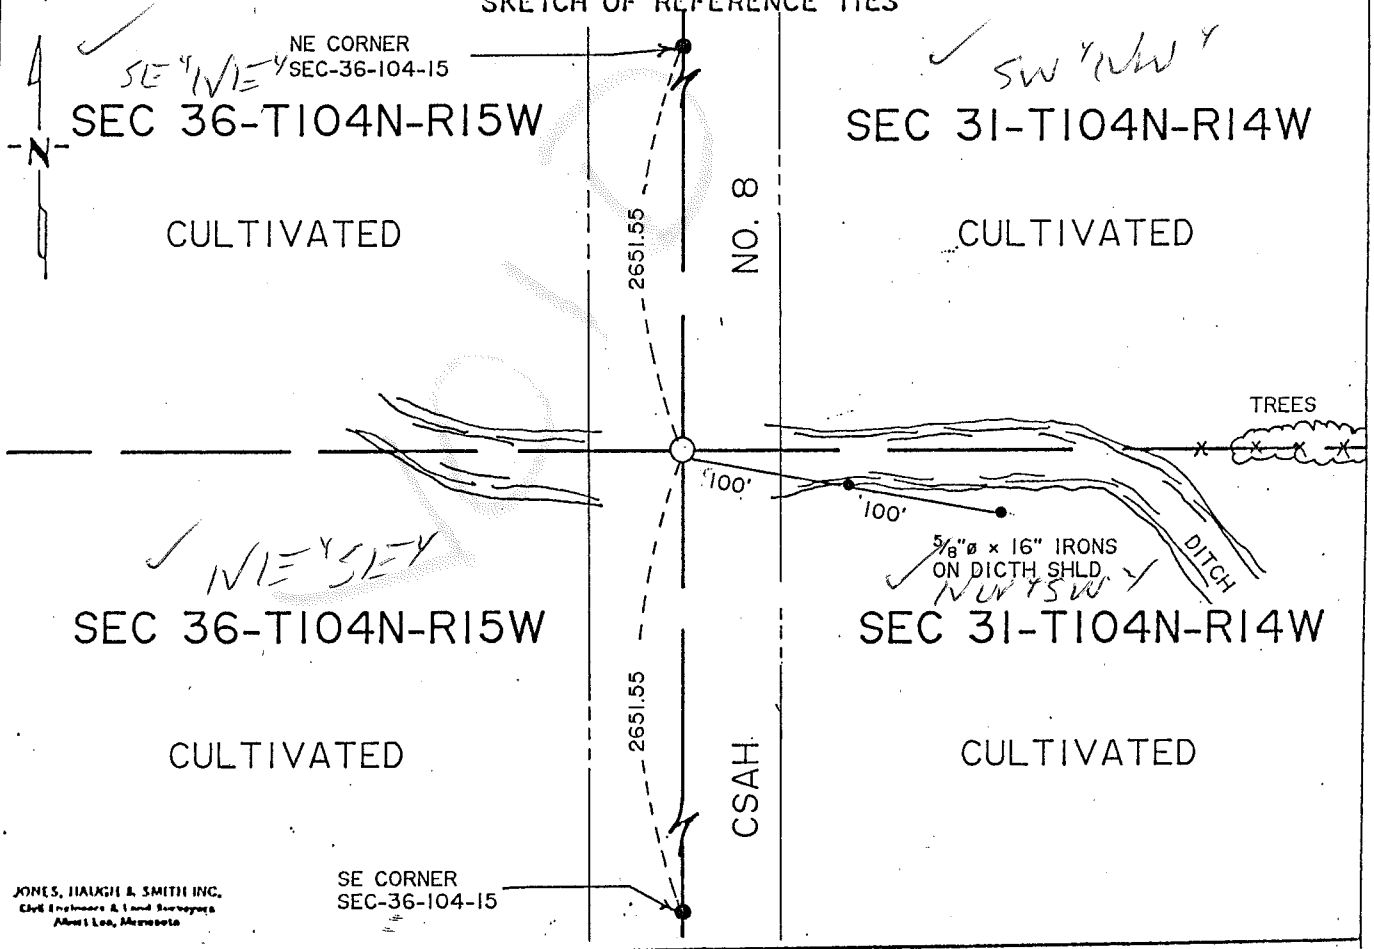

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-13-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 14 day of July A.D., 19 93

COUNTY RECORDER Amanda Enger

By Marlene Martin, Deputy

DOCUMENT NO. 422236

M.H.D. FORM NO. 2105 BOOK 80 PAGE 315 bk 80 Misc. pg. 315

STATEMENT OF EVIDENCE

E 1/4 corner Section 36-104-15

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, searched area and found no evidence of a perpetuation of the original corner. The original public land survey corner would have been destroyed by ditch construction. Therefore we set a 5/8" diameter x 16" iron on a straight line and at midpoint between the northeast corner and southeast corner of Section 36. Iron set was inline with line fence running east, as shown on 1945 County Highway Plans.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 316

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 36, Township 104N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-27-93 (DATE) found a NOTHING Recvd 7-19-93

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-30-93 (DATE) placed a 5/8"ø x 16" IRON

SKETCH OF REFERENCE TIES

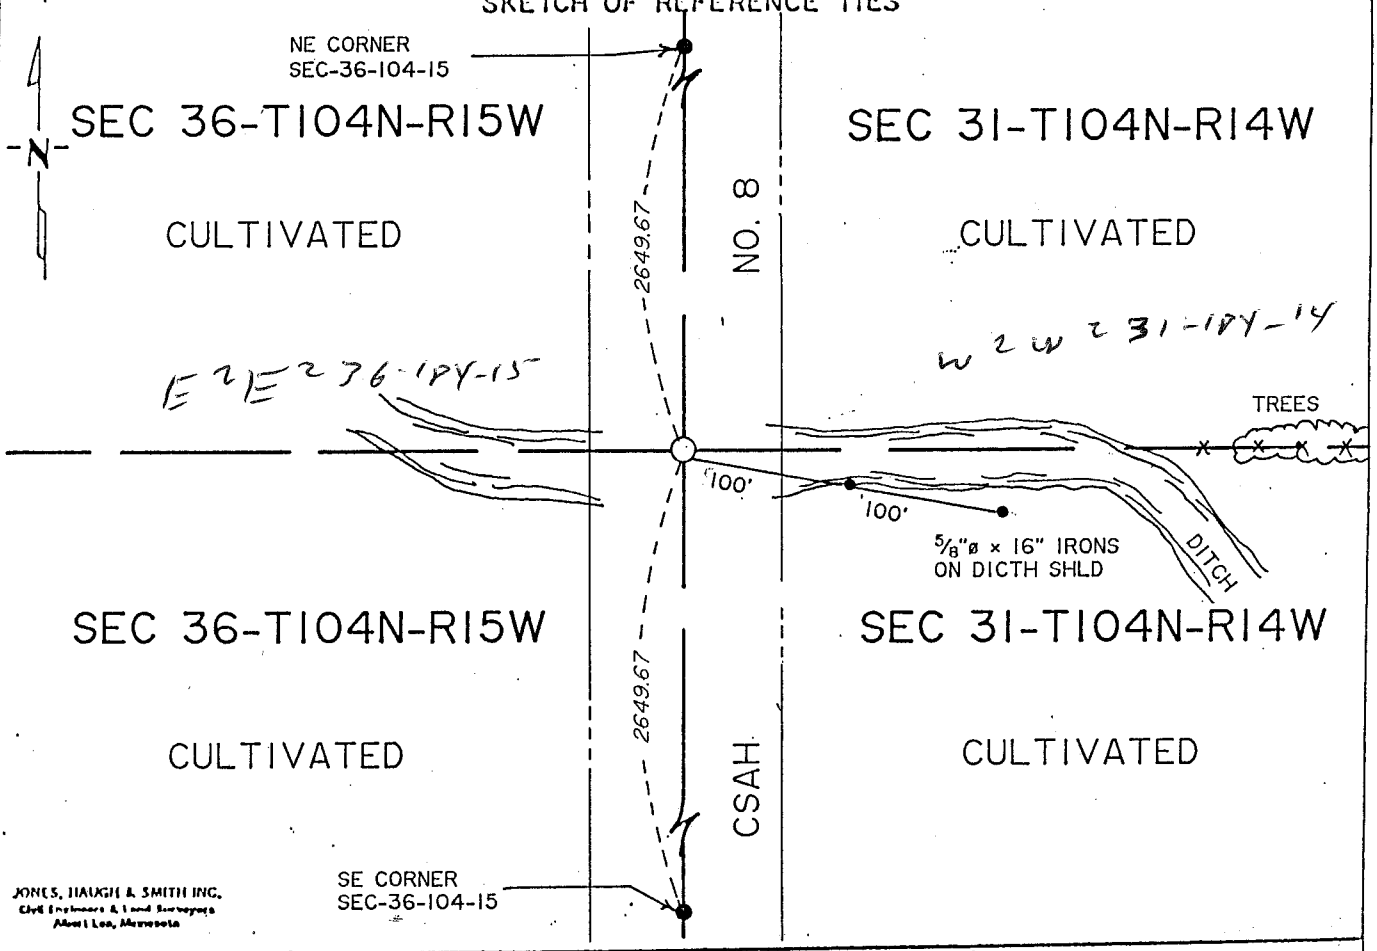

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10:4 .M. on the 21 day of June A.D., 1994

COUNTY RECORDER Charles Enger

By Marlene Manton, Deputy

DOCUMENT NO. 430119

Book 83 Misc Pg 479

BOOK 83 PAGE 479

M.H.D. FORM NO. 2103

STATEMENT OF EVIDENCE

E 1/4 corner Section 36-104-15

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, searched area and found no evidence of a perpetuation of the original corner. The original public land survey corner would have been destroyed by ditch construction. Therefore we set a 5/8" diameter x 16" iron on a straight line and at midpoint between the northeast corner and southeast corner of Section 36. Iron set was inline with line fence running east, as shown on 1945 County Highway Plans.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 83 PAGE 480

Revised

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 36, Township 104N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-27-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-30-93 (DATE) placed a 5/8"ø x 16" IRON

SKETCH OF REFERENCE TIES

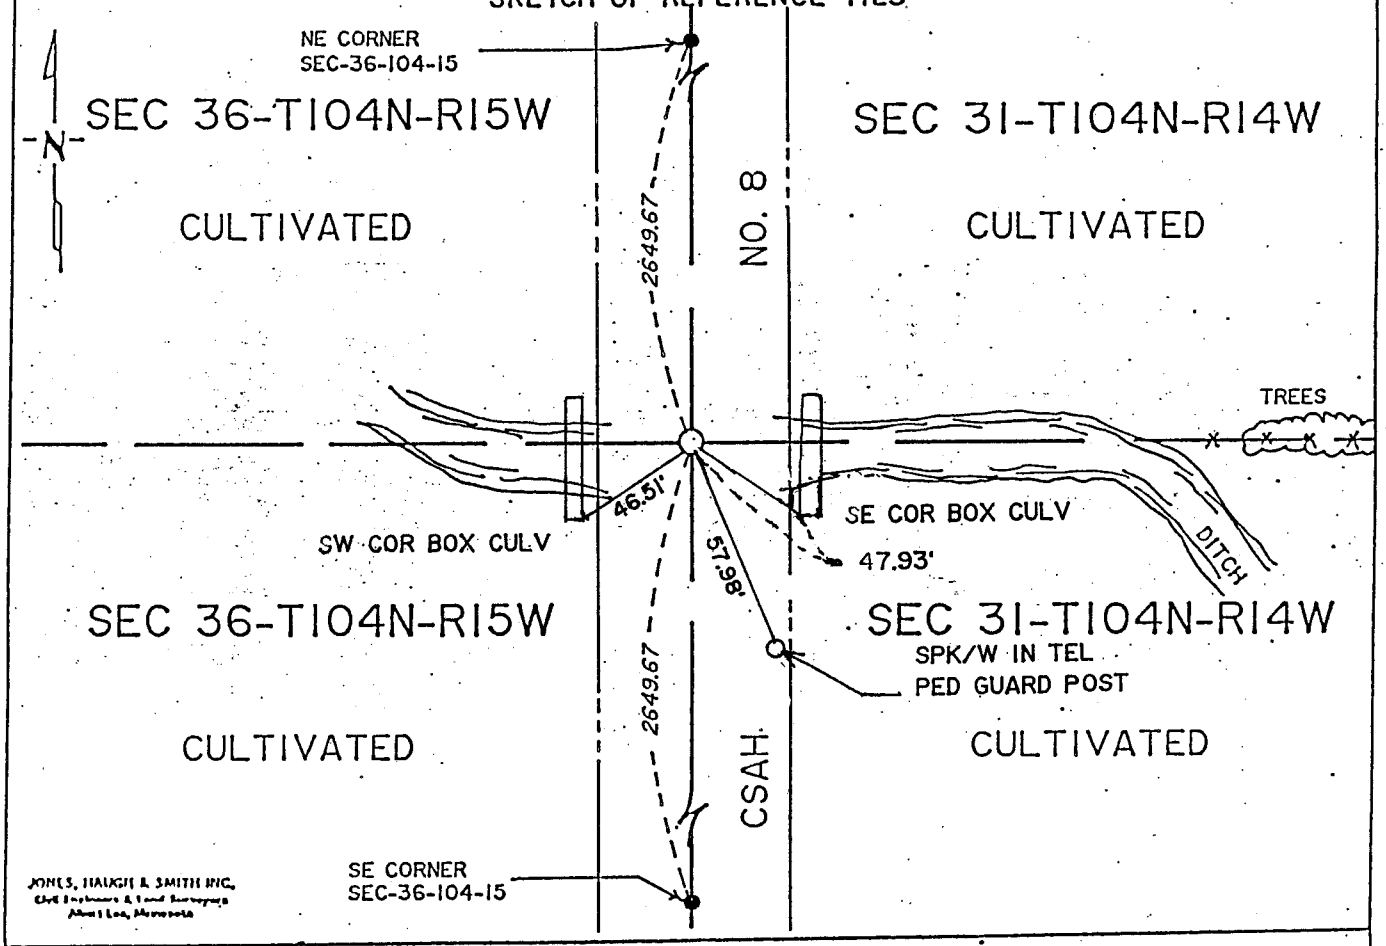

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE _____ DATE

Registration No. _____

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 36-104-15

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, searched area and found no evidence of a perpetuation of the original corner. The original public land survey corner would have been destroyed by ditch construction. Therefore we set a 5/8" diameter x 16" iron on a straight line and at midpoint between the northeast corner and southeast corner of Section 36. Iron set was inline with line fence running east, as shown on 1945 County Highway Plans.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.