Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 2, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/19/1994 (DATE) found a 3/4" PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 04/19/1994 (DATE) placed a CAPPED 5/8" IRON

SKETCH OF REFERENCE TIES

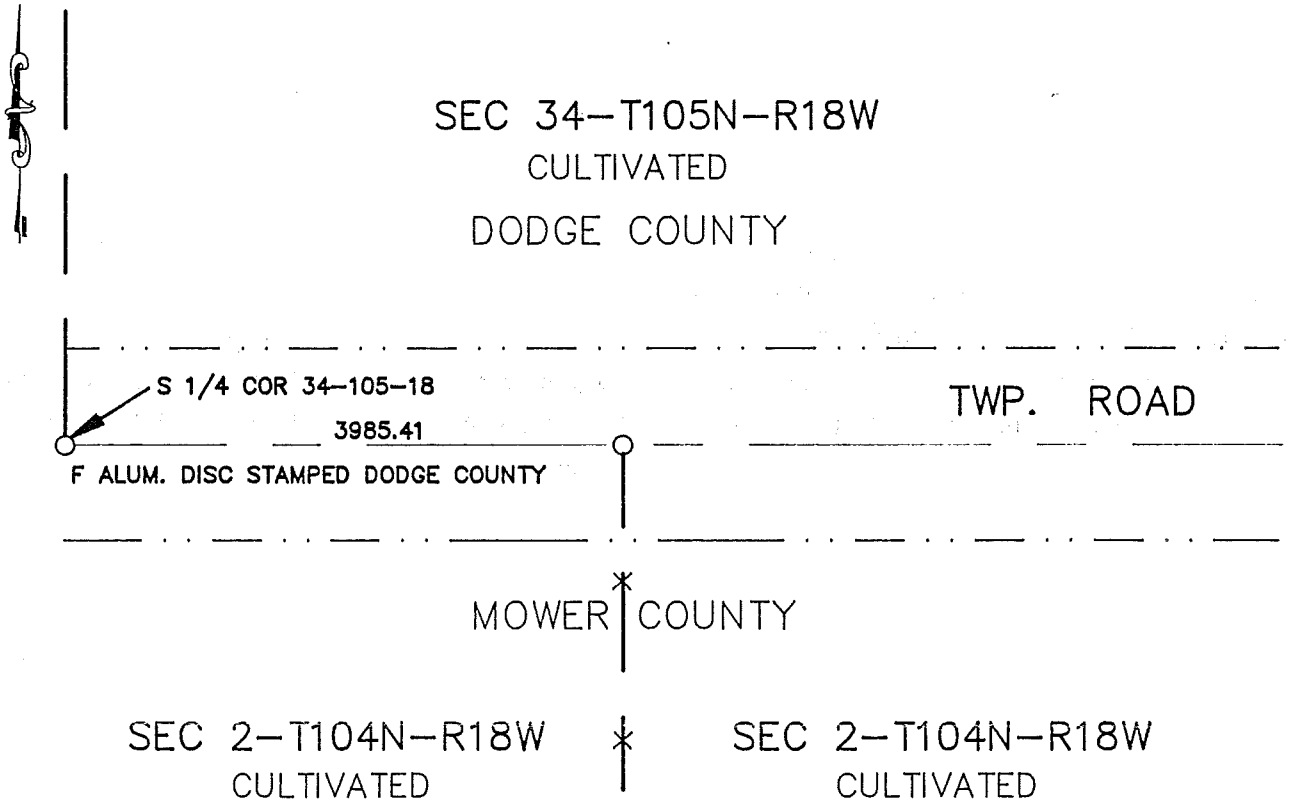

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a.M. on the 15th day of March A.D., 1996

COUNTY RECORDER Charles Engen
By Mayla Taylor, Deputy
DOCUMENT NO. 443129

M.H.D. FORM NO. 2105

Book 90 Page 411

N 1/4 Cor SEC 2-104-18

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1854. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL E-W twp. road and in line with a fence line to the south. At a depth of 2.5', a bent 3/4" pipe was found. The pipe straightened after 6" and extended into virgin soil. The pipe was accepted as best evidence of the original PLS corner and was replaced by a 5/8" iron capped RLS 13807.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 4, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/08/1981 (DATE) found a PIPE AND FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 01/28/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

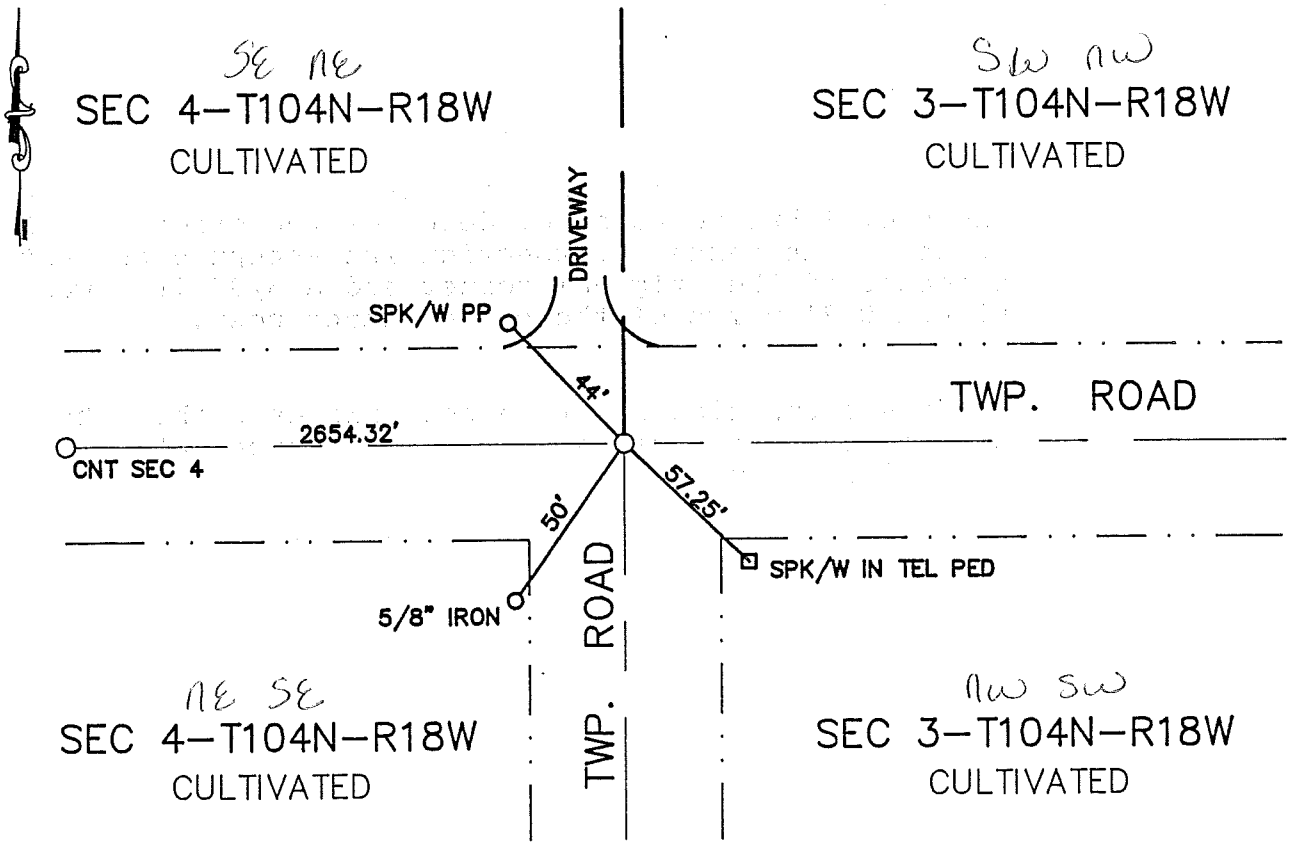

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a.M. on the 15th day of March A.D., 1996

COUNTY RECORDER Charles Engel
By Meryl A. Taylor, Deputy
DOCUMENT NO. 443132

M.H.D. FORM NO. 2105

BOOK 90 PAGE 417

Book 90 Page 417

E 1/4 Cor SEC 4-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1981 John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL twp. roads E-W and South. At a depth of 1.5' uncovered a 1 1/4" pipe. Continued digging and found a field stone. The stone was accepted as best evidence of the original PLS corner and a 5/8" iron was placed on the west side of the stone. A capped 5/8" iron was also placed over the stone 0.7' below the road surface.

1995 Jones Haugh and Smith Crew, under the direction of John Schulte, Mower County Surveyor RLS 13807, found 5/8" iron and placed a cast iron monument over the 5/8".

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 4, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch


☐ On 01/18/1995 (DATE) found a CORNER FENCE POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 01/18/1995 (DATE) placed a CAPPED 5/8" IRON

SKETCH OF REFERENCE TIES



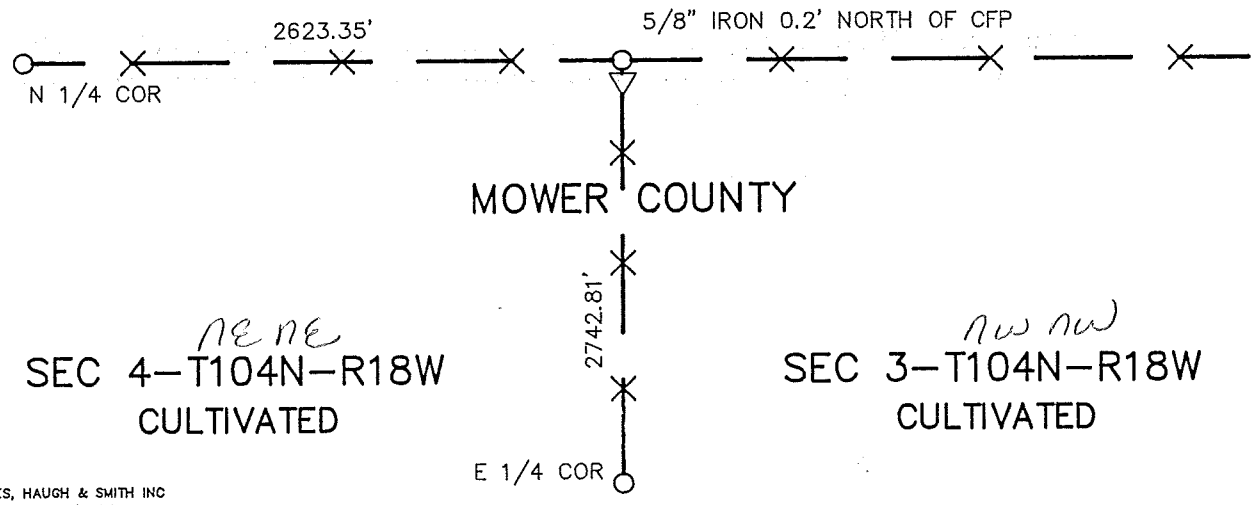

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a.M. on the 15th day of March A.D., 1996

COUNTY RECORDER Charles Enger

By Sheryl Naylor, Deputy

DOCUMENT NO. 143131

M.H.D. FORM NO. 2105 BOOK 90 PAGE 415 Book 90 Page 415

NE Cor SEC 4-104-18

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1854. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Dodge County Highway Dept.
Dodge County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, searched in area of fenceline intersection E-W-S with metal locator and shovel but found no evidence of the original PLS corner. The fence intersection was accepted as best evidence of the original corner and a 5/8" iron was placed 0.2' north of the corner fence post.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 4, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 01/18/1995 (DATE) found a FENCE INTERSECTION

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 01/18/1995 (DATE) placed a CAPPED 5/8" IRON

SKETCH OF REFERENCE TIES

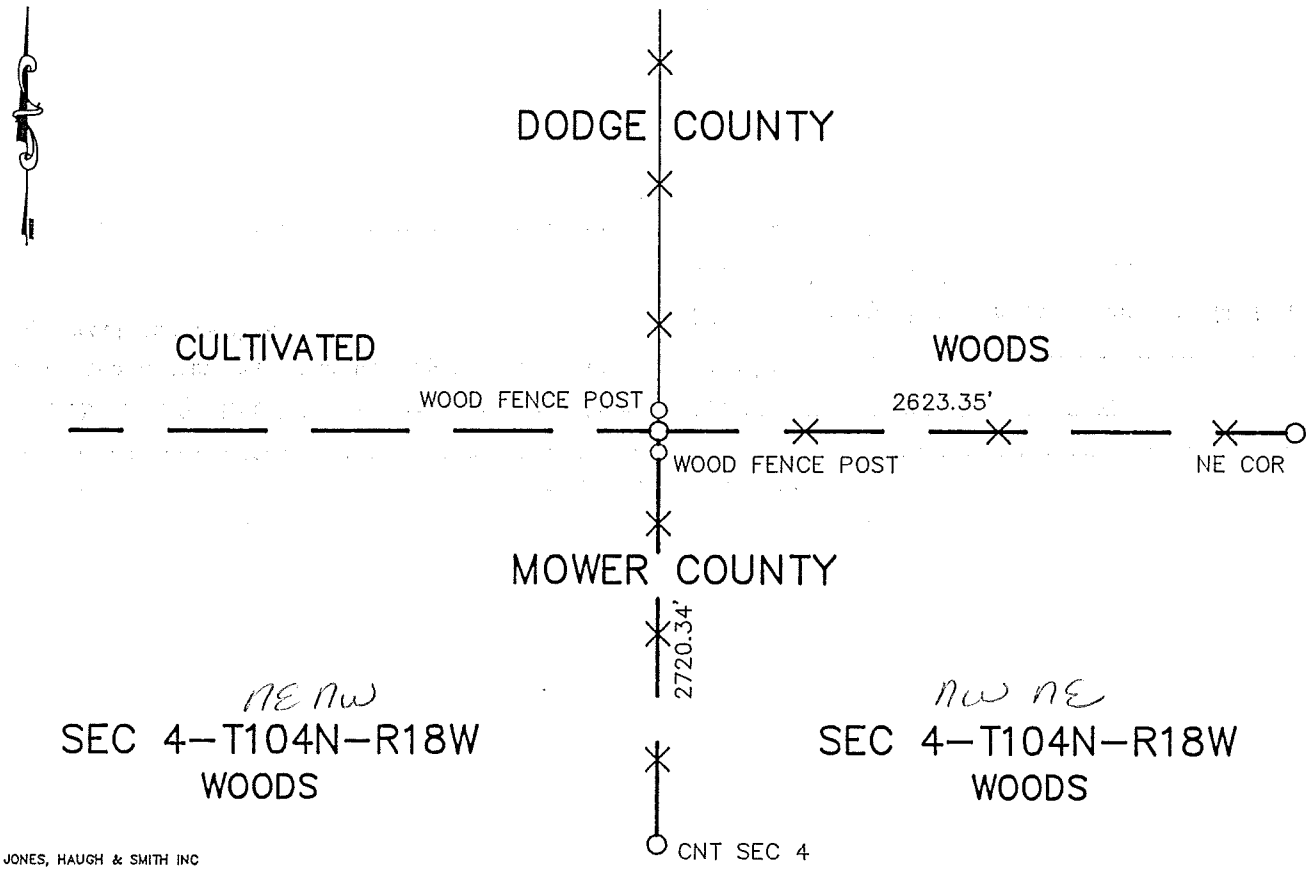

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 A.M. on the 15th day of March A.D., 1996

COUNTY RECORDER Charles Enger

By Cheryl Taylor, Deputy

DOCUMENT NO. 14,8136

BOOK 90 PAGE 413

M.H.D. FORM NO. 2105

Book 90 Page 413

N 1/4 Cor SEC 4-104-18

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1854. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Dodge County Highway Dept.
Dodge County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, searched in area of two wood fence posts with metal locator and shovel but found no evidence of the original PLS corner. The wood fence posts were accepted as the best evidence of the corner and a 5/8" iron capped RLS 13807 was placed between the two posts.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER Corner of Section 4, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 01/18/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 01/18/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

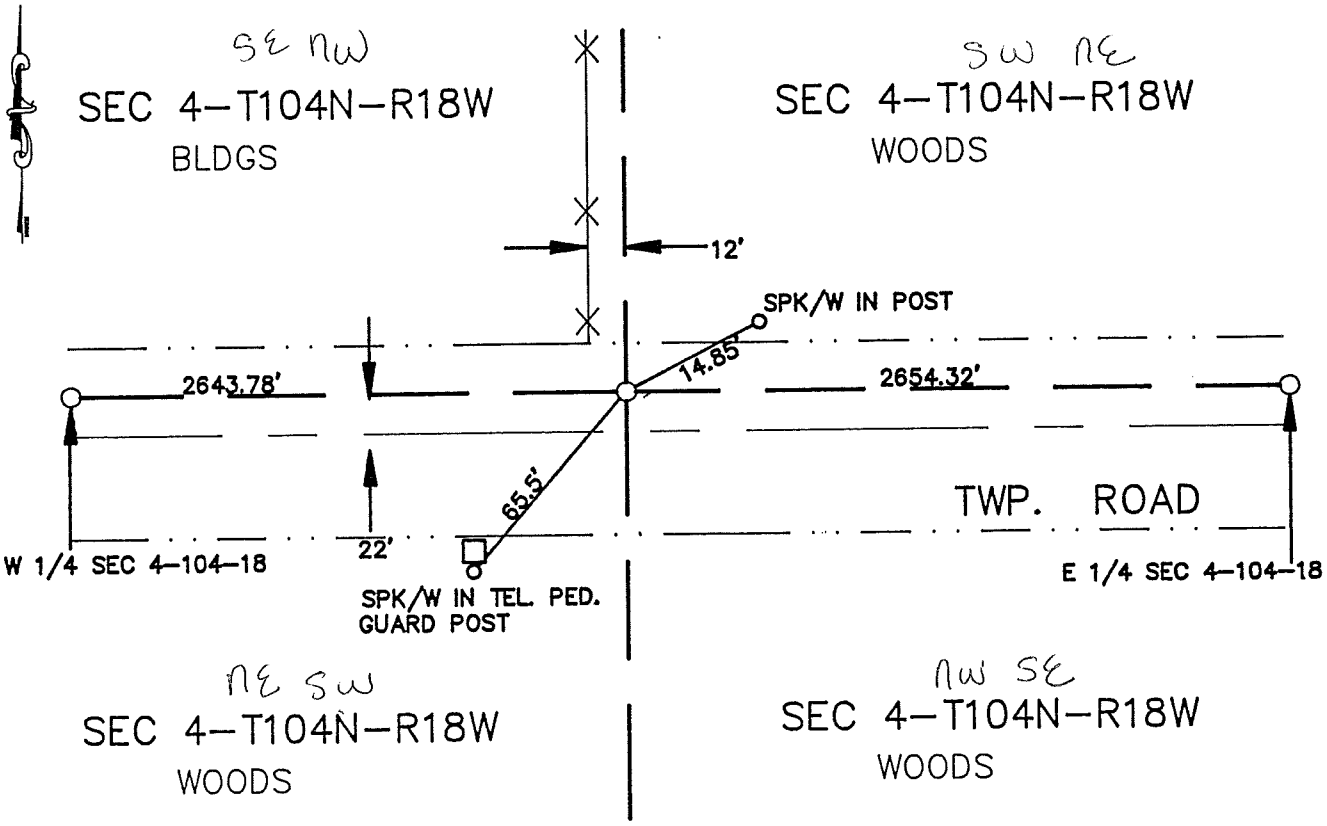

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 90 PAGE 376

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-11-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 12 day of Mar A.D., 1996

COUNTY RECORDER Charles Engen
By Susan M. Davis, Deputy
DOCUMENT NO. 443075

M.H.D. FORM NO. 2105

Book 90 Misc Page 376

Center SEC 4-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show nothing was set here at this time.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh, and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand on the CL of township road E-W and in line with line fence North. Found no evidence of original PLS corner. Placed a capped 5/8" iron on the straight lines between the W 1/4 corner and the E 1/4 corner, and between the N 1/4 corner and the S 1/4 corner.

1996 Jones, Haugh, and Smith crew removed cap set in 1995 and set a cast iron monument in place of it. The corner is now retired.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 90 PAGE 377

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 4, Township 104 Range 18, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/08/81 (DATE) found a STONE AND REMAINS OF WOOD STAKE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4/08/81 (DATE) placed a CAST IRON MON. OVER MON. FOUND IN 1981

SKETCH OF REFERENCE TIES

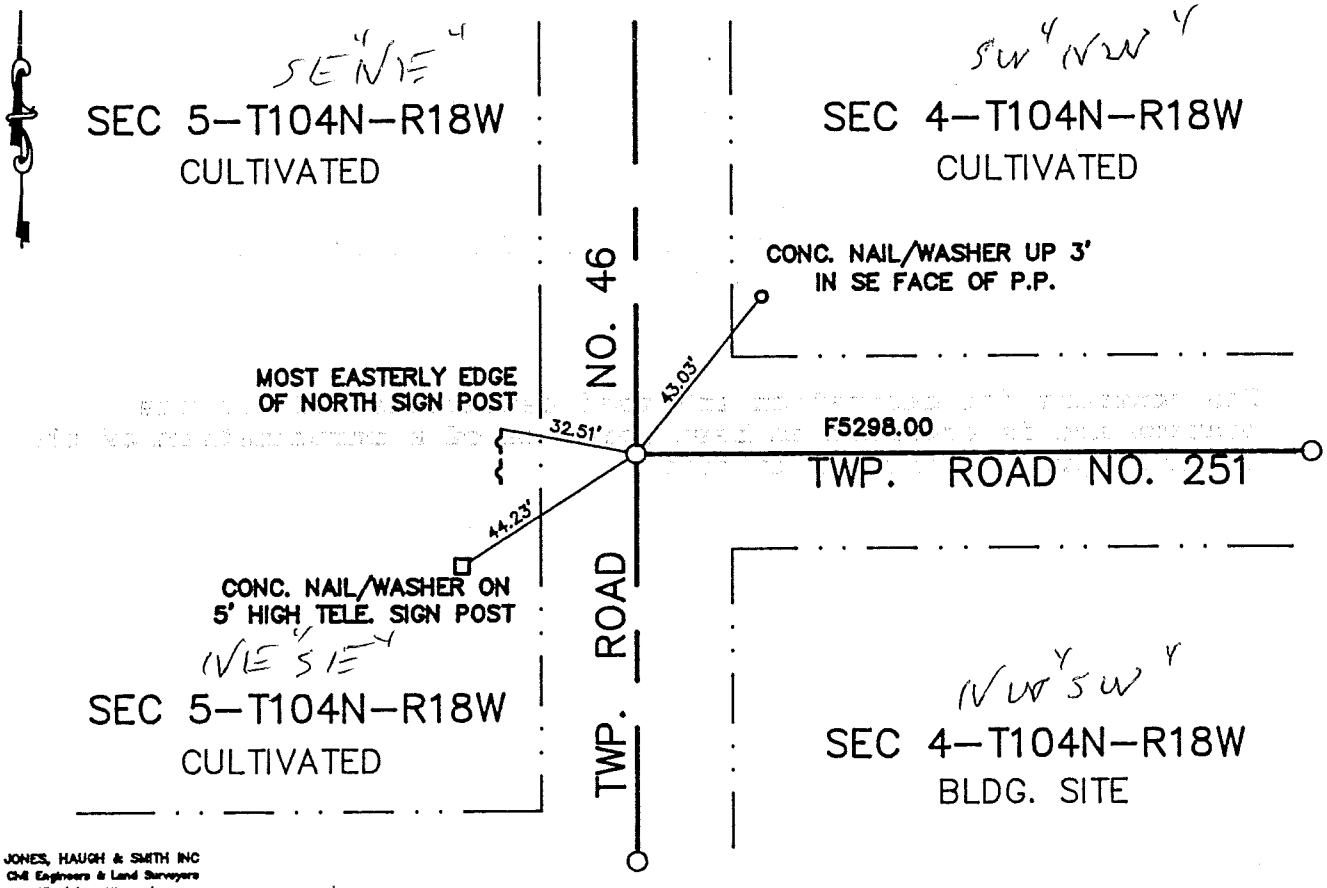

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-1-95

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2p .M. on the 3 day of Nov A.D., 1995

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 140543

M.H.D. FORM NO. 2105 BOOK 89 PAGE 145 Book 89 Misc Page 145

W 1/4 Cor SEC 4-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1981 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL of road N-S and road E-W. Found a field stone and remains of a wood stake. Placed a 5/8" iron pin on the south side of the stone. Placed a 5/8" iron pin over the center of the stone.

1995 Found the 5/8" iron pin set in 1981 and placed a cast iron monument over the 5/8" iron pin found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 6, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-17-86 (DATE) found a 8"x8" concrete monument w/ ½" iron in center

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 3-20-91 (DATE) placed a CAST IRON MONUMENT OVER CONCRETE MONUMENT FOUND.

SKETCH OF REFERENCE TIES

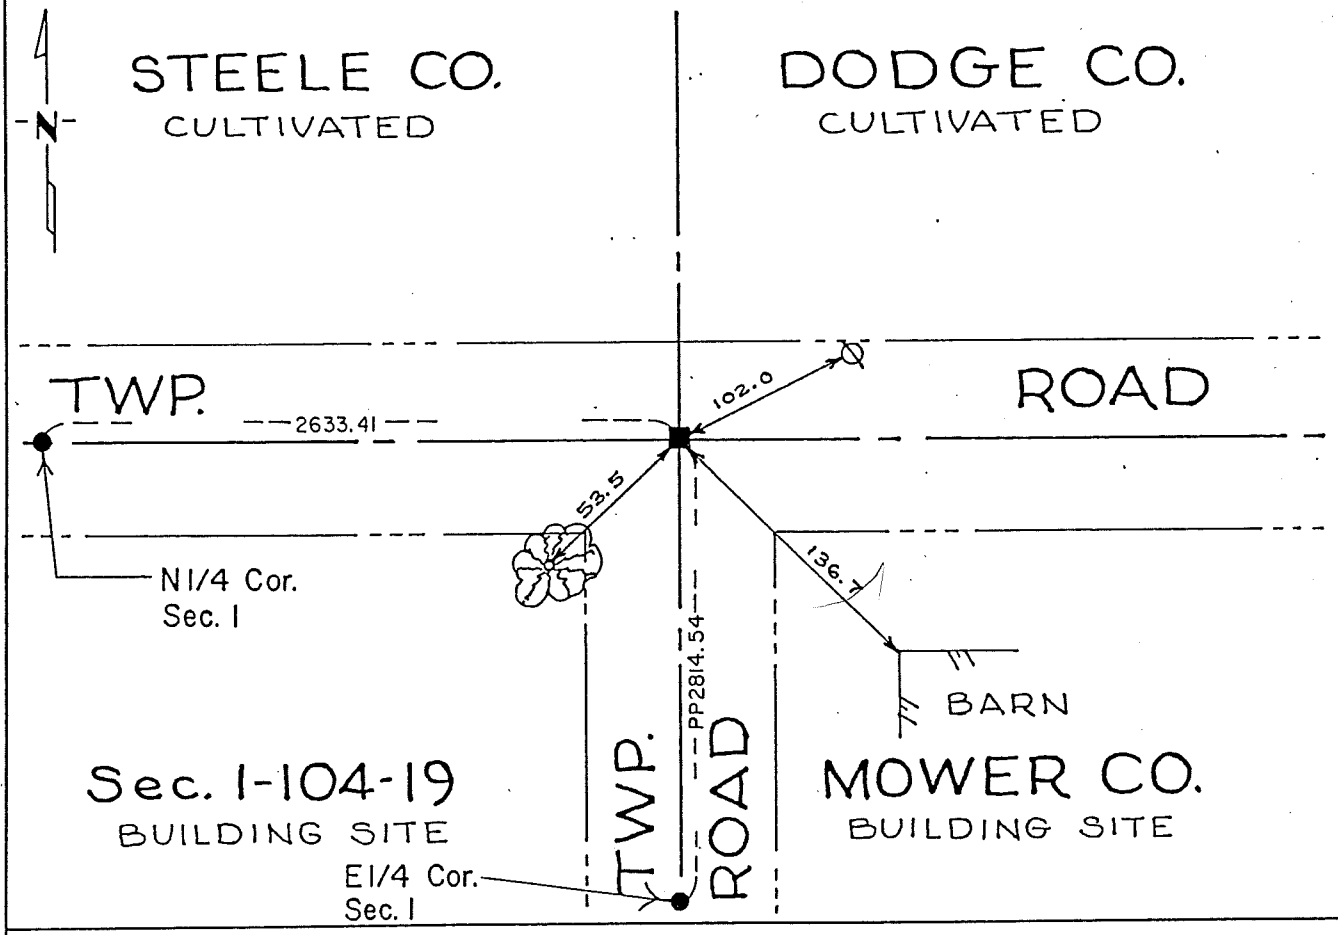

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-10-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 13 day of May A.D., 1993

COUNTY RECORDER Chandra Engan

By Marlene Martin, Deputy

DOCUMENT NO. 420708

Bk 79 Misc Pg. 419

M.H.D. FORM NO. 2105

BOOK 79 PAGE 419

STATEMENT OF EVIDENCE

NW corner Sec 6-104-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

14" Burr Oak	N 75° W	143 links (94.38 ft)
14" Burr Oak	S 26° E	275 links (181.50 ft)

The following were contacted for section corner information:
Freeborn County Engineering Department
Freeborn County Recorder's Office
Mower County Highway Department

1952 Dick Spellman dug and found a concrete monument with a spike in center. The following ties were taken:

Spk & disc in twin Red Oak	71.6' SW
Face REA pole	101.4' ENE
Face Tele pole	106.9' ESE
NW cor grainery	136.9' SSE

1986 Jones, Haugh & Smith Inc crew uncovered a 8"x8" square concrete monument with a 1/2" diameter iron in center.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, Freeborn County Surveyor, set a cast iron monument over concrete monument found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 420

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 6, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-17-1986 (DATE) found NO EVIDENCE OF THE P.L.S. CORNER.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-20-1991 (DATE) placed a CAST IRON MONUMENT AT A PROPORTIONAL DISTANCE ON A STRAIGHT LINE BETWEEN THE NE & SE CORNERS OF SECTION 1.

SKETCH OF REFERENCE TIES

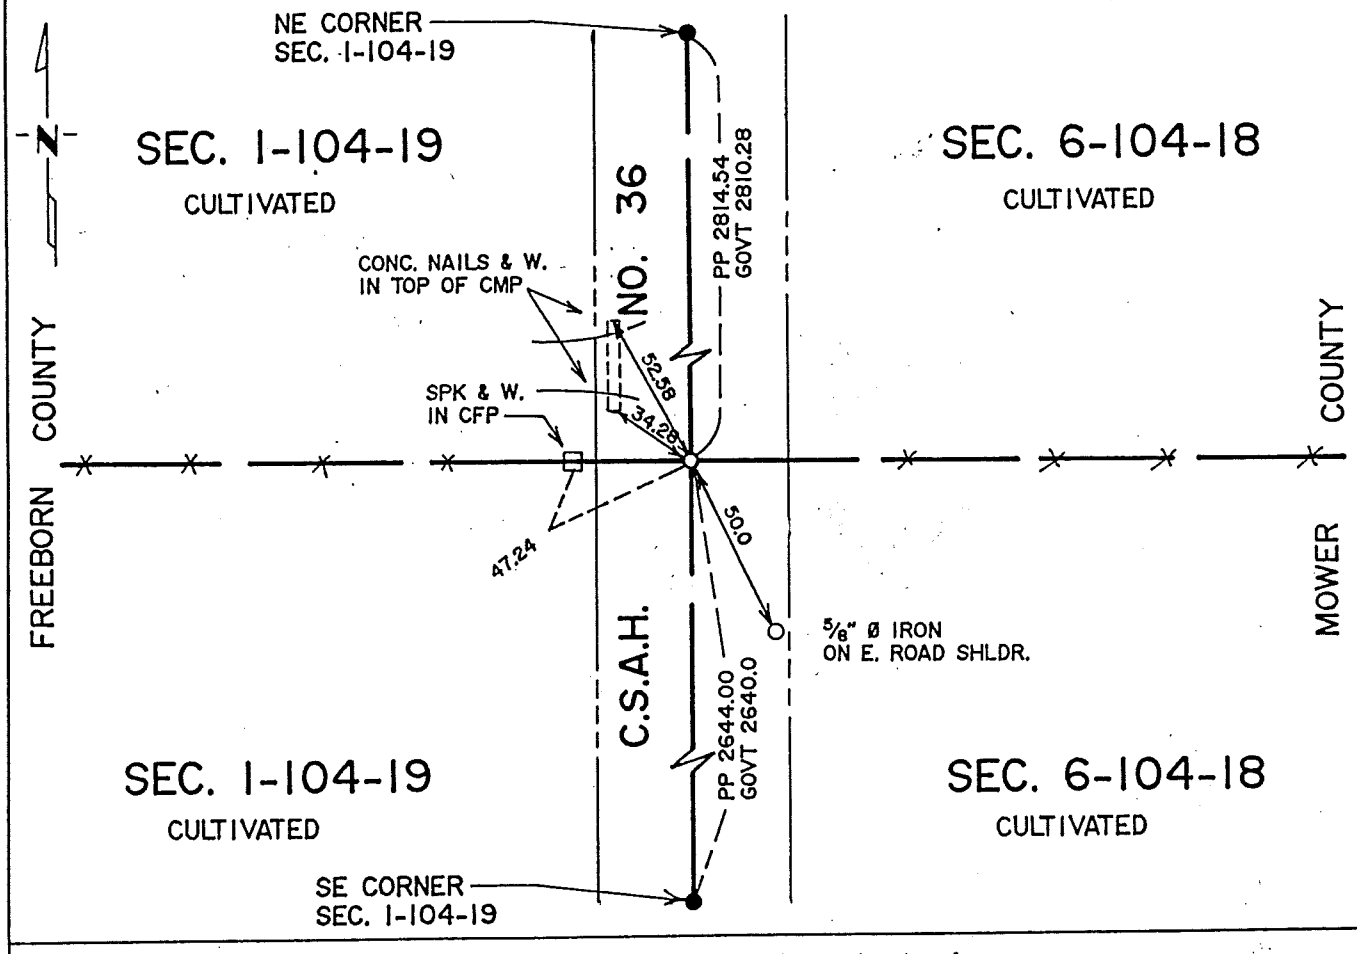

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 5-10-93
SIGNATURE DATE

Registration No. 13007

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 13 day of May A.D., 1993

COUNTY RECORDER Orlando Enge

By Marlene Martin, Deputy

DOCUMENT NO. 420707

Bk 79 Misc, Pg. 417

M.H.D. FORM NO. 2105

BOOK 79 PAGE 417 BOOK 79 PAGE 417

STATEMENT OF EVIDENCE

W 1/4 corner Sec 6-104-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

6" Burr Oak	S 22° E	216 links (142.56 ft)
6" Burr Oak	S 74° W	400 links (264.0 ft)

The following were contacted for section corner information:
Freeborn County Engineering Department
Freeborn County Recorder's Office
Mower County Highway Department

1986 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, Freeborn County Surveyor, dug with the County backhoe on centerline centerline of north-south road in line with east-west fence and found no evidence of the public land survey corner.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, Freeborn County Surveyor, set a cast iron monument at a proportional distance on line between the northeast and southeast section corners and measured a distance of 2644.0 feet south to the southeast corner versus 2640.0 feet government; and measured a distance of 2814.54 feet north to the northeast corner versus 2810.28 feet government.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 79 PAGE 418

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 7, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-4-86 (DATE) found a 3/4"Ø IRON OVER 1"Ø PIPE IN WOOD POST BY FIELD STONE 2.5' DEEP.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-4-86 (DATE) placed a CAST IRON MONUMENT OVER PIPE FOUND.

SKETCH OF REFERENCE TIES

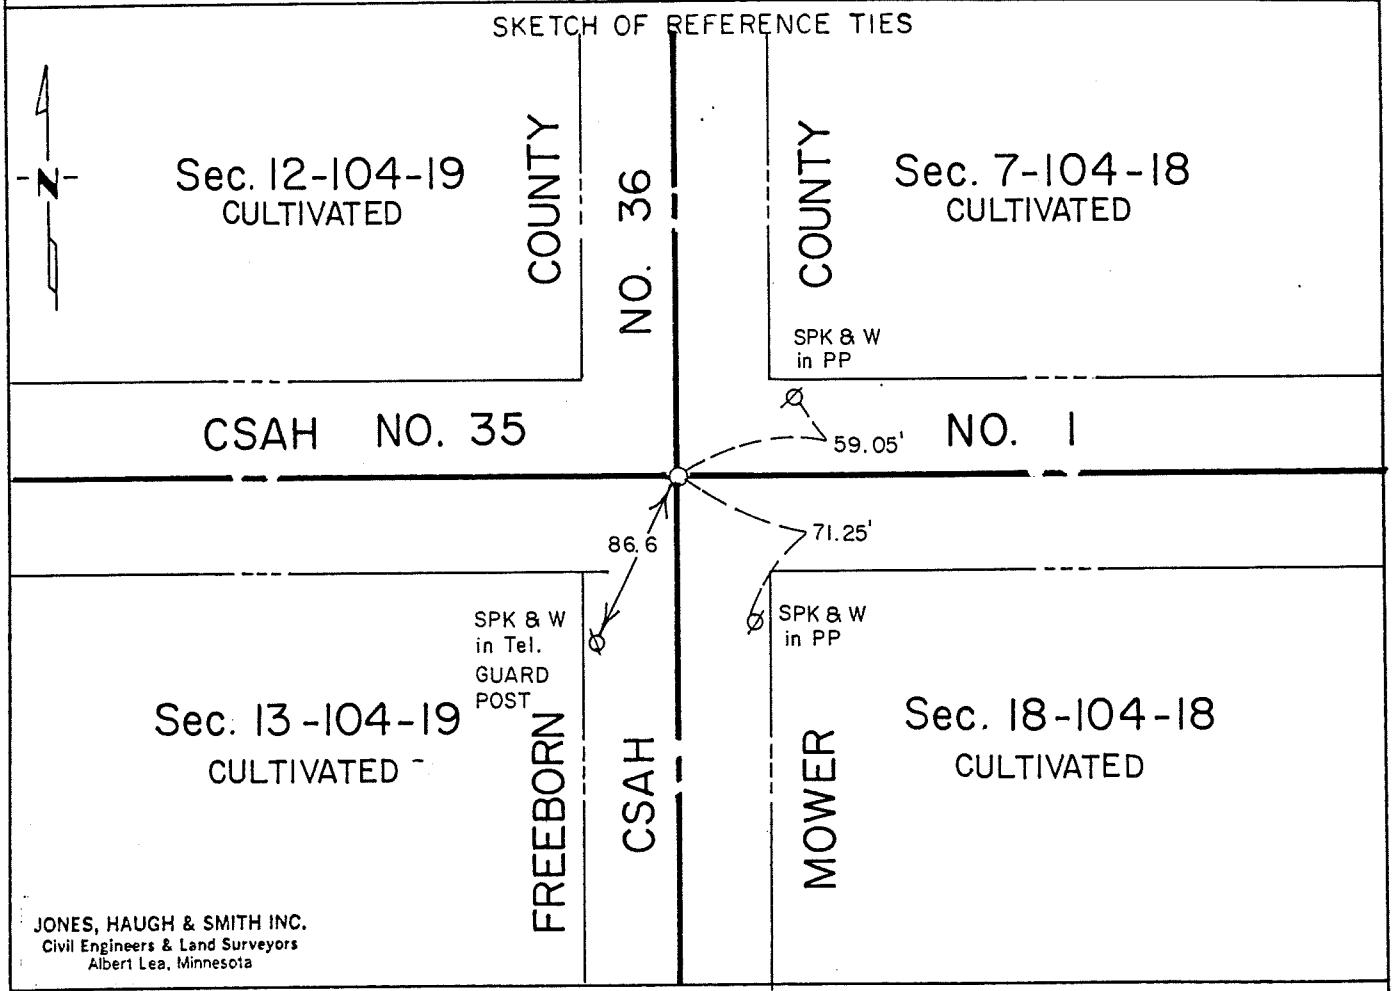

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-11-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW cor Sec 7-104-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Freeborn County Engineering Department
Freeborn County Recorder's Office
Mower County Engineering Department

1941 John Nielsen, County Surveyor, uncovered corner and the following ties were taken:
PP 47.6' NE
TP 108.0' SW
PP 70.8' SE

1962 George Murphy, County employee, located corner. The following ties were taken:
Spk in PP 59.5' NE
Spk in Tp 108.0' SW
Spk in PP 70.8' SE

1986 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, Freeborn County Surveyor, dug with the County backhoe on centerline centerline of north-south-east-west roads. Found a 3/4" diameter iron on surface over a 1" diameter pipe in a wood post on the east side of a pointed field stone 2.5 feet deep. Set a cast iron monument over pipe found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P8V #W'

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 9, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-22-86 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

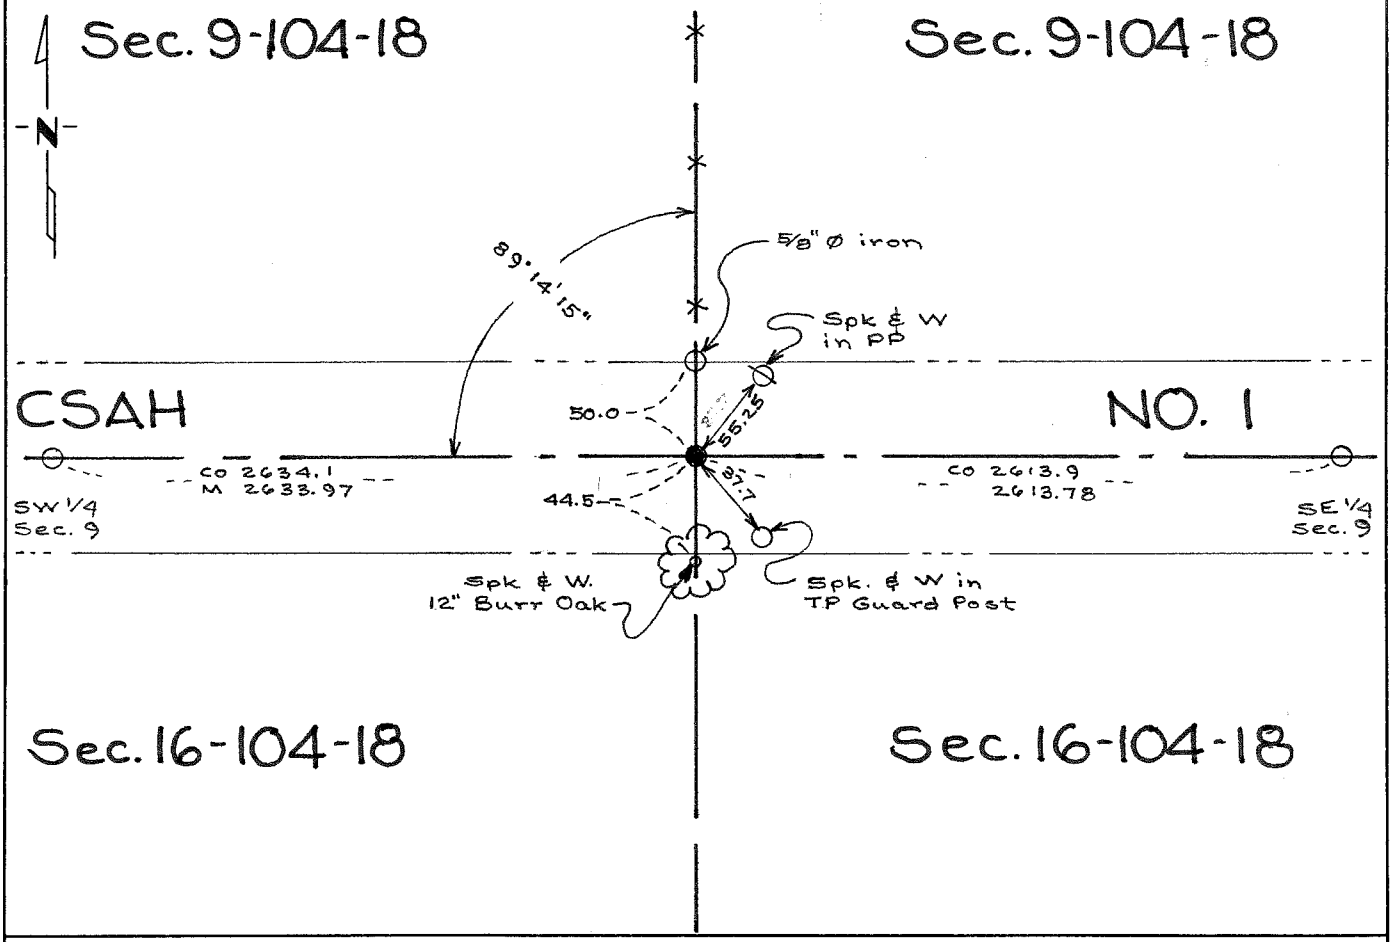

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] III 3-8-89
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec 9-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set and the following ties were taken:

12" Burr Oak	N 57 1/2° E	60 links	=	39.6 ft
14" Burr Oak	S 55° E	200 links	=	132.0 ft

In 1986 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Dept.
Tucker Land Surveying

The 1930 Mower County Grading Plan shows a core cut was made at this location and no monumentation was found.

Therefore we established the position of the corner using obliterated methods on a straight line between southwest and southeast section corners in line with the fence north.

The position fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith.

p82 "M"

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 9, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-22-86 (DATE) found a concrete monument 5'± deep

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-22-86 (DATE) placed a 5/8"ø x 24" iron over concrete monument

SKETCH OF REFERENCE TIES

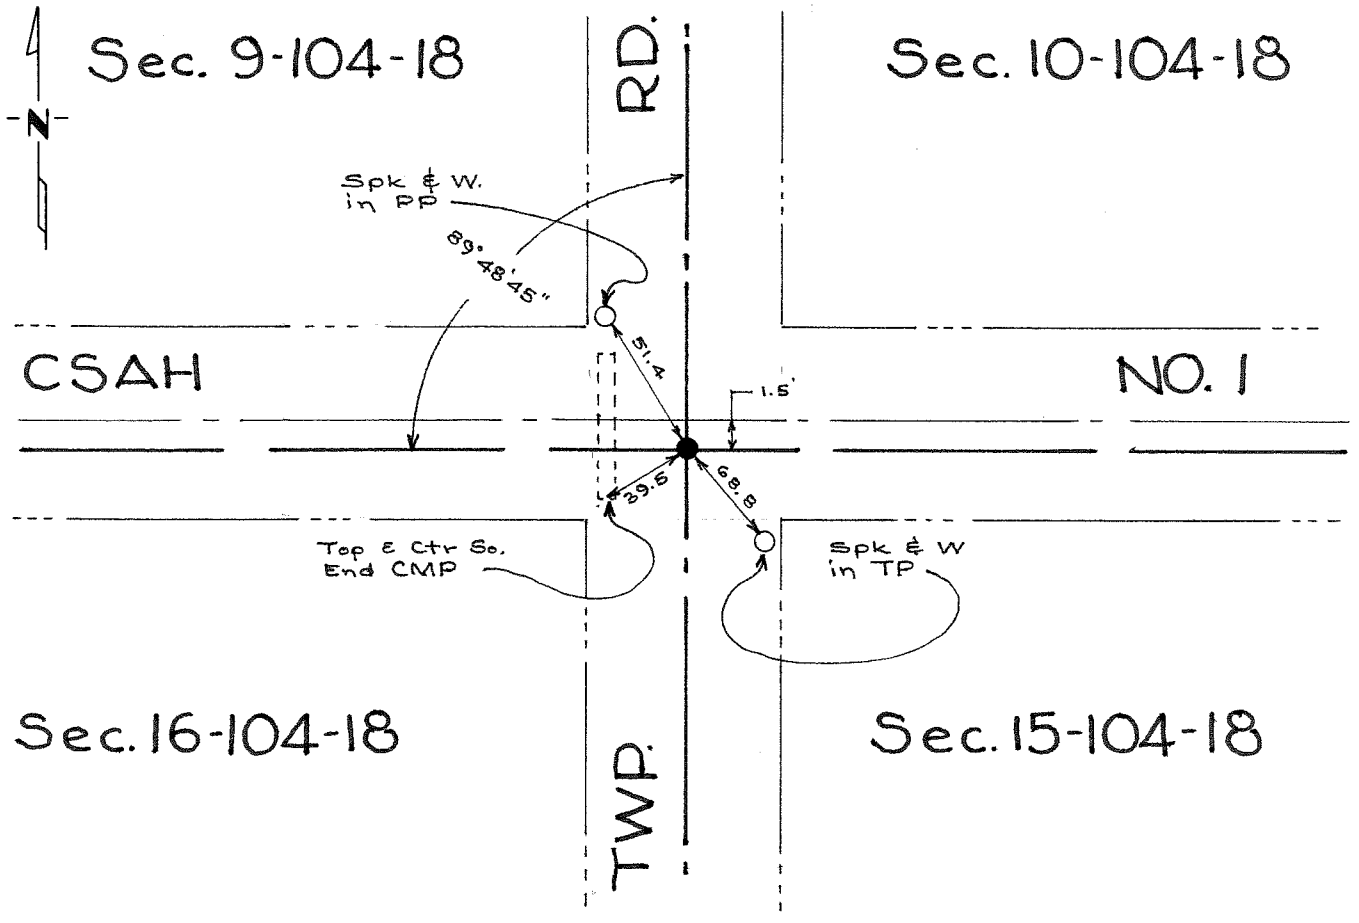

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 3-8-89
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec 9-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show the corner was marked with a wood post and the following bearing trees were marked:

5" Burr Oak	S 32 1/2° W	365 links	= 240.9 ft
14" Burr Oak	S 40° E	295 links	= 194.7 ft

In 1986 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Dept.
Tucker Land Surveying

The 1930 Mower County Grading Plan shows a concrete monument at this location.

No further information was obtained on this corner.

In September 1986 Jones, Haugh & Smith Inc crew together with the Mower County Highway Department backhoe operator dug with the county backhoe on the centerline centerline north-south-east-west roads and uncovered a 5" square concrete monument 5 feet more or less, below road surface in virgin soil. Backfilled and set a 5/8" diameter x 24" iron over the concrete monument on the road surface.

The monument found fits occupation and road centerlines within the section and agrees with 1930 records from Mower County Highway Department and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith.

Index No. p82 "J"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 9, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-22-86 (DATE) found a wood stake, field stone & iron @ depth of 3.5'±

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-22-86 (DATE) placed a cast iron monument over

SKETCH OF REFERENCE TIES

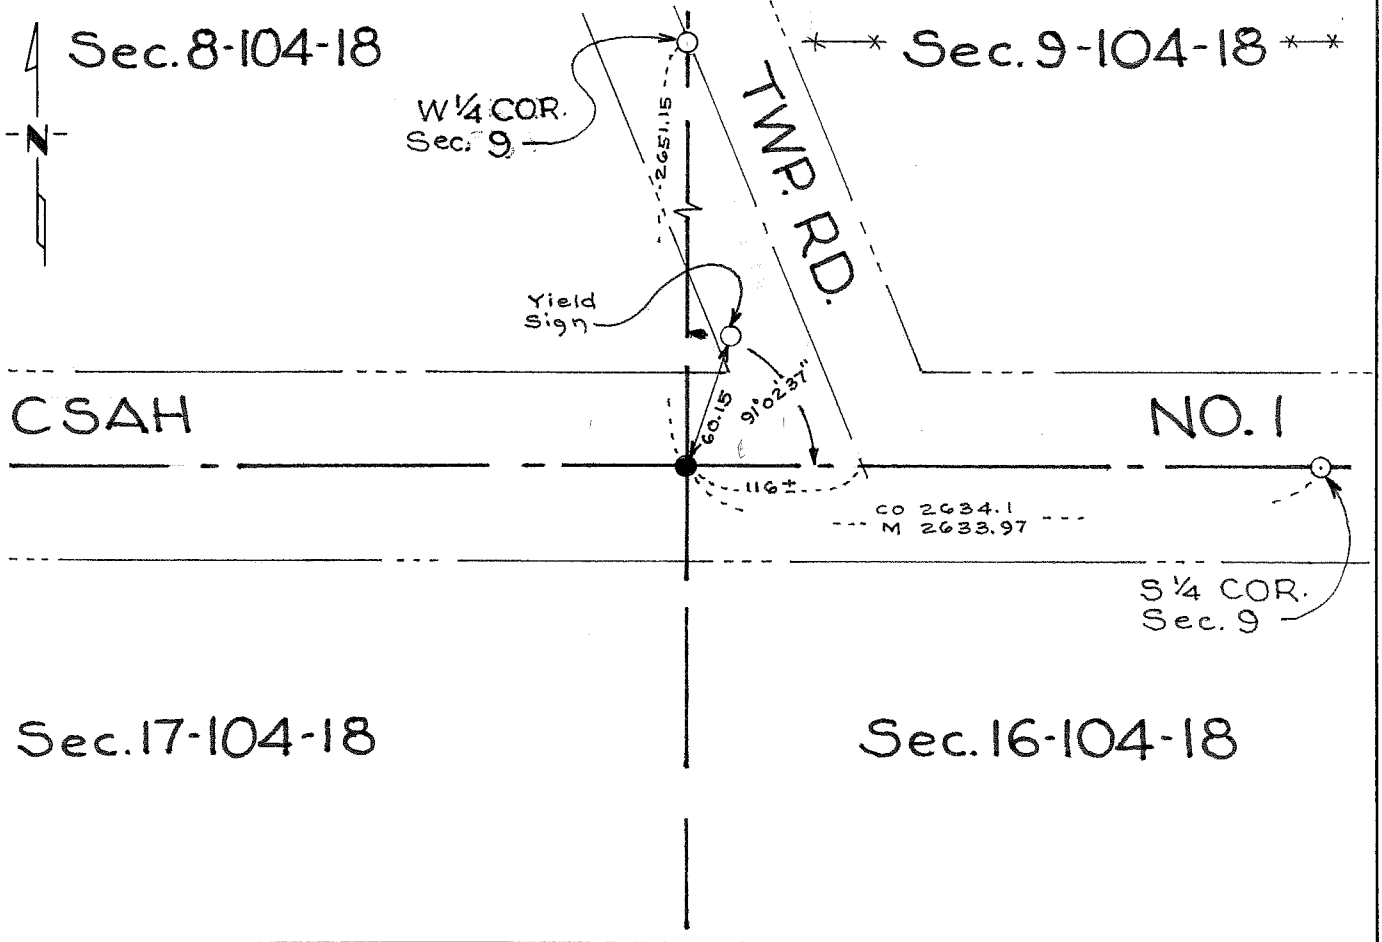

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 3-8-89 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 9-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set and the following ties were taken:

10" Burr Oak	S 38 1/2° E	640 links	=	422.4 ft
8" Burr Oak	N 70° E	440 links	=	290.40 ft

In 1986 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Dept.
Tucker Land Surveying

The 1930 Mower County Grading Plan shows a monument was found during road construction.

In September 1986 Jones, Haugh & Smith Inc personnel together with the Mower County backhoe operator dug with the County backhoe on the centerline of the east-west road at the location of an iron pipe flush on road surface and uncovered a wood stake and field stone at a depth of 3.5 feet below road surface. The wood stake and stone were 3 feet more or less, west of the pipe found on road surface. Accepted the position of wood stake and field stone and set a cast iron monument over them on road surface and discarded pipe found on road surface.

The monument fits occupation and road centerlines within the section and agrees with 1930 records from Mower County Highway Department and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith.

Index No. P82 "H"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 9, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-13-90 (DATE) found a 10"x 15"x 20" pointed field stone 3.0' below road surface in virgin soil.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-13-90 (DATE) placed a 5/8"Ø iron on east side of stone and over monument found.

SKETCH OF REFERENCE TIES

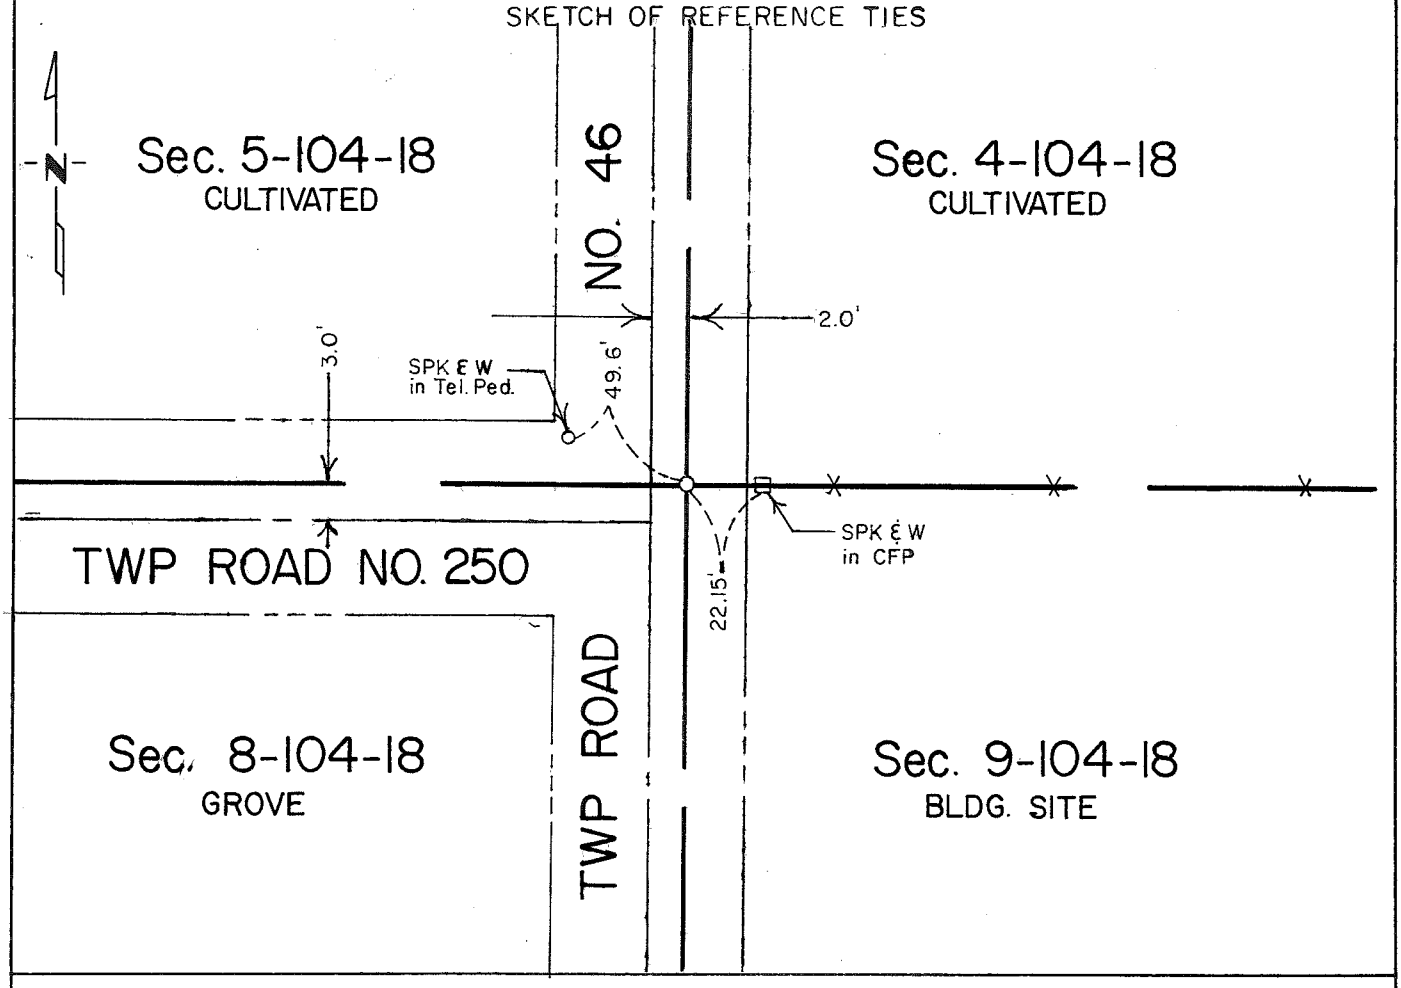

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 9-17-90 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 9-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a charred stake with a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew together with the Mower County backhoe dug a hole 15'x10'x3' deep on centerline centerline of north-south-west roads. Uncovered a 10"x15"x20" point field stone in virgin soil 3.0 feet below road surface. Placed a 5/8" diameter iron on east side of stone and a 5/8" diameter iron over monument found.

Corner found fits occupation lines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. p82 "I"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 9, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On Sept. 1986 (DATE) placed a 5/8" ϕ x 24" iron

SKETCH OF REFERENCE TIES

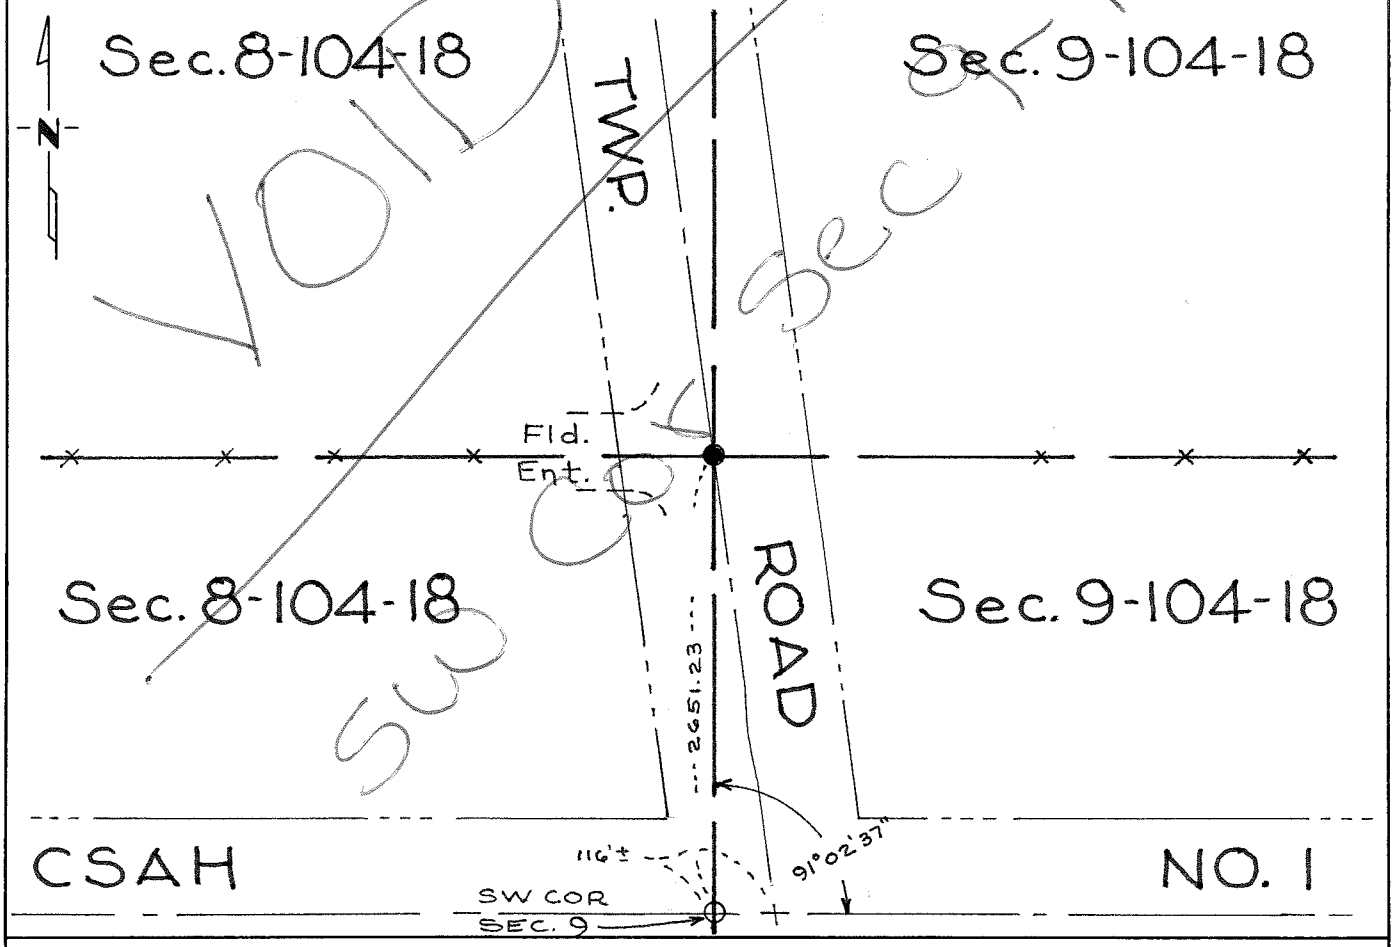

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 3-8-89
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 9-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set and a charred stake was deposited in a mound of earth during original public land survey.

In 1986 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Dept.
Tucker Land Surveying

No information or surveys in the area were found to have been done.

In September 1986 Jones, Haugh & Smith Inc crew, together with the Mower County Highway Department backhoe operator dug on the centerline of north-south road in line with fence west. An 8 x 40 long hole was dug and no evidence of the public land survey corner or a perpetuation thereof was found. Therefore after the completion of a traverse around the section and analysis of existing fence and occupation lines a fence line occupying the north line of the SE 1/4 was extended westward to intersect with the centerline of the north-south township road.

The position fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith.

Index No. 982 "K"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 9, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On Sept. 1986 (DATE) found a 6" dia. wood fence post in a 3 way fence intersection

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

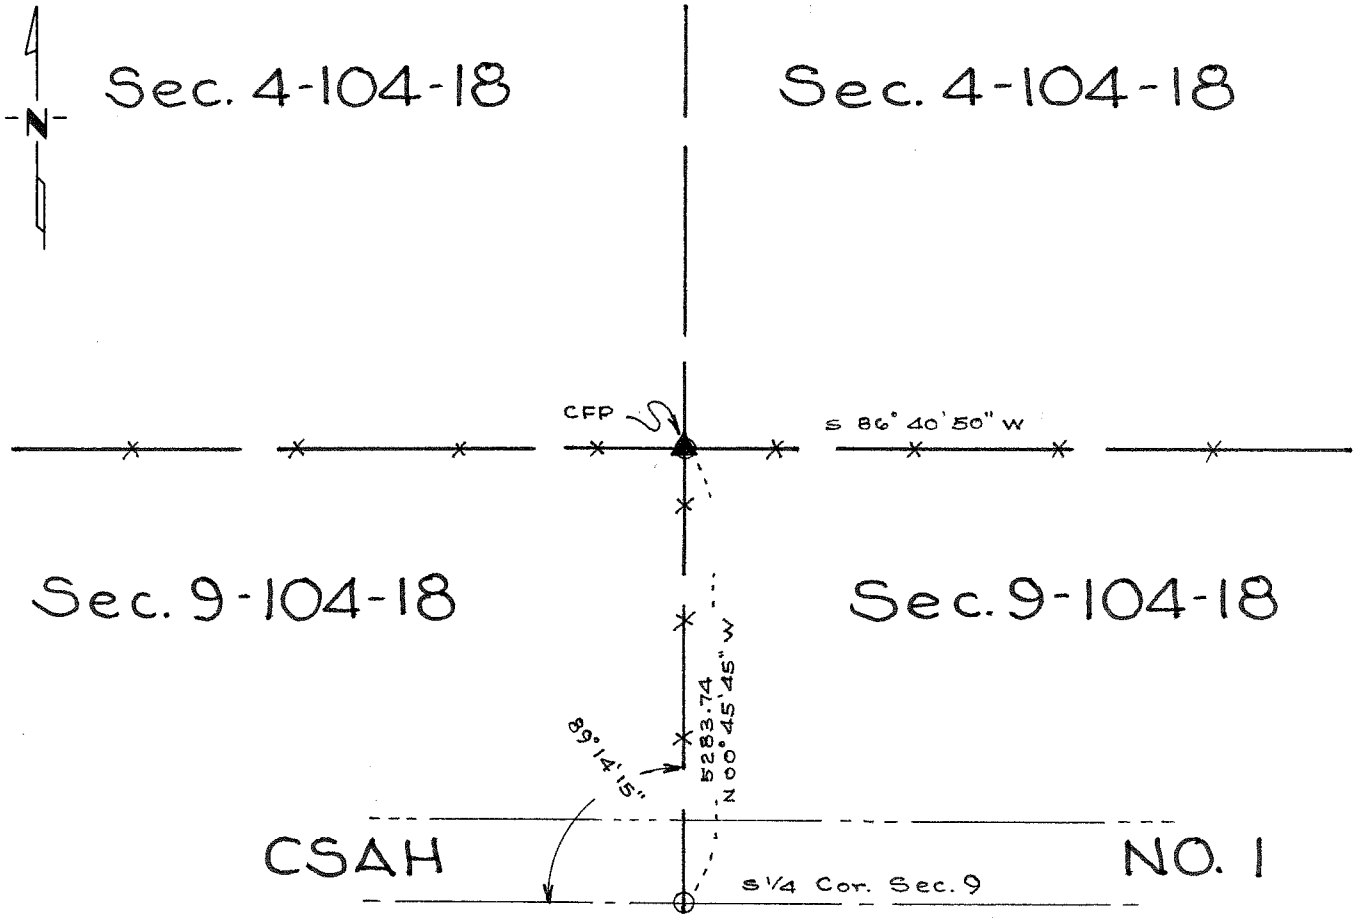

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 3-6-89
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 9-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show the corner was marked with a wood post and the following bearing trees were marked:

12" Burr Oak	N 15° W	82 links	= 54.12 ft
6" Burr Oak	S 64° W	15 links	= 9.90 ft

In 1986 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Dept.
Tucker Land Surveying

No information or surveys in the area were found to have been done.

In September 1986 Jones, Haugh & Smith Inc crew traversed around the section and found a 6" diameter wood corner fence post in a 3-way fence intersection. After computing a section breakdown, we accepted the position of corner fence post as best evidence of the public land survey corner.

The position fits occupation and fence lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 10, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/14/1995 (DATE) found a POINTED STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/14/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

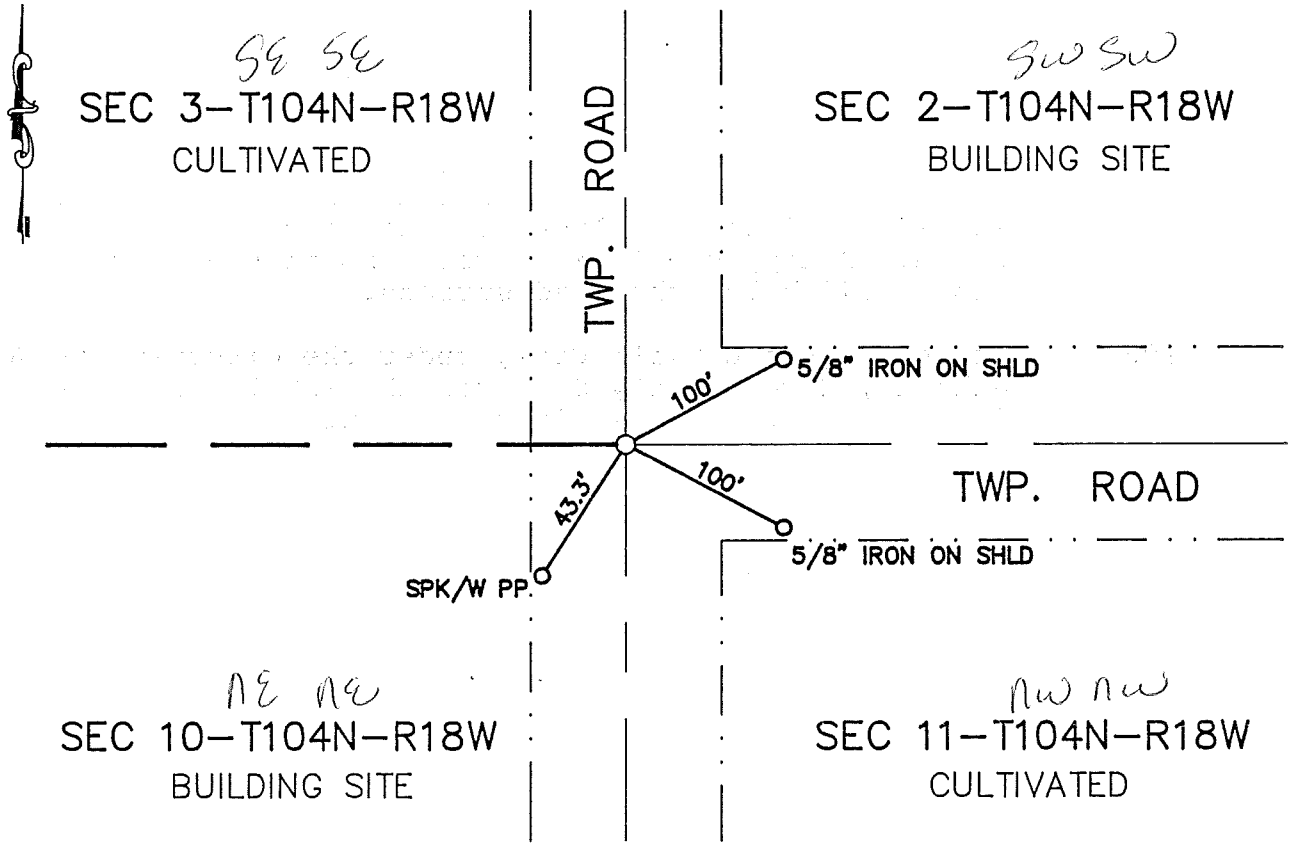

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 o'clock A.M. on the 15th day of March A.D., 1996

COUNTY RECORDER Charles Engel

By Mary Lou Ayala, Deputy

DOCUMENT NO. 443133

M.H.D. FORM NO. 2105 BOOK 90 PAGE 419 Book 90 Page 419

NE Cor SEC 10-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and in line with fence line west. Found a 1" pipe at a depth of 2'. Placed a 5/8" iron capped #13807 above the pipe found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 10, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/01/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/01/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

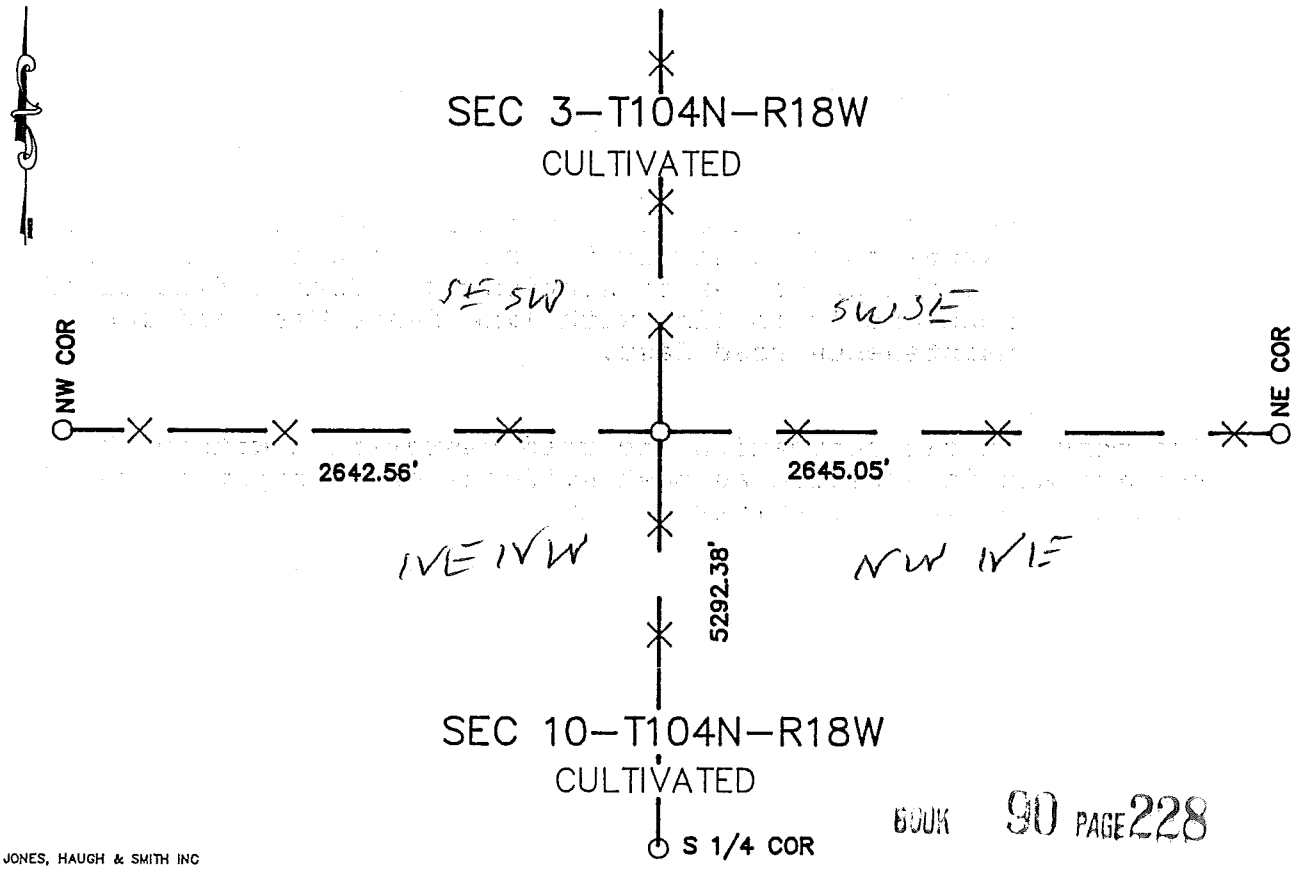

BOOK 90 PAGE 228

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P .M. on the 15 day of Feb A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 142563

M.H.D. FORM NO. 2105

Book 90 Misc Page 228

N 1/4 Cor SEC 10-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of fence line N-S and fence E-W. Found no evidence of original PLS corner. Placed a cast iron monument at the intersection of the fence lines.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 10, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/14/1995 (DATE) found a LARGE ROCK

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/14/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

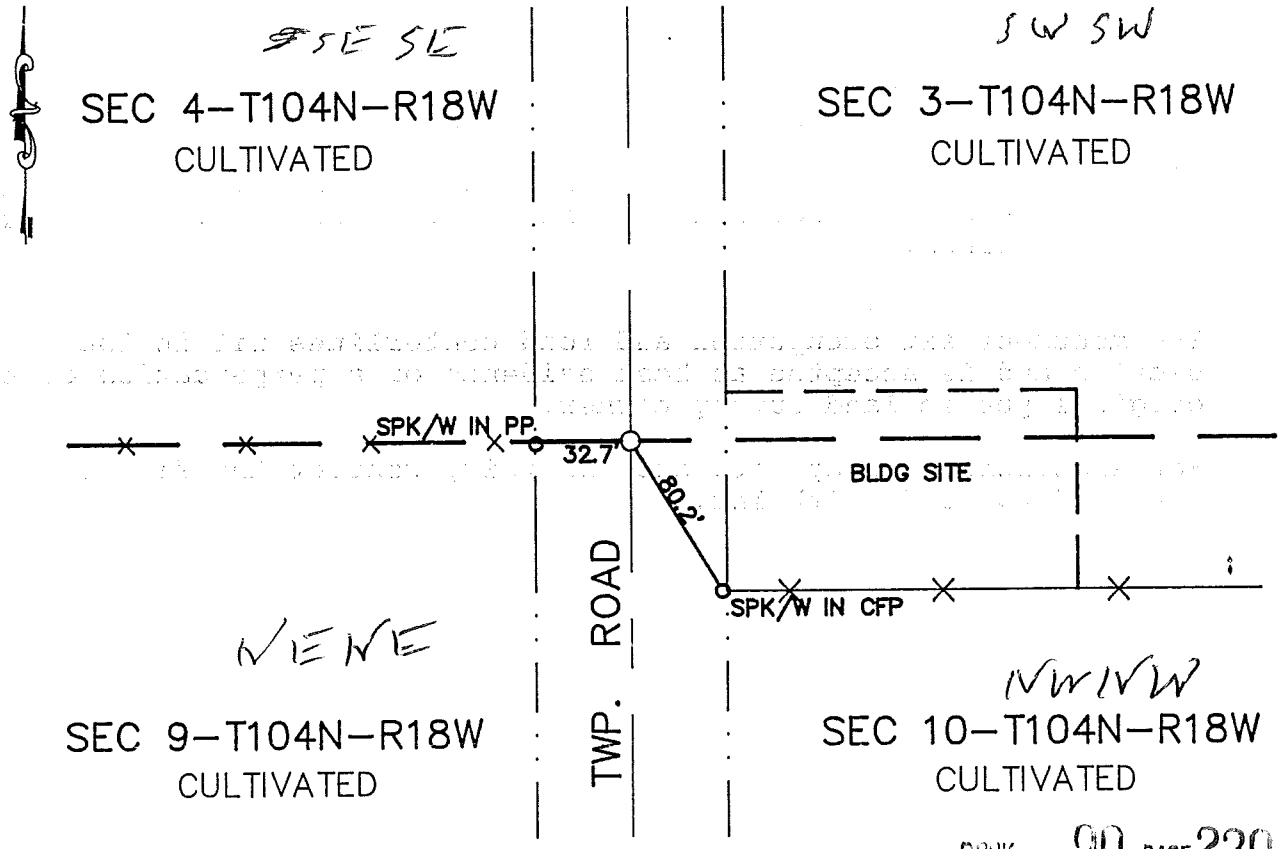

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 90 PAGE 230

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 15 day of Feb A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 142564

M.H.D. FORM NO. 2105

Book 90 Misc Page 230

NW Cor SEC 10-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of N-S township road and in line with line fence West. Uncovered a large rock 1'x2'. Continued digging to virgin soil and found no other evidence of original PLS corner. Accepted the rock as a perpetuation of the original PLS corner and placed a 5/8" iron on the North side of the rock and set cast iron monument over the rock found 0.5"+- below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 10, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/14/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/14/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

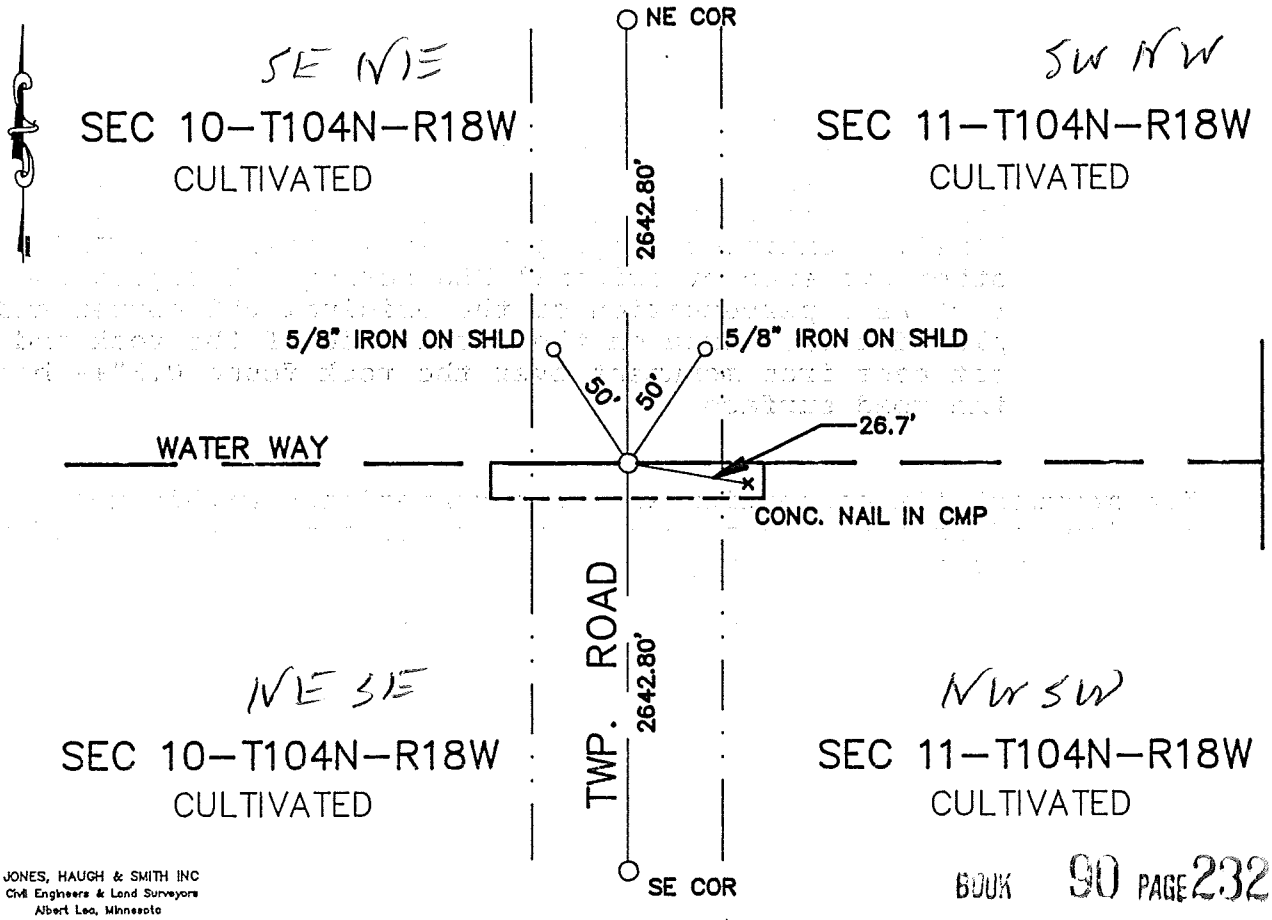

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 90 PAGE 232

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-8-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4p .M. on the 15 day of Feb A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 442565

M.H.D. FORM NO. 2105

Book 90 Misc Page 232

E 1/4 Cor SEC 10-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found that the original PLS corners have been destroyed by the installation of a culvert therefore we placed a cast iron monument at the midpoint of a straight line between the NE and SE corners.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 10, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/14/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/14/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

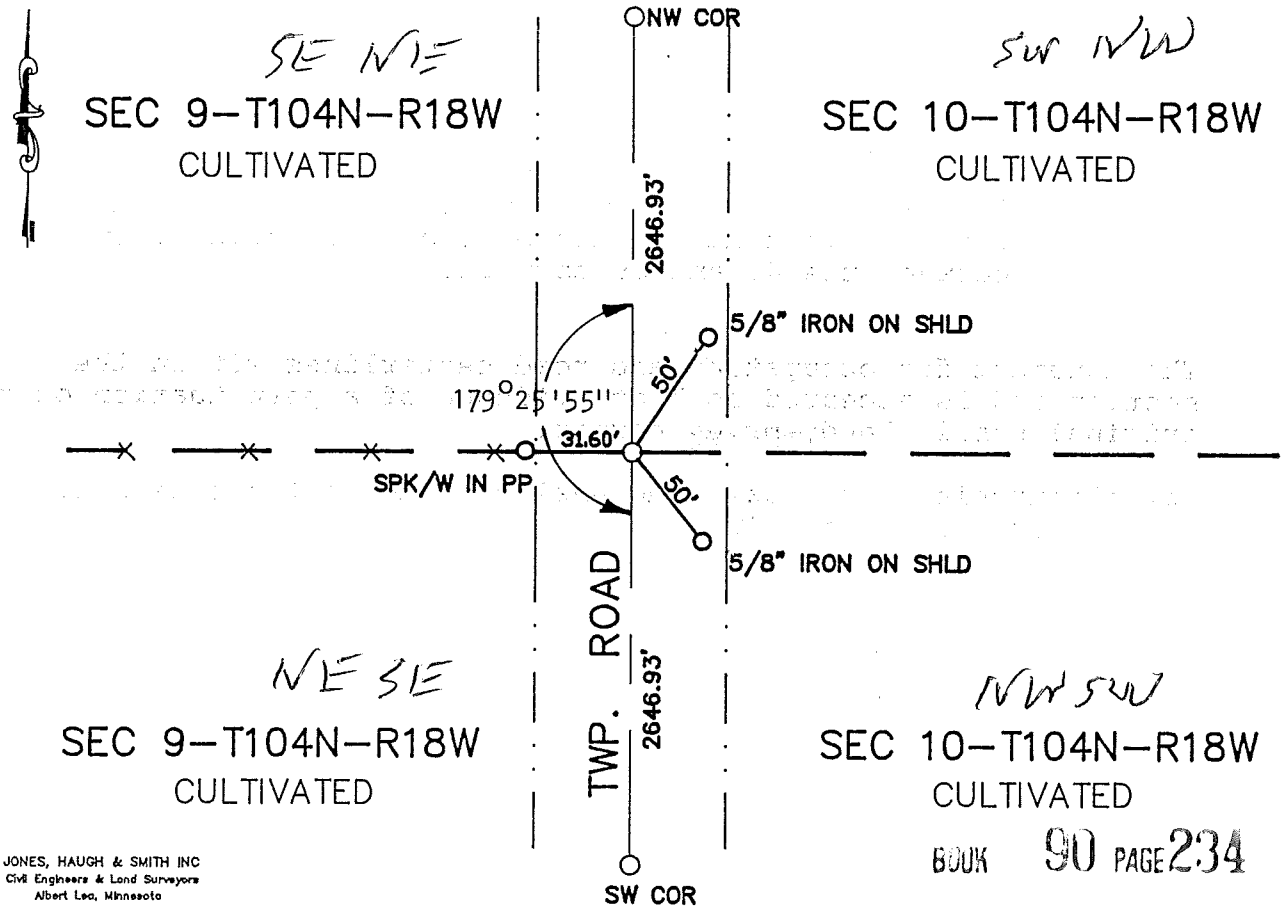

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 90 PAGE 234

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 p .M. on the 15 day of Feb A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 442566

M.H.D. FORM NO. 2105

Book 90 Misc Page 234

W 1/4 Cor SEC 10-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and in line with line fence West. Dug to virgin soil and found no evidence of the original PLS corner. Placed a cast iron monument on the CL of the N-S township road at the midpoint between the NW and the SW section corners.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 11, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/14/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/14/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

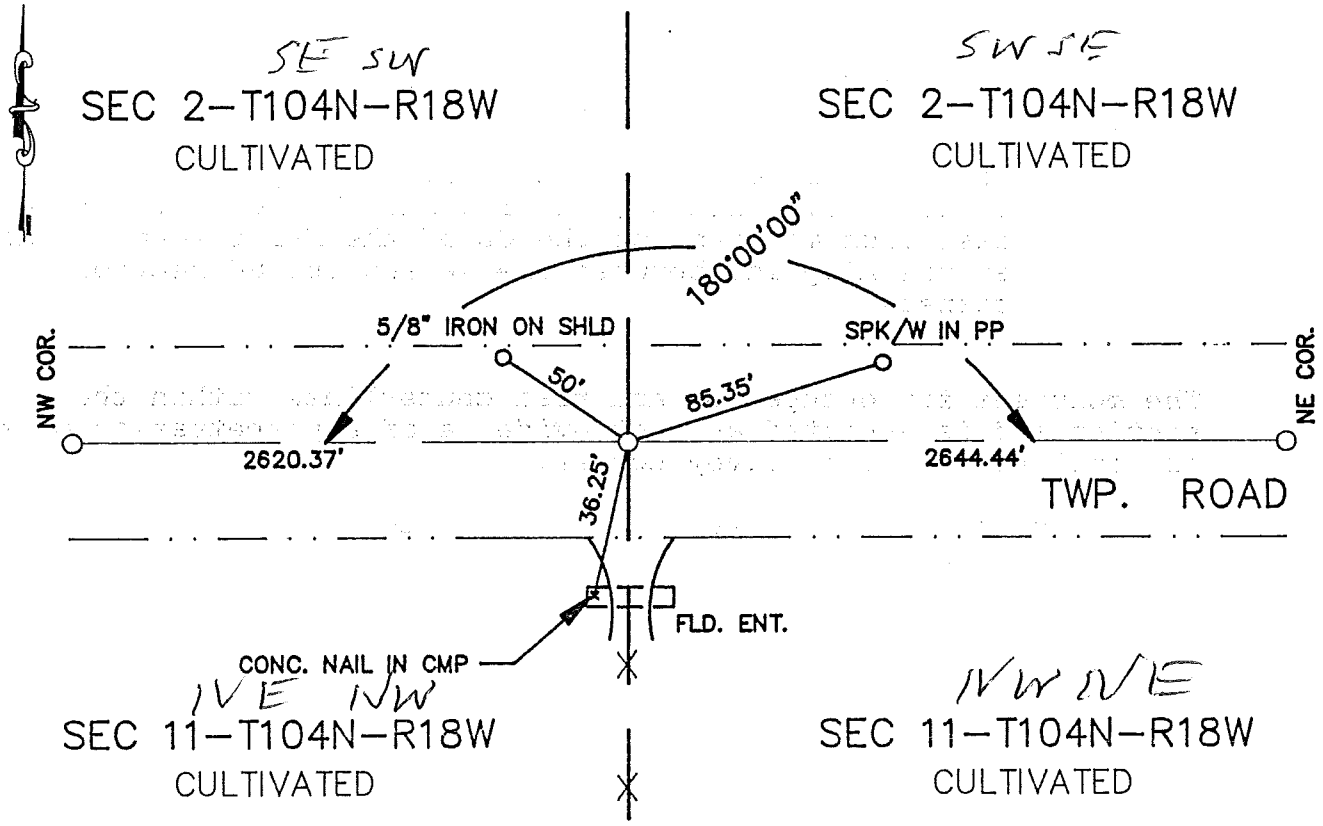

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 90 PAGE 236

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 2-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 15 day of Feb A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 142567

M.H.D. FORM NO. 2105

Book 90 Misc Page 236

N 1/4 Cor SEC 11-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and in line with line fence N-S. Dug to virgin soil and found no evidence of original PLS corner. Placed a cast iron monument on a straight line between the NW and the NE section corners in line with existing fence to the South.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 12, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-3-93 (DATE) found a 4"X 24" WOOD STAKE 1' FOOT BELOW ROAD SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-3-93 (DATE) placed a CAPPED 5/8ø ON CNT. OF STAKE
SET CIM OVER 5/8ø & WOOD STAKE

SKETCH OF REFERENCE TIES

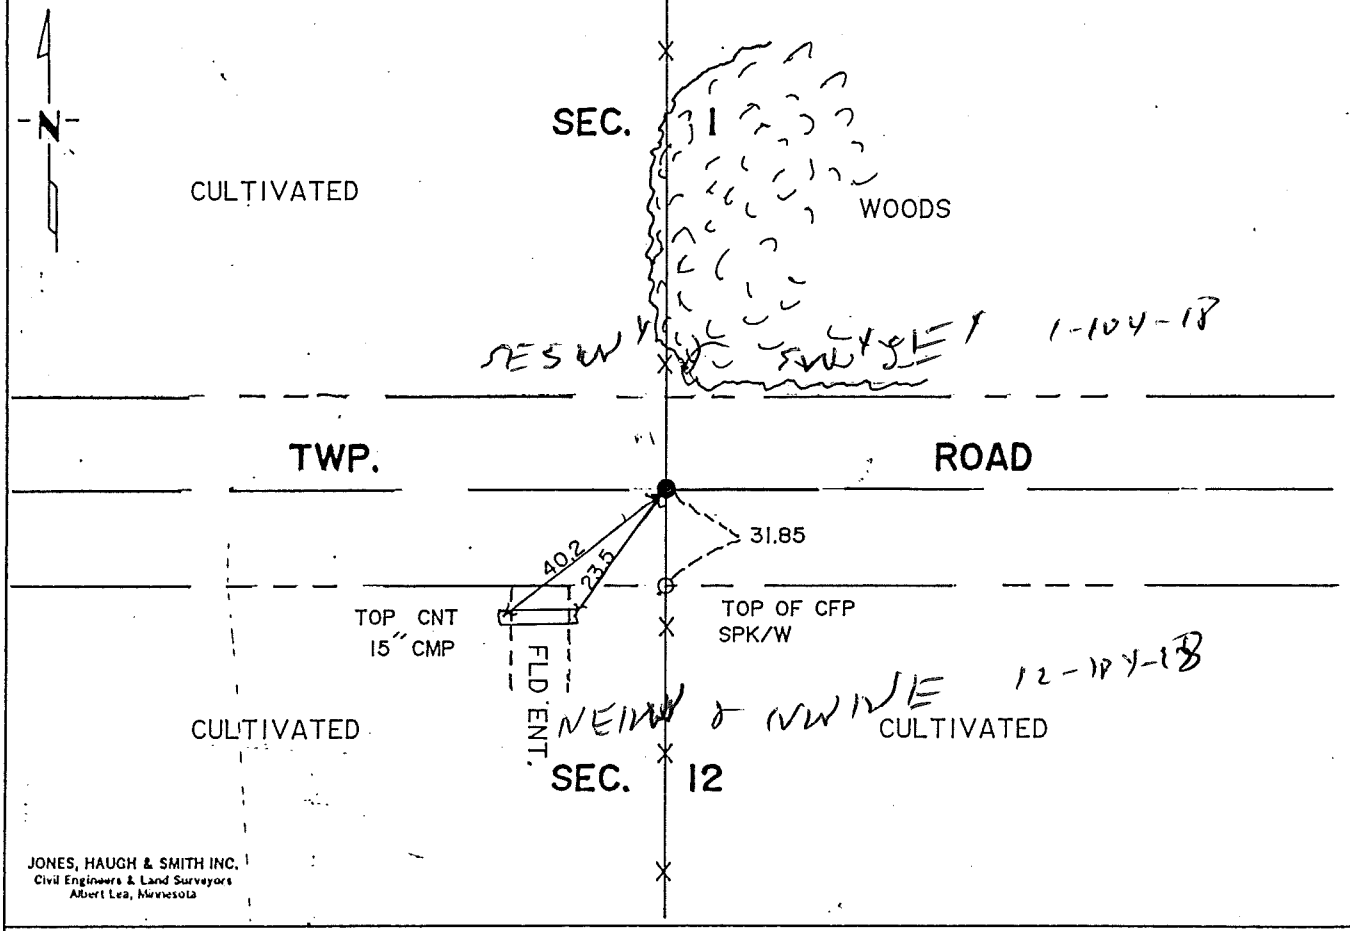

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-7-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 11 day of July A.D., 1994

COUNTY RECORDER Charles Engel

By Marlene Martin, Deputy

DOCUMENT NO. 430569
Book 84 Misc Pg 7

LAND FORM NO. 2105 BOOK 84 PAGE 7

STATEMENT OF EVIDENCE

N 1/4 cor 12-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and a trench with a mound of earth.

10" Burr Oak N 73° E

The following were contacted for section corner information:
Mower County Engineering Department
Minnesota Department of Transportation

No information on the corner was obtained from Mower County or Minnesota Department of Transportation.

1993 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated with a backhoe a 3'x8'x3' deep hole on centerline of east-west township road and in line with south fence and edge of woods north. Found a 4" diameter x 24" wood stake at one foot. Continued digging and uncovered pieces of clay tile one foot below wood stake found. Dug into virgin soil and found no other evidence. Left monuments as found and set a capped 5/8" diameter x 18" iron in center of stake found and set cast iron monument near road surface above stake.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 12, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 9-3-93 (DATE) found a 12"x12"x18" POINTED STONE-4FT. BELOW SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-3-93 (DATE) placed a CAST IRON MONUMENT ABOVE STONE

SKETCH OF REFERENCE TIES

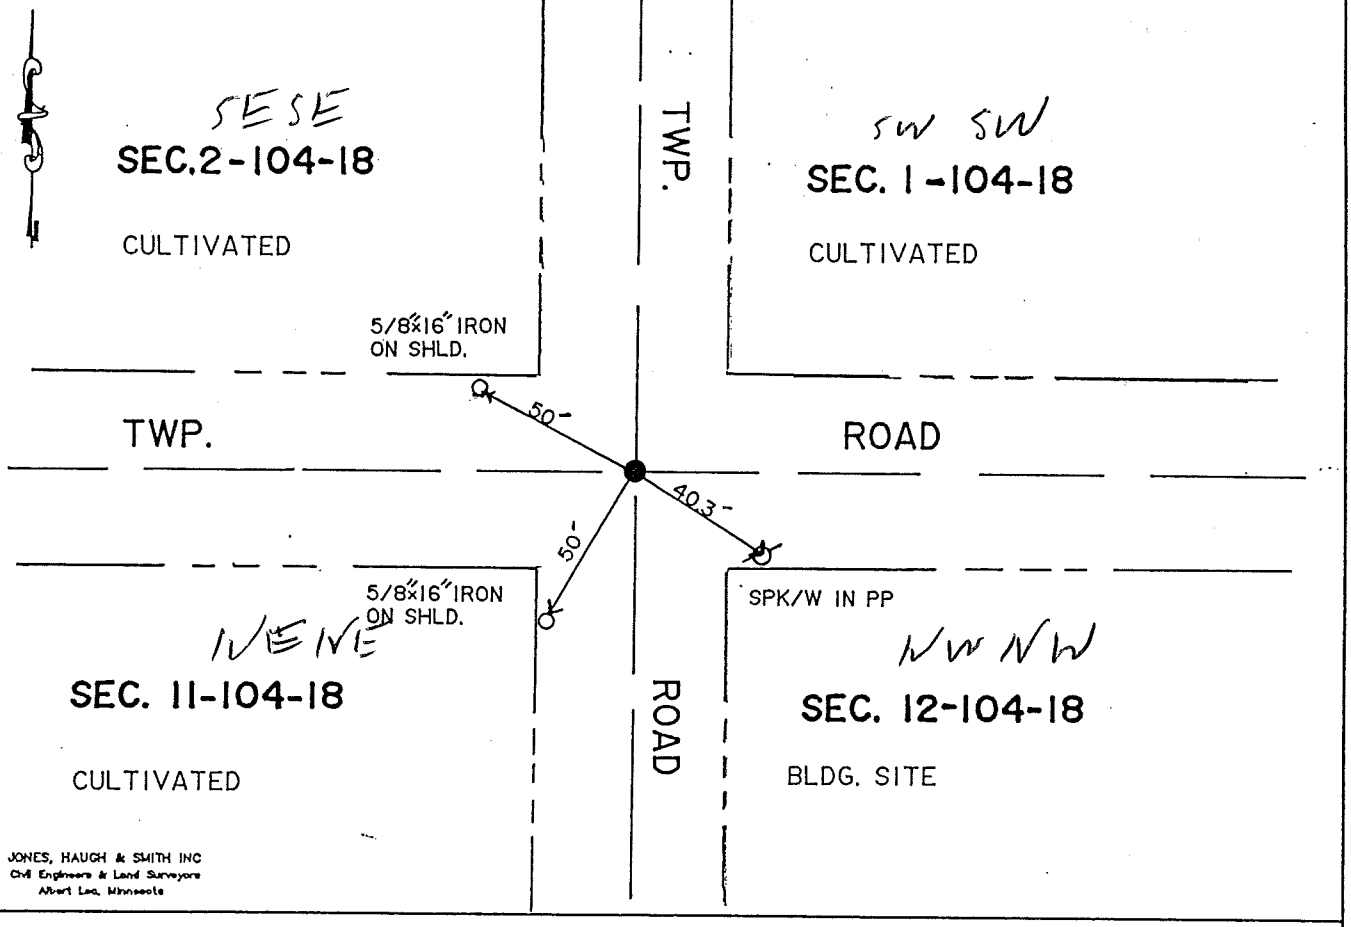

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-7-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 11 day of July A.D., 1994

COUNTY RECORDER Charles Engen

By Marlene Martin, Deputy

DOCUMENT NO. 430570

M.H.D. FORM NO. 2105

BOOK 84 PAGE 9 Book 84 Misc Pg 9

STATEMENT OF EVIDENCE

NW cor 12-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post.

16" Burr Oak	S 47° W	30 links
8" Burr Oak	S 38° E	260 links

The following were contacted for section corner information:
Mower County Engineering Department
Minnesota Department of Transportation

No information on the corner was obtained from Mower County or Minnesota Department of Transportation.

1993 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated with a backhoe a 4'x12'x5' deep hole on centerline centerline of township roads. Found a 12"x12"x18" pointed field stone at a depth of four feet and resting in virgin soil. Dug around stone and found no other evidence. Left stone as found and set a capped 5/8" diameter x 18" iron on north side of stone and a cast iron monument near road surface above stone found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 12, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 3-9-93 (DATE) found NO EVIDENCE PLS CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 3-9-93 (DATE) placed a CASTIRON MON.

SKETCH OF REFERENCE TIES

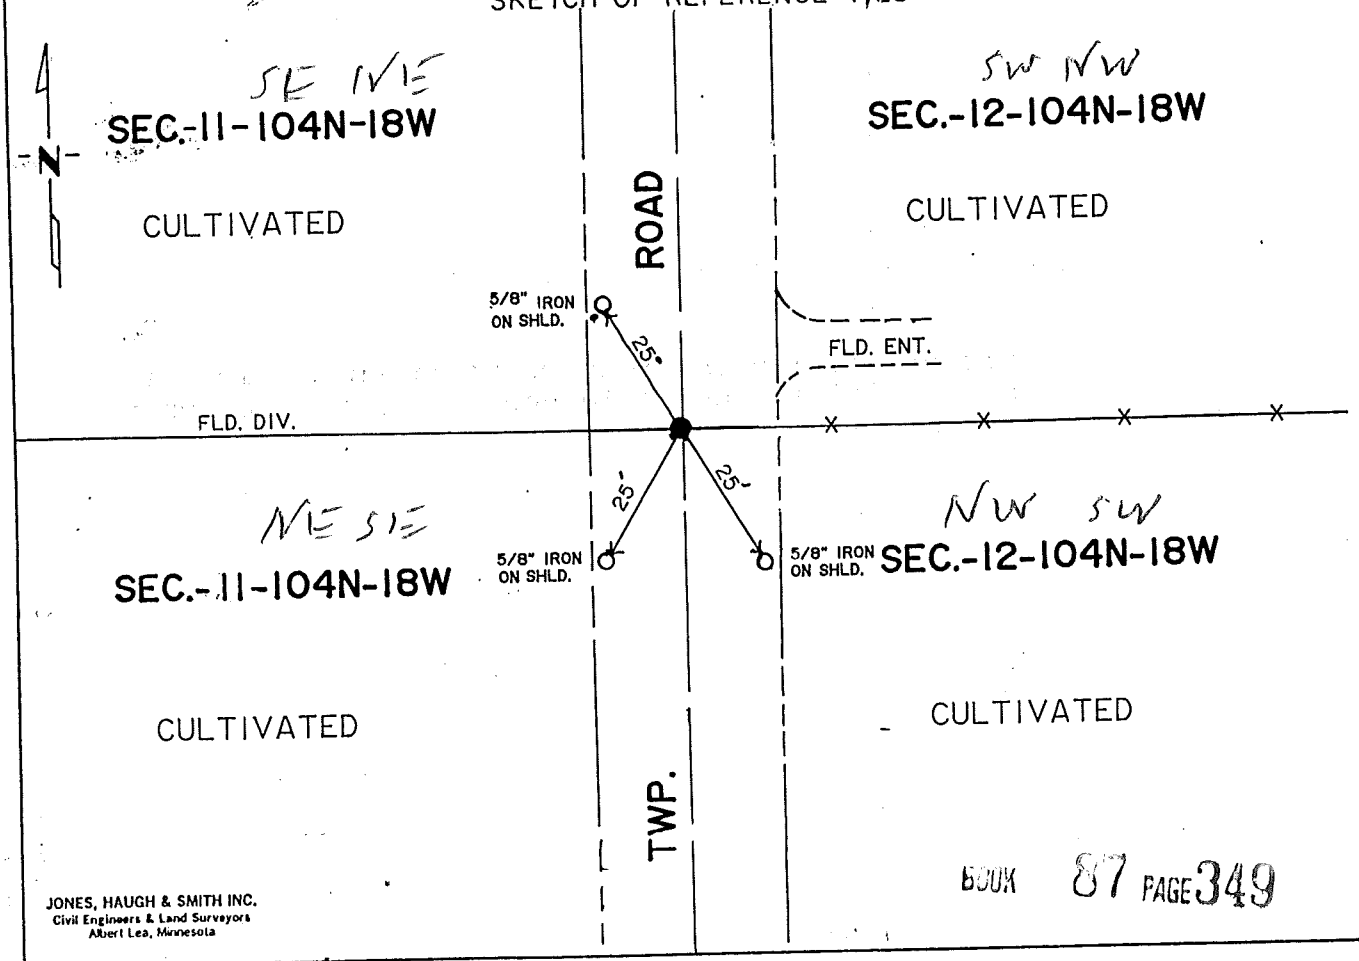

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 87 PAGE 349

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-12-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 19 day of June A.D., 19 95

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 437352

Book 87 Misc Page 349

M.H.D. FORM NO. 2105

W 1/4 SEC 12-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked by a charred stake with a mound and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones, Haugh and Smith crew, under the direction of John Schulte, Mower Co. Surveyor, RLS 13807, dug with county backhoe a 4' X 12' X 3' deep hole on CL N-S twp. road in line with a fence line to the east and field division west. Road was found to have been core cut as evidenced by 2' of 1.5" rock fill. Rock was into virgin soil. Set CIM near road surface on line between the NW and SW corners of sec. 12 and in line with fence to the east and a field division to the west. The corner is in line with road centerline N-S.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 87 PAGE 350

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 13, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-9-92 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-12-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

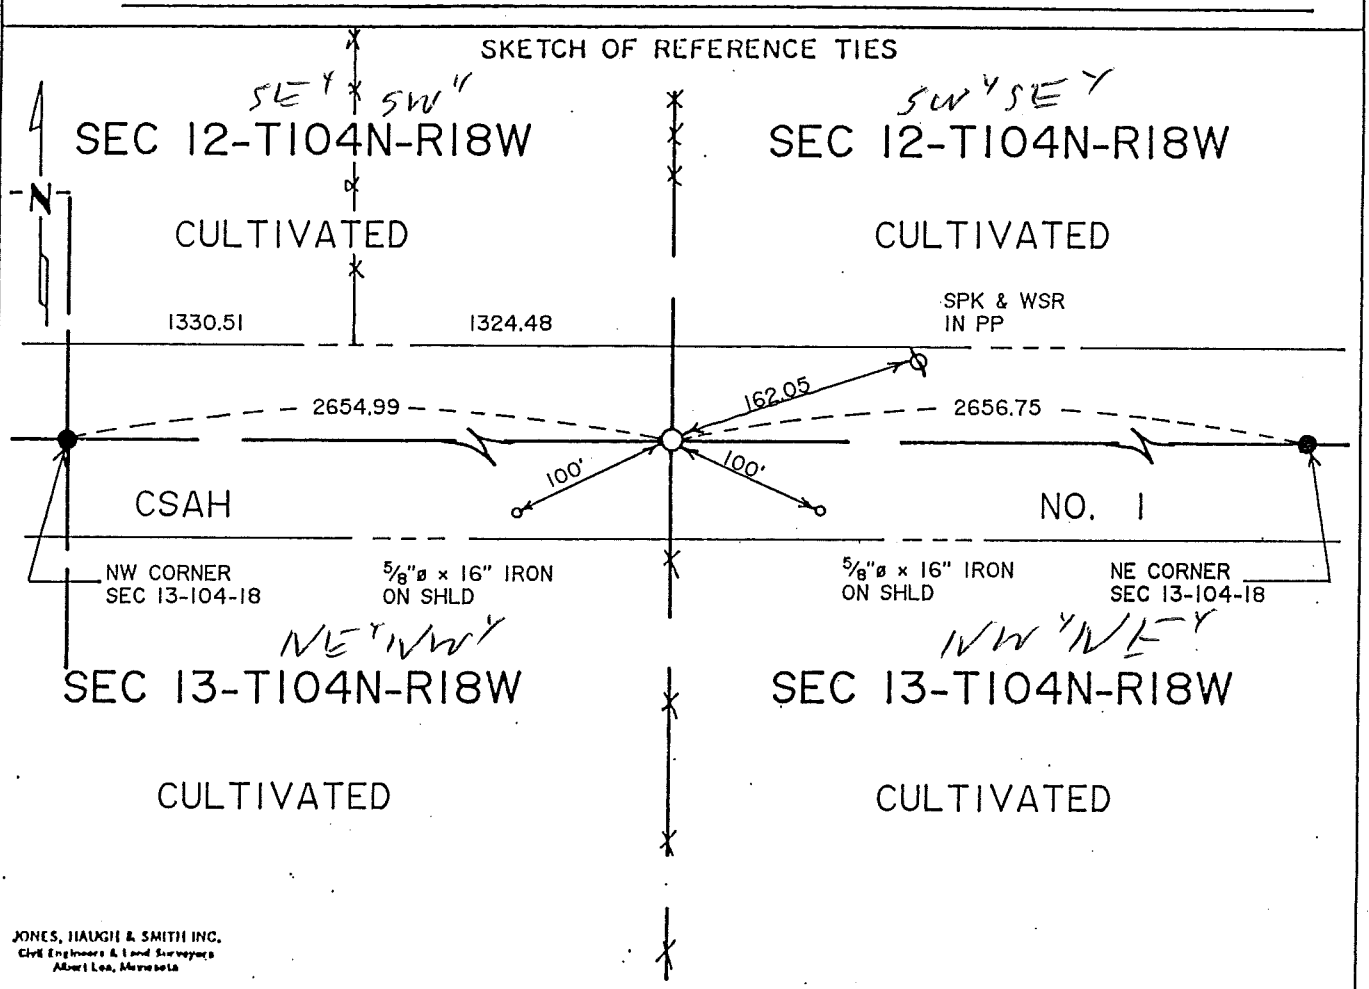

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 6-18 93
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 24 day of June A.D., 19 93

COUNTY RECORDER Grantel Engen

By Marlene Martin, Deputy

DOCUMENT NO. 421719

Bk 80 Misc Pg 117

M.H.D. FORM NO. 2105 BOOK 80 PAGE 117

STATEMENT OF EVIDENCE

N 1/4 corner Section 13-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following tie was taken:

6" Burr Oak	South	140 links (92.40 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe and found no evidence of public land survey corner or a perpetuation thereof. Therefore established position of corner using obliterated methods on a straight line between the northwest and northeast section corners in line with fences north and south.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public
land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 13 Township 104 Range 18W 5th P.M.

STATE OF MINNESOTA. County of MOWER


At the corner location shown on the sketch:

☒ On 4-19-1995 (DATE) found a 24"LONG GRANITE STONE WITH A 6"X6" SHAPED TOP

____ left monument as found ____ lowered monument X removed monument

☒ On 4-19-1995 (DATE) placed a 24" TELSPAR WITH CAST IRON CAP AT SAME LOCATION AS FOUND STONE

SKETCH OF REFERENCE TIES

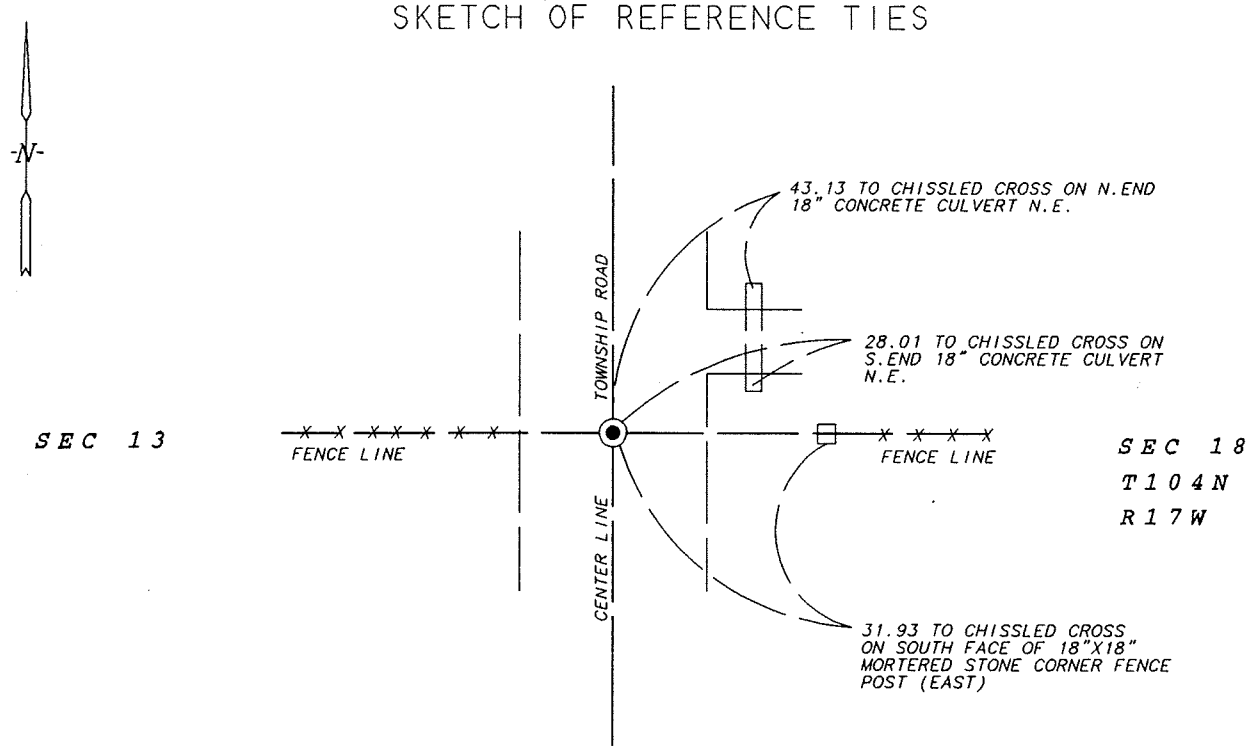

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Vincent A. Fangman
Licensed Land Surveyor
Minnesota Registration No. 14888

4/19/1995
Date.

FANGMAN LAND SURVEYING Pine Islands MINNESOTA

OFFICE OF THE COUNTY RECORDER
County of MOWER

I herby certify that this document was filed in Co. Recorder's office at _____ .M. on the _____ day of _____ A.D. 19

County Recorder _____

By _____ .Deputy

DOCUMENT NO. _____

Statement of Evidence:

East Quarter Corner Section 13, T104N, R18W

April 19, 1995 Vince Fangman, private land surveyor, dug with backhoe at the center of the north-south road and in line with fences east and west. A large granite stone was found 2 feet below the road surface. The stone was layed on its side and moved slightly southeast of its true position to make room for the permanent metal monument. The distance to the northeast corner is 2651.98 and the distance to the occupation at the southeast corner of section 13 is approximately 2655. This corner is being accepted as the public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 13, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/31/1995 (DATE) found a CORNER FENCE POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/31/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

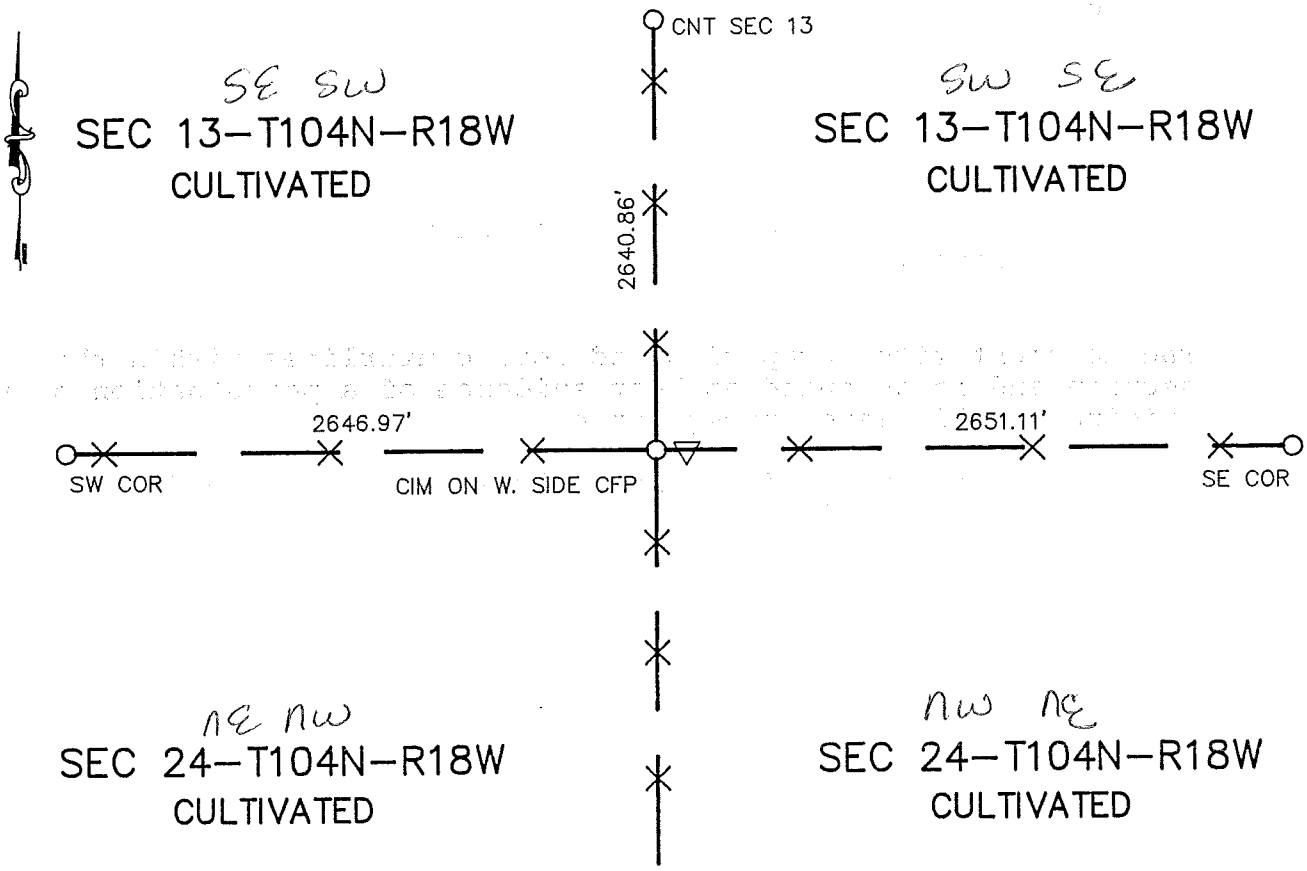

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a.M. on the 15th day of March A.D., 1996

COUNTY RECORDER Charles Engel
By Wayne Taylor, Deputy
DOCUMENT No. 431134

M.H.D. FORM NO. 2105

BOOK 90 PAGE 421

Book 90 Page 421

S 1/4 Cor SEC 13-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, searched in area of fence intersection near a wood fence post with metal locator and shovel. No evidence was found of the original PLS corner and the wood post was accepted as best evidence of the corner. A 5/8" iron with cast iron head was placed on the west side of the post.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 14, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/31/1995 (DATE) found a ROCK PILE IN LINE WITH FENCES N-S, E-W

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/31/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

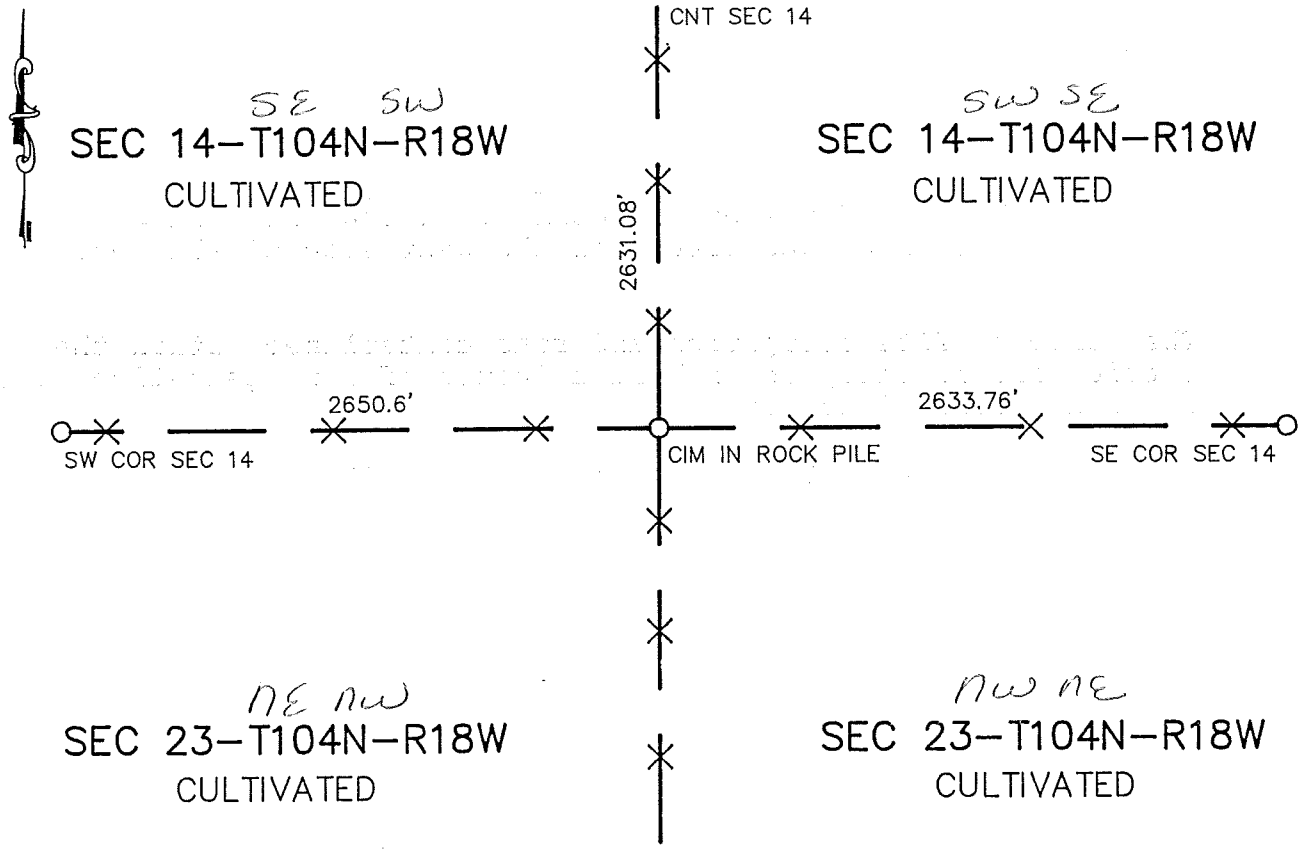

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a.M. on the 15th day of March A.D., 1996

COUNTY RECORDER Charles Enger

By Sheryl Taylor, Deputy

DOCUMENT NO. 143135

M.H.D. FORM NO. 2105 BOOK 90 PAGE 423

Book 90 Page 423

S 1/4 Cor SEC 14-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, searched in area of N-S-E-W fence intersection with metal locator and shovel. Fence intersection lies under 10' rock pile. No further evidence of the original PLS corner was found. A 5/8" iron with cast iron head was set in the rock pile in line with fences.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 14, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-9-92 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-12-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

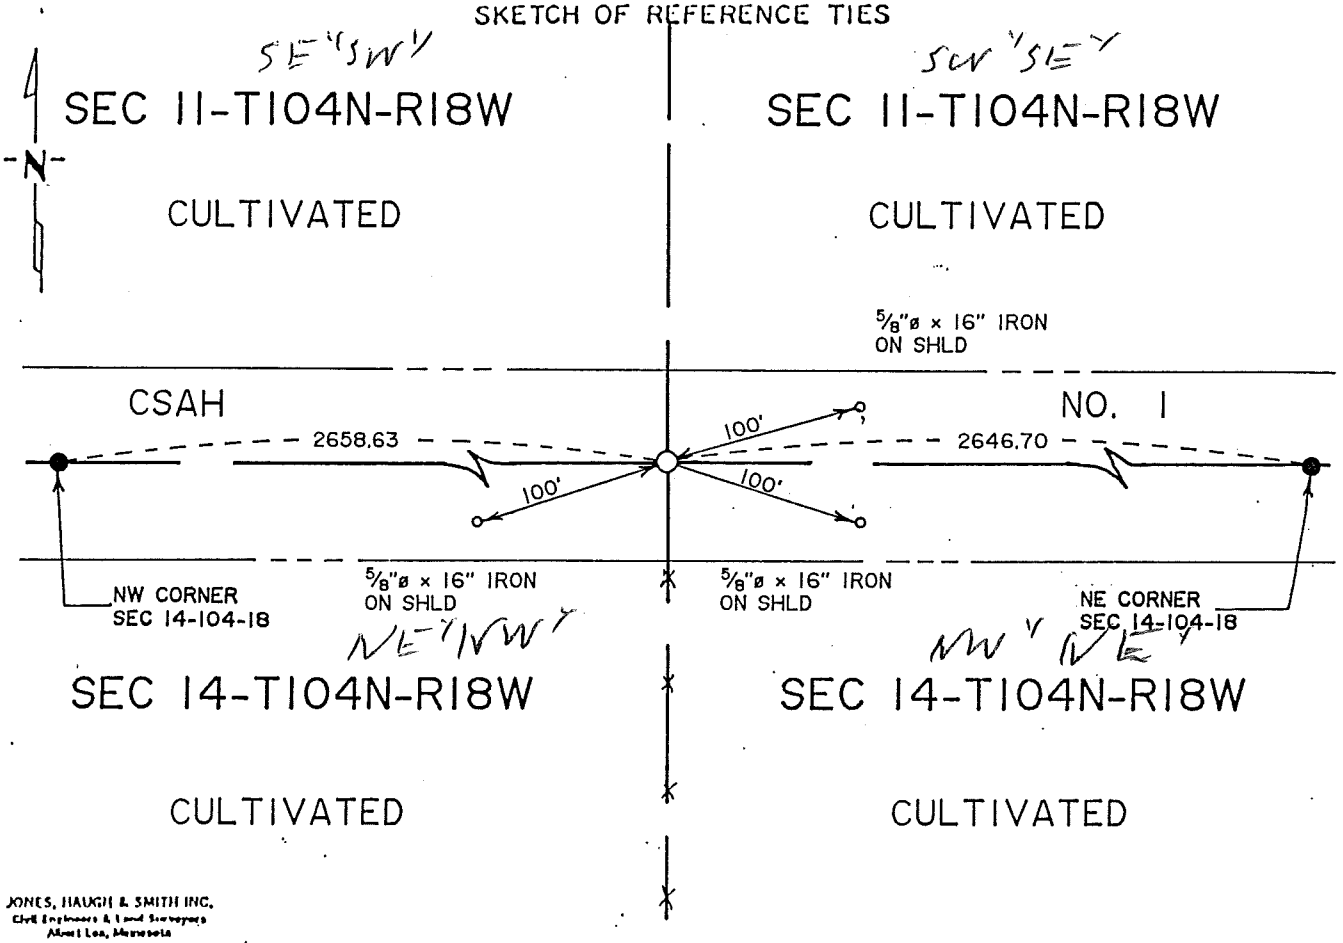

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-10-93

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 24 day of June A.D., 1993

COUNTY RECORDER Edward Enger

By Marlene Marten, Deputy

DOCUMENT NO. 421718 Bk 80 Misc Pg. 115

M.H.D. FORM NO. 2105

Bk 80 Page 115

STATEMENT OF EVIDENCE

N 1/4 cor Sec 14-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

6" Burr Oak	S 25° W	83 links (54.78 ft)
7" Burr Oak	N 57° E	90 links (59.40 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1992 Jones, Haugh & Smith crew under the direction of John H. Schulte IV, Reg No. 13807, dug with the County backhoe on centerline of County State Aid Highway No. 1 and in line with line fence running south and found no evidence of a perpetuation of this corner or the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, set this corner on a straight line between the northwest and northeast corners of Section 14 and also in line with the line fence running south.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P 76 "C"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 14, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-9-92 (DATE) found a 6"ø CONCRETE MONUMENT WITH ½"ø IRON CAST IN CENTER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-9-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

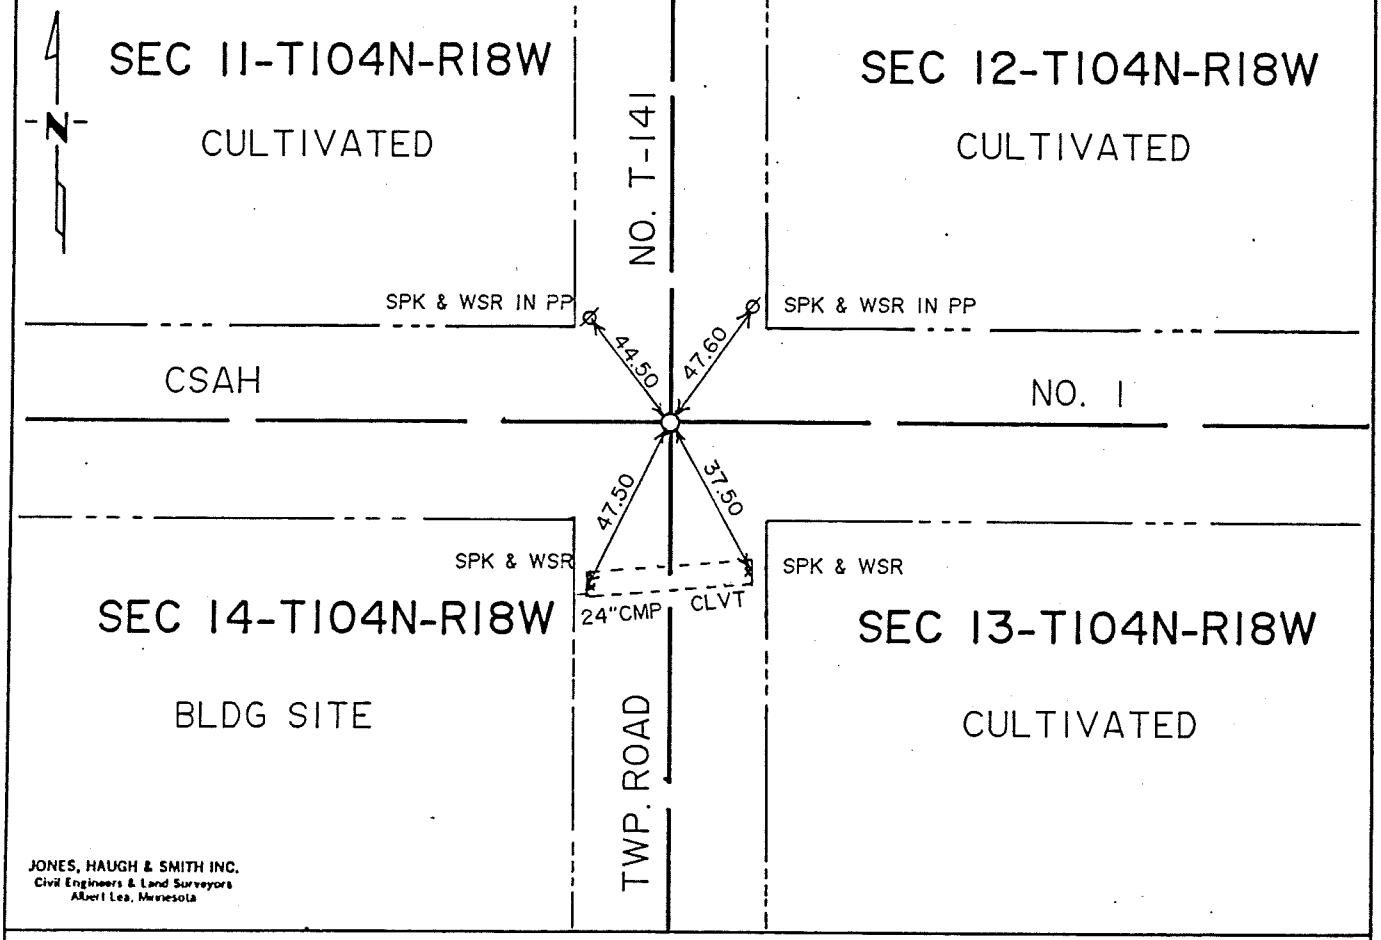

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 11-12-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 14-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following tie was taken:

8" Burr Oak	S 59 1/2° W	247 links (163.02 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1941 Recorded in Book 'A' in the office of the Mower County Engineer, a monument was uncovered and the following ties were taken:

N to REA pole	30.6 ft
SW to Maple	57.7 ft
N to fence west	36.5 ft
NE to PP	47.2 ft
NW to CFP	44.0 ft
NW to guy pole	44.0 ft
W to fence line	24.8 ft

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe and uncovered a 1/2" diameter iron cast in center of 6" diameter concrete monument three feet below road surface in virgin soil. Tie to the face of power poles NW and NE agree with 1941 records. Set cast iron monument over concrete monument on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public
land survey corner.

Index No. P 76 "E"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 14, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 12-8-88 (DATE) found a 3/8" dia. iron in a 6" dia. concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 12-8-88 (DATE) placed a 5/8"ϕ x 16" iron capped RLS 13807 on south side of concrete monument

SKETCH OF REFERENCE TIES

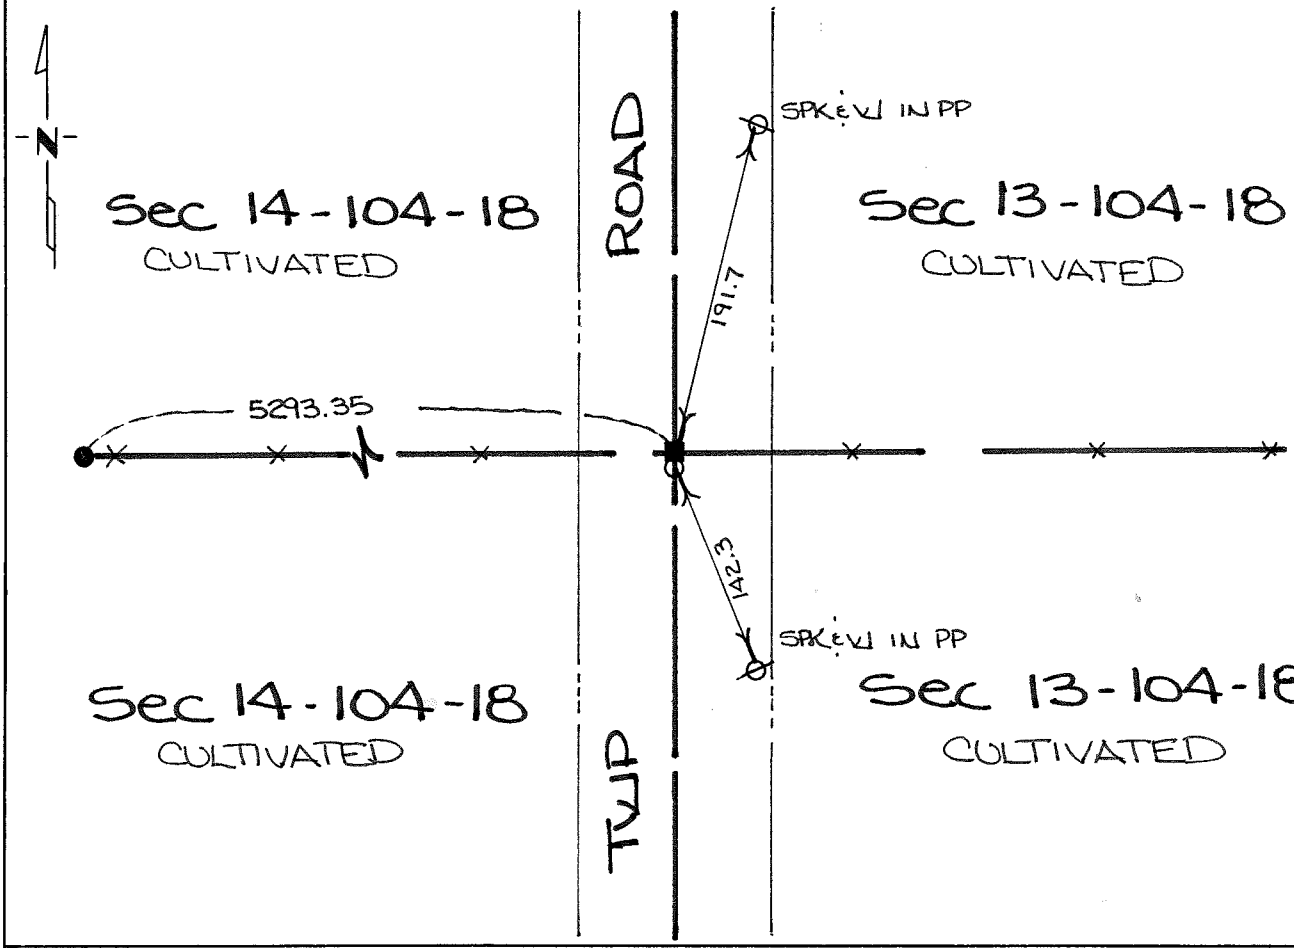

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
E¼ corner Section 14-104-18

1854 William I. Anderson, Deputy Surveyor of the US General Land Office set a wood post and took ties to the following bearing trees:

11" Burr Oak	S 02° 3/4 E	384 Links
12" Burr Oak	S 06° 3/4 W	295 Links

No further evidence was obtained from County or private records of ¼ corner.

1988 Jones, Haugh & Smith crew uncovered a 6" diameter concrete monument in clay tile with a 3/8" diameter iron cast in center of monument on centerline of north-south road and in line with fence east-west.

The monument found fits occupation and road centerlines within the section and has been accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. P76 "A"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 14, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 12-8-88 (DATE) found a 1/2" dia. iron in a 6" dia. concrete monument

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 12-8-88 (DATE) placed a 5/8"ϕx16" iron over a concrete monument

SKETCH OF REFERENCE TIES

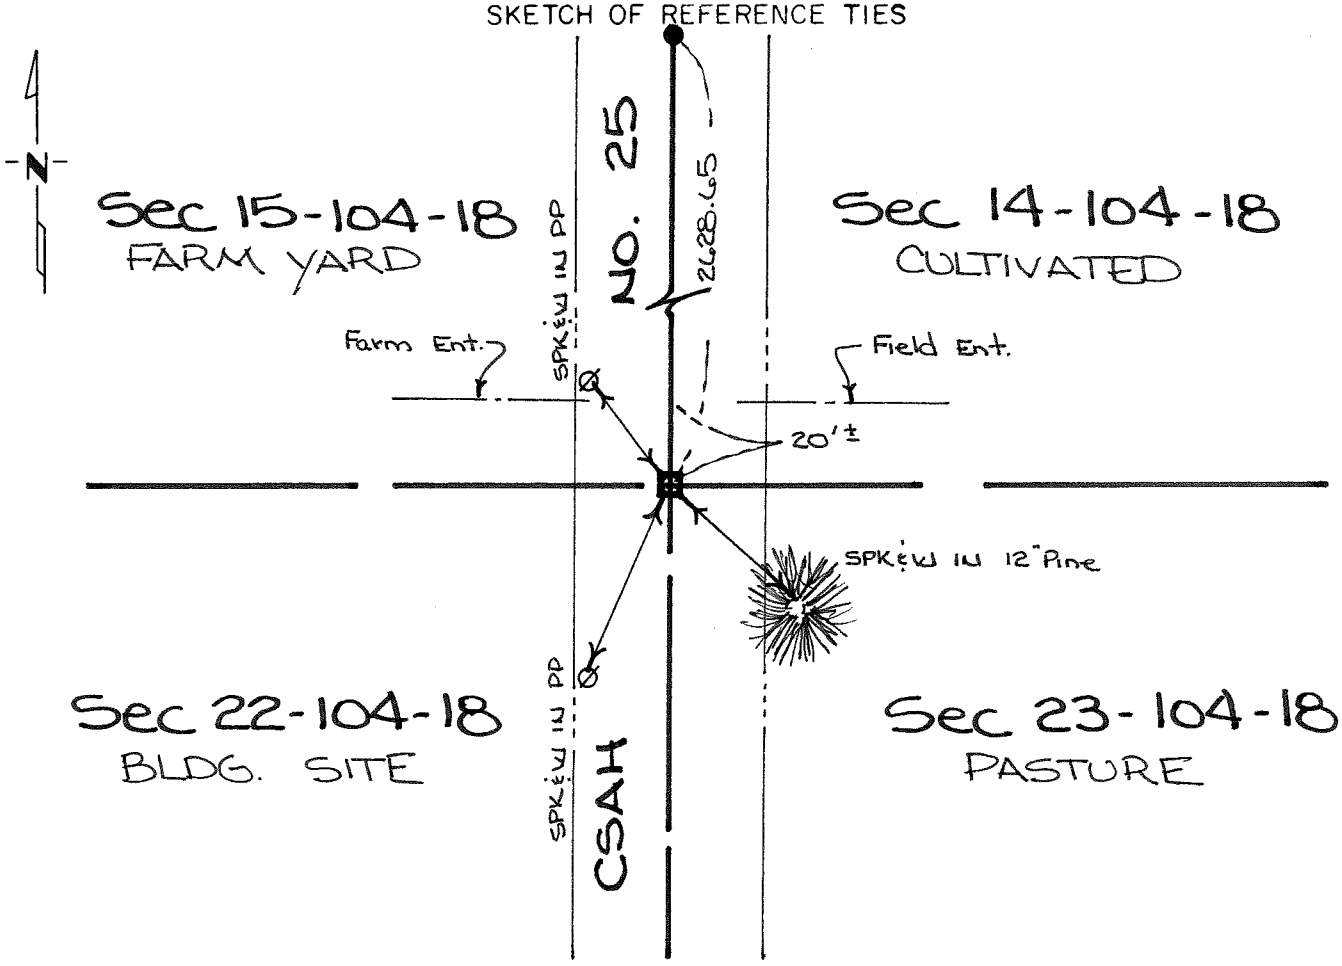

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 12-12-88
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 __

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
SW corner Section 14-104-18

1854 William I. Anderson deputy surveyor of the US General Land Office set a wood post and took ties to the following bearing trees:

10" Burr Oak	N 70° W	20 Links
12" Burr Oak	N 12° E	175 Links
13" Burr Oak	S 27° W	153 Links

1935± Mower County Engineering Department uncovered a concrete monument as shown on grading plan and ties were taken and recorded in the County Tie Book.

1950± Mower County Engineering Department uncovered a concrete monument as shown on grading plan, no new ties were taken.

1988 Jones, Haugh & Smith crew uncovered a 6" diameter concrete monument in a clay tile with a ½" diameter iron in center of monument on the centerline of north-south road.

The monument found fits occupation and road centerlines within the section and agrees with past records from the Mower County Highway Department and has been accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

16 "F"

Index No. 9

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 14, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 12-8-88 (DATE) found a NO EVIDENCE OF CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12-8-88 (DATE) placed a 5/8"Ø IRON CAPPED RLS 13807

SKETCH OF REFERENCE TIES

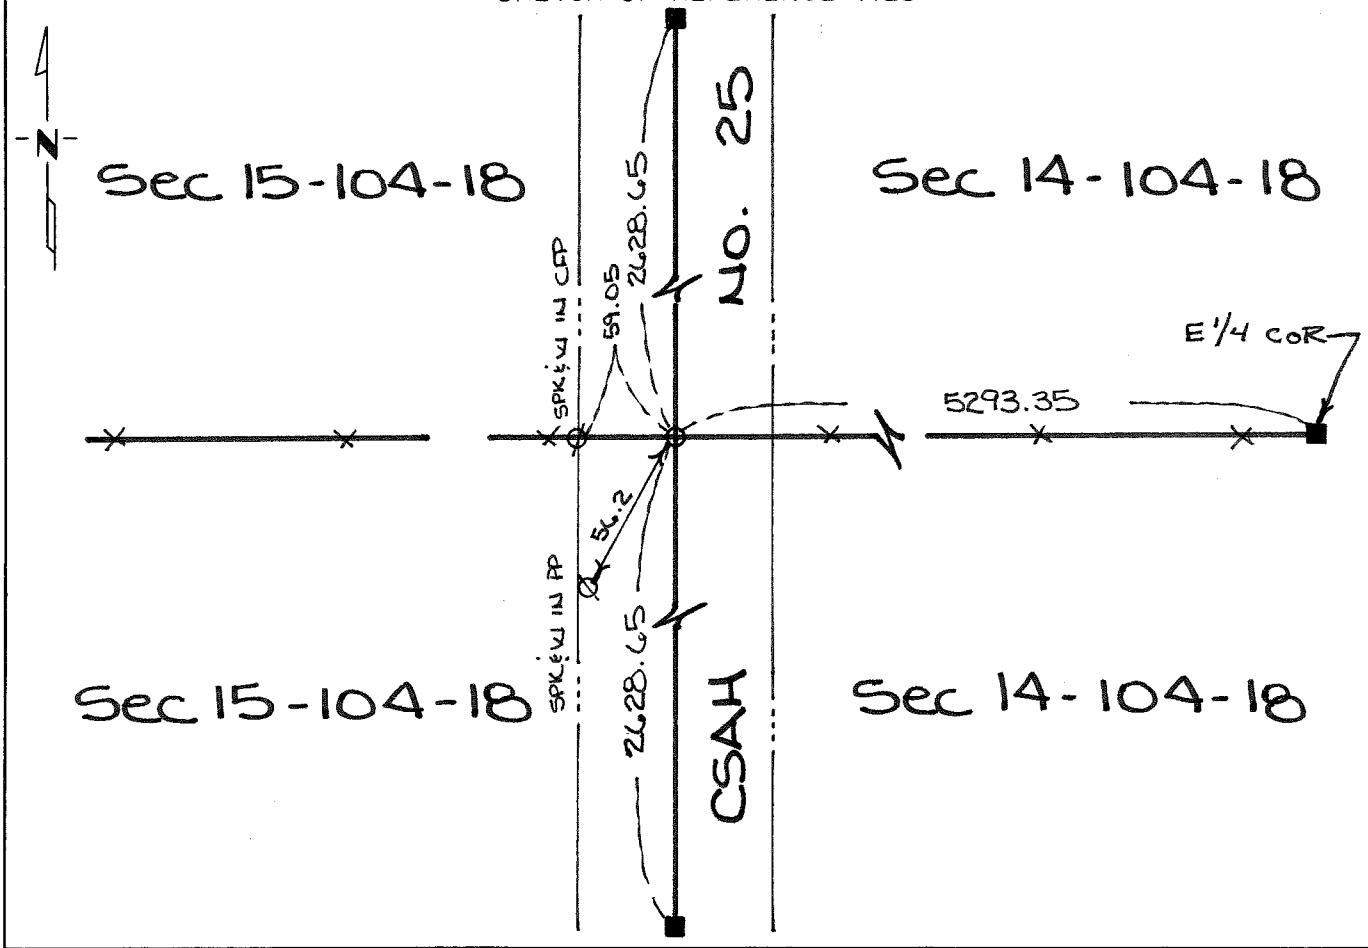

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-12-88 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
W¼ corner Section 14-104-18

1854 William I. Anderson, Deputy Surveyor of the US General Land Office set a wood post and took ties to the following bearing trees:

6" Burr Oak S 20° W 68 Links
13" Burr Oak 307 Links North

1935± Mower County Engineering Department indicates no monument was uncovered during 1935 grading project, at the time of the grading project there was a township road on the assumed ¼ line going west from ¼ corner. Distance from northwest corner to centerline township road was 2628.5 feet.

1950± Mower County Engineering Department regraded county road and shows no evidence of ¼ corner and at this time township road to the west has been removed.

1988 Jones, Haugh & Smith crew found no evidence of public land survey corner or a perpetuation thereof. Therefore established position of ¼ corner using obliterated methods setting a 5/8" diameter iron on a straight line at the midpoint between the northwest corner and southwest corners of Section 14-104-18.

The monument set fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. P 76"8"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 14, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 12-8-88 (DATE) found a 1/2" dia. iron in a concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

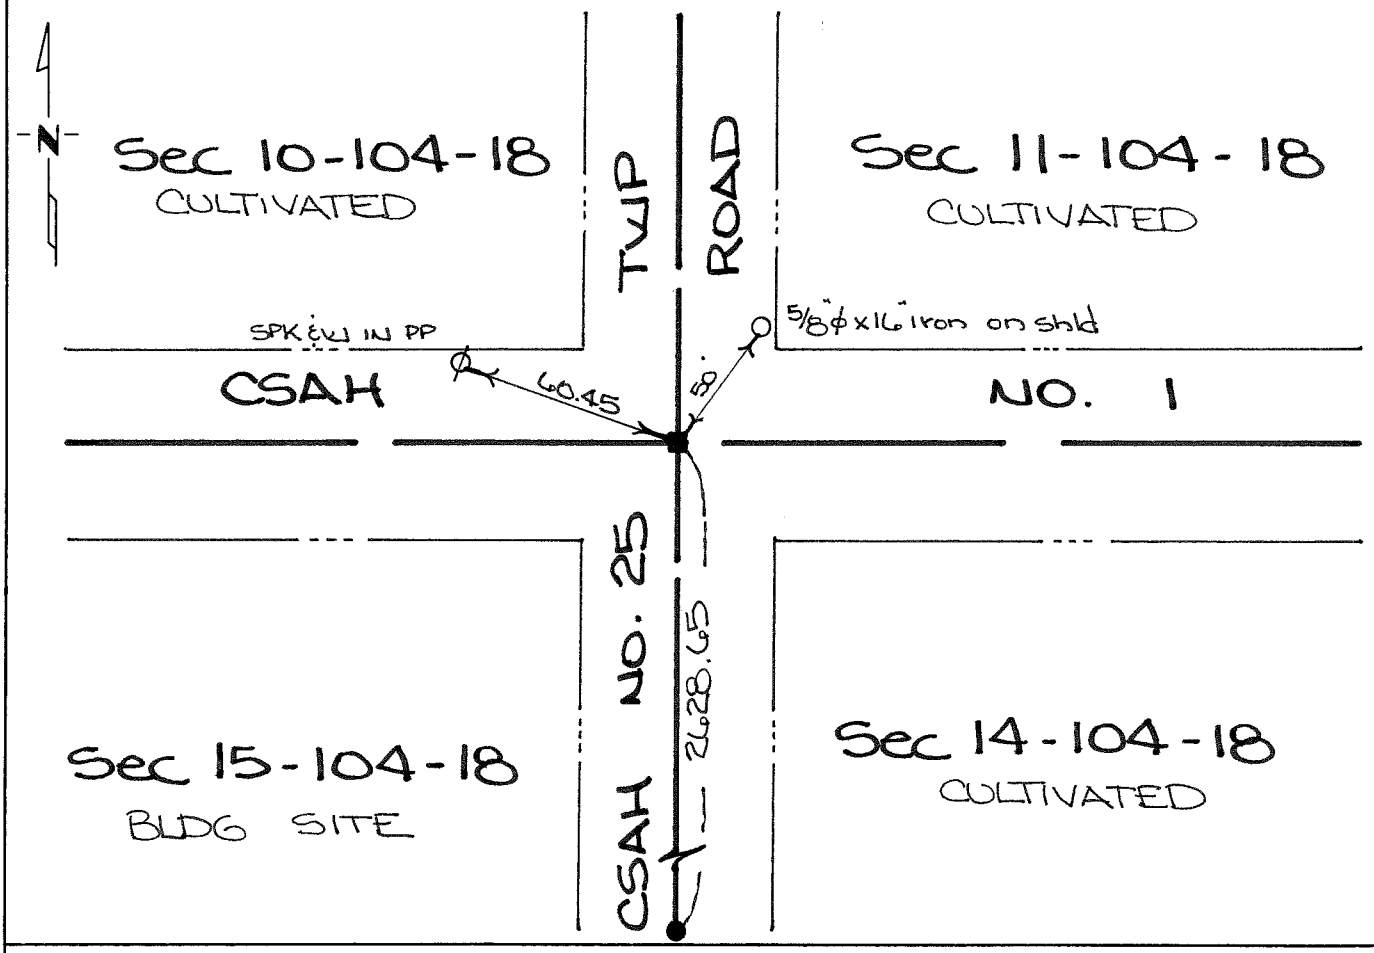

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-12-88

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
NW corner Section 14-104-18

1854 William I. Anderson deputy surveyor of the US General Land Office set a wood post and ties were taken to the following bearing trees:

7" Burr Oak	S 63° E	290 Links
8" Burr Oak	S 80° W	466 Links

1935± Mower County Engineering Department grading plan shows a concrete monument inplace and ties were taken and recorded in the tie book.

1950± Mower County Engineering Department grading plan shows a concrete monument inplace, no new ties were taken.

1988 Jones, Haugh & Smith crew uncovered a 6" diameter concrete monument in clay tile with ½" diameter iron cast in center of monument.

The monument found fits occupation and road centerlines and agrees with records from the Mower County Engineering Department and has been accepted as a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 15, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-9-92 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-12-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

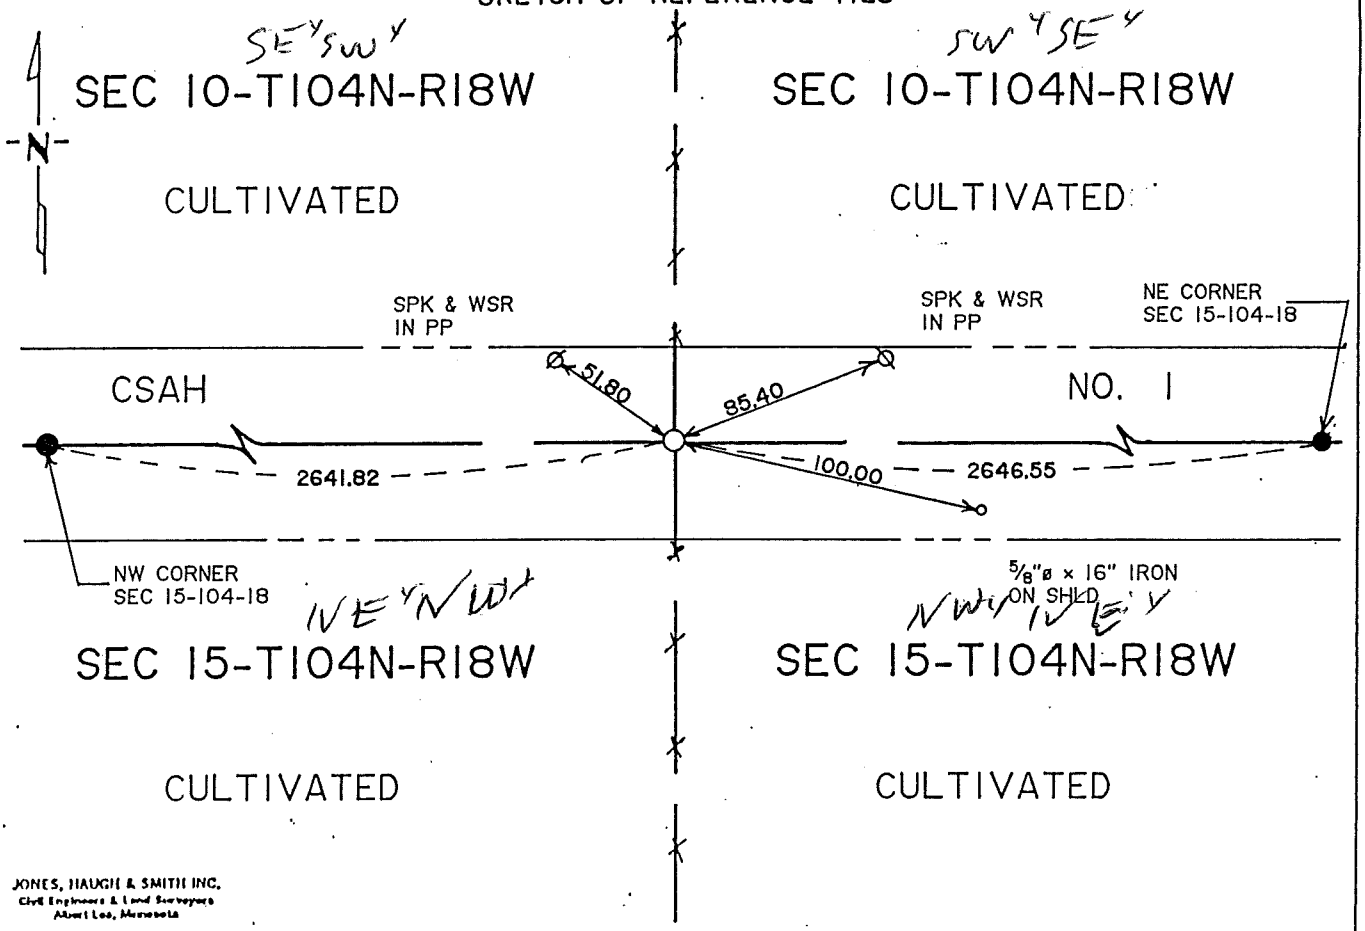

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-18-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 24 day of June A.D., 1993

COUNTY RECORDER Amanda Ernzen

By Marlene Martin, Deputy

DOCUMENT NO. 121717

BOOK 80 PAGE 113

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 cor Sec 15-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

6" Burr Oak	N 5° E	111 links (73.26 ft)
10" Burr Oak	N 87° W	222 links (146.52 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1992 Jones, Haugh & Smith crew under the direction of John H. Schulte IV, Reg No. 13807, dug a 6'x12'x5' hole on the centerline of County State Aid Highway No. 1 and also in line with the north-south line fences. We found no evidence of the perpetuation of this corner or the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, set this corner on a straight line between the northwest and northeast corners of Section 15 and also in line with the line fences running north-south.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

B
RW 9
C

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 15, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/01/1995 (DATE) found a CORNER FENCE POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/01/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

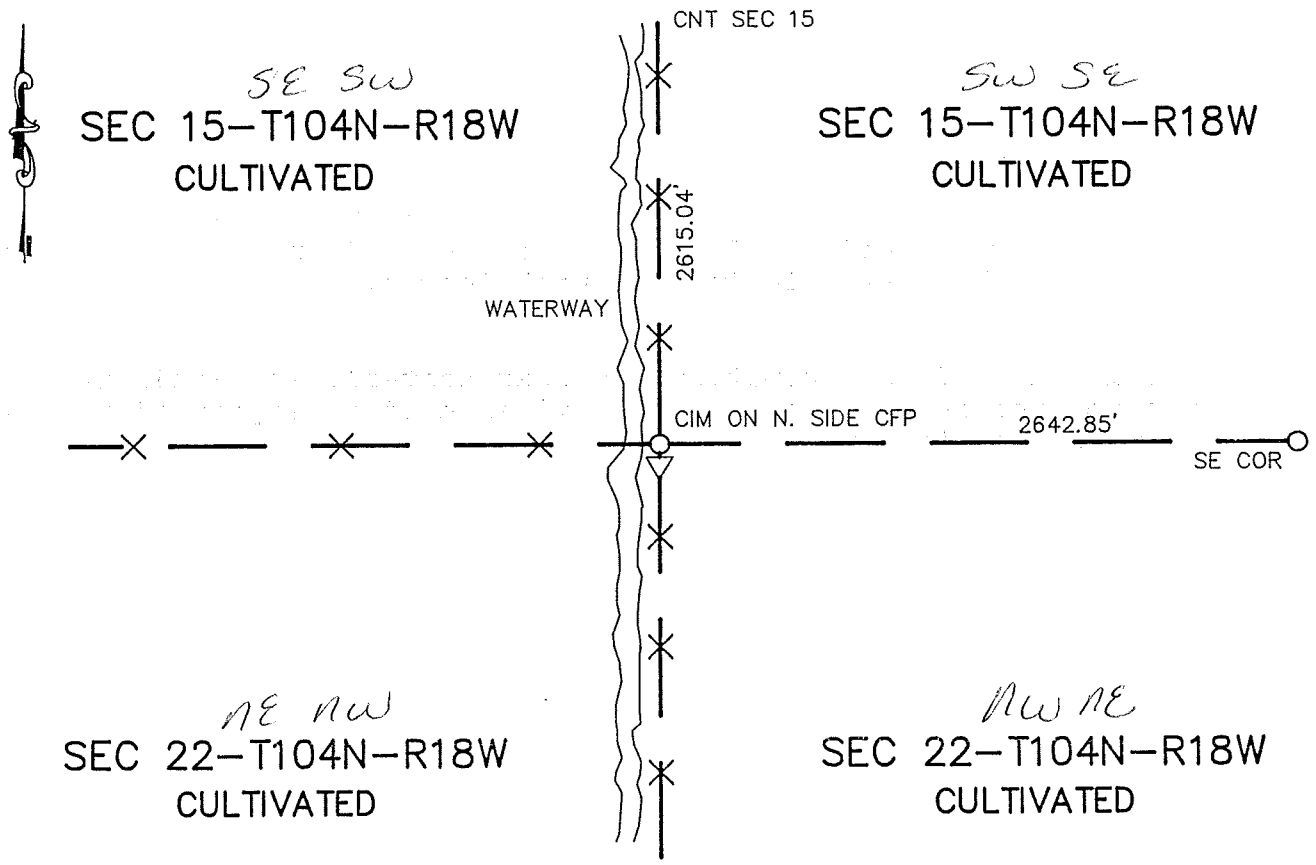

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a.M. on the 15th day of March A.D., 1996

COUNTY RECORDER Charles Engen

By Mary Beth Boyle, Deputy

DOCUMENT NO. 143136

M.H.D. FORM NO. 2105

BOOK 90 PAGE 425

Book 90 Page 425

S 1/4 Cor SEC 15-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, searched in area of wood fence post in fence line N-S-W and in line with field division east. No further evidence of the original PLS corner was found and the wood post was accepted as best evidence of the corner. A 5/8" iron with cast iron head was placed on the north side of the post.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 16, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/14/1998 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/14/1998 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

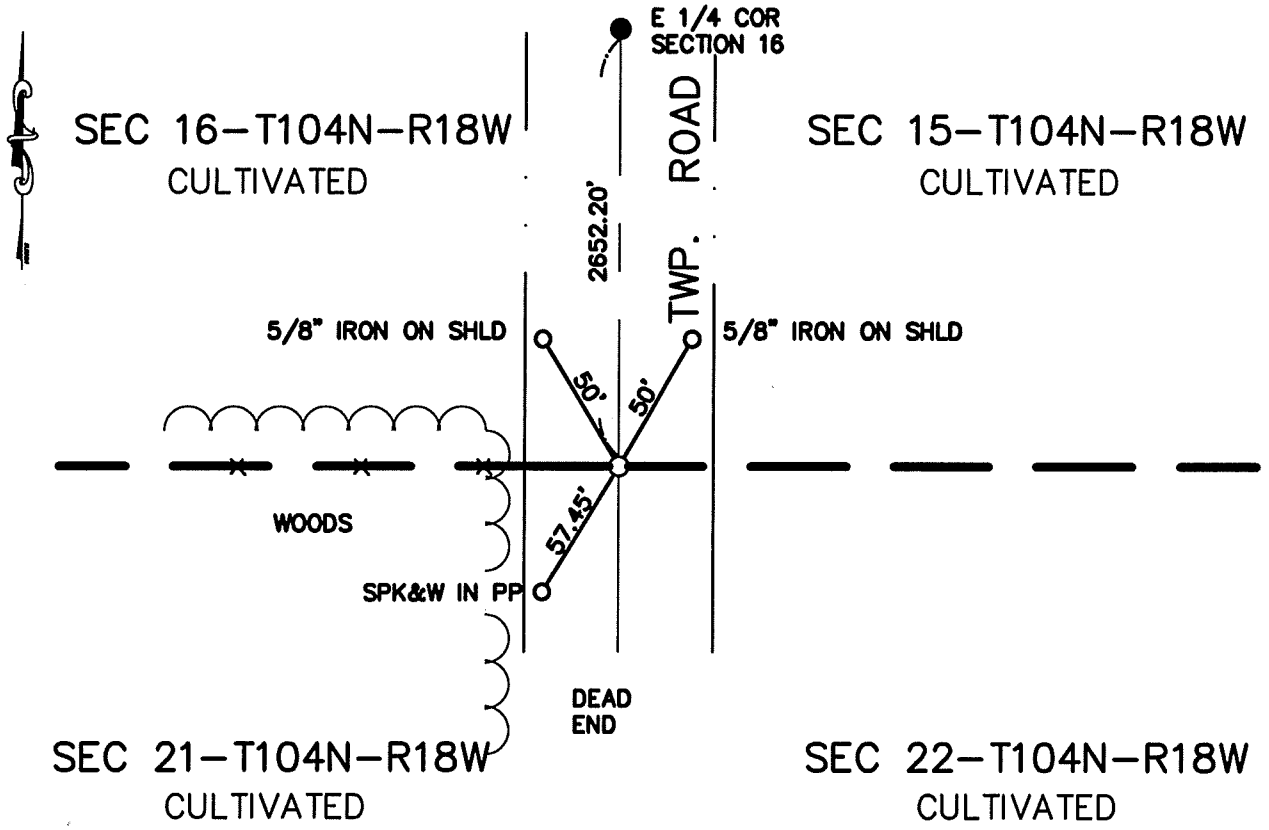

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 5-21-98
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Cor Sec 16-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1998 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the Mower County backhoe at the centerline of dead end township road and in line with line fence west. Dug to virgin soil and found no evidence of the original PLS corner. Placed a cast iron monument at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 16, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/31/1988 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/31/1988 (DATE) placed a 5/8" IRON PIN

SKETCH OF REFERENCE TIES

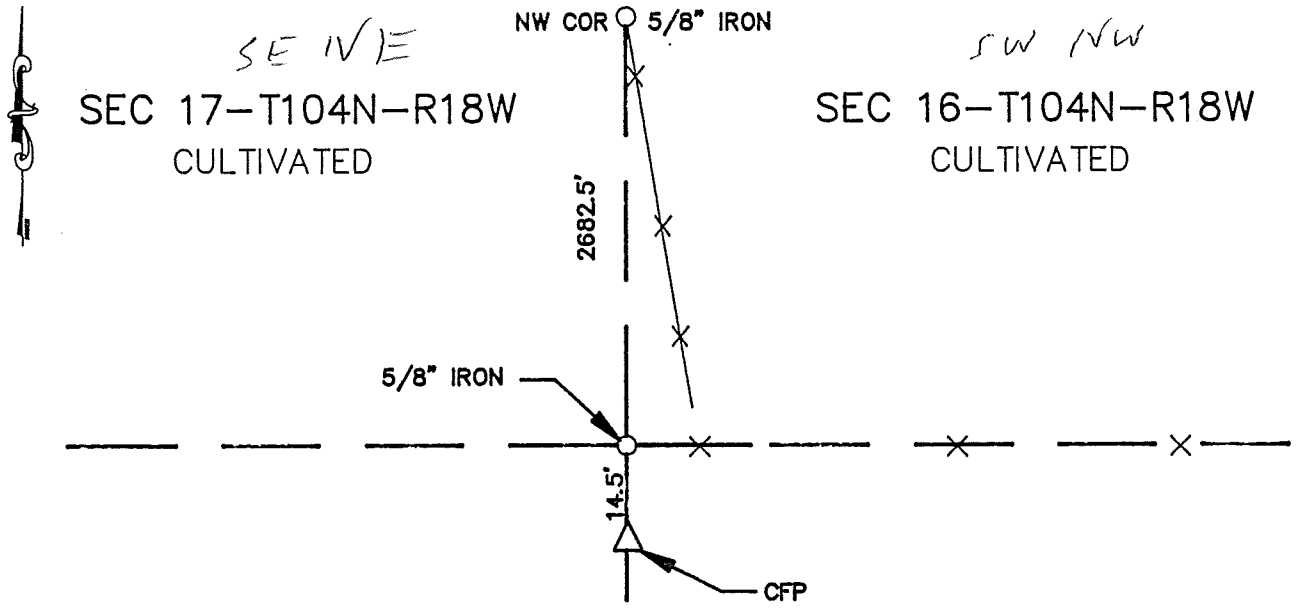

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 90 PAGE 395

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-11-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 13 day of Mar A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 143107

M.H.D. FORM NO. 2105

Book 90 Misc Page 395

W 1/4 Cor SEC 16-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of fences N-S and E-W. Found no evidence of original PLS corner. Measured distance from the NW section corner to the CL of road near the SW corner. Placed a cast iron monument at the split of the distance found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 16, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/31/1988 (DATE) found a 8"x16" POINTED STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/31/1988 (DATE) placed a –

SKETCH OF REFERENCE TIES

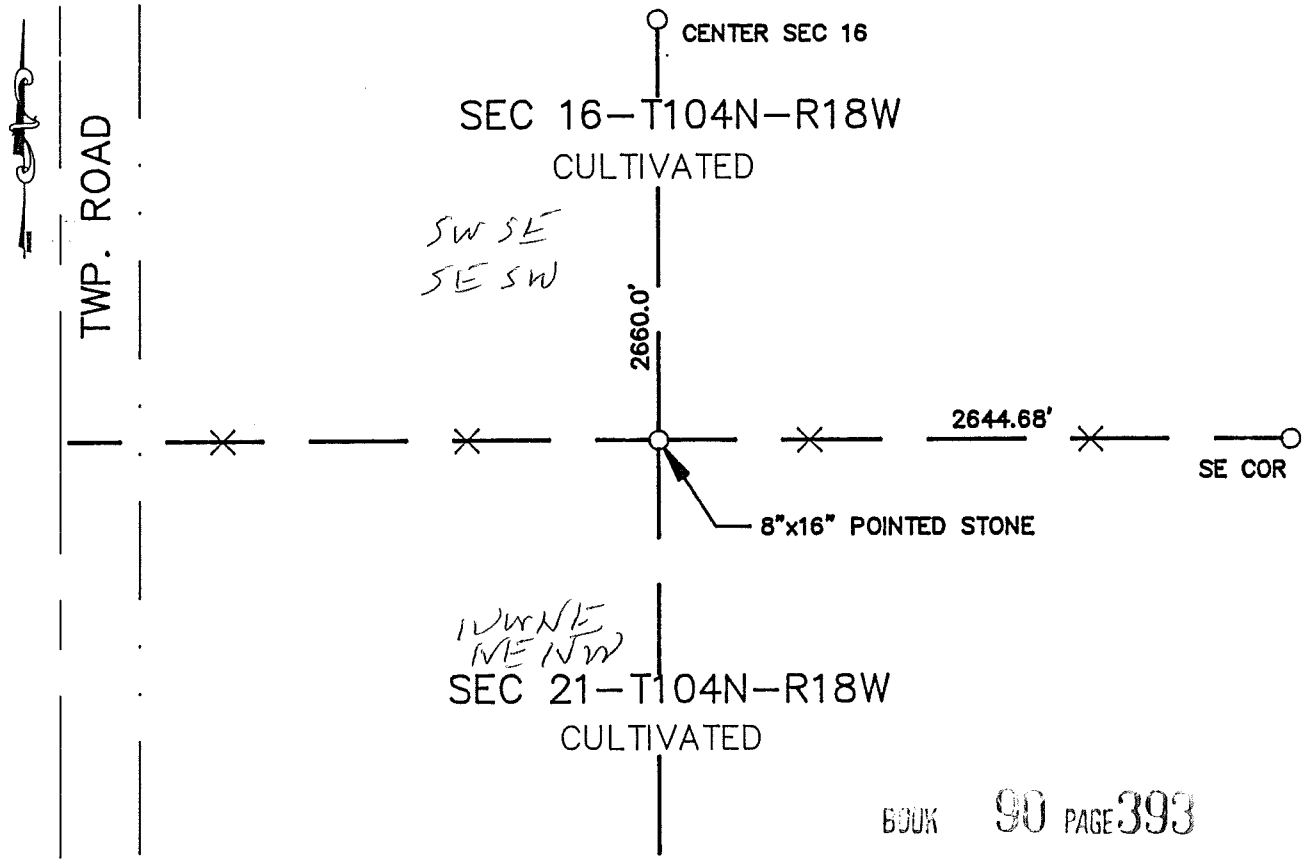

BOOK 90 PAGE 393

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-11-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 13 day of Mar A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 443106

M.H.D. FORM NO. 2105

Book 90 Misc Page 393

S 1/4 Cor SEC 16-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found 8"x16" stone in E-W fence line. The stone was accepted as best evidence of the original PLS corner and distances were measured to the east to the SE corner of the section and north to the center of section 16.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 16, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/31/1988 (DATE) found a 1" DIAMETER PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/31/1988 (DATE) placed a 5/8" IRON PIN CAPPED #13807

SKETCH OF REFERENCE TIES

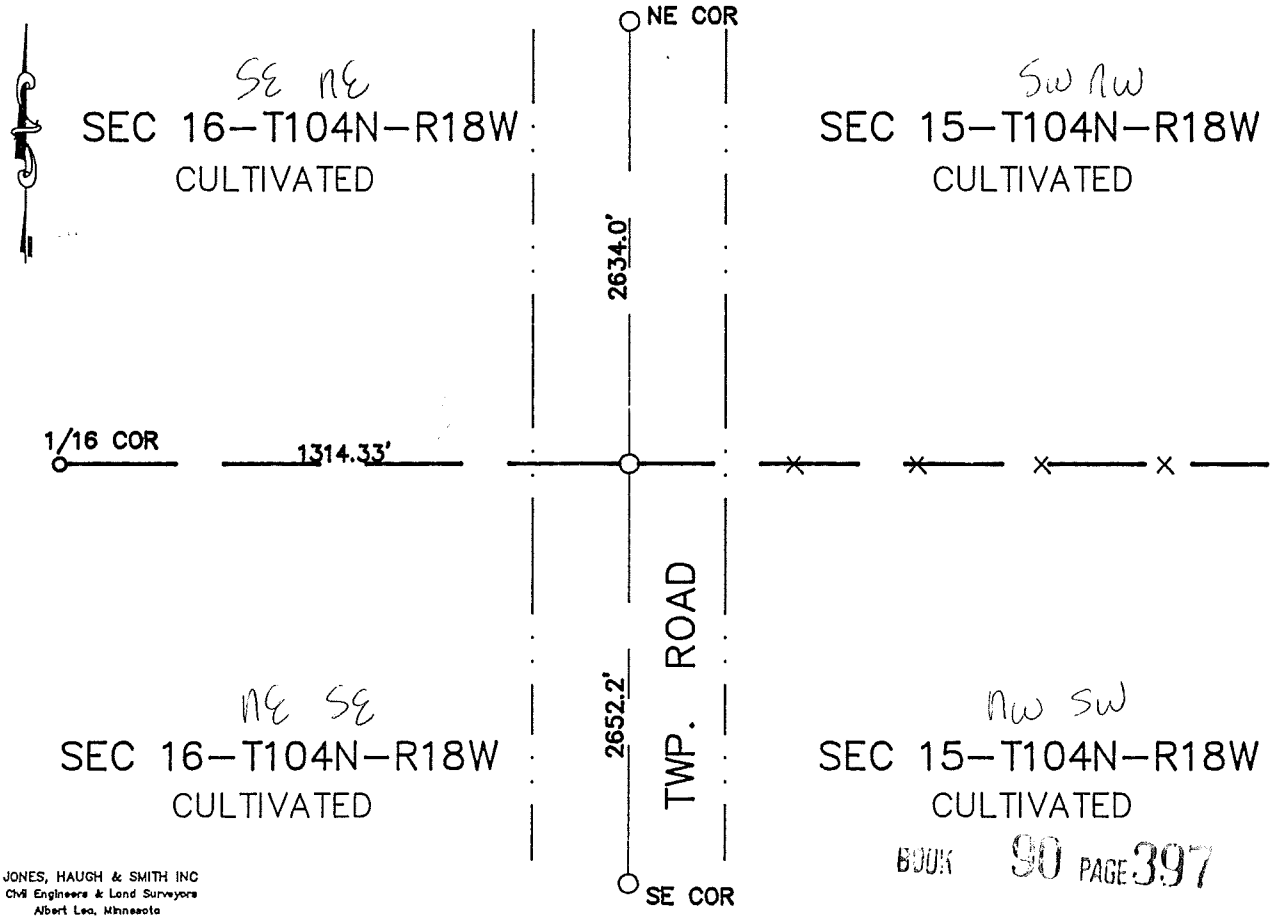

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 90 PAGE 397

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 3-11-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 13 day of May A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 443105

M.H.D. FORM NO. 2105

Book 90 Misc Page 397

E 1/4 Cor SEC 16-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and in line with fence line west. Found a 1" pipe at a depth of 2'. Placed a 5/8" iron capped #13807 above the pipe found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 18, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/1991 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/28/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

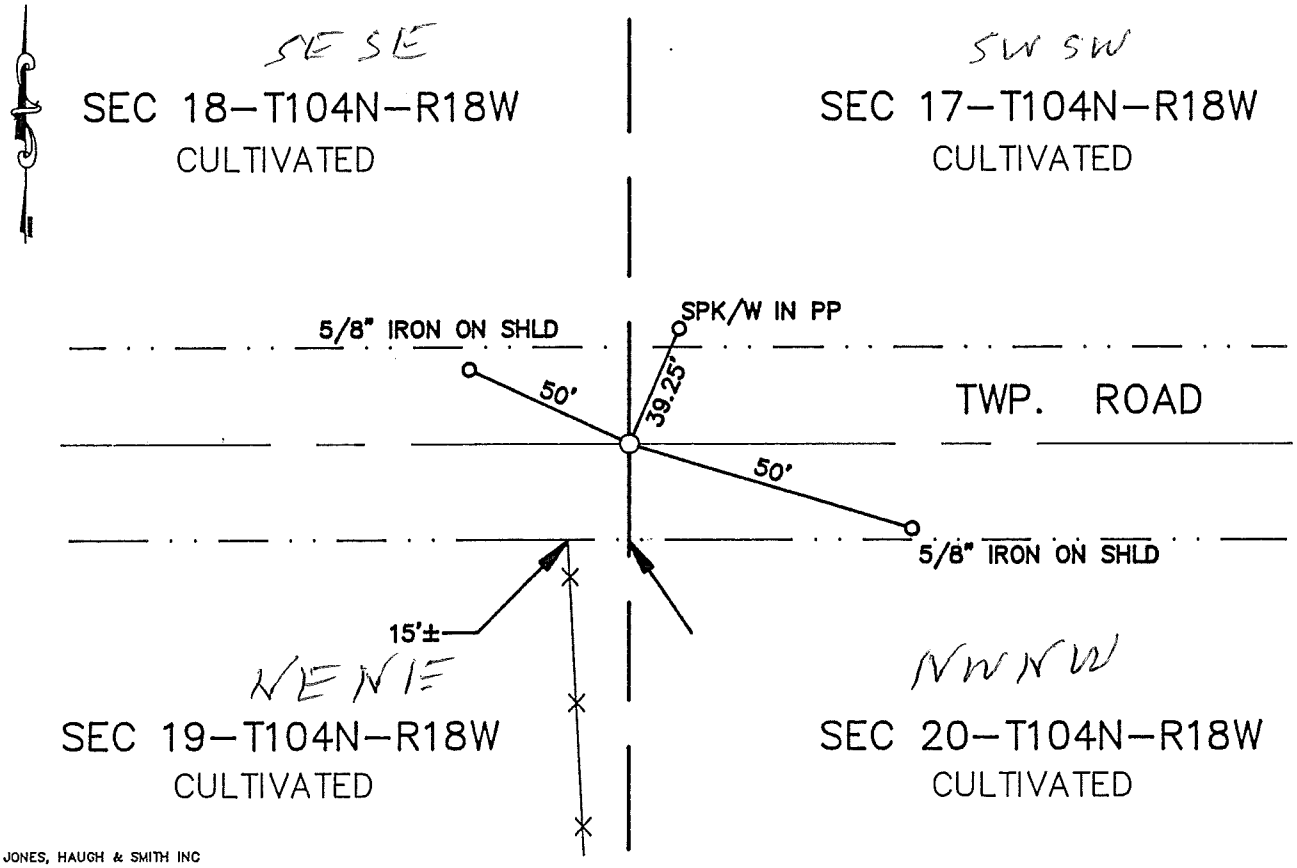

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 3-11-96
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2p .M. on the 14 day of Mar A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 443112

M.H.D. FORM NO. 2105 BOOK 90 PAGE 401 Book 90 Misc Page 401

SE Cor SEC 18-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1991 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and with fence line south. Found a 5/8" iron pin at .5' below road grade.

1994 Jones Haugh and Smith crew dug by hand at the CL of township road E-W and in line with fence south. Found a 5/8"x6" iron resting at a 60 degree angle. Reset and placed a cast iron monument using the section 18-104-18 section breakdown. Cast iron monument is in agreement with the 5/8" iron found in 1991.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 18, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/16/1991 (DATE) found a STEEL FENCE POST IN A MOUND OF STONES

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/16/1991 (DATE) placed a –

SKETCH OF REFERENCE TIES

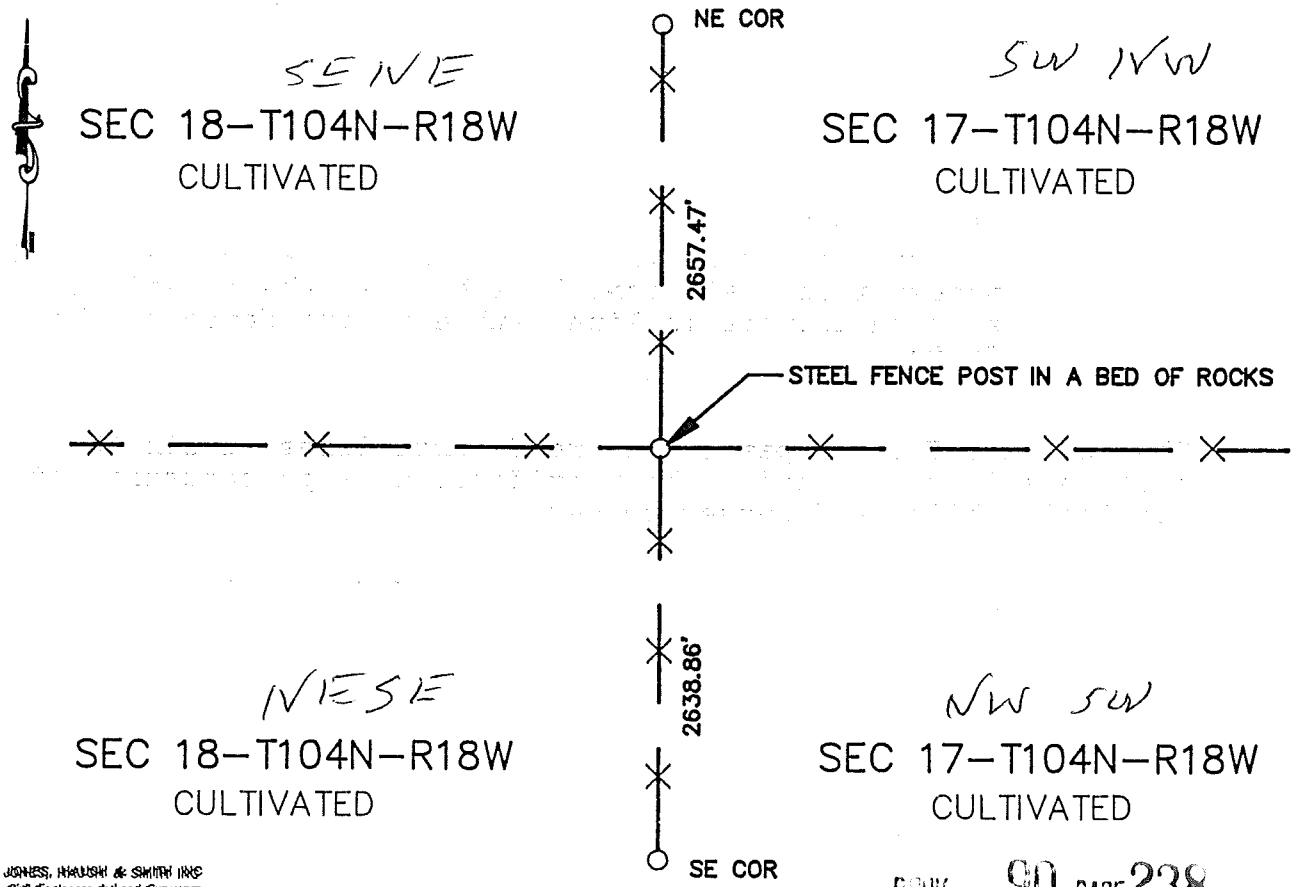

JONES, HAUSH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 90 PAGE 238

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] SIGNATURE 2-13-96 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 15 day of Feb A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M Davis, Deputy

DOCUMENT NO. 442568

M.H.D. FORM NO. 2105

Book 90 Misc Page 238

E 1/4 Cor SEC 18-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1991 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, measured the distance from the NE and the SE corners and found a steel fence post in a mound of stones. Long time resident, Dale Peterson, said that the post was fallen over, but never moved in over 50 years.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 18, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/1991 (DATE) found a CONCRETE MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

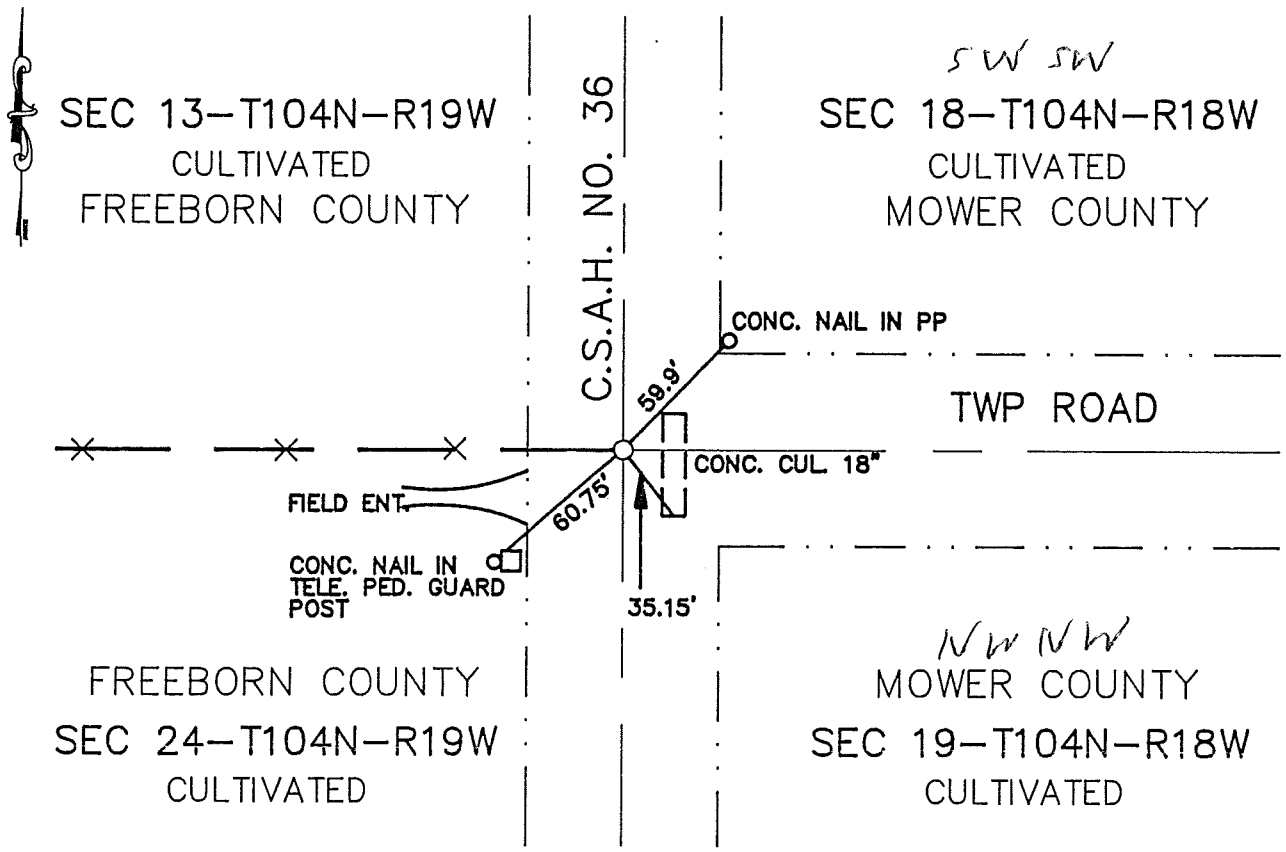

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-11-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 14 day of Mar A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 143116

M.H.D. FORM NO. 2105 BOOK 90 PAGE 399

Book 90 Misc Page 399

SW Cor SEC 18-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Freeborn County Highway Dept.
Freeborn County Recorder
Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1952 Mower County Highway Department notes show a concrete monument in place.

1991 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and east and in line with line fence to the west. Found a concrete monument 3' below the road surface.

1995 Jones Haugh and Smith crew set a cast iron monument over the concrete monument.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 18, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 9/1991 (DATE) found a CONCRETE MONUMENT AT A DEPTH OF 3'± BELOW ROAD SURFACE.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9/1991 (DATE) placed a CAST IRON MONUMENT ON ROAD SURFACE OVER CONCRETE MONUMENT FOUND.

SKETCH OF REFERENCE TIES

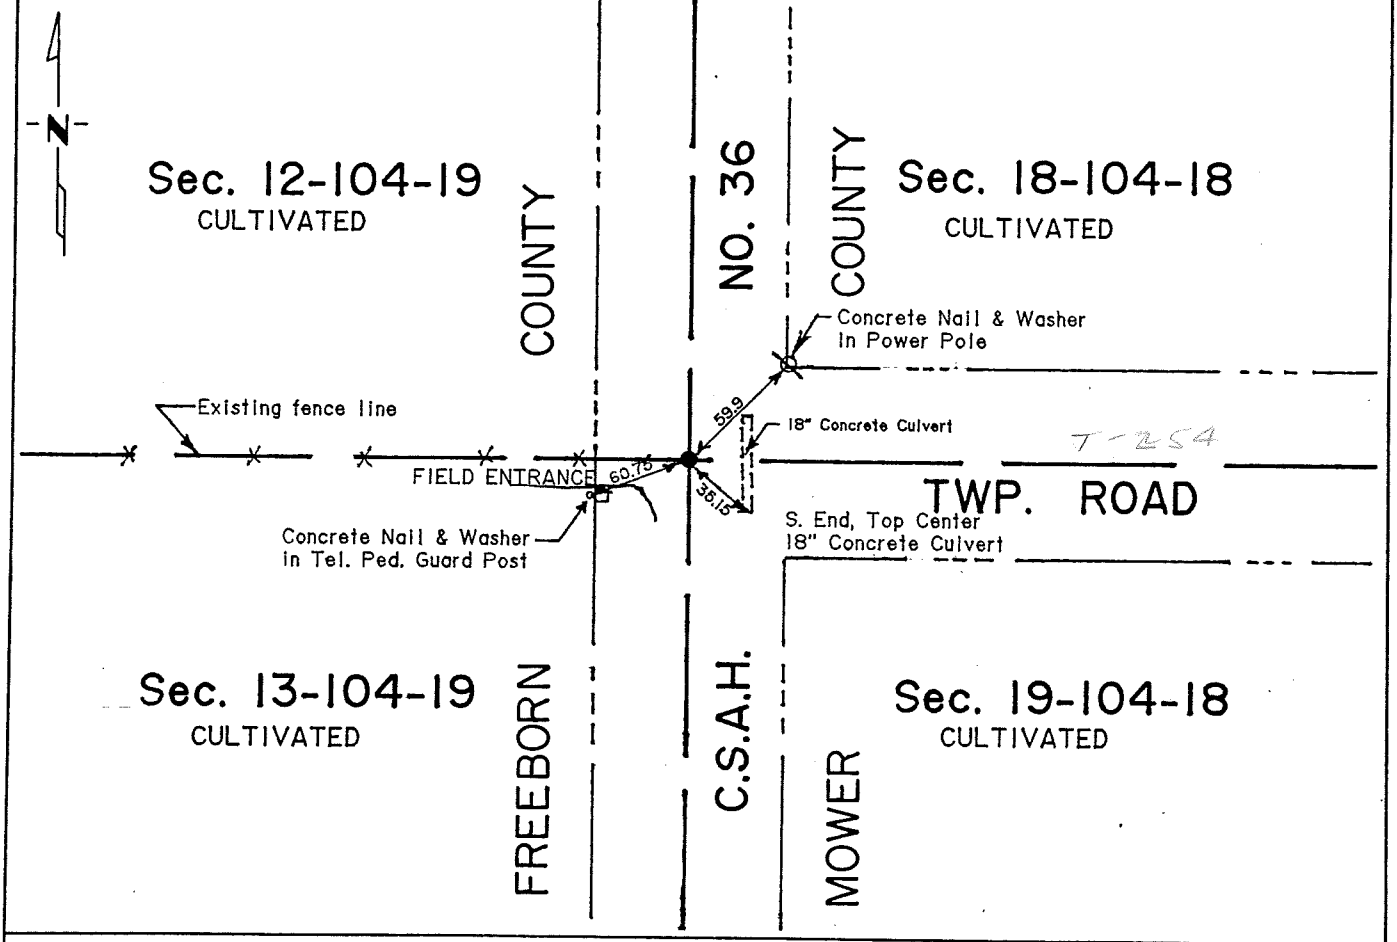

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-4-91

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 18-104-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

11" Burr Oak	N 77° W	167 links (110.22 ft)
12" Burr Oak	N 87° E	27 links (17.82 ft)
12" Burr Oak	S 53° E	200 links (132 ft)
10" Burr Oak	S 1° W	177 links (116.82 ft)

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

1952 Mower County Highway Dept tie book shows a concrete monument inplace.

1991 Jones, Haugh & Smith crew dug with County backhoe and found concrete monument on centerline of roads north, south and east and in line with fence line west. Left monument as found and set cast iron monument at road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 18, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/1991 (DATE) found a LARGE FIELDSTONE WITH A WOOD POST ON NORTH SIDE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

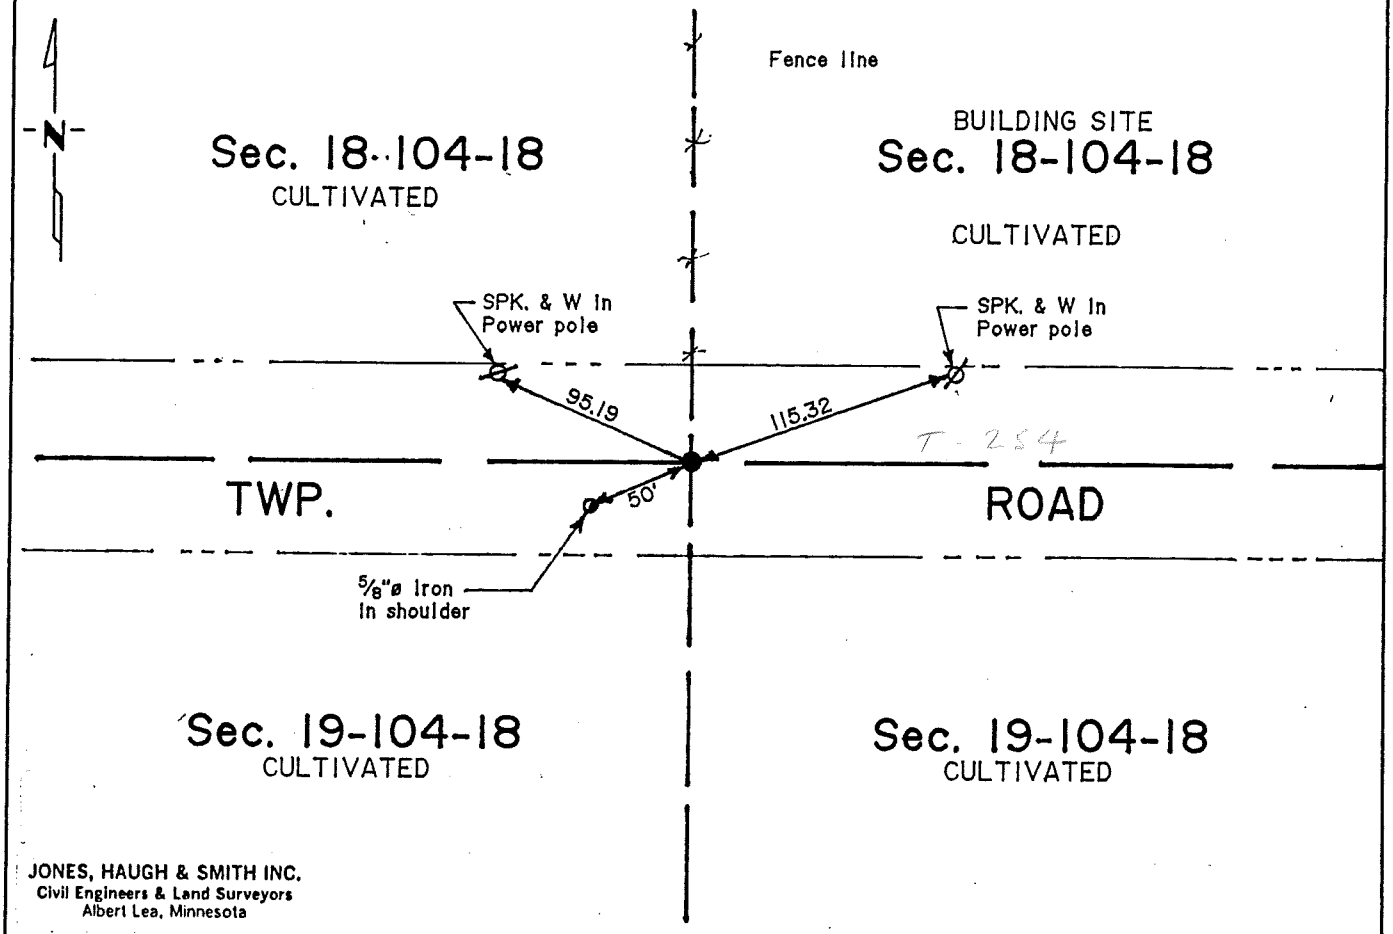

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-15-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec 18-104-18

This corner was originally established by Deputy Surveyor William J. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of original public land survey corner.

1991 Jones, Haugh & Smith crew dug with County backhoe on centerline of east-west road in line with fence north and found a large field stone with a wood post on the north side of field stone. Left monuments as found and set a cast iron monument near road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 18, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☑ On 9/1991 (DATE) found a NO EVIDENCE OF PLS CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

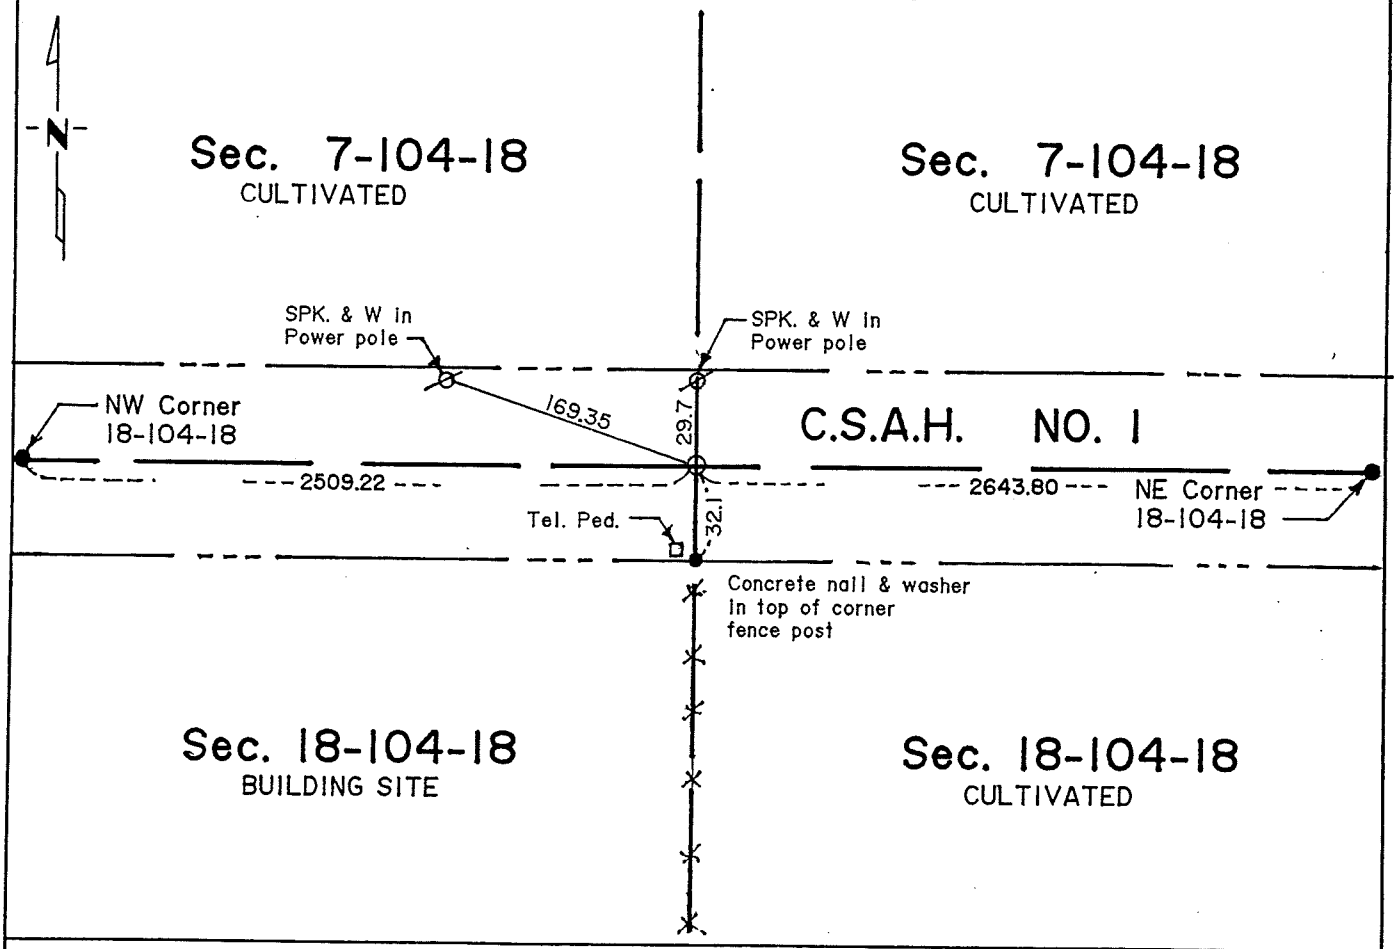

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-15-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 18-104-18

This corner was originally established by Deputy Surveyor William J. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

1940 Mower County Highway Dept plans show a monument at the N 1/4 corner in line with fence south, 2509.2 feet east of the northwest corner and on centerline of highway.

1991 Jones, Haugh & Smith crew dug a large hole in line with fence south and on centerline of highway and found no evidence of public land survey monument. We then placed a cast iron monument using the distance of 2509.20 west, centerline of highway.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 18, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 9/1991 (DATE) found NO EVIDENCE OF PLS CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

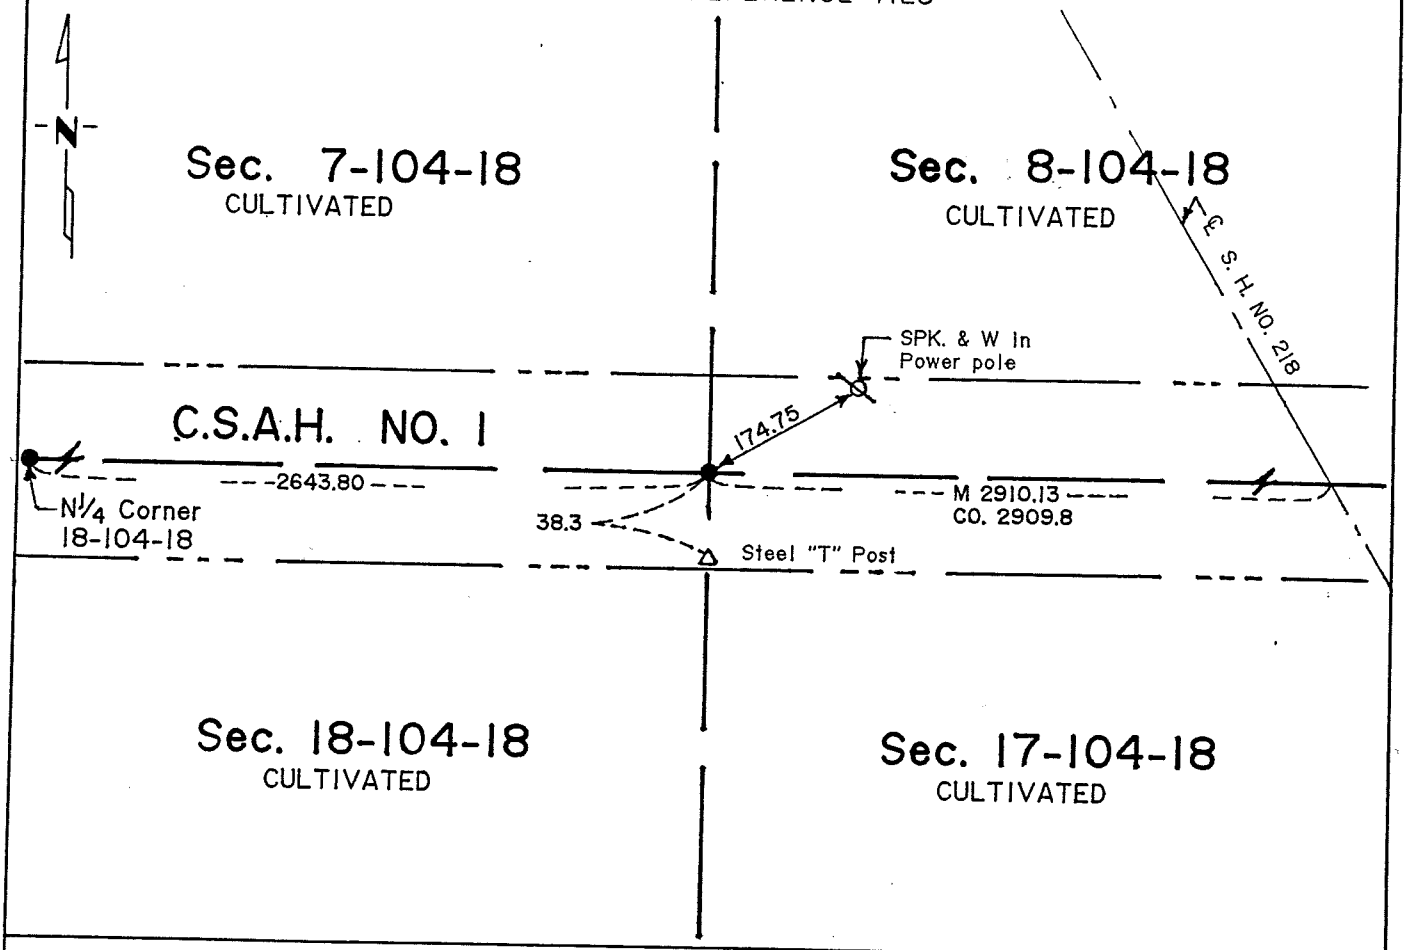

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-15-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec 18-104-18

This corner was originally established by Deputy Surveyor William J. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

1940 Mower County Highway Dept plans show a corner on centerline of road at station 51+53.

1991 Jones, Haugh & Smith crew dug with County backhoe and found that a core cut of the road would have destroyed all evidence of corner. Using stationing from highway plans set cast iron monument on centerline of east-west road.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 19, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/02/1992 (DATE) found a CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/02/1992 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

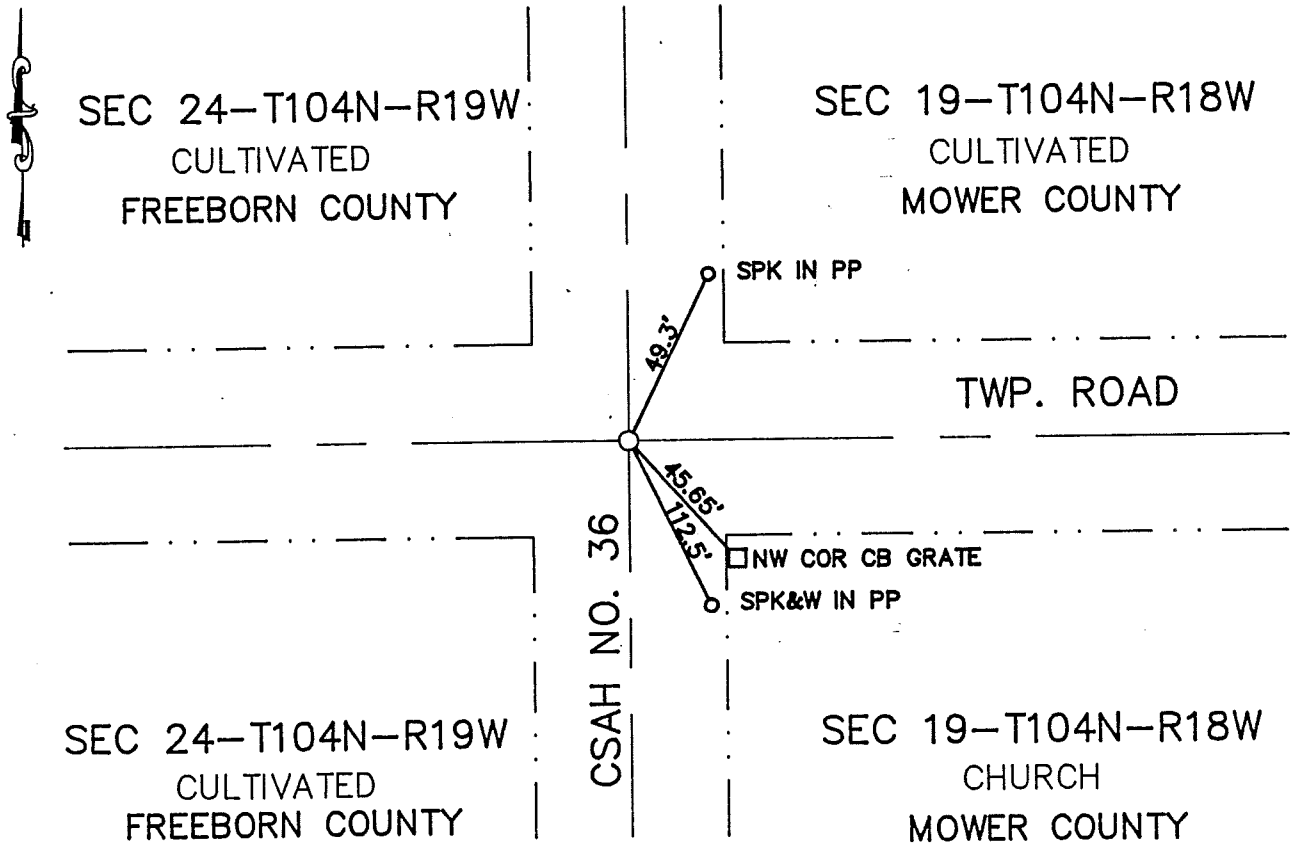

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of Mower

I hereby certify that this document was filed in the County Rec. office at 12 a .M. on the 23 day of June A.D., 1997

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. 454029

M.H.D. FORM NO. 2105

BOOK 95 PAGE 381

W 1/4 Cor SEC 19-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the intersection of township road E-W and CSAH No. 36 N-S. Located a concrete monument. Placed a cast iron monument at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 24, Township 104N Range 19W, 5th P.M.

STATE OF MINNESOTA, County of FREEBORN


At the corner location shown on the sketch

☐ On 10/02/1992 (DATE) found a CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/02/1992 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

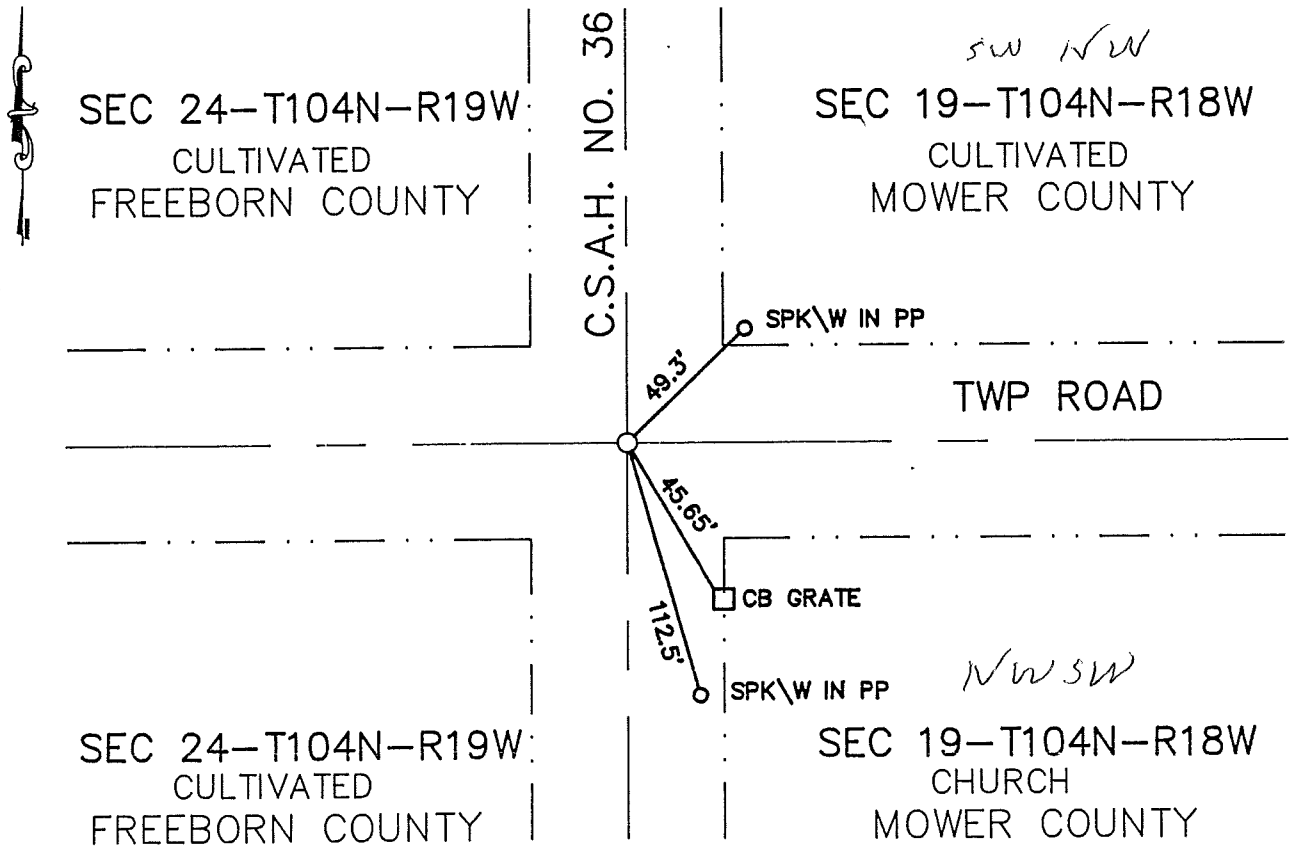

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-11-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 14 day of May A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 143118

M.H.D. FORM NO. 2105 BOOK 90 PAGE 403 Book 90 Misc Page 403

E 1/4 Cor SEC 24-104-19

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth was built with a trench around.

The following were contacted for section corner information.

Freeborn County Highway Dept.
Freeborn County Recorder
Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1992 Mower County Hwy. Dept. records indicate a concrete monument in place at this location.

1992 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and CSAH No. 36 N-S. Uncovered a concrete monument in agreement with the hwy. dept. records. A cast iron monument was placed over the monument found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 20, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-90 (DATE) found a 1"Øx1.5' iron bar 2.5' north of E-W road centerline in line with fence N-S.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

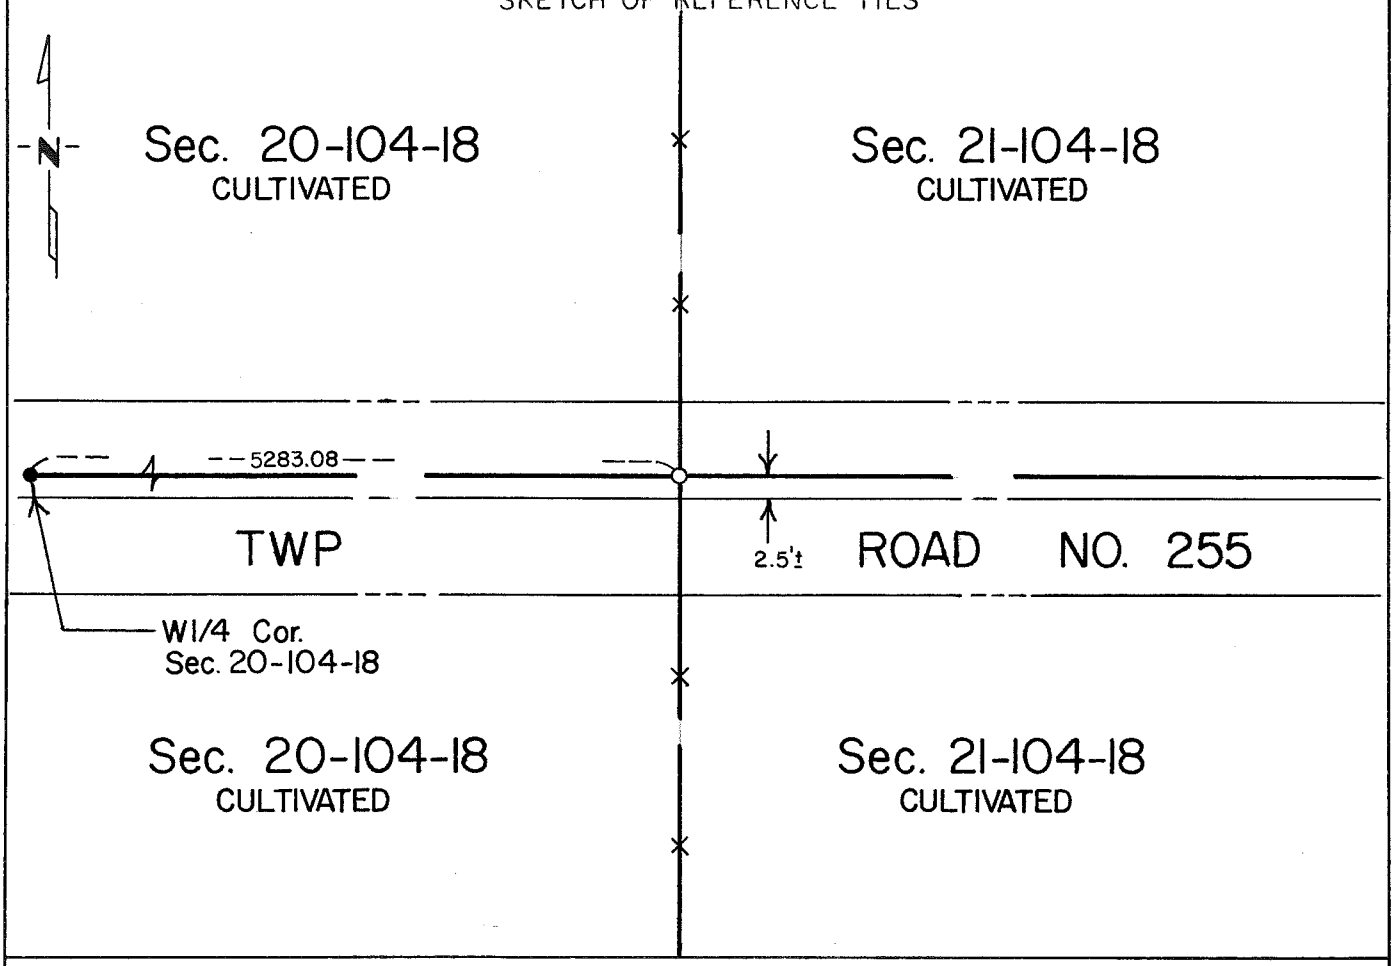

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 20-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a charred stake with a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew dug with a jackhammer in line with fences north-south. Found 1" diameter iron bar 1.5 feet long 2.5 feet north of centerline of east-west road. Left monument as found.

Corner found fits occupation lines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 20, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-29-90 (DATE) found a 1/2"Ø square iron in concrete 2.5' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-29-90 (DATE) placed a capped 5/8"Ø (13807) iron over monument found.

SKETCH OF REFERENCE TIES

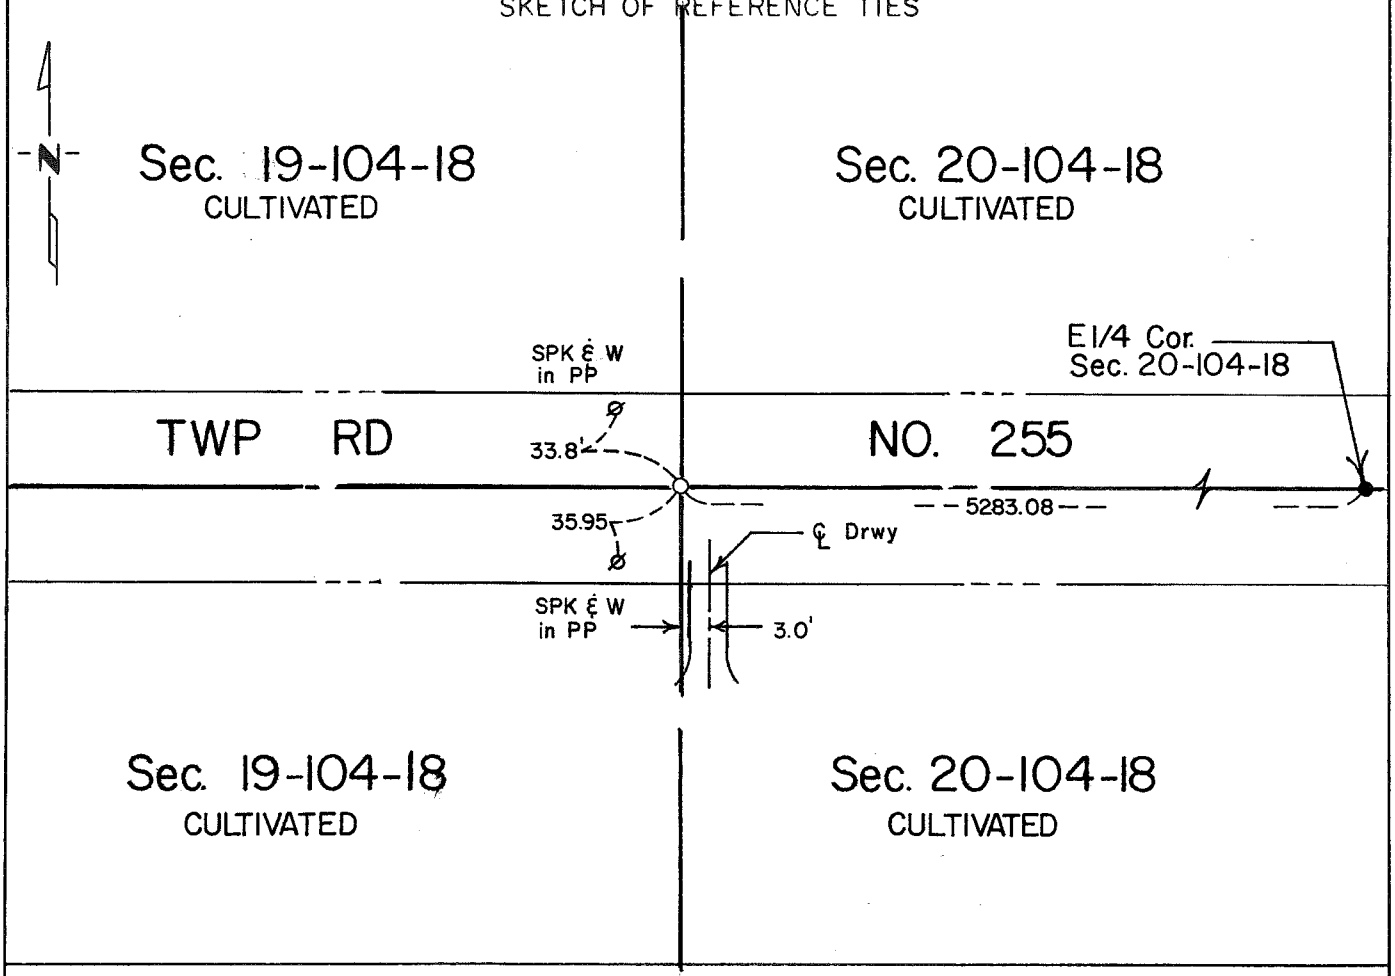

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 20-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a charred stake with a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew dug with a jackhammer on centerline in line with fences north-south. Found 1/2" square iron in concrete 2.5 feet below road surface. Placed a capped 5/8" diameter iron over monument found.

Corner found fits occupation lines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 20, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/09/1996 (DATE) found a WOOD POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/09/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

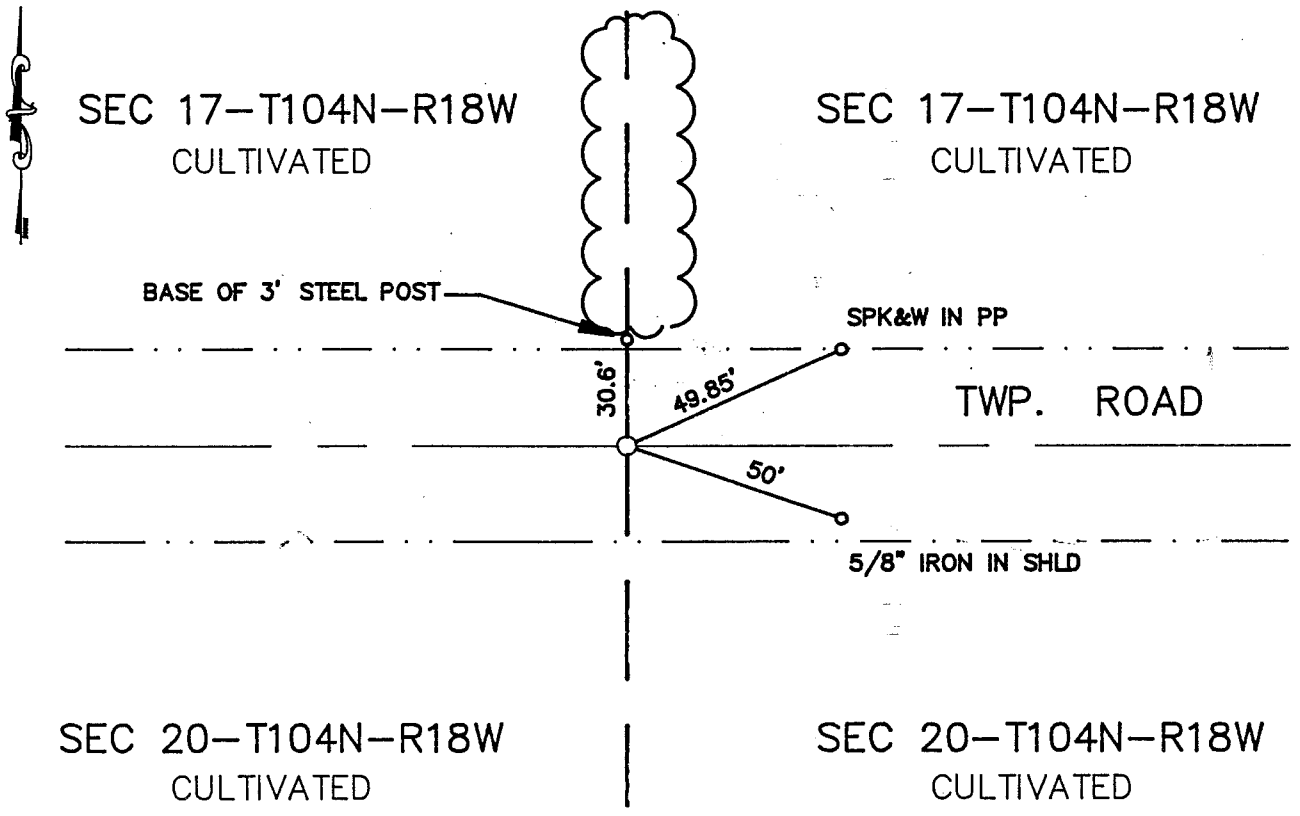

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A.M. on the 23 day of June A.D., 19 97

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. 454030

M.H.D. FORM NO. 2105

BOOK 83 PAGE 385

N 1/4 Cor SEC 20-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and in line with line fence north. Uncovered a wood post 2' below road surface. Continued digging by hand and found no further evidence of original PLS corner. Accepted post as true corner. Placed a capped 5/8" iron #13807 in the center of post. Placed cast iron monument over post found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 21, Township 104N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/17/1995 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/17/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

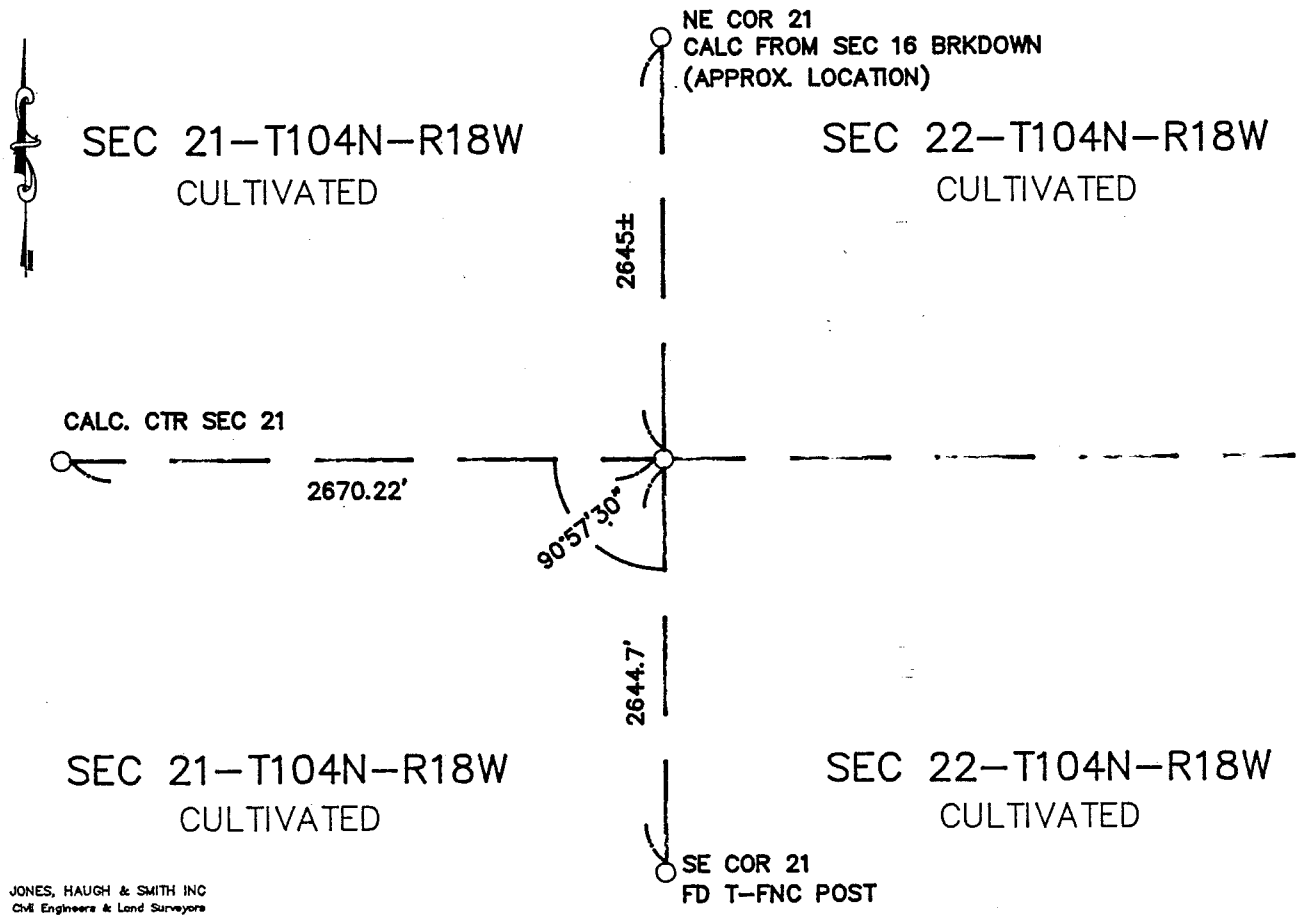

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 a .M. on the 23 day of June A.D., 1997

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. 454031

M.H.D. FORM NO. 2105

BOOK 35 PAGE 385

E 1/4 Cor SEC 21-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, searched with magnetic locator at the intersection of fence lines N-S and E-W. Located no evidence of original PLS corner. Corner is tilled in field. Placed a cast iron monument on a straight line midway between the NE and SE section corners.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 22, Township 104N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-10-90 found STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed 3/4" REBAR AND COUNTY CAP OVER STONE

SKETCH OF REFERENCE TIES

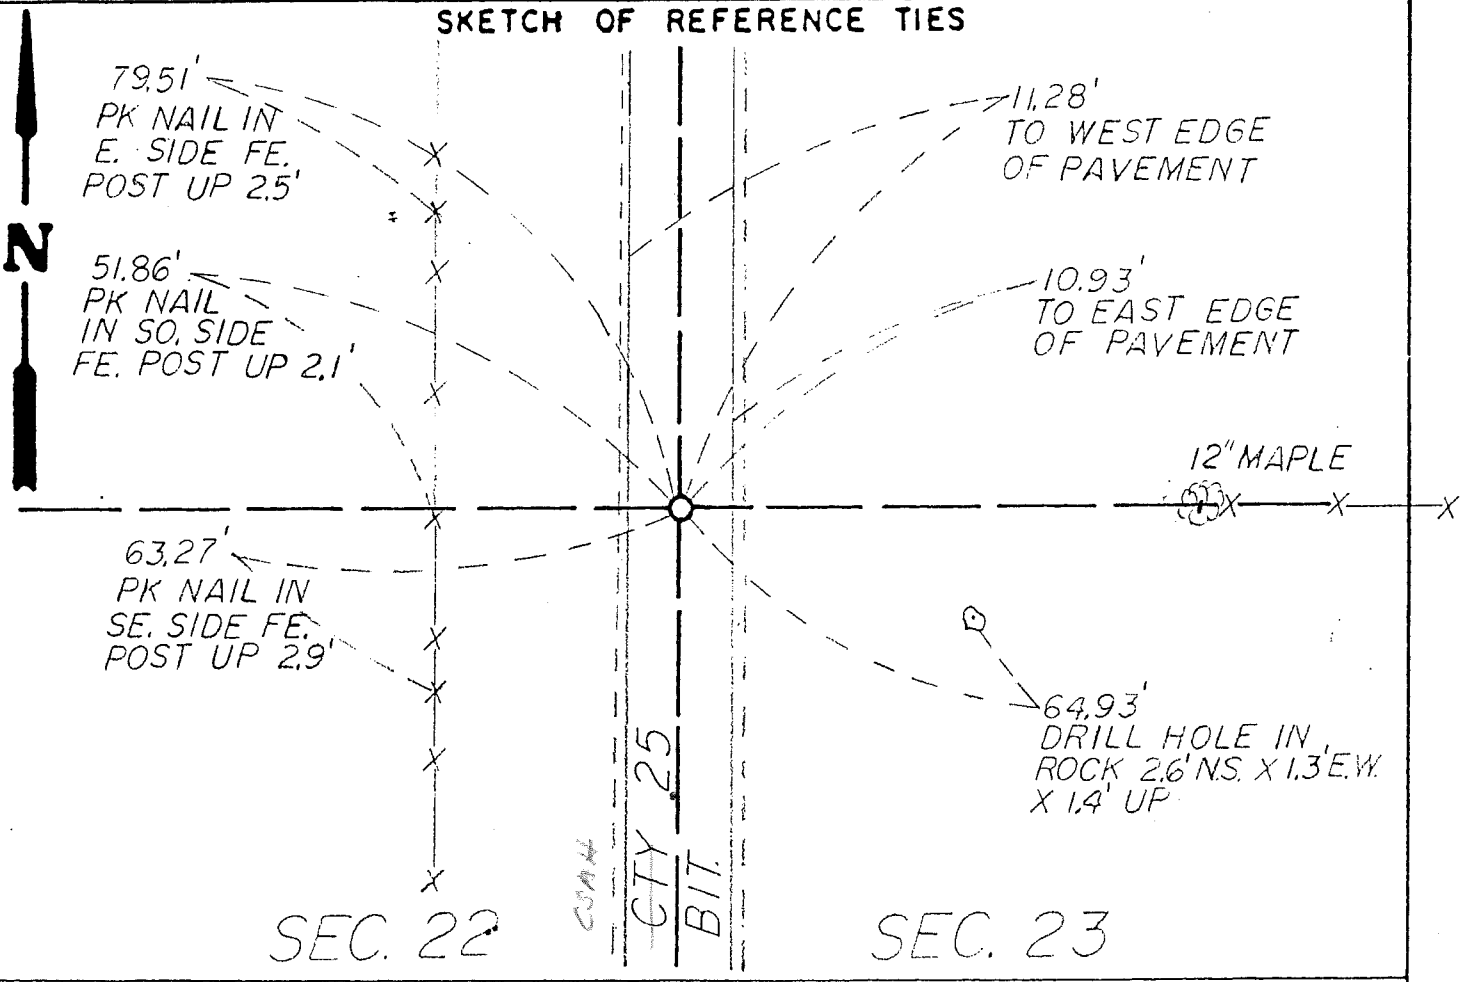

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 22, TOWNSHIP 104 NORTH, RANGE 18 WEST, 5TH P.M.

July, 1854 — William Anderson, Deputy Surveyor, set a post at the corner during the original Public Land Survey.

1936 — County Engineers Road Plans show section line crossing at Station 205+31.

1962 — County Engineers Road Plans show a concrete monument inplace.

July 6, 1990 — Zenk Read Trygstad & Associates excavated 4.5 feet deep 2 feet East to 2 feet West of centerline and 4 feet south to 8 feet North of fence to the East.

A stone was found 3.3 feet below the surface in mottled soil, and a 1/2 inch pipe and cap # 11009 was set on the Northwest side of the stone at the time of excavation.

An analysis of the record data gives no indication of the origin of the stone. The concrete monument over the stone shows the County has used the stone as the corner. Similar stones have been found at other corners in the area and is accepted as marking the location of the corner of the original Public Land Survey.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 25, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 2-8-93 (DATE) found a ½"ø IRON CAST IN A 6"ø CONCRETE MONUMENT 1.5' DEEP

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 2-8-93 (DATE) placed a CAST IRON MONUMENT OVER CONC. MON.

SKETCH OF REFERENCE TIES

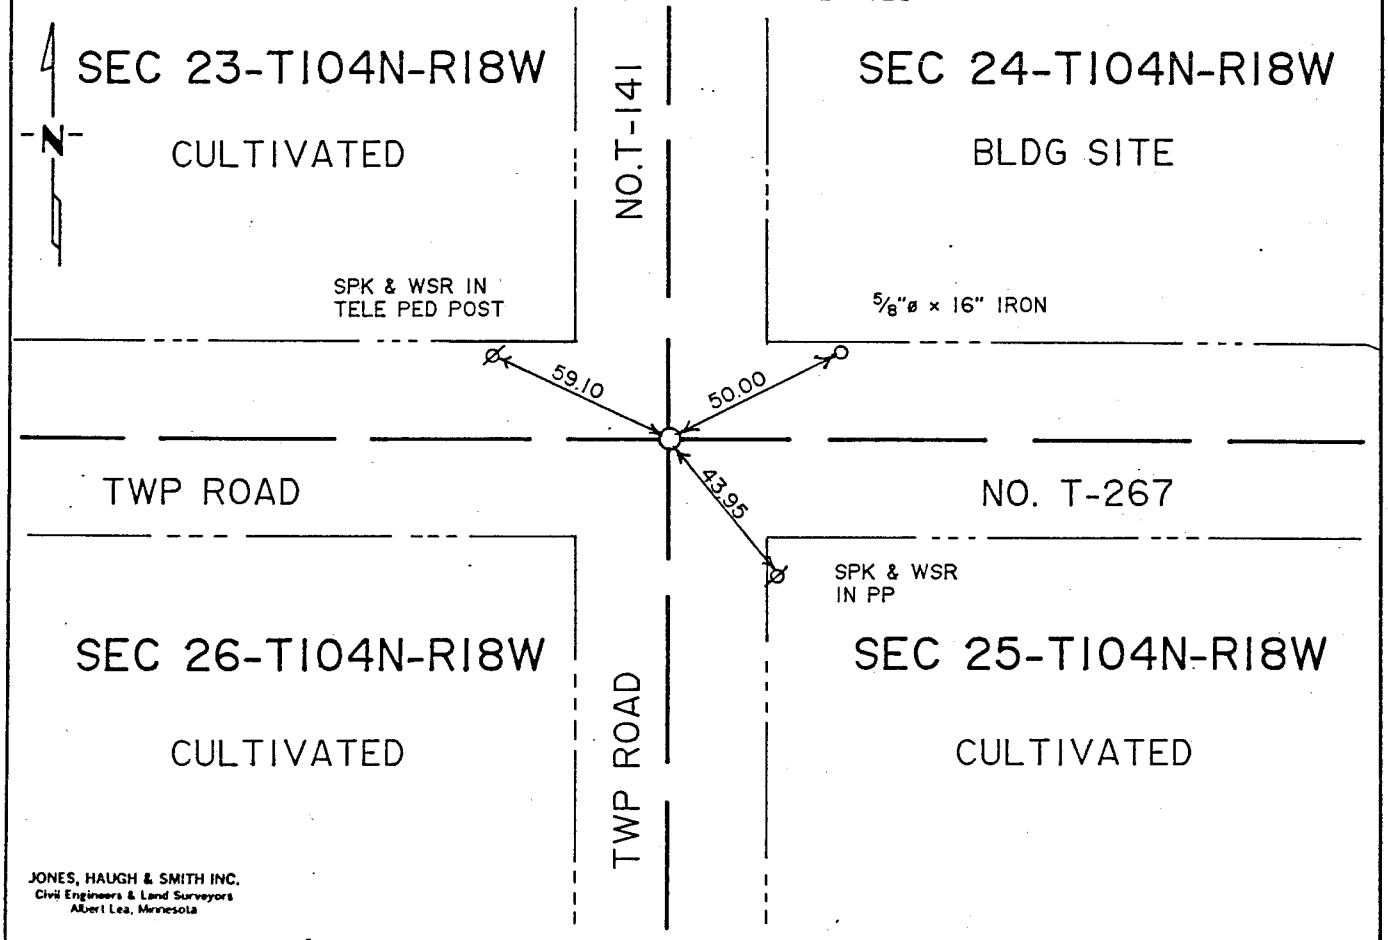

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 2-12-93
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW cor Sec 25-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

10" Burr Oak	S 34°E	690 links (455.40 ft)
8" Burr Oak	N 9°E	1255 links (828.30 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the original public land survey corner:

1885 Clausen, Mower County Surveyor, field notes indicate a government post was found.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug on centerline centerline north, south, east and west township roads and uncovered a 1/2" diameter iron cast in 6" diameter concrete monument 1.5 feet deep. We accepted concrete monument as best evidence of the perpetuation of the original public land survey corner and set cast iron monument near road surface above concrete monument.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic distances, angles and further analysis, contact Jones, Haugh & Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 27, Township 104N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-6-90 found STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed A COUNTY CAP ON A 5/8" ROD OVER STONE

SKETCH OF REFERENCE TIES

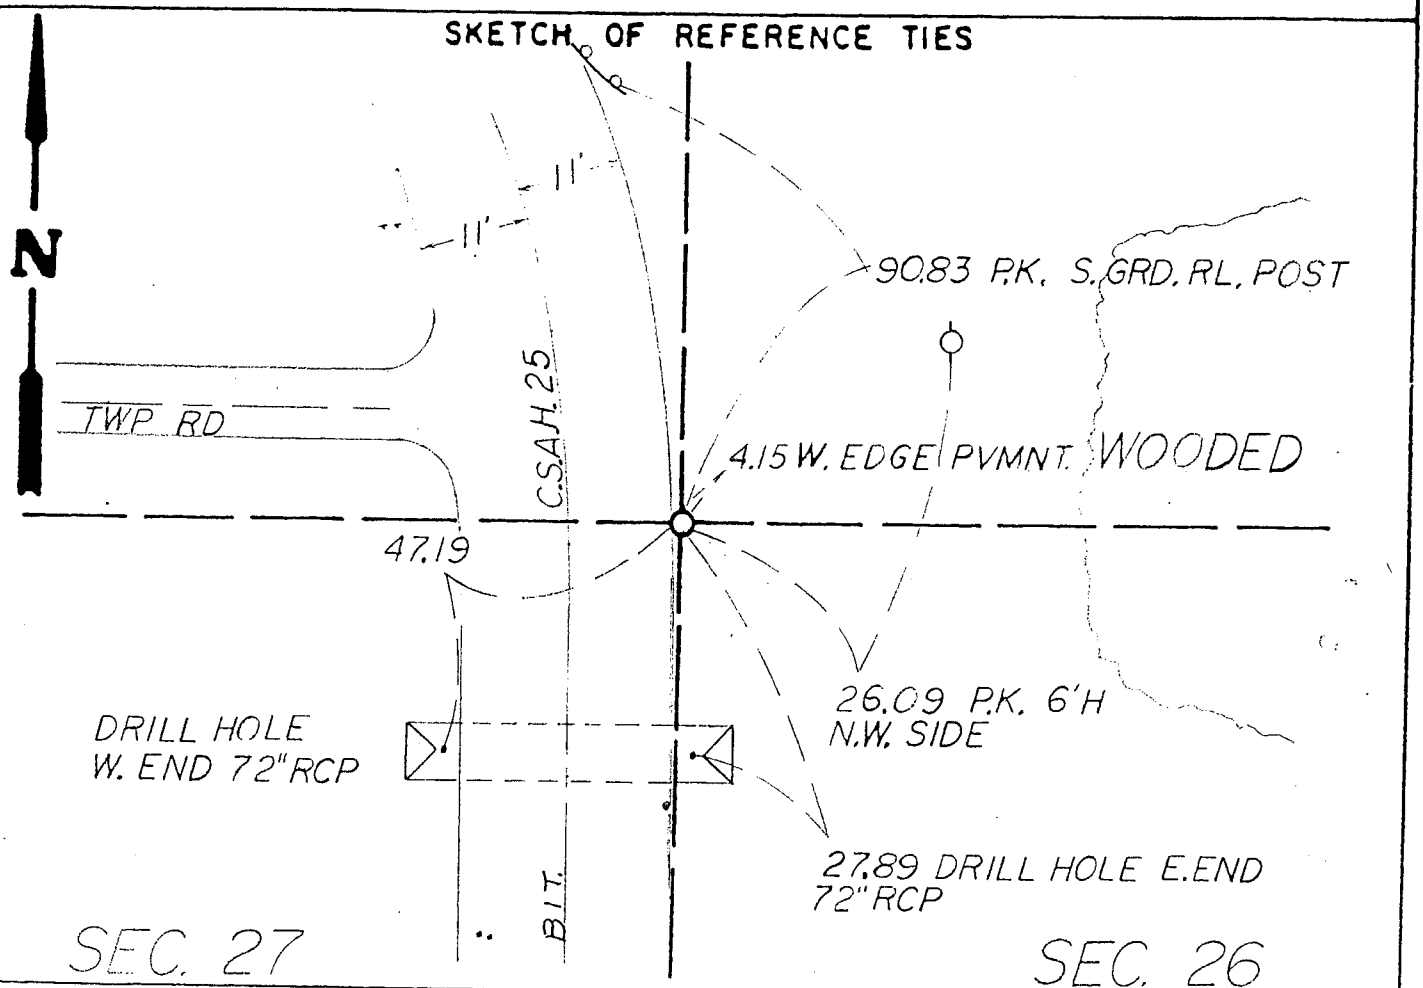

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ____ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 27, TOWNSHIP 104 NORTH, RANGE 18 WEST, 5TH P.M.

Aug., 1854	William Anderson, Deputy Surveyor, set a post at the corner during the original Public Land Survey.
June, 1885	Government post shown in Clausen Field notes, and used to subdivide Section 26.
1936±	County Engineers Road Plans shows section line at Station 132+10
1962	County Engineers Road Plans show a concrete Monument inplace. The centerline is shown as 12 feet West of the section line.
July 1990	Zenk Read Trygstad & Associates excavated 7 feet deep by from 12 feet to 22 feet East of Centerline by 12 feet long North to South. A stone .6 feet by .8 feet by 1.8 feet high was found 2.3 feet below the surface. A concrete monument and a nail were found above the stone.

An analysis of the record data gives no indication of the origin of the stone. Other stones of similar size have been located at corners throughout Mower Country. The stone agrees with the County Road centerline and the township road West. It is accepted as marking the location of the original Public Land Survey Corner.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 27, Township 104N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-10-90 found A CONC. MON. OVER STONE, SET CONC. MON. ON W. SIDE OF STONE

☐ left monument as found, ☐ lowered monument, ☑ removed monument (explain)

On 7-10-90 placed A COUNTY CAP ON A 1/2" X 18" PIPE OVER STONE

SKETCH OF REFERENCE TIES

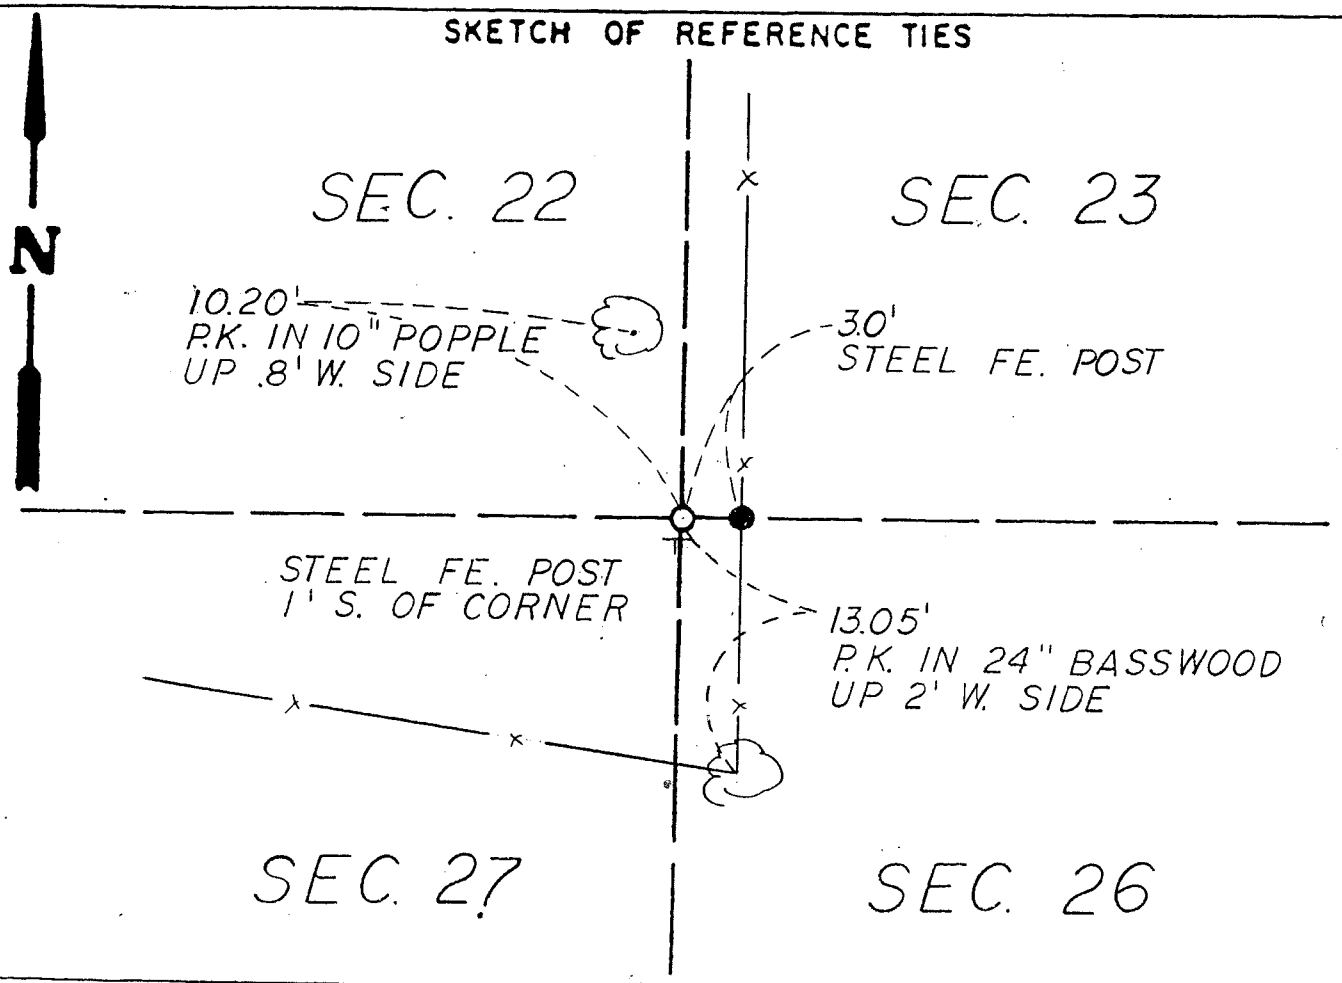

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHEAST CORNER SECTION 27, TOWNSHIP 104 NORTH, RANGE 18 WEST, 5TH P.M.

Aug., 1854 — William J. Anderson, Deputy Surveyor, set a post at the corner during the original Public Land Survey.

June 1885 — Clausen Field Notes show a government post, which as used to subdivide Section 26.

1962 — County Engineers Road Plans show a concrete monument and stone inplace.

July 1990 — Zenk Read Trygstad & Associates found a stone 1'x0.7'x0.8' high and 1.4 feet below the surface.

A concrete monument was found over the stone 0.3 feet below the surface.

An analysis of the record gives no indication of the origin of the stone. The concrete monument over the stone shows the County has used and maintained this location for 28 years. Other stones and concrete monuments have been found at corners throughout the county. The stone is accepted as marking the location of the original Public Land Survey Corner.

TIE BOOK p. 83

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 28, Township 104 N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☑ On 6-20-84 (DATE) found a Painted field stone 3.7' below road surface

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☑ On 6-20-84 (DATE) placed a 5/8"ϕ x 24" iron over stone 0.3' below road surface

SKETCH OF REFERENCE TIES

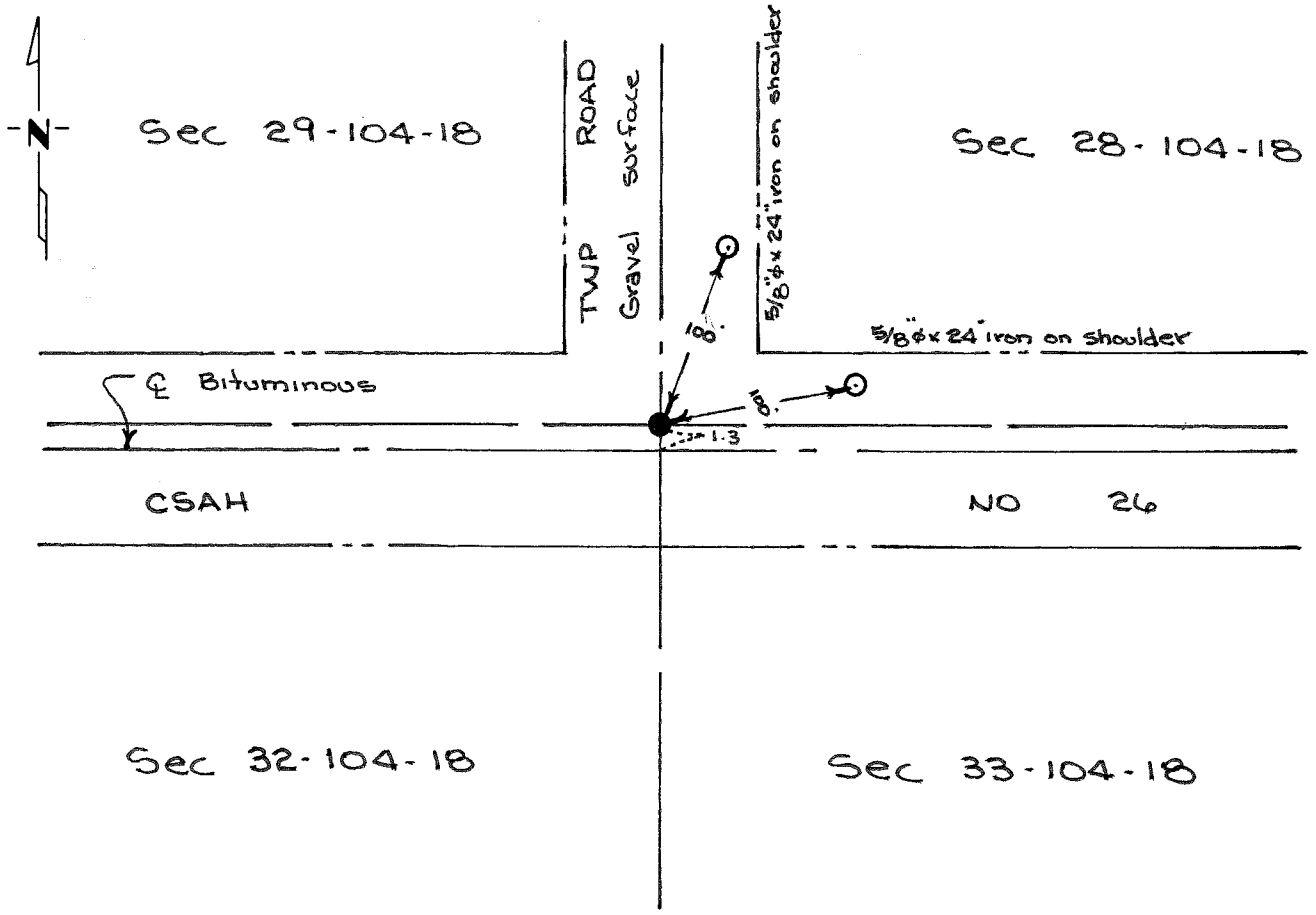

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

H. [signature] 7-19-84
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 28-104-18

1854 Wm I. Anderson, Deputy Surveyor set wood post and deposited charred stake with trench and mound during public land survey.

1930± Mower County Engineering Department tie book shows a concrete monument inplace at the section corner and gives County stationing on southwest corner and southeast corner.

1984 Jones, Haugh & Smith crew dug with County backhoe and at a depth of 3.7 feet below road surface found a 16" flat pointed field stone with a 3" diameter top. Found old wood stake on the east side of stone. Placed a 5/8"ø x 24" iron over stone capped RLS 13807. (Ray Guttormson, Mower County Engineer, said that he believed the 1930± concrete monument had been destroyed by road construction.)

The stone monument found fits road centerline and occupation lines and is in agreement with distance to southeast section corner using County Highway Department stationing. The corner is accepted as a perpetuation of the public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 29, Township 104N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 3-17-86 (DATE) found a cast iron monument 1.5' below road surface.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-17-86 (DATE) placed a cast iron monument on road surface over monument found.

SKETCH OF REFERENCE TIES

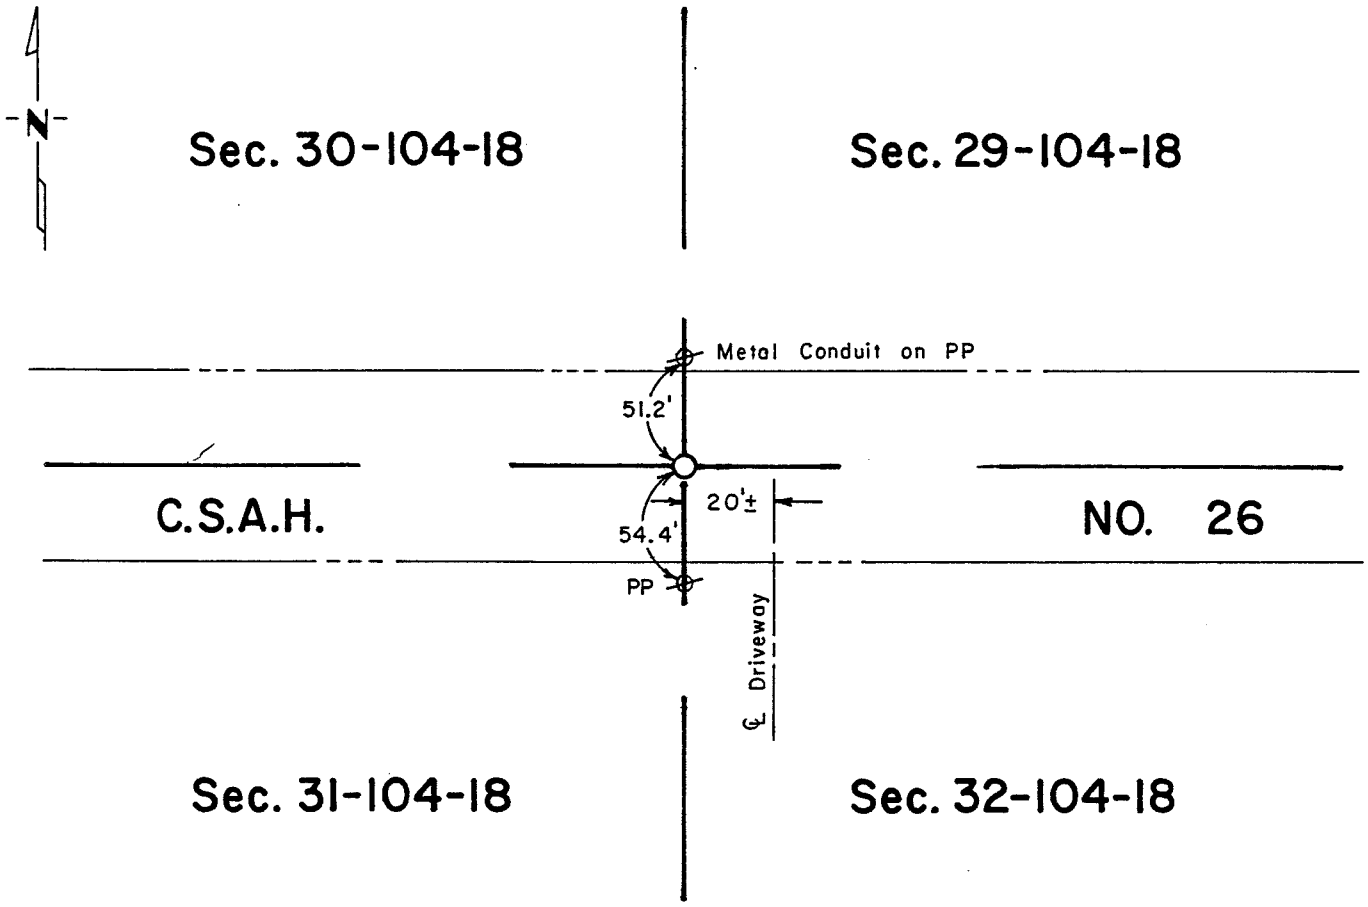

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-30-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec. 29-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a post with a trench and the following ties were taken:

14" Burr Oak	S 33 W	90 links	(59.40')
6" Burr Oak	N 89 E	265 links	(174.90')

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

Book 'A' in the Mower County Engineer's Office shows a magnetic corner inplace. Ties were taken and recorded as follows:
54.4 feet South to PP 51.2 feet North to Conduit on PP

1970 County State Aid Highway No. 26 road plans show a cast iron monument inplace.

1986 Jones, Haugh & Smith crew dug and found a cast iron monument 1.5 feet below road surface on centerline east-west roads and 20 feet more or less, west of centerline driveway south. Placed a cast iron head over a 5/8" diameter iron at road surface. Monuments found were left inplace.

Corner found fits occupation, road centerlines and past records and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 30, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-17-90 (DATE) found a 3/4"Ø pipe 1.0' below road surface on ℄ ℄ of N-S-E road.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-17-90 (DATE) placed a cast iron monument over a 5/8"Ø iron at location of monument found.

SKETCH OF REFERENCE TIES

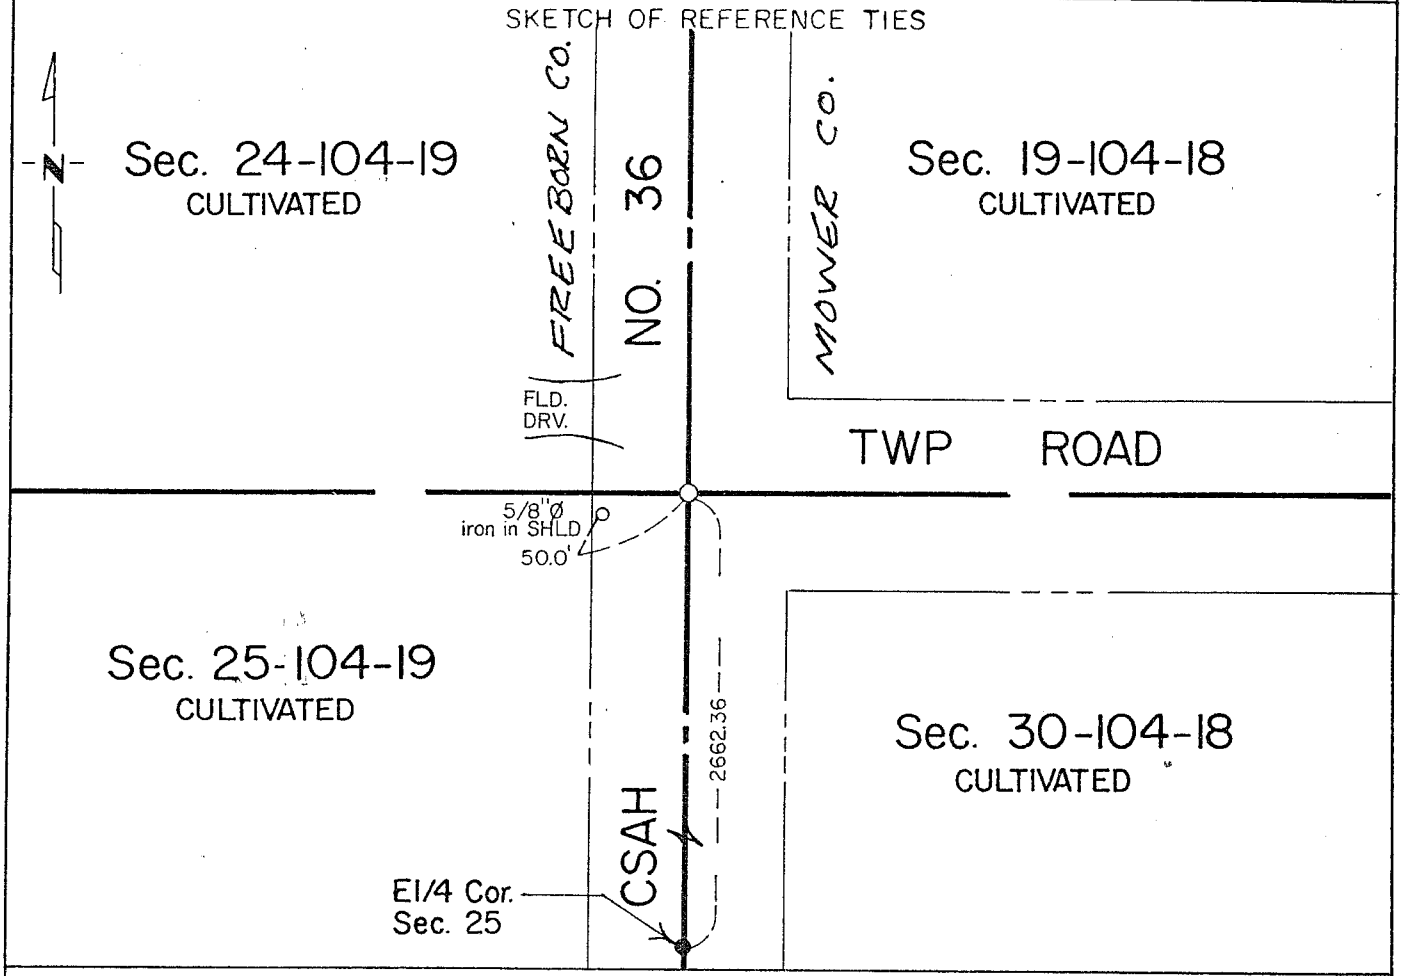

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-23-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 30-104-18

This corner was originally established by Deputy Surveyor J.B. Reynen of the U.S. General Land Office in 1854. The government notes show this corner was marked with a charred stake and a mound of earth with a trench.

The following were contacted for section corner information:
Mower & Freeborn County Engineering Department
Mower & Freeborn County Recorder's Office

1952 Book "A" of the Mower County Engineering Department shows a concrete monument inplace and the following ties were taken:
35.5' W to PP
59.4' W to 4th F.P. on F.L. west
32.6' E to top center south end culvert
52.0' NE to SW corner Hdwl. culvert

1990 Jones, Haugh & Smith crew along with the Freeborn County backhoe dug a hole 20'x4'x6' deep on centerline centerline of north-south-east road. Found a 3/4" diameter pipe 1.0' below road surface. Continued digging and found no further evidence of public land survey. Removed pipe and placed a cast iron monument over a 5/8" diameter iron at road surface.

Monument found fits occupation and road centerlines and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 30, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-17-90 (DATE) found a no evidence

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-17-90 (DATE) placed a cast iron monument on straight line between NE & SE corners in line with fence to East.

SKETCH OF REFERENCE TIES

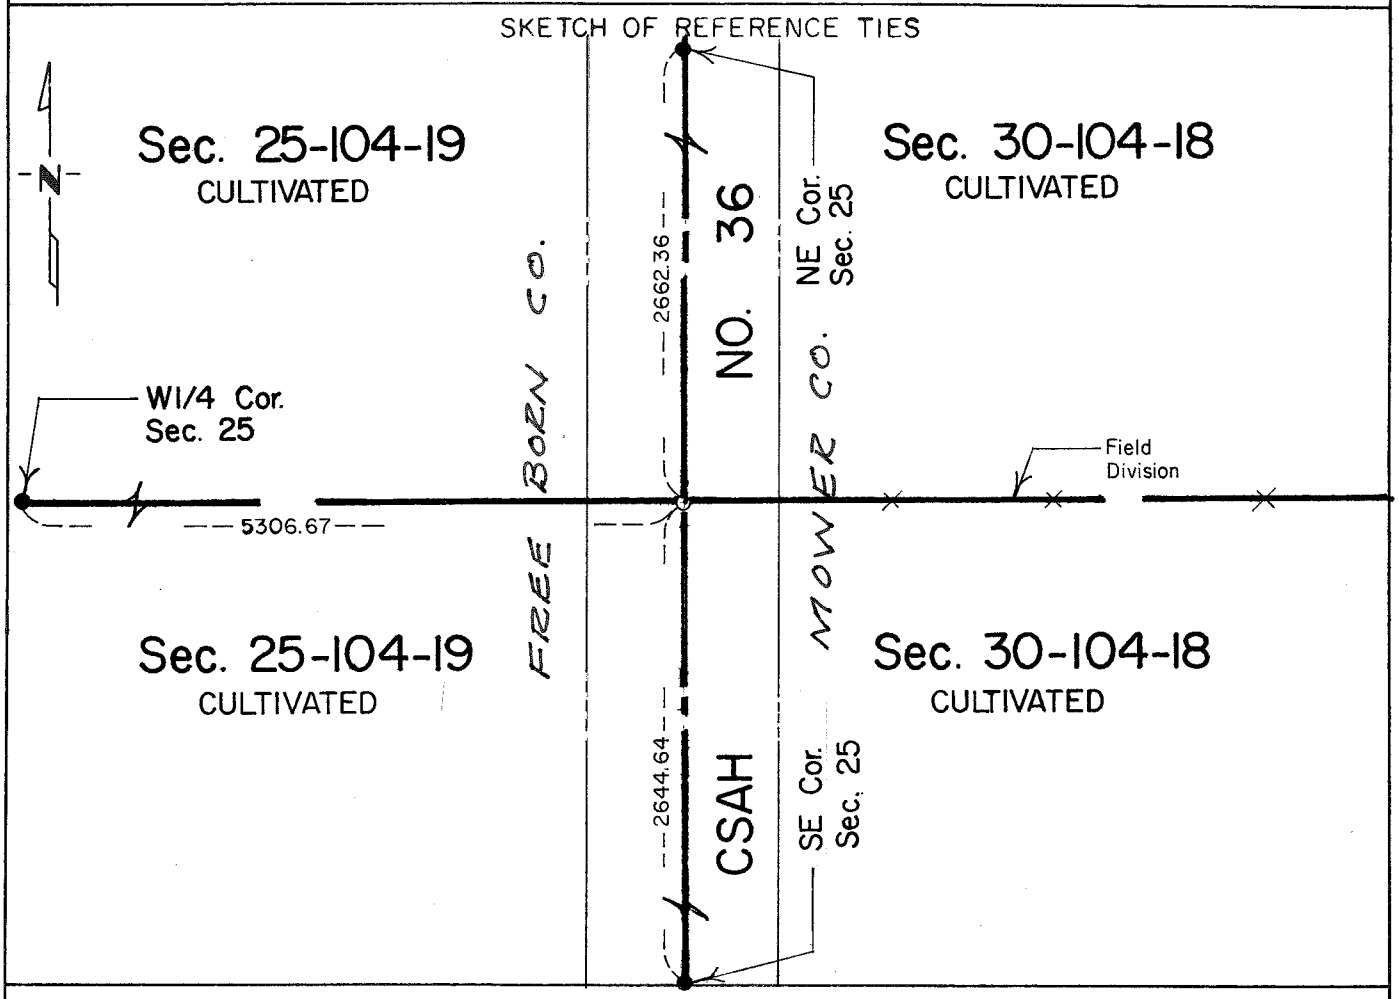

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-23-91 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 30-104-18

This corner was originally established by Deputy Surveyor J.B. Reymen of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and the following ties were taken:

8" Burr Oak	N 54° E	16 links (10.56')
7" Burr Oak	S 42° W	17 links (11.22')

The following were contacted for section corner information:
Freeborn County Engineering Department
Freeborn County Recorder's Office

1990 Jones, Haugh & Smith crew along with the Freeborn County backhoe dug a hole 7'x20'x4' deep on centerline centerline of north-south road and field division east. Found no evidence of public land survey corner. Placed a cast iron monument on a straight line between NE & SE corners in line with fence to the east.

The corner placed fits occupation and road centerlines and is accepted as best evidence of the public land survey corner.

For electronic survey data and analysis contact firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 30, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-17-90 (DATE) found a no evidence

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-17-90 (DATE) placed a cast iron monument on straight line between NE&SE corners in line with fence to East.

SKETCH OF REFERENCE TIES

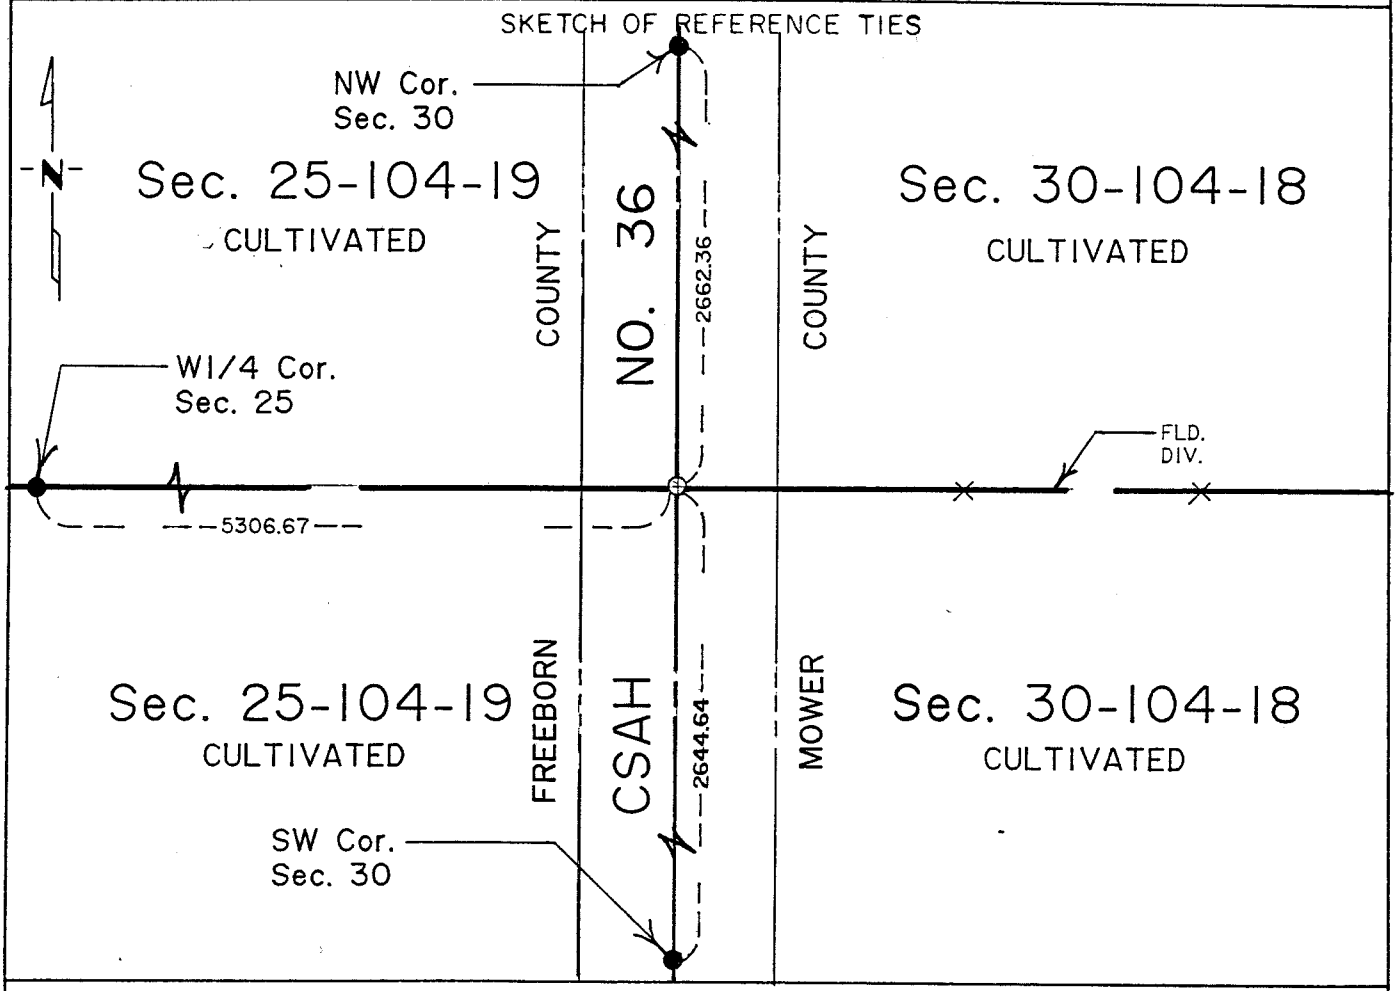

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 7-30-91 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec. 30-104-18

This corner was originally established by Deputy Surveyor J.B. Reymen of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a wood post. The following ties were taken:

8" Burr Oak	N 54 E	16 links	(10.56 feet)
7" Burr Oak	S 42 W	17 links	(11.22 feet)

The following were contacted for section corner information:

Freeborn & Mower County Engineering Department
Freeborn & Mower County Recorders Office

1990 Jones, Haugh & Smith crew along with the Freeborn County backhoe dug a hole 7'x20'x4' deep on centerline of north-south road and field division east. Found no evidence of public land survey corner. The W 1/4 corner was re-set on a straight line between NE and SE corners in line with fence to east. A cast iron monument was placed at corner.

This location fits occupation and road centerlines and is accepted as best evidence of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 30, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-17-90 (DATE) found a 3/4"Ø pipe 1.0' below road surface continued digging and found no further evidence.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-17-90 (DATE) placed a cast iron monument over 5/8"Ø iron at place of pipe on road surface.

SKETCH OF REFERENCE TIES

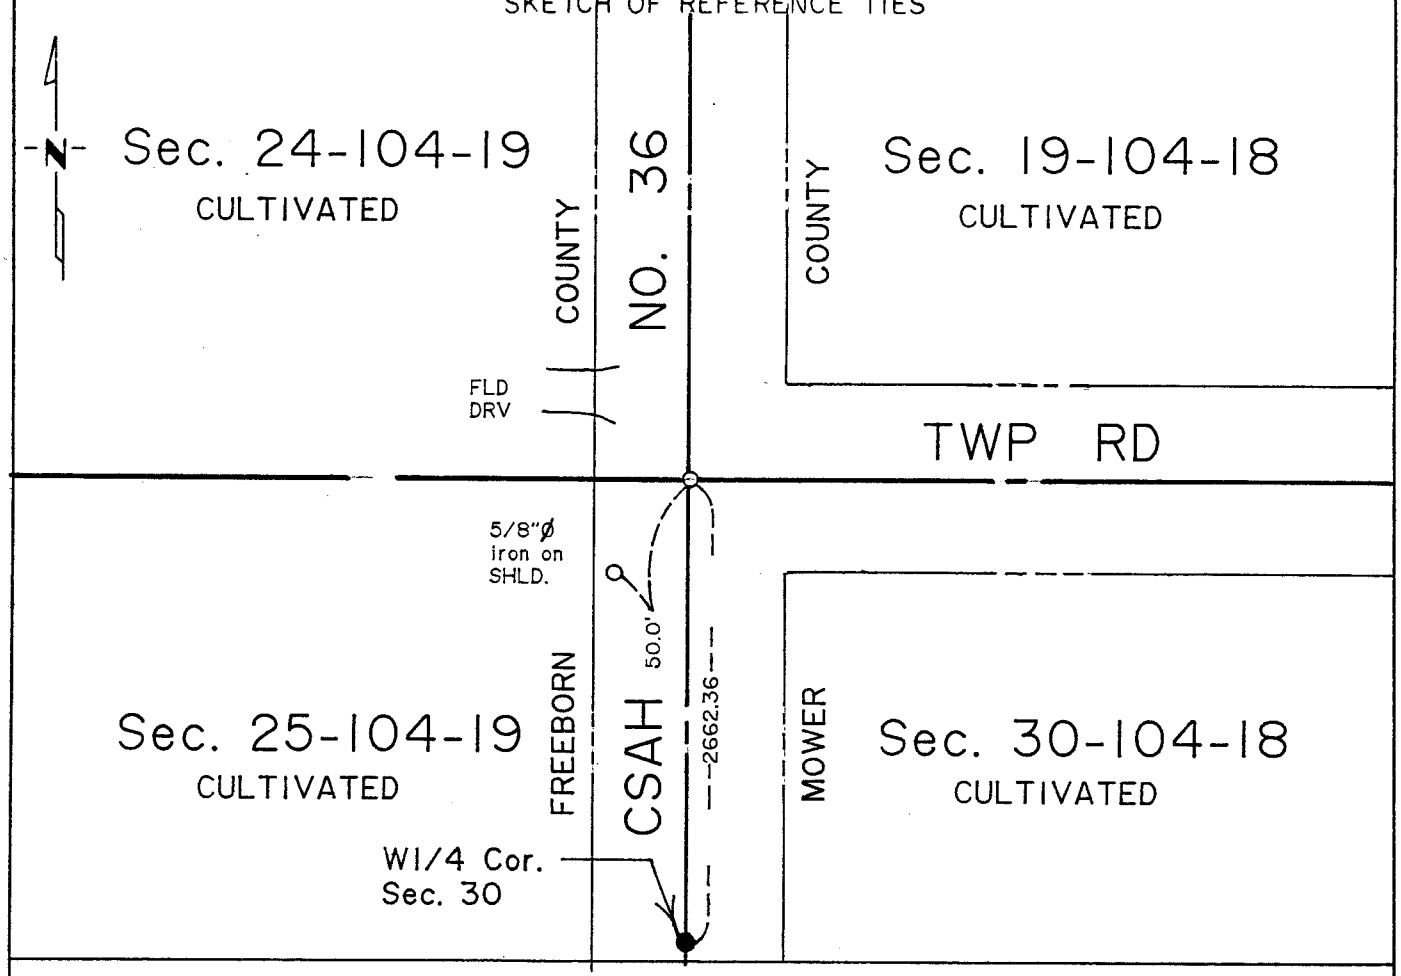

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-30-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec. 30-104-18

This corner was originally established by Deputy Surveyor J.B. Reymen of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a charred stake and a mound of earth with a trench.

The following were contacted for section corner information:

Freeborn & Mower County Engineering Department
Freeborn & Mower County Recorders Office

1952 Book 'A' of the Mower County Engineering Department show a concrete monument inplace and the following ties were taken:
35.5' W to PP
59.4' W to 4th FP on FL west
32.6' E to top center S end culvert
52.0' NE to SW cor hdwl culvert

1990 Jones, Haugh & Smith crew along with the Freeborn County backhoe dug on centerline centerline of north-south-east road a hole 20'x4'x6' deep. Found a 3/4" diameter pipe 1.0' below road surface. Continued digging and found no further evidence of public land survey corner. A cast iron monument was placed over monument found.

Monument found fits occupation and road centerlines and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 31, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-1-89 (DATE) found a 3/4"Ø x 18" IRON OVER A 1 3/4"Ø PIPE OVER A STONE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-1-89 (DATE) placed a 5/8"Ø IRON OVER PIPE AND SET CAST IRON MONUMENT.

SKETCH OF REFERENCE TIES

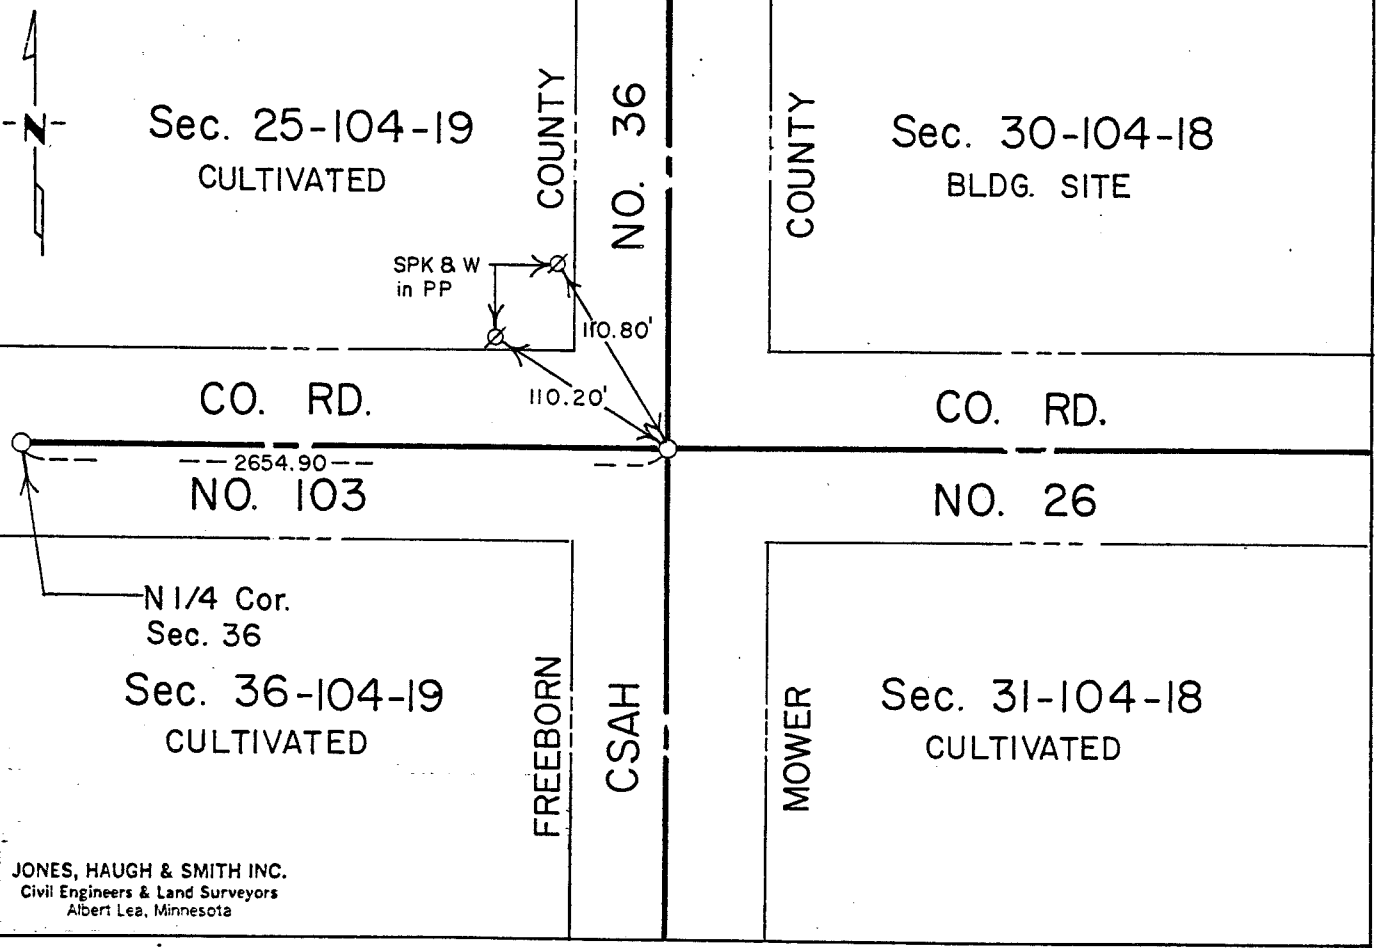

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-11-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW cor Sec 31-104-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

10" Burr Oak	N 32° W	73 links (48.18 ft)
8" Burr Oak	S 23° E	703 links (463.98 ft)
6" Burr Oak	N 24° E	111 links (73.26 ft)
12" Burr Oak	S 12° W	91 links (60.06 ft)

The following were contacted for section corner information:
Freeborn County Engineering Department
Freeborn County Recorder's Office
Mower County Engineering Department
Mower County Recorder's Office

1887 Clausen, County Surveyor, notes show a government post inplace.

1952 Book "A" of the Mower County Engineering Department show an iron inplace. The following ties were taken:

50.2' SW to TP	134.0' NW to PP
69.0' NE to Maple tree	53.1' SE to TP

1954 Freeborn County notes show a pipe inplace. The following ties were taken:

Mower County Road sign (C-13)	SE	71.3'
Spk & W in REA pole	NNE	68.9'
SW cor School	NE	130.5'

1962 George Murphy, County employee, uncovered corner. The following ties were taken:

Spk & W in PP	68.9' NE
Spk & W in TP	60.0' SW
Face of tele stand pipe	56.3' SE

1989 Jones, Haugh & Smith Inc crew under the direction of John Schulte, Freeborn County Surveyor, dug with the County backhoe on centerline centerline of north-south-east-west roads. Uncovered a 3/4" diameter x 18" iron 0.5' deep over a 1 3/4" diameter bent pipe. Using a tile probe found pipe to be over a stone 3 feet below road surface. Set a 5/8" diameter iron over pipe and a cast iron monument at surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 31, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-15-89 (DATE) found a NO EVIDENCE OF PLS CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-15-89 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

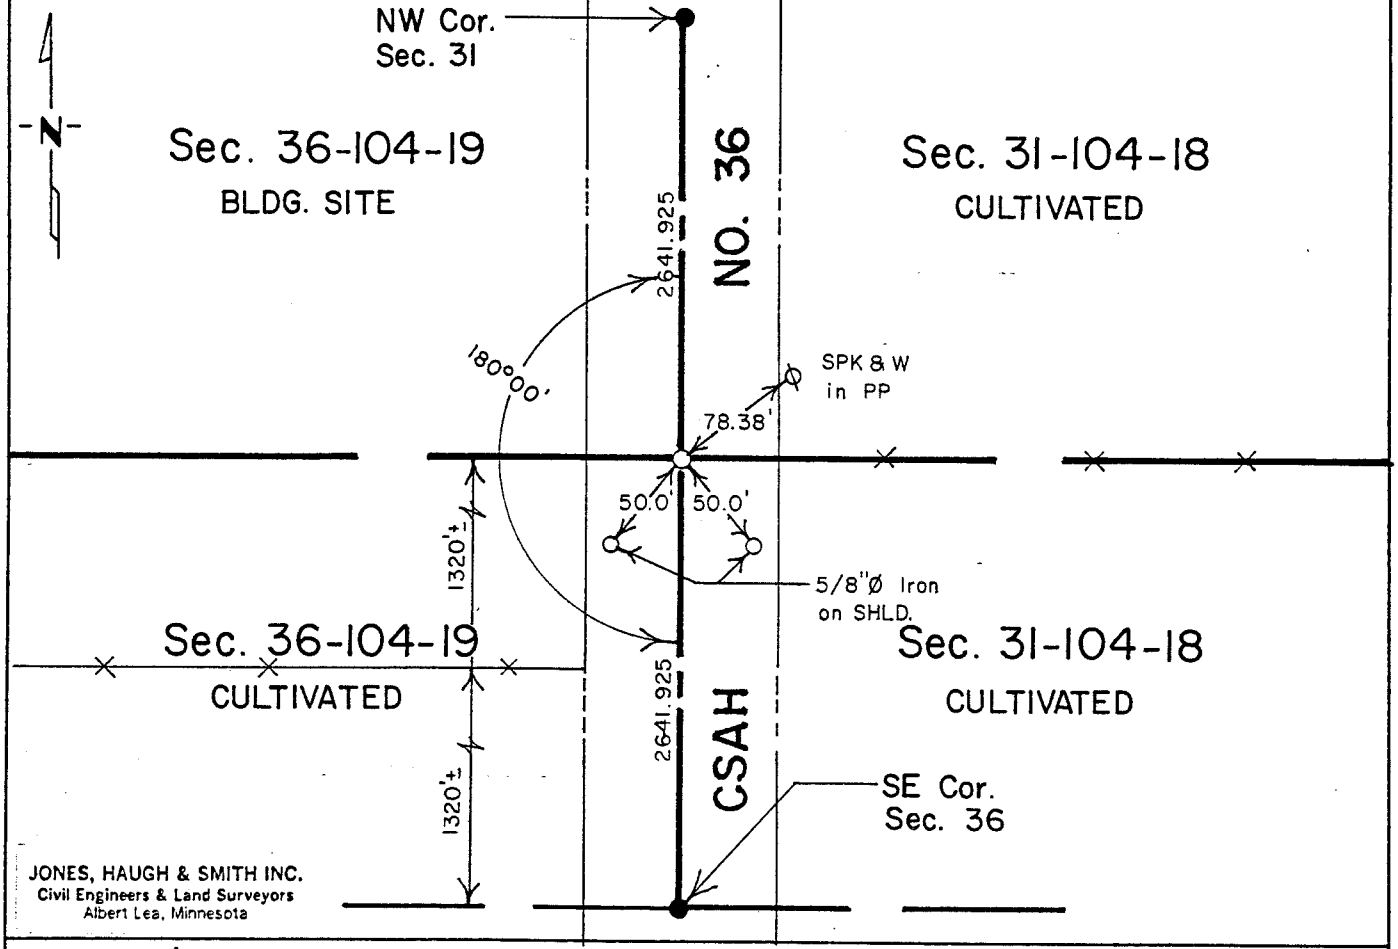

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-11-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 cor Sec 31-104-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

12" Burr Oak	S 37° E	198 links (130.68 ft)
5" Burr Oak	N 26° W	26 links (17.16 ft)

The following were contacted for section corner information:
Freeborn County Engineering Department
Freeborn County Recorder's Office
Mower County Engineering Department
Mower County Recorder's Office

1887 Clausen, Mower County Surveyor, notes show a government post inplace.

1989 Jones, Haugh & Smith Inc crew under the direction of John Schulte, Freeborn/Mower County Surveyor, dug with the County backhoe and found no evidence of the public land survey corner. Set a cast iron monument on line at midpoint between the northeast and southeast corners of this section.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 31, Township 104N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-15-89 (DATE) found a SQUARE HEAD BOLT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-15-89 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

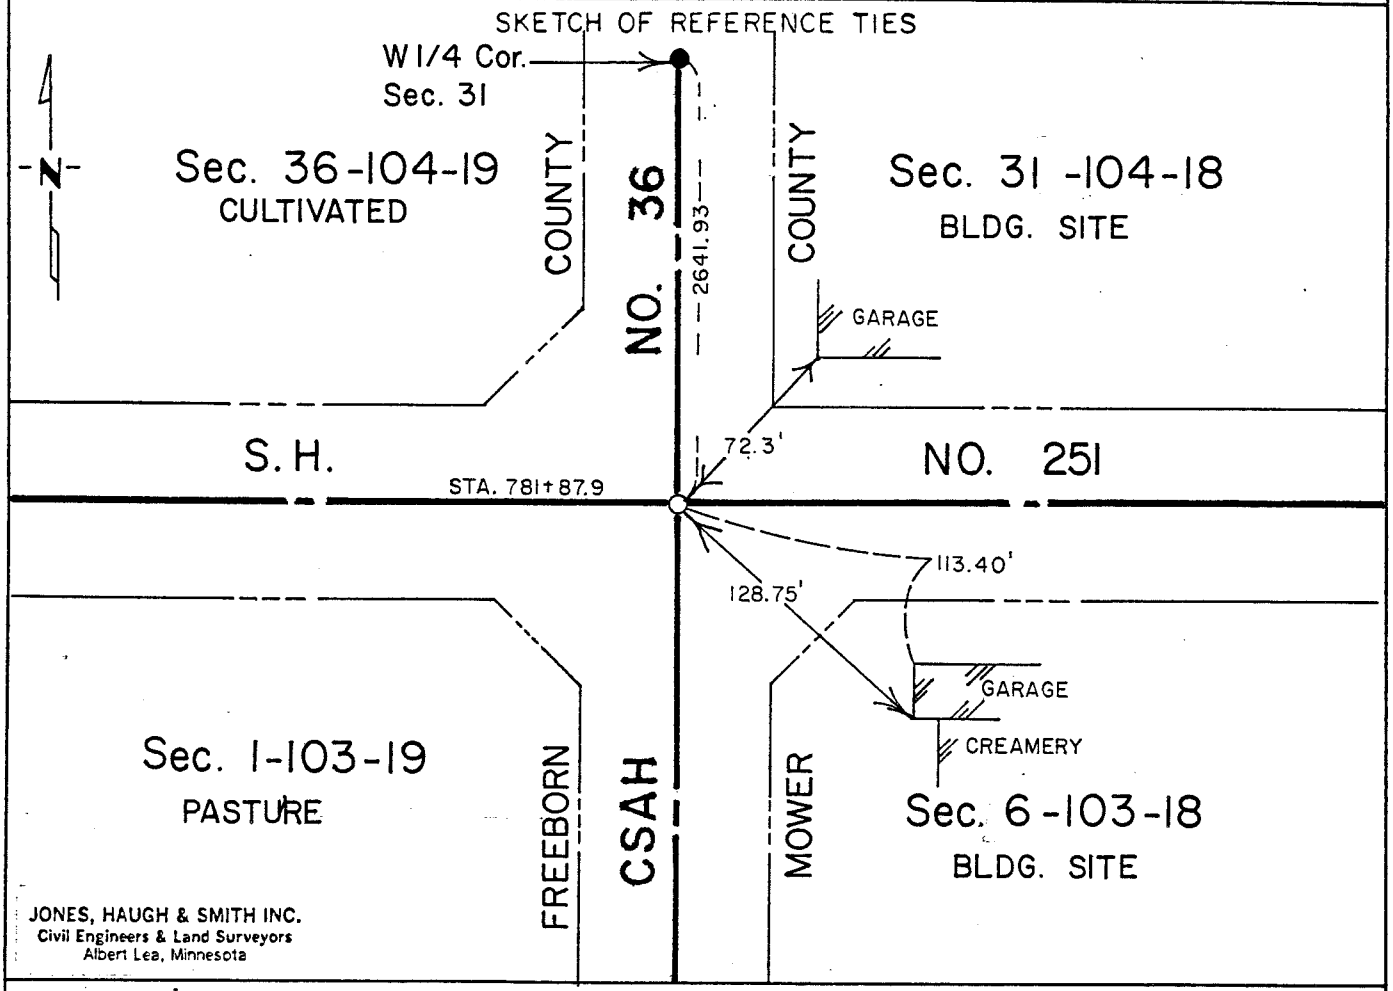

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 10-29-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW cor Sec 31-104-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

14" Burr Oak	N 75° W	143 links (94.38 ft)
14" Burr Oak	S 26° E	275 links (181.50 ft)

The following were contacted for section corner information:
Freeborn County Engineering Department
Freeborn County Recorder's Office
Mower County Engineering Department
Mower County Recorder's Office

1887 Clausen, Mower County Surveyor, notes show a government post inplace.

1944 John Nielsen, Freeborn County Surveyor uncovered a wood stake with a bolt in center. The following ties were taken:

SW corner of garage	72.4' NE
NW corner of Creamery	129.0' SE
NE corner concrete platform	178.5' SSE

1954 C.V. Jones Engineering notes show a square head bolt inplace. The following ties were taken:

SW corner garage	72.3' NE
NW corner of Creamery	128.75' SE

1982 Jones, Haugh & Smith Inc crew uncovered a 3/4" diameter iron for a survey in the NE 1/4 Section 6-103-18.

1989 SAR No. 1 construction survey shows a wood stake with a bolt in center at this location. Jones, Haugh & Smith Inc crew under the direction of John Schulte, Freeborn County Surveyor, placed a cast iron monument on centerline centerline of north-south-east-west roads at location of bolt found.

The monument found fits occupation and road centerlines within the section and is in agreement with past records and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 33, Township N104, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 12-5-90 (DATE) found a concrete nail an washer with flagging 0.5' deep found no further evidence

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12-5-90 (DATE) placed a 1/2"Ø octagon iron on ℄ of N-S road and ℄ of E-W road.

SKETCH OF REFERENCE TIES

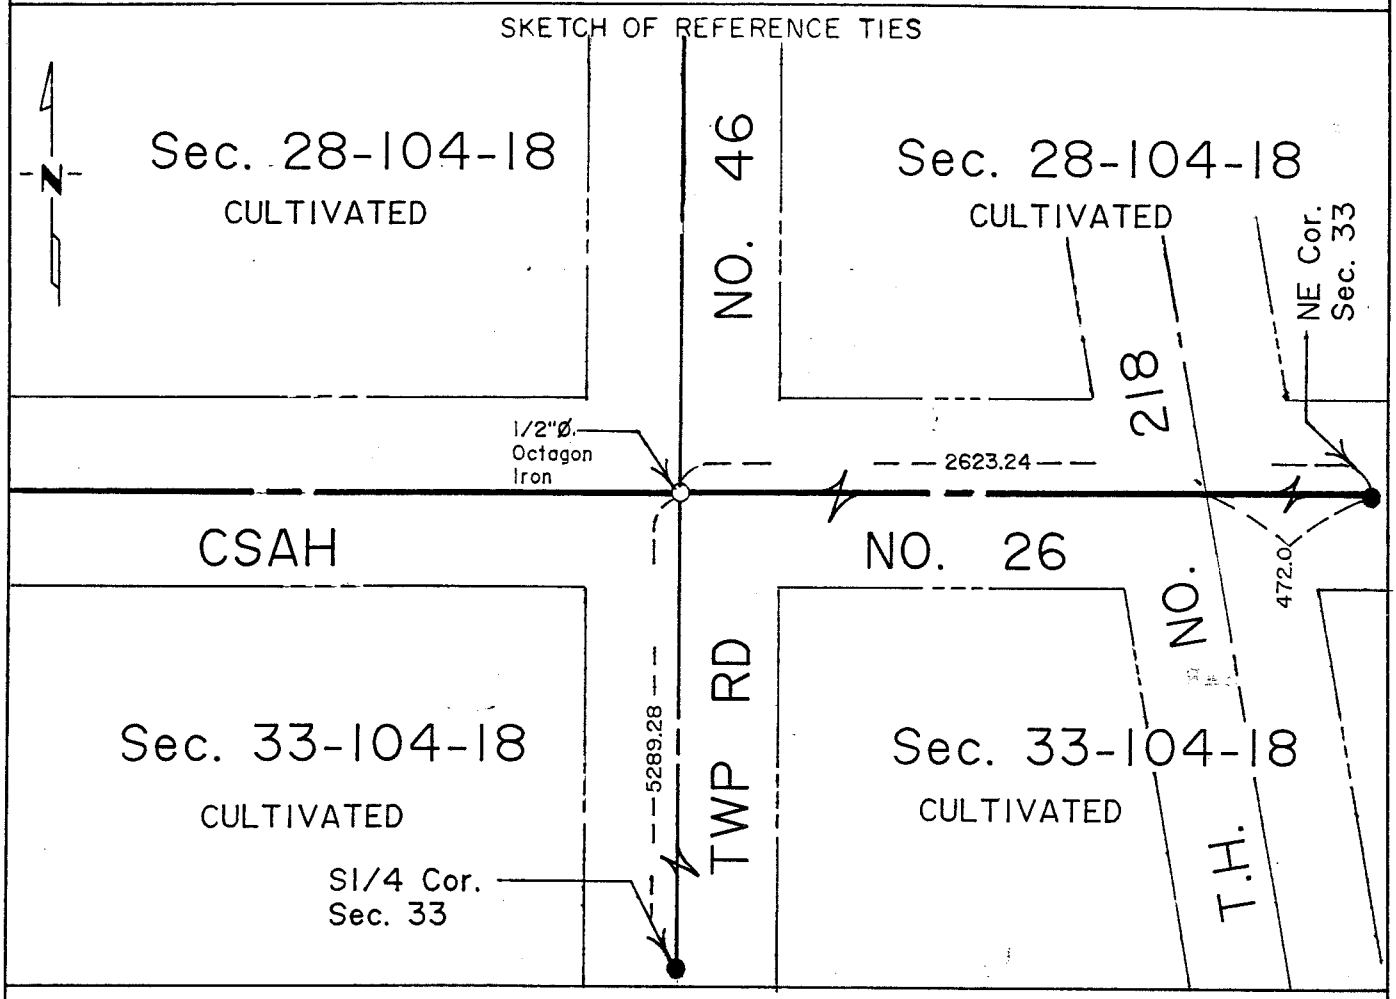

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-30-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec. 33-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with charred stake and a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1930± Mower County Highway grading plans show a corner at this location.

1988 Ray Tucker, Registered Land Surveyor, dug with Mower County backhoe before County began their 1988 overlay project.

1990 Jones, Haugh & Smith crew dug and found a concrete nail with flagging 0.5 feet deep. Found no further evidence of public land survey corner. No information was available from Ray Tucker to substantiate this corner location. Placed a 1/2" octagon iron on centerline centerline of north-south-east-west roads.

Corner placed fits occupation and road centerlines and agrees with 1930 grading project and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 33, Township N104, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 12-5-90 (DATE) found a 1/2"Ø iron in 6" concrete monument.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

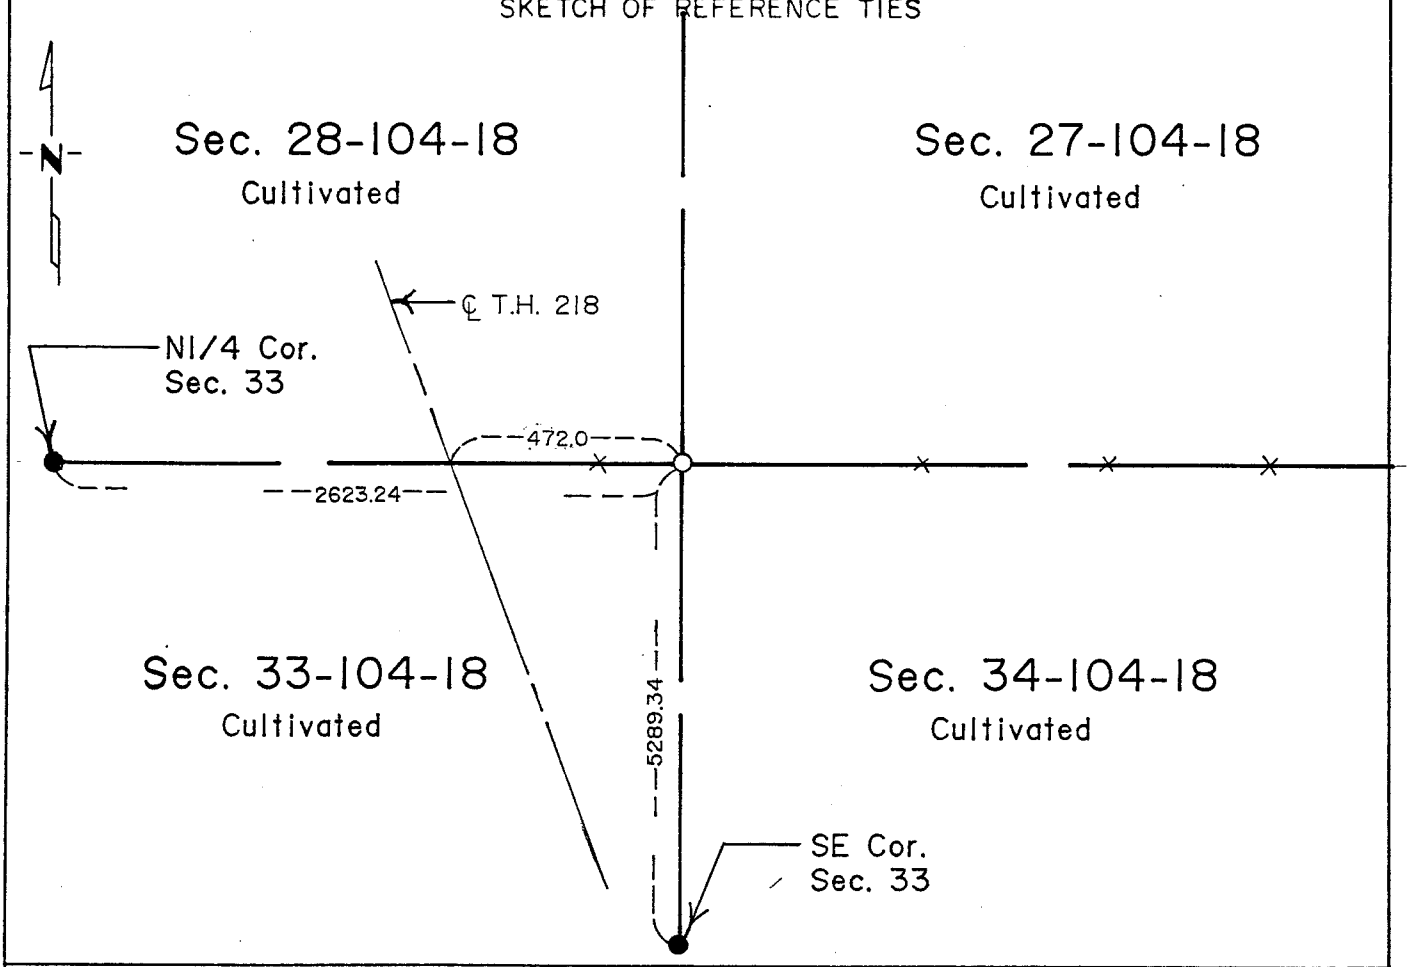

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-30-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec. 33-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with charred stake and a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

Book 'A' in the Mower County Engineering Office show a concrete monument inplace in line with fences east and west. The following tie was recorded:
472.0' W of centerline TH No. 218

1990 Jones, Haugh & Smith crew found a 1/2" diameter iron cast in a 6" square concrete monument in E-W fence line 472 feet more or less, east of centerline Trunk Highway 218.

Corner found fits occupation and past records and is accepted as best evidence of a perpetuation of public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 34, Township 104N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-10-90 found STONE AND BRICK

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-12-90 placed 5/8" REBAR AND COUNTY CAP OVER THE STONE

SKETCH OF REFERENCE TIES

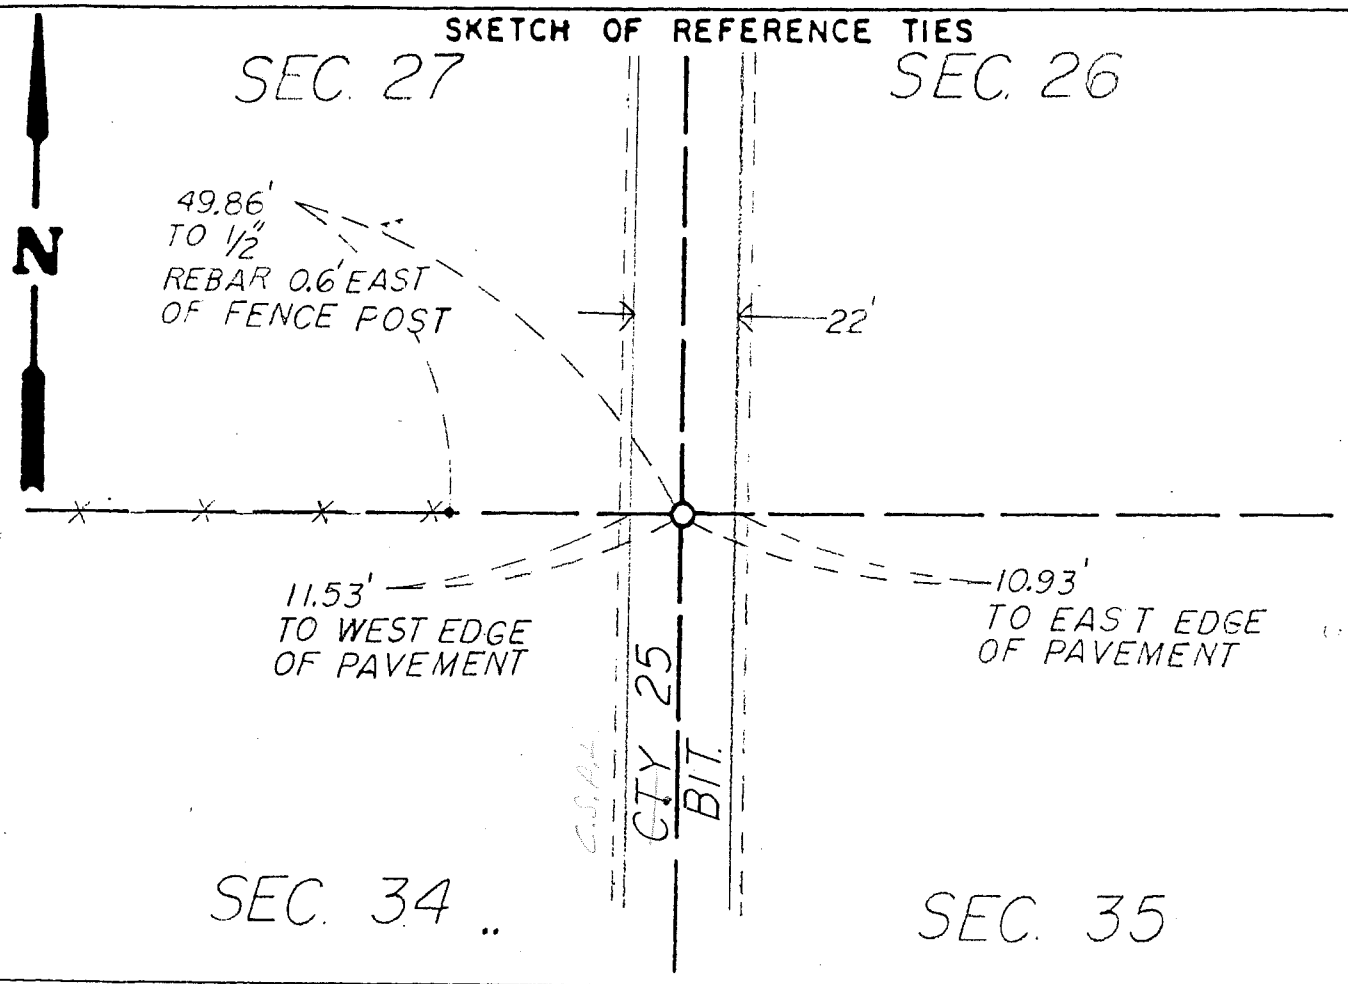

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHEAST CORNER SECTION 34, TOWNSHIP 104 NORTH, RANGE 18 WEST, 5TH P.M.

Aug., 1854 — William J. Anderson, Deputy Surveyor, set post at corner; deposited charred stake and made earth mound and trench as per instructions for the original Public Land Survey.

June 1885 — Clausen Field notes show a government post and mound which was used to subdivide Section 26.

1935 — County Engineer road Plans show a stone inplace.

1962 — County Engineers Road Plans show a concrete Monument inplace.

July 1990 — Zenk Read Trygstad & Associates excavated a trench 3.2 feet below the surface 4 feet West to 3 feet East of centerline and 2 feet South to 8 feet North of the Fenceline to the West. A stone 3.2 feet deep was found with pieces of brick on North side. A PK nail was found on the surface directly above the stone which agreed with the fence to the West and the existing centerline. A 1/2" pipe was set on the North side of the stone at the time of excavation.

An analysis of the record shows no evidence of the origin of the stone. The brick near the stone is evidence that the stone has been recognized and used as the corner and is accepted as marking the location of the original Public Land Survey Corner.

P. 485
Bk. 237

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 35, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 4-13-81 (DATE) found ~~o~~ no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-15-81 (DATE) placed a 4" Dia. cast iron marker stamped Quarter Corner

SKETCH OF REFERENCE TIES

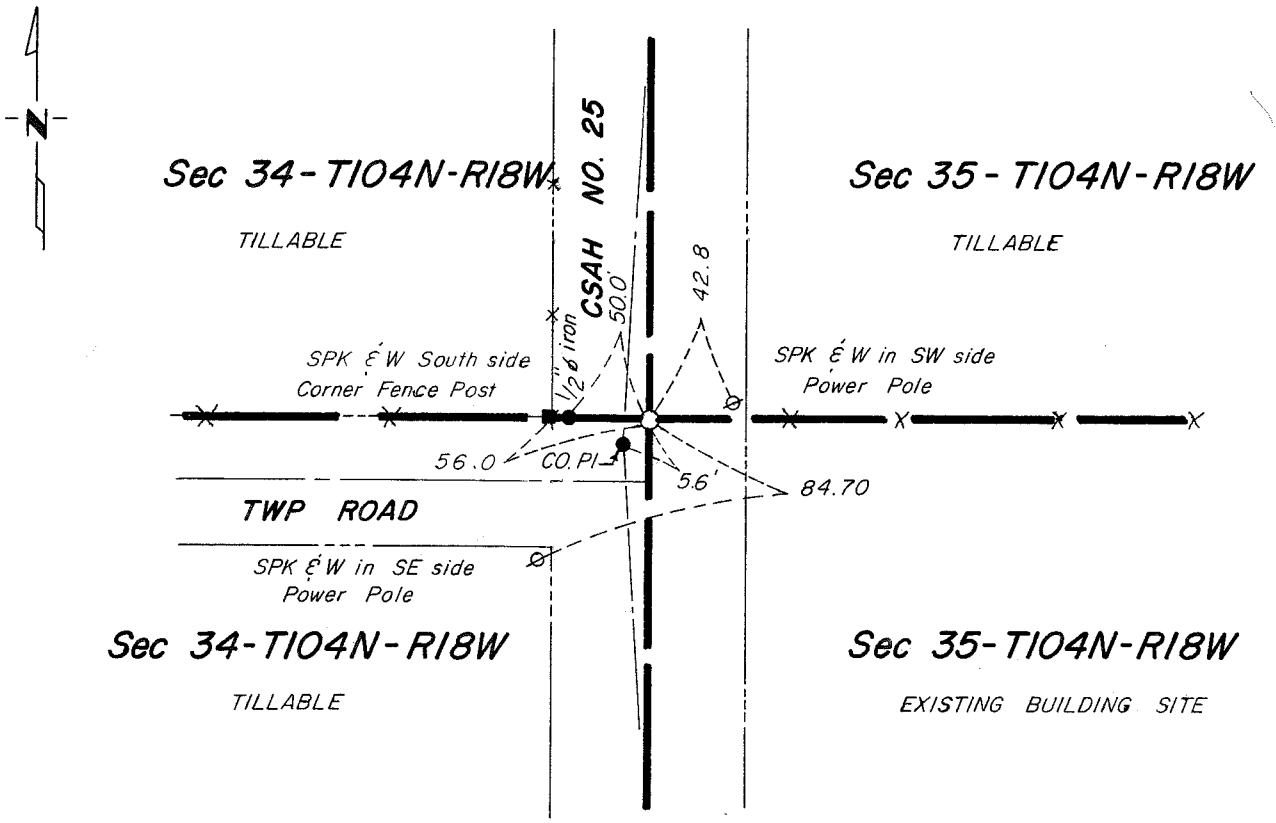

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-14-88 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19__

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
W¼ corner Sec 35-T104N-R18W

1854 - William I. Anderson, Deputy Surveyor, set a post for the W¼ corner of Sec 35-T104N-R18W, during the original public land survey.

Mower County grading plans for County State-Aid Highway No. 25 indicate an iron pin 5.0 feet west of the W¼ corner Sec 35-T104N-R18W.

Jones, Haugh & Smith Inc personnel excavated a 10' x 5' x 4.5' deep hole at location of W¼ corner as shown on Mower County road plans, and found no evidence of the original wood post.

Jones, Haugh & Smith Inc personnel, then set a cast iron monument on a straight line between northwest corner Sec 35 and the southwest corner Sec 35, and in line with a fence line east and a fence line west. Distance to the northwest section corner is 2642.0. Distance to the southwest section corner is 2636.31.

The above corner agrees with existing occupation lines, existing county road surveys and has been used and recognized as the corner in several surveys. It is accepted as a perpetuation of the public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 35, Township 104N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-8-81 (DATE) found a ½" ø (2.5' deep) in concrete in 4" clay tile over iron by stone & old fence post 3.5' deep.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-8-81 (DATE) placed a 5/8" ø iron (capped #13807) over monuments found.

SKETCH OF REFERENCE TIES

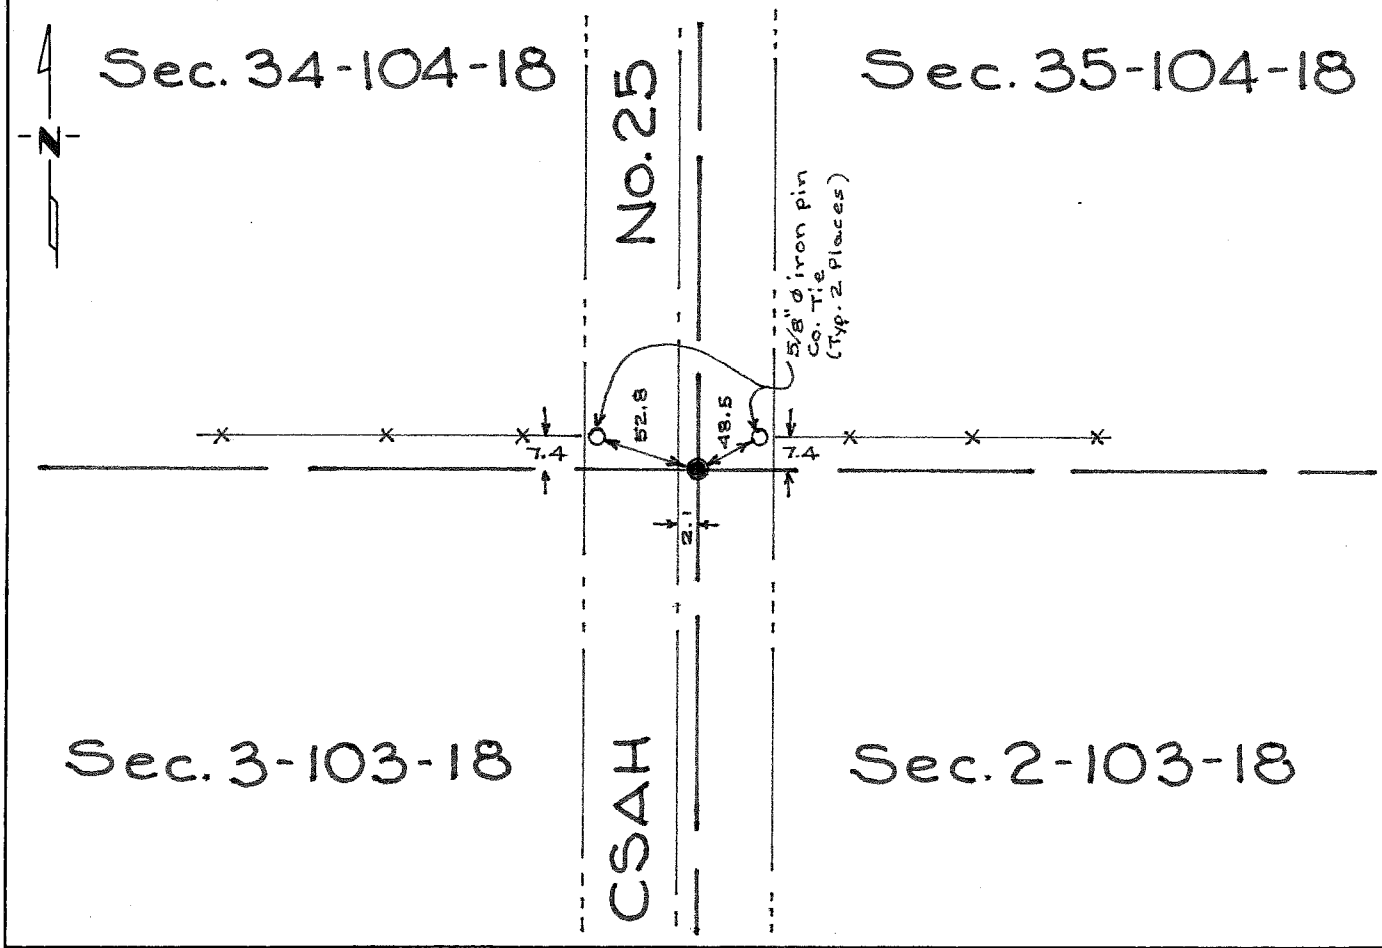

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-12-88 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
SW corner Section ~~36~~ 35-104-18

This corner was originally established by Deputy Surveyor John Ball of the US General Land Office in 1854. The government notes show this corner was marked with a wood post and made a mound of earth with trench.

The following were contacted for section corner information:

Mower County Engineering Department

The record book in the office of the Mower County Engineer indicates a stone was found and ties were taken.

County grading plan shows an iron monument was found during road grading project.

1981 Jones, Haugh & Smith crew dug with County backhoe at location of good signal with metal locator and uncovered a ½" diameter iron in a 4" diameter clay tile over an iron on the side of a field stone with a wood post on the north side of the stone. Reset clay tile with ½" diameter iron and placed a 5/8" diameter iron over it on road surface.

The monuments found agree with past record and fits occupation within the section and is accepted as best evidence of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 36, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-2-92 (DATE) found a ½"ø x 30" IRON OVER 8"x18" FIELD STONE

■ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-2-92 (DATE) placed a _____

SKETCH OF REFERENCE TIES

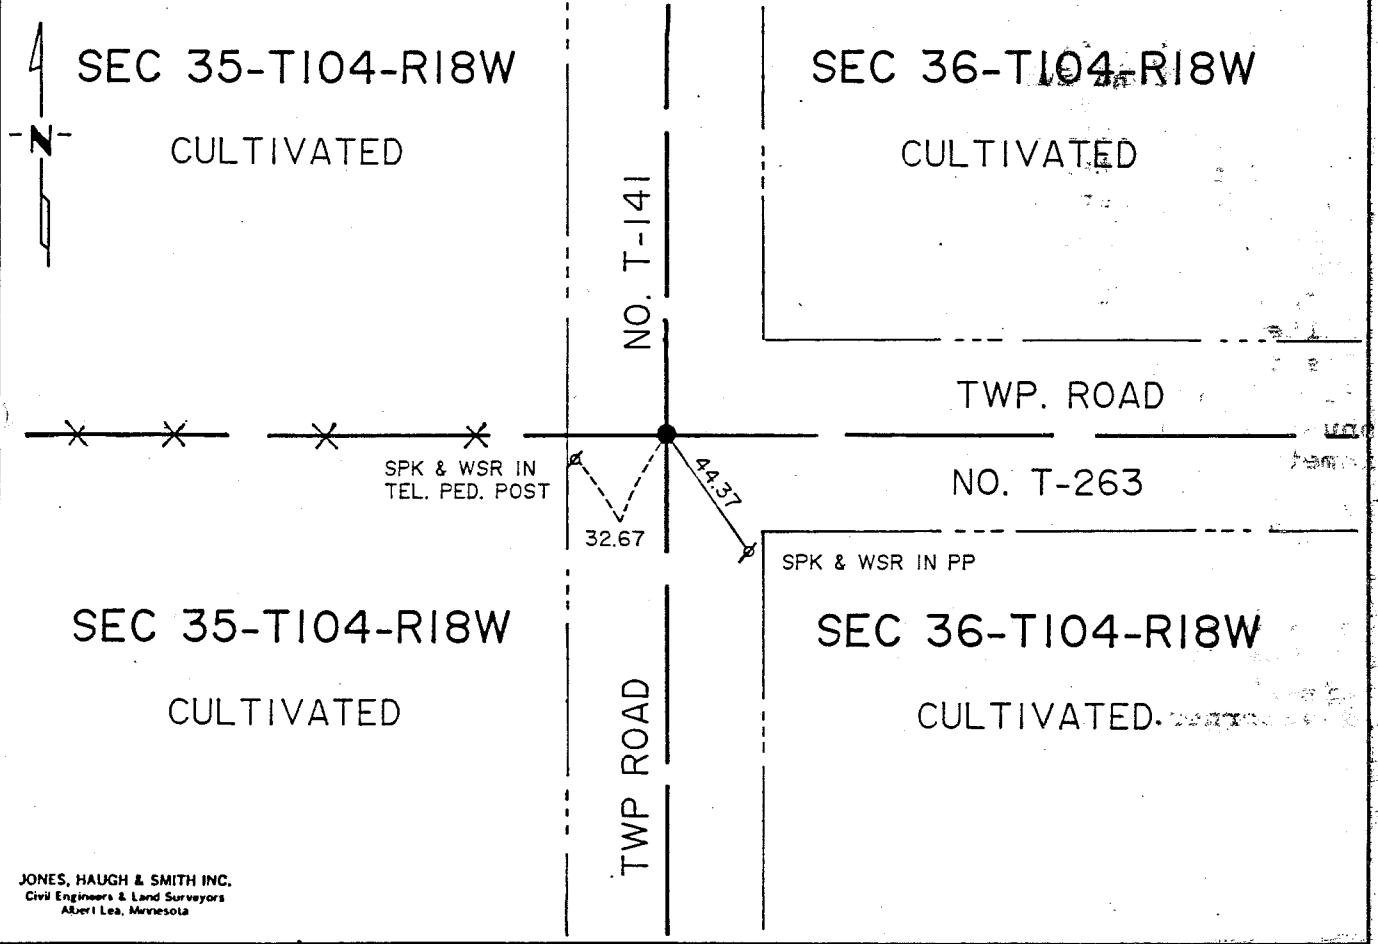

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-12-92 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 36-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

8" Burr Oak	S 73° W	90 links (59.40 ft)
8" Aspen	N 52° E	140 links (92.4 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe on centerline centerline of township roads and uncovered a 1/2" diameter x 30" long iron over a 8" x 18" long pointed field stone three feet deep in virgin soil. Set a cast iron monument over pointed stone on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 36, Township 104N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-2-92 (DATE) found a 8"x16" POINTED FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-2-92 (DATE) placed a 5/8"ø IRON ON WEST SIDE OF STONE AND 5/8"ø IRON OVER STONE ON SURFACE

SKETCH OF REFERENCE TIES

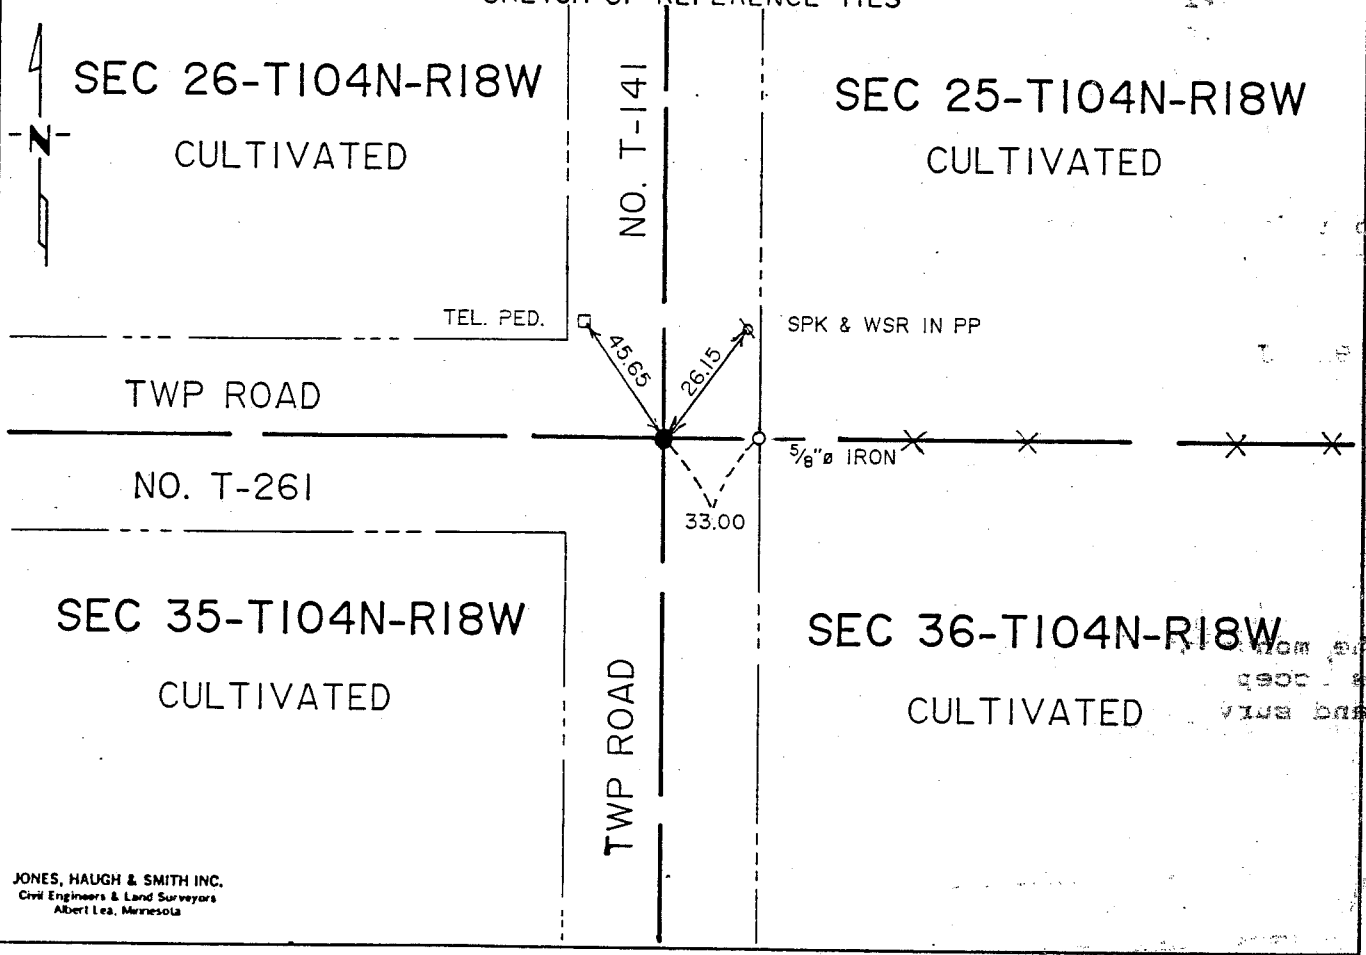

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-12-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 36-104-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

10" Burr Oak	S 2 1/2° E	25 links (16.5 ft)
9" Red Oak	N 44° E	73 links (48.18 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe on centerline centerline of township roads and uncovered a 8" diameter x 18" long pointed field stone three feet deep in virgin soil. Set cast iron monument over pointed stone on road surface and placed a 5/8" diameter iron on west side of stone.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public
land survey corner.