Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 28, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/18/1999 (DATE) found a CONCRETE MONUMENT WITH A 3/4" REBAR INSIDE.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11/18/1999 (DATE) placed a 3/4" X 20" IRON PIPE ABOVE CONCRETE MONUMENT FOUND

SKETCH OF REFERENCE TIES

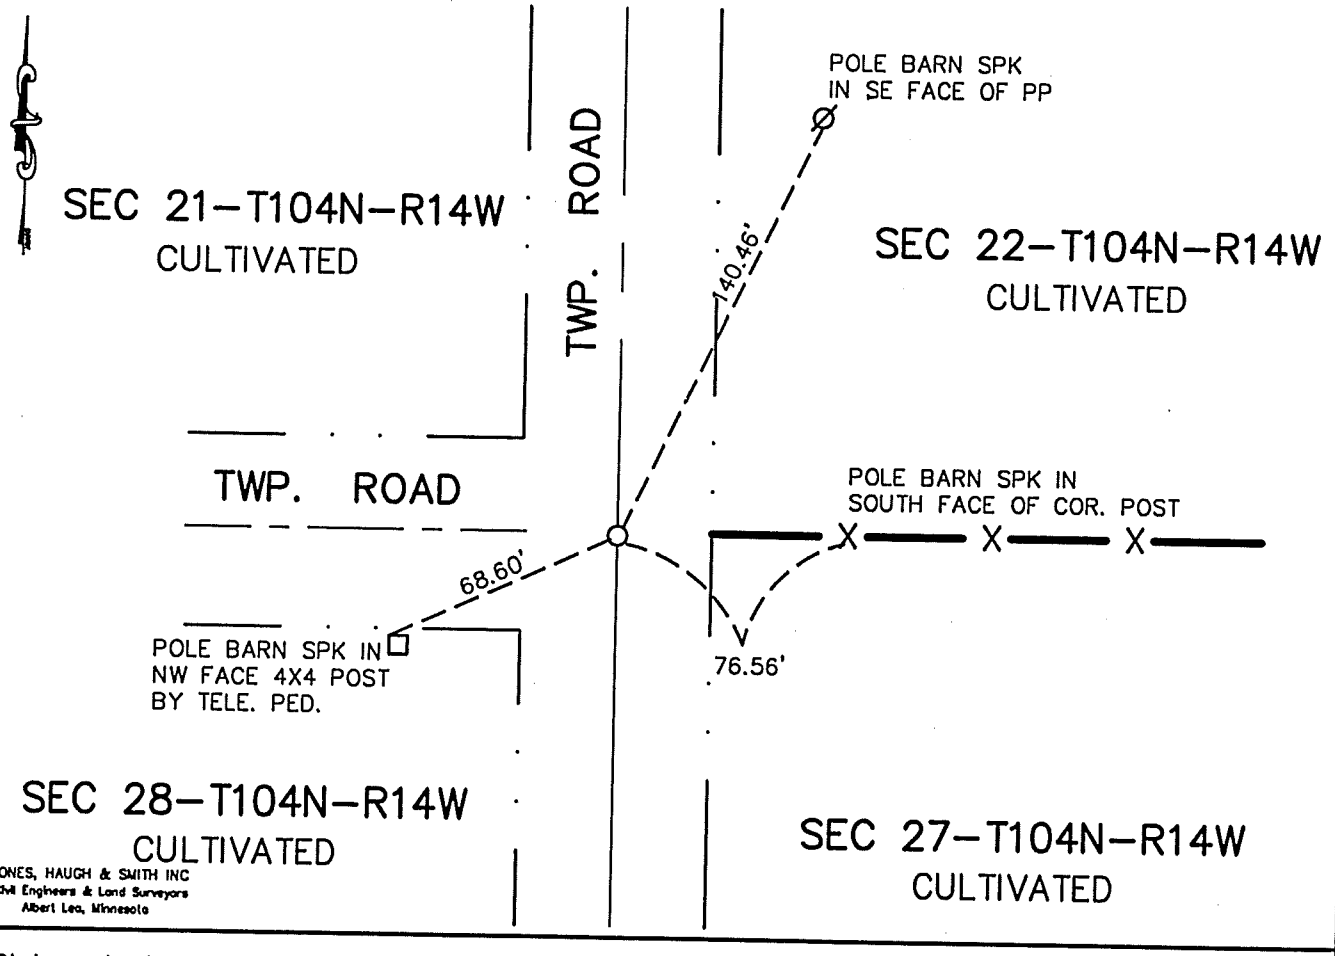

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-10-99 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Cor Sec 28-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1999 Jerome Schwarz, RLS 13810, dug with a backhoe at intersection of North-South Twp. Road, and centerline of Twp. Road going West. At a depth of 2'+/- below 2nd roadbed, found a concrete monument with a 3/4" rebar, set inside a 6" clay tile, and a wooden hub along side. Left monument in place, and set a 3/4" X 20" iron pipe above monument and 0.4' below road surface.

Corner falls on intersection of Twp. Roads, and 1'+/- North of fence running east.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 28, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/18/1999 (DATE) found a WITH METAL LOCATOR, FOUND A 1/2" X 24" PIPE, 0.5' DOWN

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

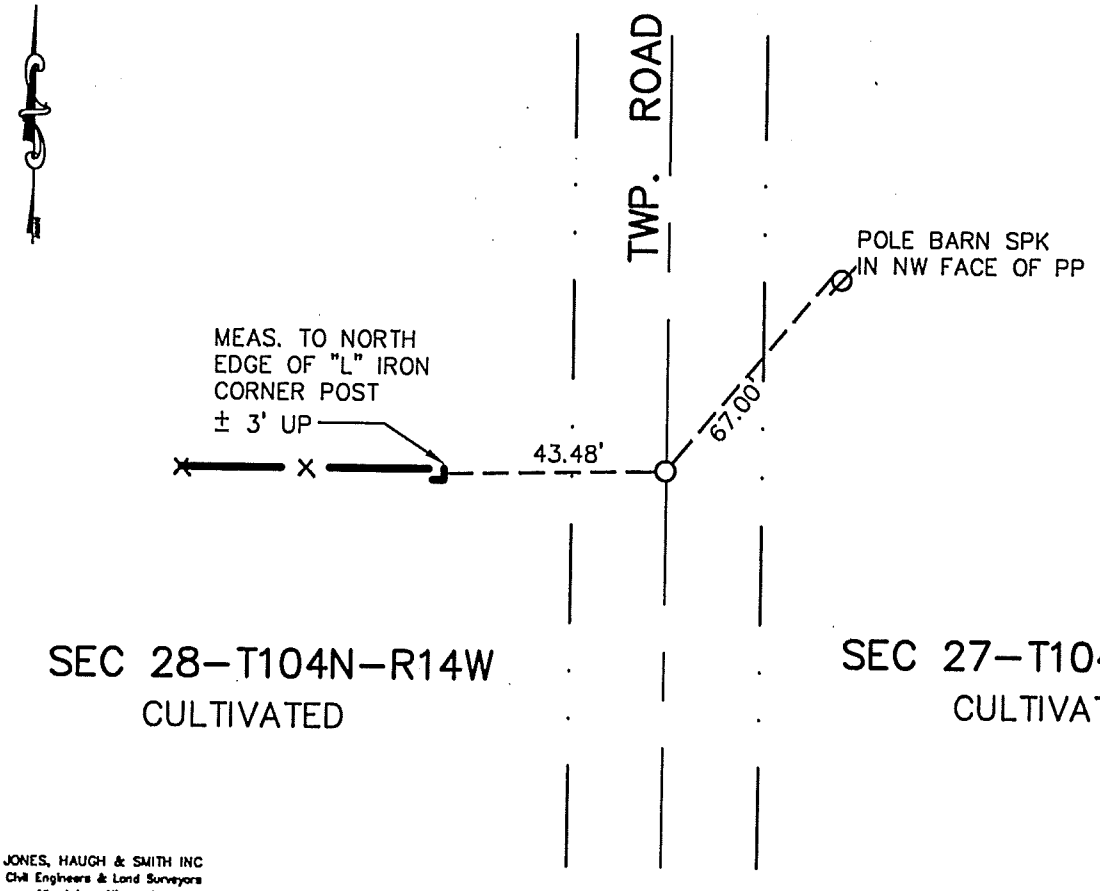

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-10-99 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Cor Sec 28-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1999 Corner location by Jerome Schwarz, RLS #13810
With metal locator, found a 1/2" x 24" iron pipe down 0.5'. Tied off the pipe, then dug a hole with a backhoe, 8'x8'x3.5' deep through the 2nd roadbed, into undisturbed soil. Found nothing.
Using ties, reset pipe in its original found location, and accepted it as perpetuation of PLS corner.

Corner falls on line with fence to the west, and 0.8' +/- east of centerline of Twp. Road.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 30, Township 104N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-17-91 (DATE) found a Harrison Cast iron monument over a 6" dia. concrete monument 3' below road surface

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

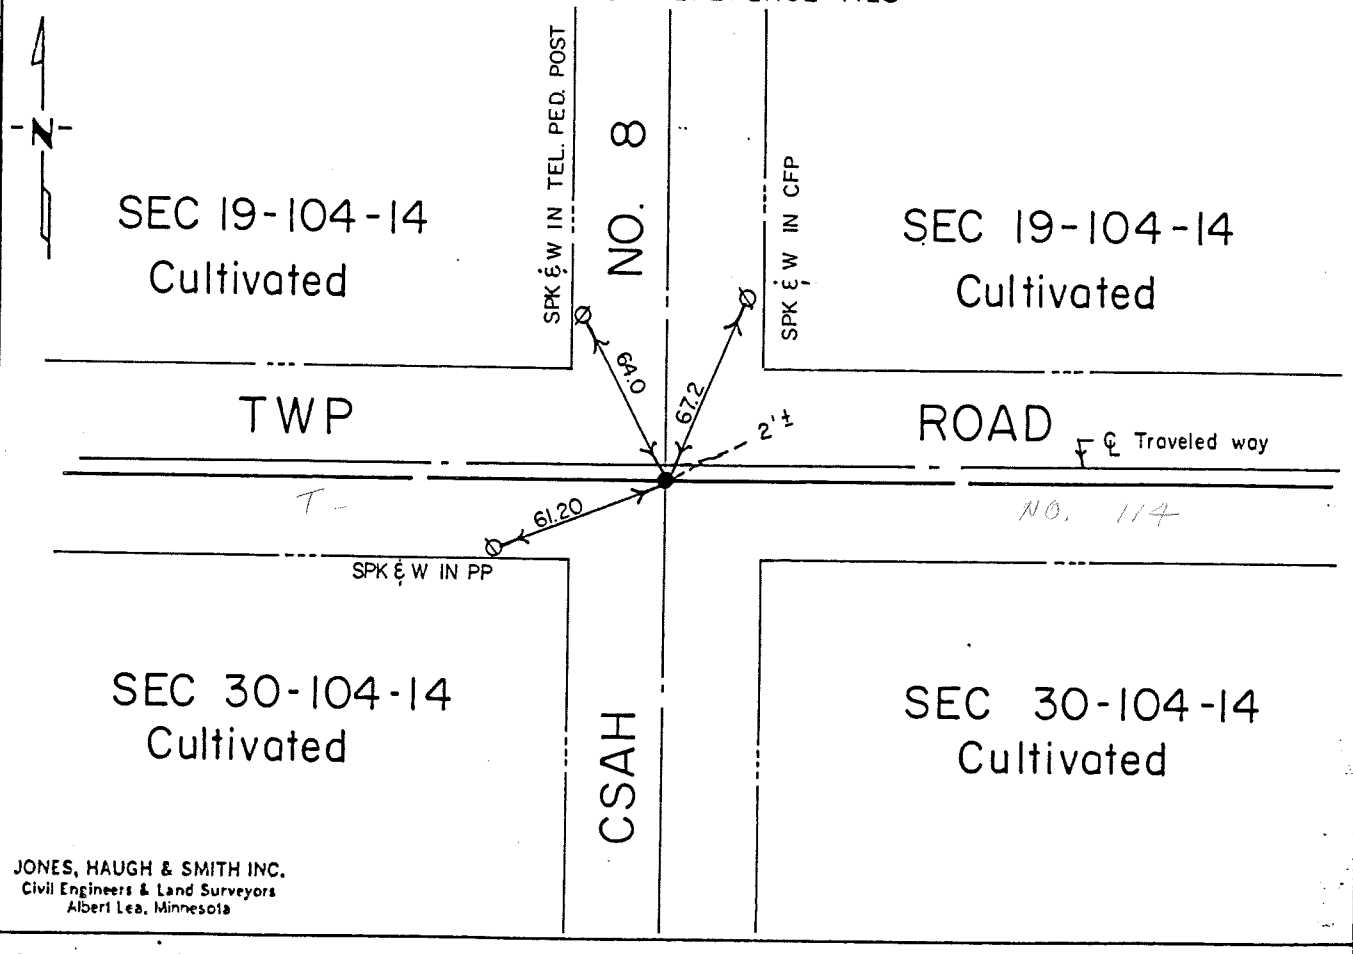

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-9-91

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 30-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plans show a concrete monument inplace on centerline centerline of north-south-east-west roads and the following ties were taken:
85.2' ENE to first fence post
29.5' SE to headwall
29.1' SW to headwall

1965 Book 'A' in the Office of the Mower County Engineer shows a concrete monument inplace and the following ties were taken:
60.6' SW to PP
85.2' ENE to first steel fence post
39.8' ESE to top south end 30" RCP
52.4' NE to TP

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe on centerline centerline of north-south-east-west roads and uncovered a harrison cast iron monument. No records found to support who placed monument. Continued digging and found cast iron monument over a 6" diameter concrete monument 3 feet below road surface in virgin soil, which agrees with past records. Left concrete monument as found and reset cast iron monument over on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.

Revised

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 31, Township 104N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/25/1993 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/25/1993 (DATE) placed a CAST IRON MONUMENT.

SKETCH OF REFERENCE TIES

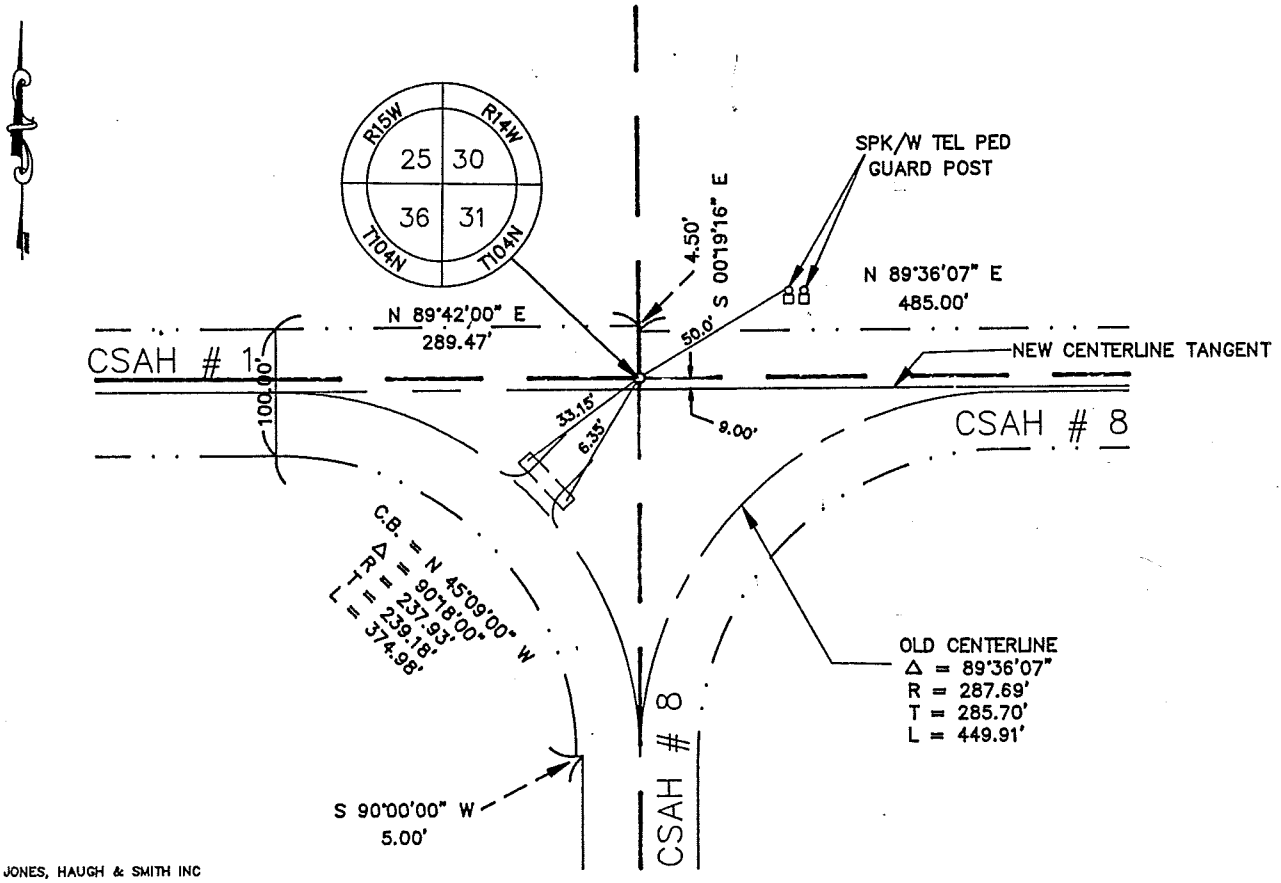

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ _____
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____ Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW cor Sec 31-104-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post and small stones were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1889 Clausen, Mower County Surveyors, indicates a government post at this corner.

1945 Mower County Highway Dept Book 1 indicates a concrete monument inplace at this corner.

1945 Mower County Road Plans indicate a concrete monument inplace 13.5 feet north of County State Aid Highway No. 8 curve PI.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 4'x3'x10' hole 13.5 feet north of iron monument found at County Road PI and also in line with north-south centerline of County State Aid Highway No. 8 and found no evidence of concrete monument or the original public land survey corner. Therefore we set a cast iron monument near the road surface using a distance of 13.5 feet north of the County Road PI and in line with the centerline of north-south County State Aid Highway No. 8 according to County State Aid Highway No. 8 Road Plans.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 31, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-25-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-25-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

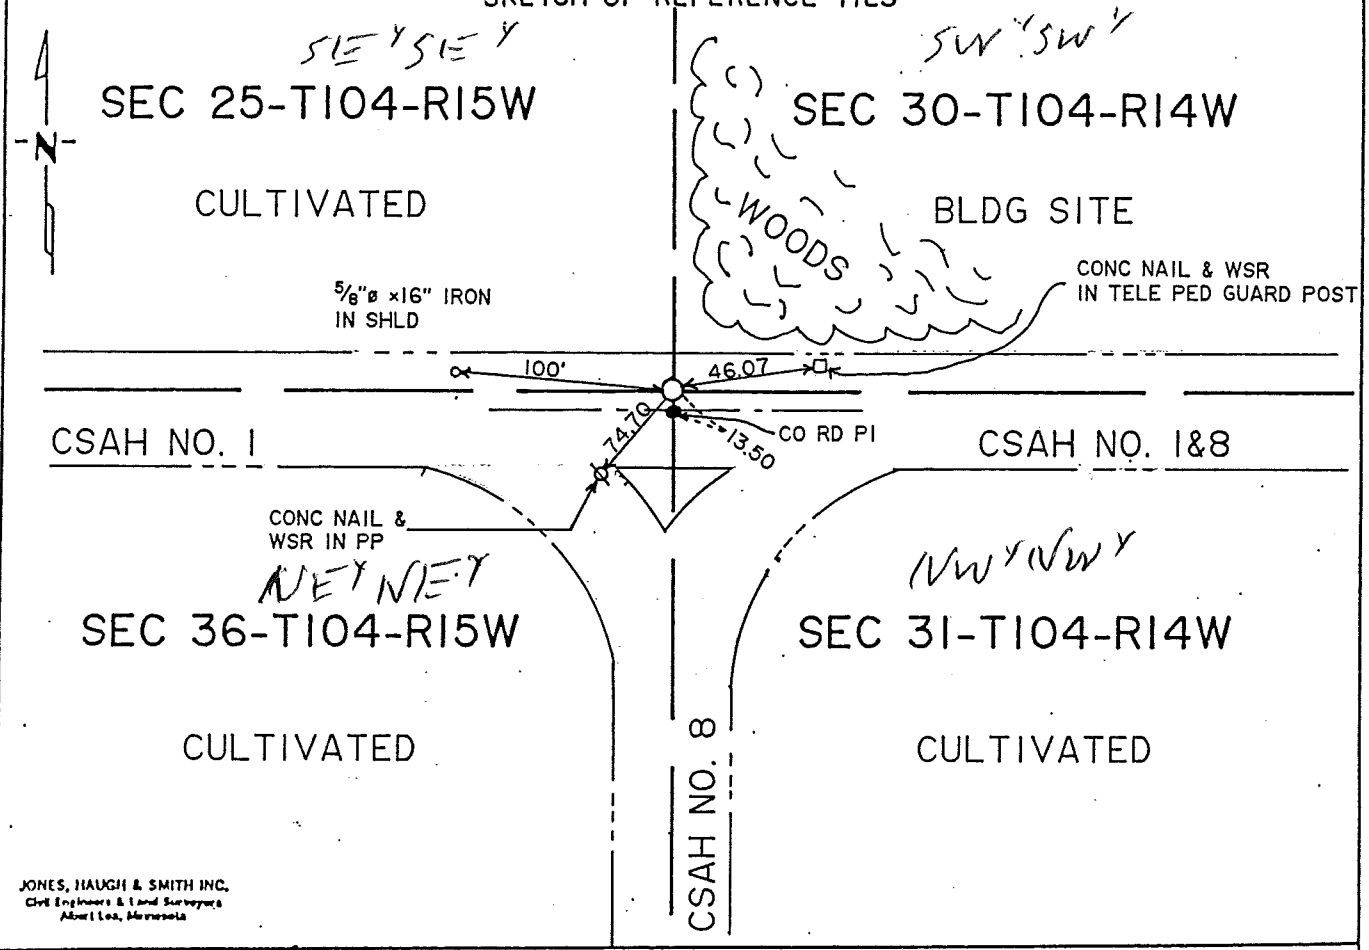

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-11-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A.M. on the 21 day of June A.D., 19 93

COUNTY RECORDER Orlando Enger

By Marlene Martin, Deputy

DOCUMENT NO. 421595 Bk 79 Misc Pg. 594

M.H.D. FORM NO. 2105 BOOK 79 PAGE 594

STATEMENT OF EVIDENCE

NW cor Sec 31-104-14

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post and small stones were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1889 Clausen, Mower County Surveyors, indicates a government post at this corner.

1945 Mower County Highway Dept Book 1 indicates a concrete monument inplace at this corner.

1945 Mower County Road Plans indicate a concrete monument inplace 13.5 feet north of County State Aid Highway No. 8 curve PI.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 4'x3'x10' hole 13.5 feet north of iron monument found at County Road PI and also in line with north-south centerline of County State Aid Highway No. 8 and found no evidence of concrete monument or the original public land survey corner. Therefore we set a cast iron monument near the road surface using a distance of 13.5 feet north of the County Road PI and in line with the centerline of north-south County State Aid Highway No. 8 according to County State Aid Highway No. 8 Road Plans.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 595

Revised

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 31, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-25-93 (DATE) found a 3/4"ø x 16" IRON AND A 6"ø x 18" CONC MON. WITH IRON IN CNT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-25-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

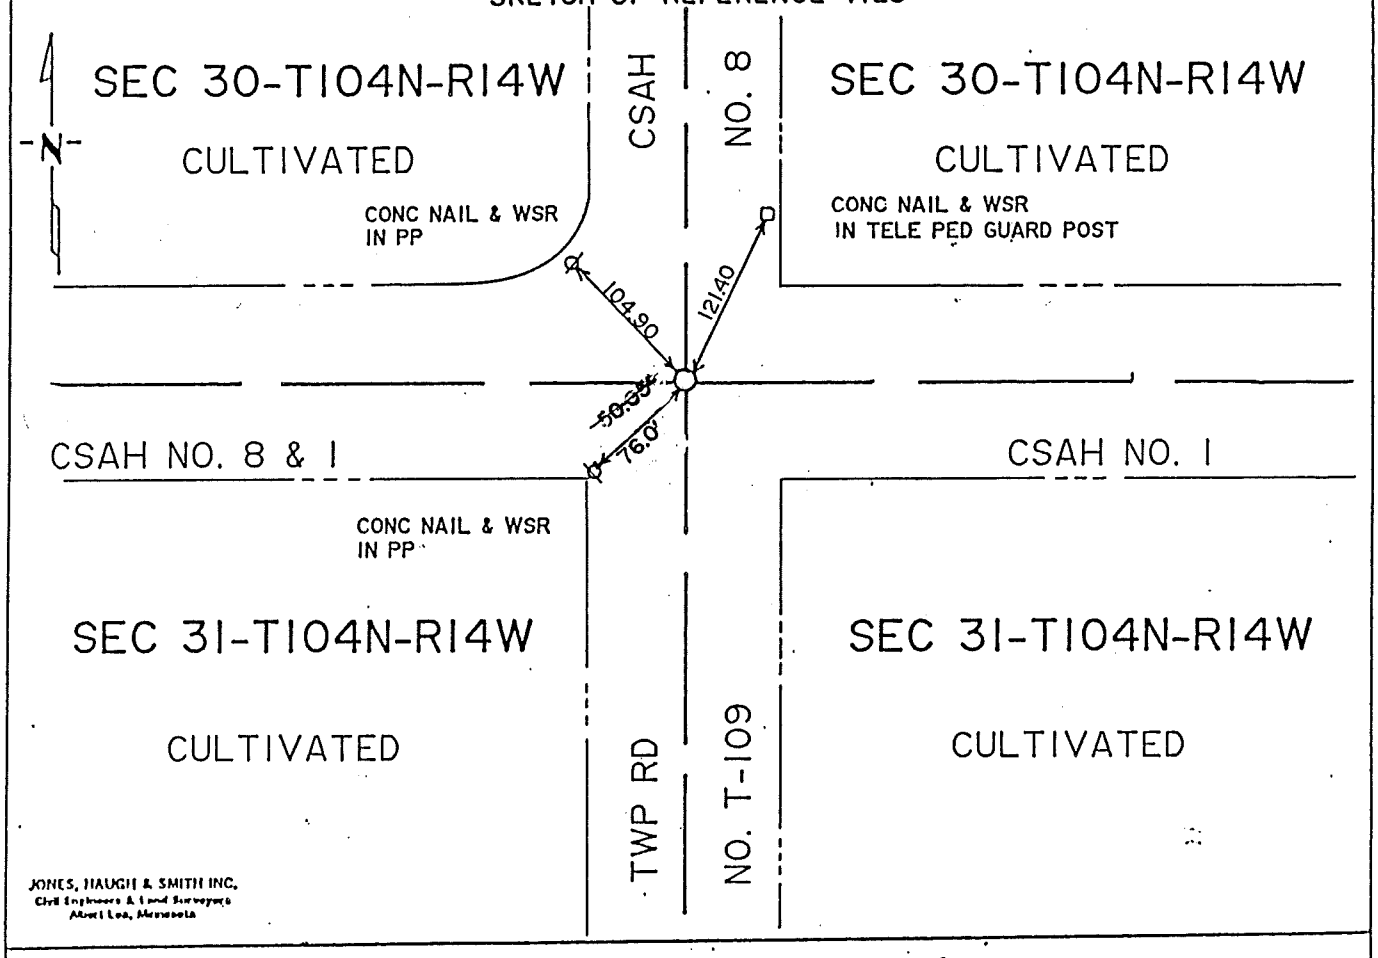

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE _____ DATE

Registration No. _____

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 31-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plans show a concrete monument inplace at Sta 0+00 4.8' south of centerline PI and the following ties were taken:
91.2' NW to TP
67.2' SW to fence post

1938 Book 'A' in the Office of the Mower County Engineer shows a concrete monument 4.8' south of centerline and the following ties were taken:
42.1' SE to Cottonwood
67.2' SW to fence post
91.2' NW to TP
82.9' NE to north end culvert

1965 Book 'A' in the Office of the Mower County Engineer shows a monument found 4.8' south of the centerline CSAH #1 and the following ties were taken:
55.5' SW to CFP
47.8' SW to PP
110.5' NW to TP

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte, County Surveyor, dug with the County backhoe 4.8' south of the centerline CSAH #1 in line with centerline north-south and found no evidence of public land survey corner or concrete monument recorded in County records. Therefore dug with backhoe on centerline centerline and uncovered a 1/2" diameter iron cast in the center of a 6" diameter concrete monument and established position of corner on centerline of north-south road 4.8' south of centerline PI as last recorded in Book 'A' in 1965. A cast iron monument was set on road surface and a capped 5/8" diameter iron RLS 13807 was set over concrete monument at centerline PI.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data & analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 31, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-25-93 (DATE) found a 3/4"ø x 16" IRON AND A 6"ø x 18" CONC MON. WITH IRON IN CNT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-25-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

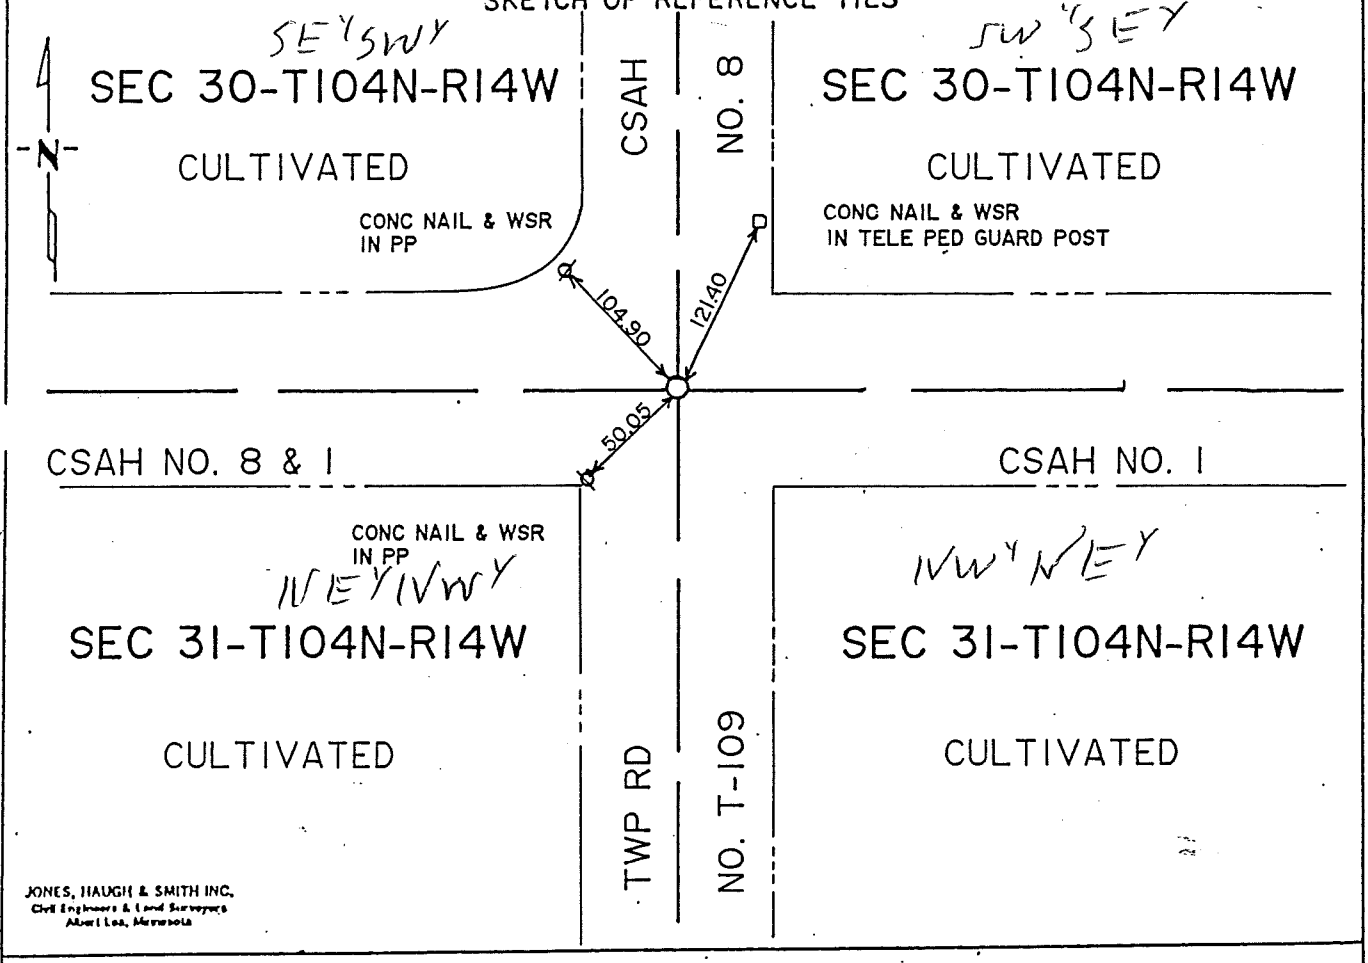

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-11-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A .M. on the 21 day of June, A.D., 19 93

COUNTY RECORDER Charles Engel

By Marlene Martin, Deputy

DOCUMENT NO. 421594

Bk 79 Misc Pg. 592

M.H.D. FORM NO. 2105

BOOK 79 PAGE 592

STATEMENT OF EVIDENCE

N 1/4 cor Sec 31-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1938 Mower County Highway Dept Book 1 indicates a tile monument inplace at this corner.

1945 Mower County Road Plans indicate a concrete monument inplace at this corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 3'x3'x6' hole on the centerline centerline intersection of County State Aid Highway No. 1. We found a 3/4" diameter x 16" iron four inches below road surface and a 6" diameter x 18" concrete monument with an iron in center at a depth of three feet. The monuments found are in agreement with the records. Therefore we accepted monuments found as the perpetuation of the original public land survey corner and left concrete monument as found and set a cast iron monument near road surface and above concrete monument.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 31, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-28-93 (DATE) found a ¾"ø x 18" IRON AND A 6"ø x 18" CONC MON WITH IRON IN CNT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-28-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

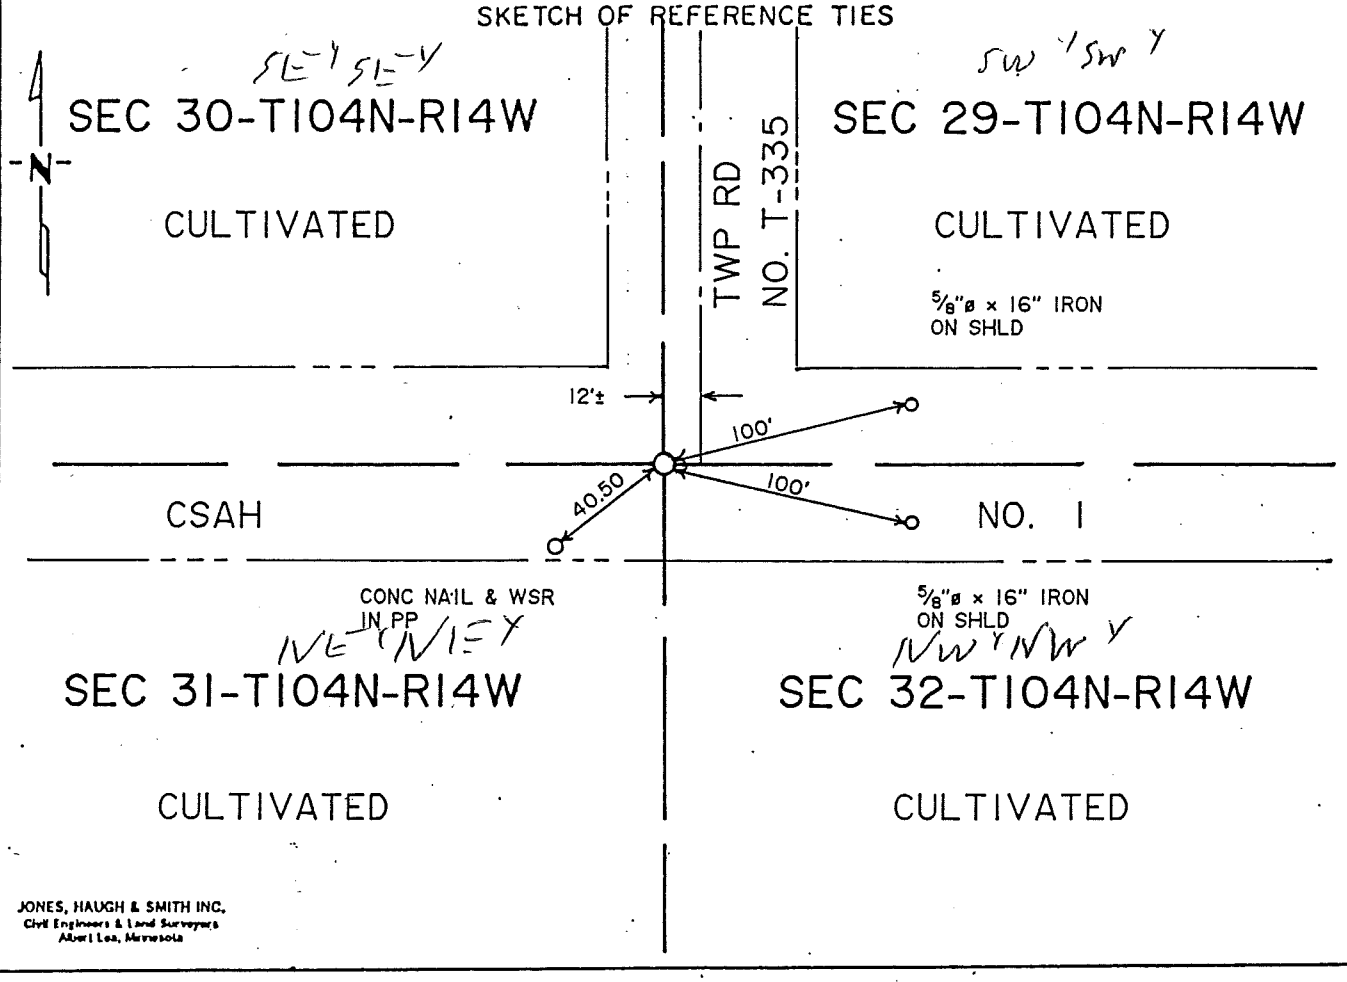

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 6-11-93 (DATE)

Registration No. 13007

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A .M. on the 21 day of June A.D., 19 93

COUNTY RECORDER Grants. Engan

By Marlene Martin, Deputy

DOCUMENT NO. 121596

Bk 79 Misc Pg. 596

M.H.D. FORM NO. 2105

BOOK 79 PAGE 596

STATEMENT OF EVIDENCE

NE cor Sec 31-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1939 Mower County Highway Dept Book 1 indicates a stone inplace at this corner.

1945 Mower County Road Plans indicate a concrete monument inplace at this corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 4'x3'x6' hole 12 feet more or less, west of the centerline of the township road running north and on the centerline of County State Aid Highway No. 1 according to 1945 Grading Plans. We found a 3/4" diameter x 18" iron four inches below road surface and a 6" diameter x 18" concrete monument with an iron in center at a depth of three feet. The monuments found are in agreement with the records. Therefore we accepted monuments found as the perpetuation of the original public land survey corner and set a cast iron monument near road surface and above concrete monument found.

The monuments found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 32, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-27-93 (DATE) found a 3/4"ø x 16" PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-27-93 (DATE) placed a 5/8"ø x 16" IRON

SKETCH OF REFERENCE TIES

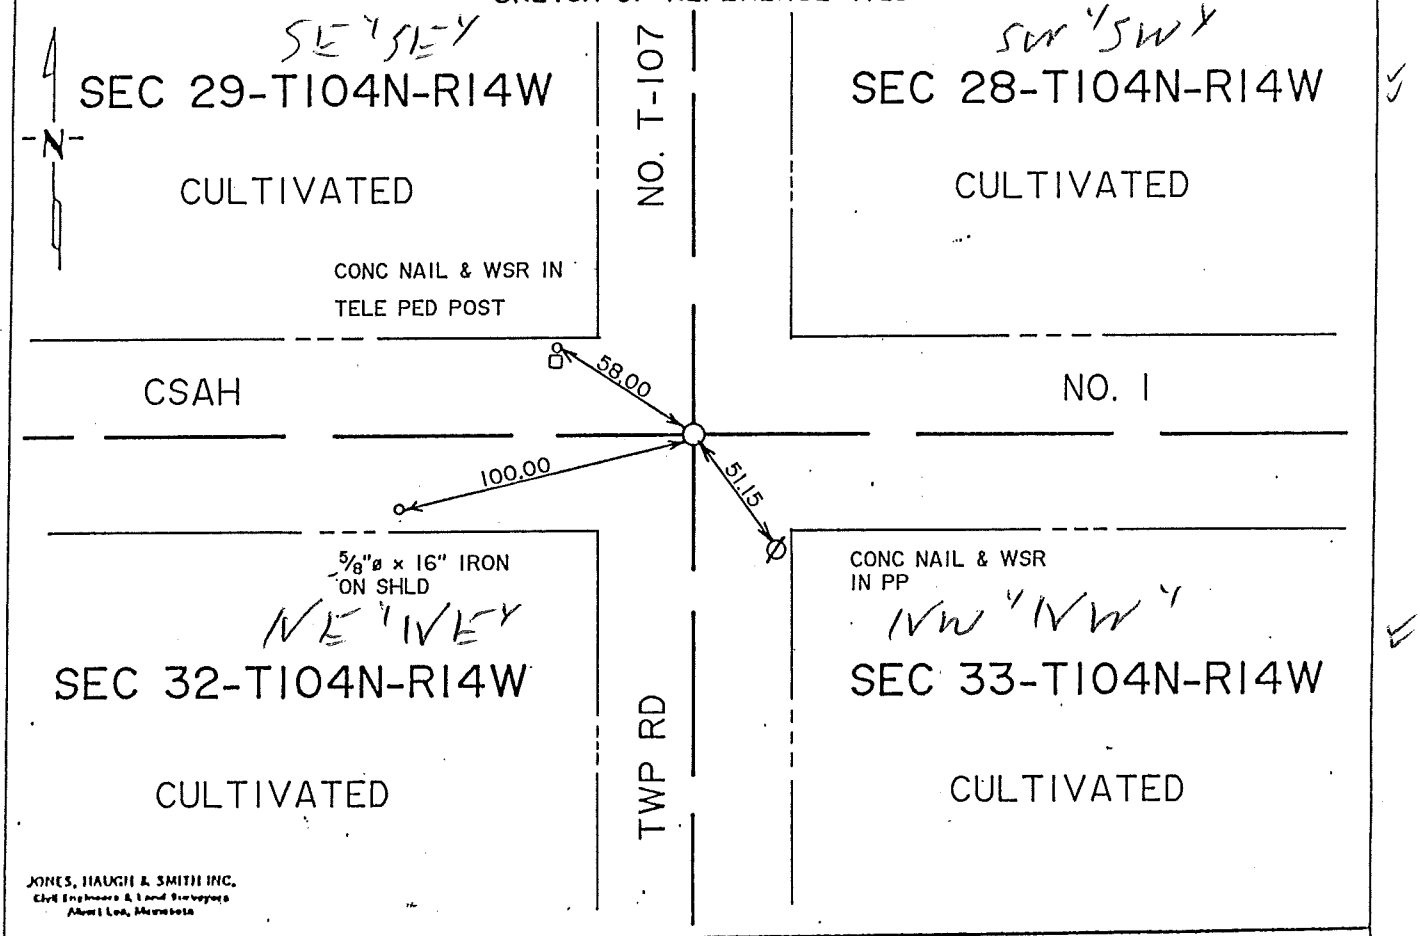

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 7-14-93
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 15 day of July A.D., 19 93

COUNTY RECORDER Charles Engel

By Marlene Martin, Deputy

DOCUMENT NO. 422859

Bk 80 Misc Pg 329

M.H.D. FORM NO. 2105

BOOK 80 PAGE 329

STATEMENT OF EVIDENCE

NE corner Section 32-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1939 Mower County Highway Department, Book 1, indicates an iron pin inplace at this corner. The following ties were taken:
Stake SSE 75' Stake SSW 74'
Stake NNE 75' Stake NNW 75'

No Date Mower County Highway Department County Road Plans indicates that section corner is on centerline centerline of County State Aid Highway No. 1 and north-south township road.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, searched area for section corner ties noted in above information and found nothing. We then dug on centerline centerline of intersection with county backhoe a 4'x4'x8' long hole and found a 3/4" diameter x 16" pipe four inches below road surface. We continued digging to a depth of four feet which was into virgin soil and found no evidence of the original public land survey corner. Therefore we accepted 3/4" diameter x 16" pipe as the perpetuation of the original public land survey corner and set a 5/8" diameter x 16" iron near road surface and above monument found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 330

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 32, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-27-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument; ☐ removed monument (explain)

☐ On 6-30-93 (DATE) placed a 5/8"ø x 16" IRON CAPPED RLS NO. 13807

SKETCH OF REFERENCE TIES

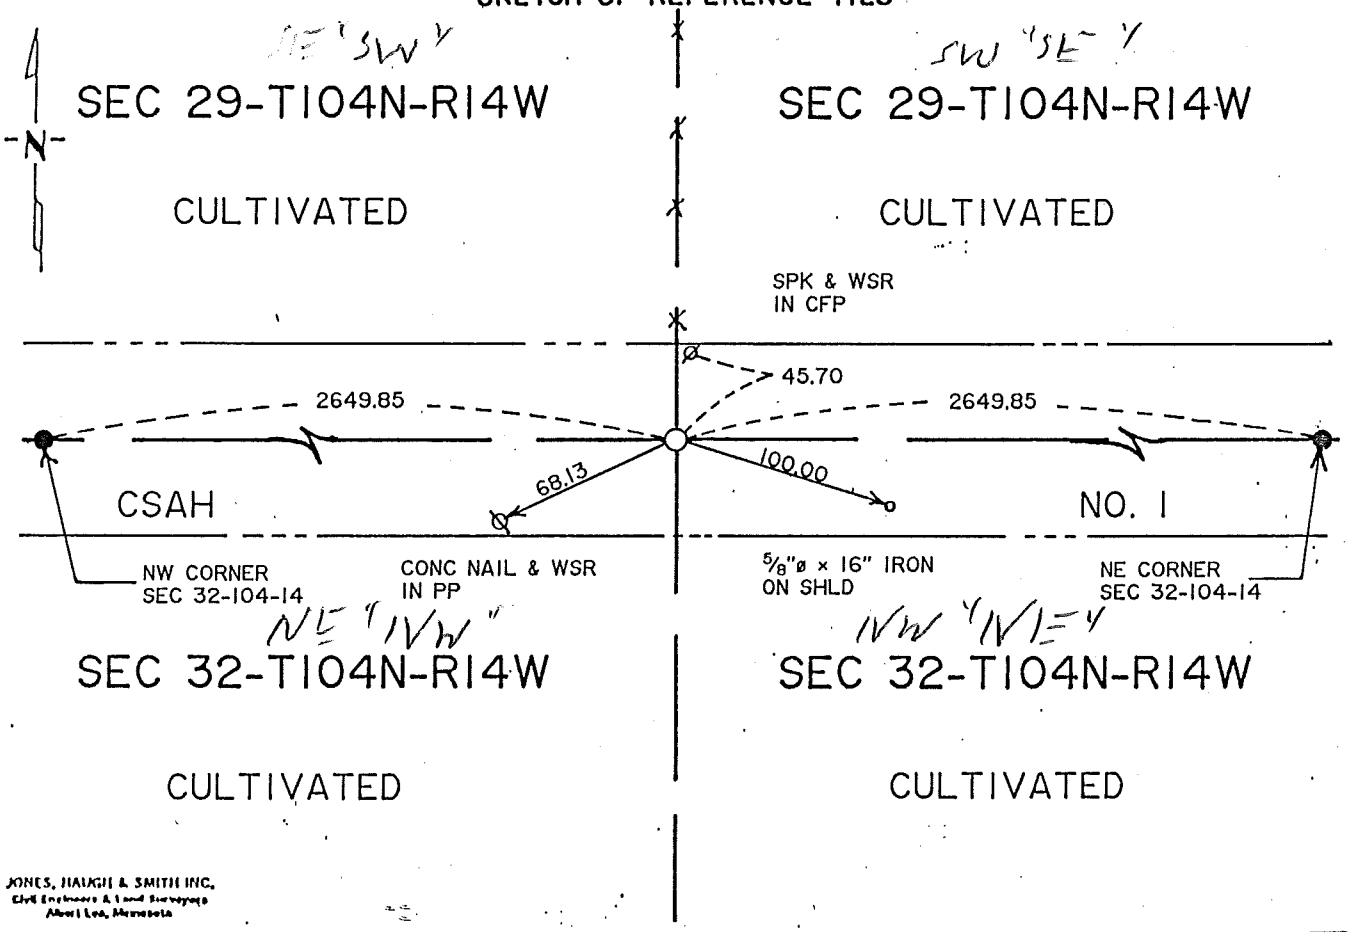

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-14-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 15 day of July A.D., 1993

COUNTY RECORDER Charles Enge

By Marlene Martin, Deputy

DOCUMENT NO. 422858

BOOK 80 PAGE 327

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 32-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, dug with the county backhoe a 4'x4'x8' long hole on centerline of County State Aid Highway No. 1 and inline with fence running north. We found an old roadbed at a depth of three feet and continued digging into virgin soil and found no evidence of the original public land survey corner. Therefore we set a 5/8" diameter x 16" iron capped RLS 13807 at the midpoint between the northeast corner and the northwest corner of Section 32 and also on a straight line between said corners.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 33, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-27-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-30-93 (DATE) placed a 5/8"ø x 16" IRON CAPPED RLS NO. 13807

SKETCH OF REFERENCE TIES

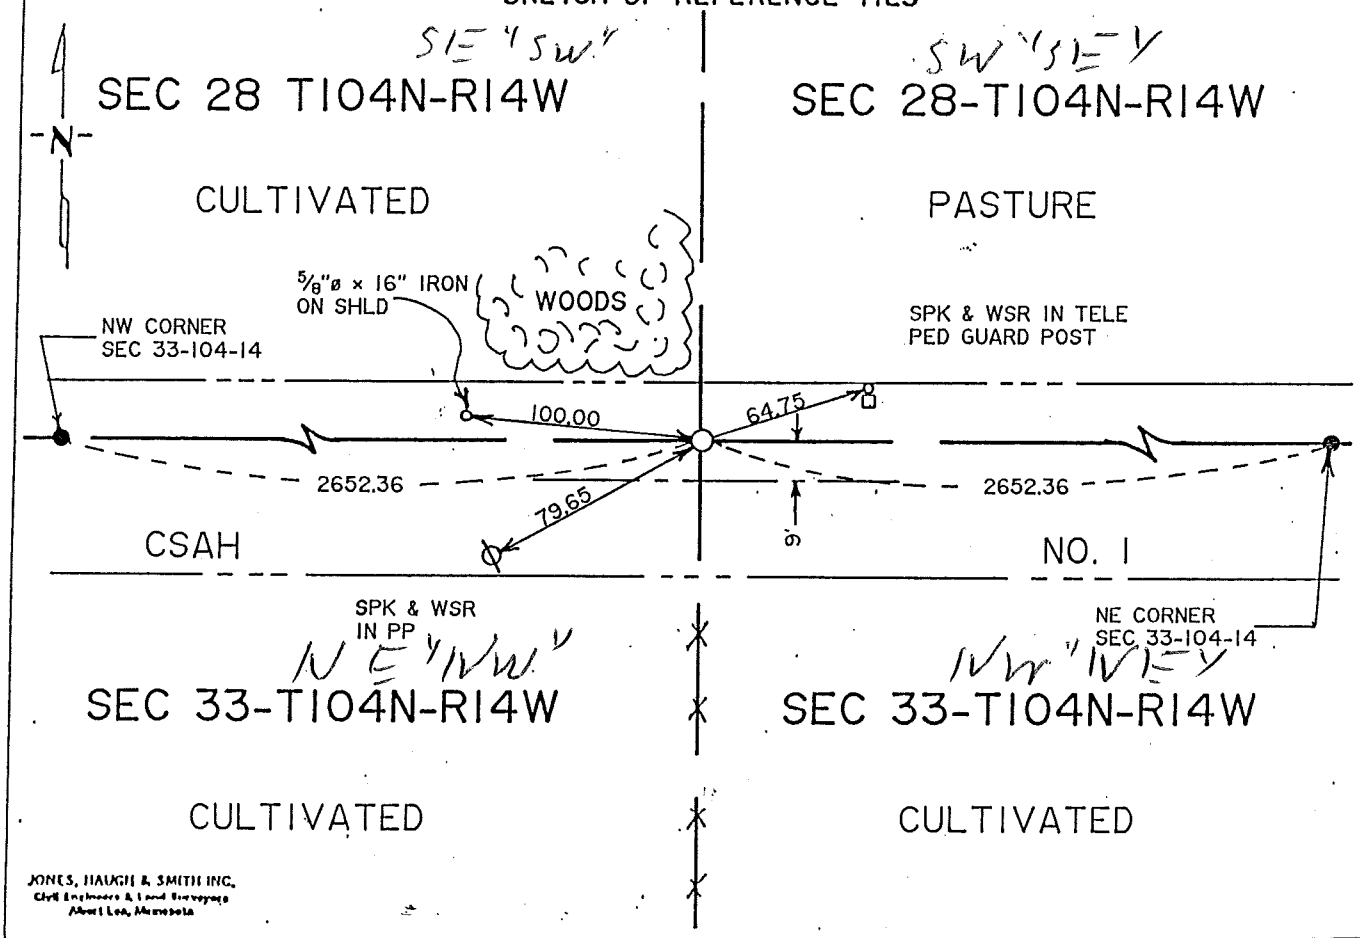

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-14-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2:15 P.M. on the 15 day of July A.D., 1993

COUNTY RECORDER Charles Enger

By Marlene Martin, Deputy

DOCUMENT NO. 422860

Bk 80 Misc Pg 331

BOOK 80 PAGE 331

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 33-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, dug a 5'x4'x8' long hole 12 feet north of centerline of County State Aid Highway No. 1 and inline with line fence running south and east side of woods on the north side of County Road. We dug into virgin soil and continued digging down to clay and found no evidence of the original public land survey corner or perpetuation thereof. Therefore we set a 5/8" diameter x 16" iron capped RLS 13807 at the midpoint distance between the northeast and northwest corners of Section 33 and also on a straight line.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P 90, "S" P 101, "L"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 26, Township 104N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-21-91 (DATE) found a 5/8" ø IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-21-91 (DATE) placed a CAST IRON MONUMENT OVER 5/8"ø IRON

SKETCH OF REFERENCE TIES

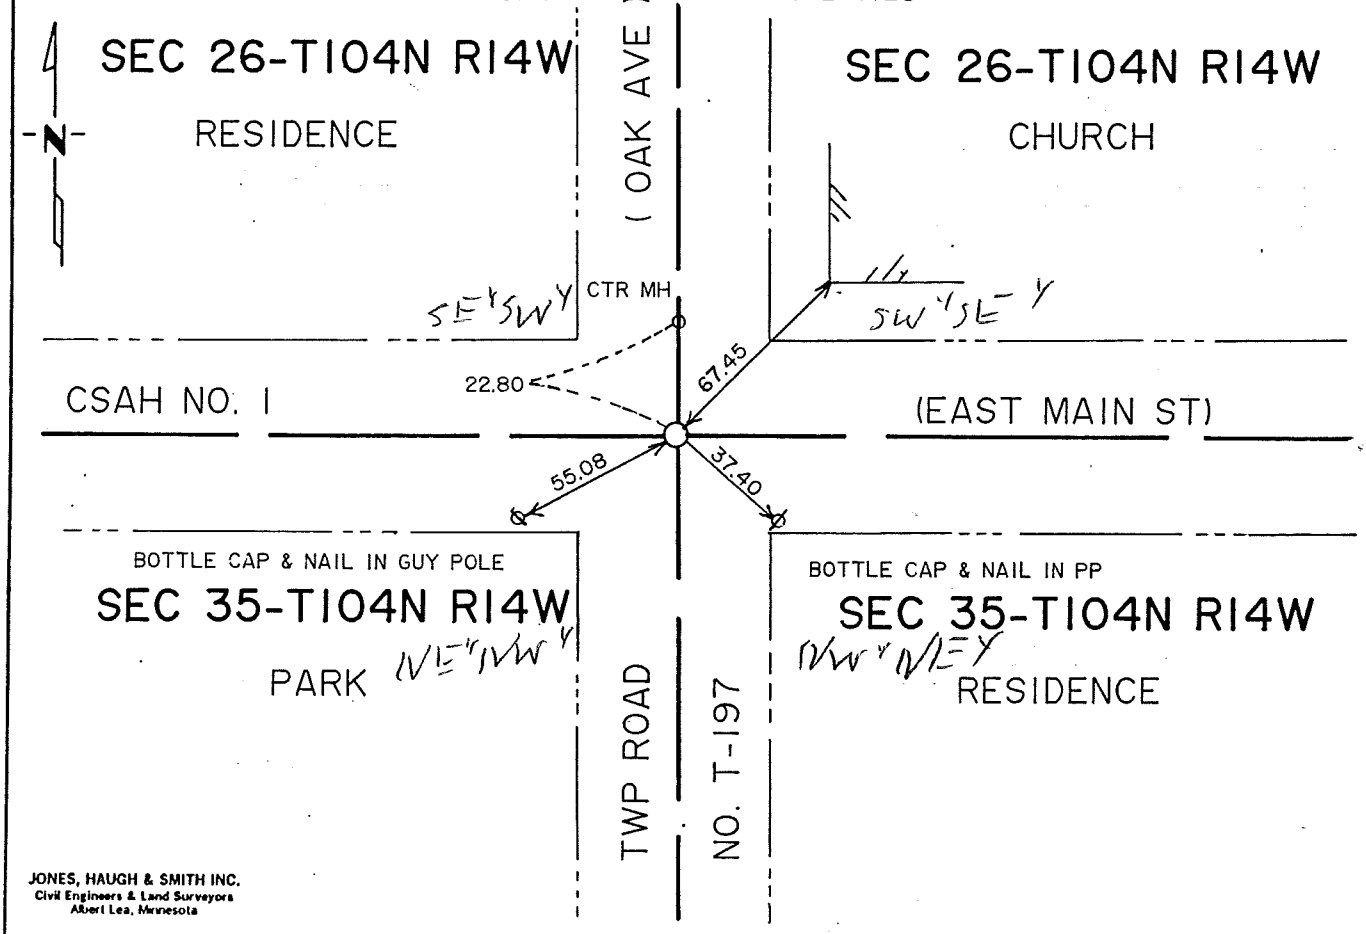

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-30-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 4 day of May A.D. 19 93

COUNTY RECORDER Richard Conger

By Marlene Martin, Deputy

DOCUMENT NO. 420485

Bk 79 of Misc Pg 336

M.H.D. FORM NO. 2105

BOOK 79 PAGE 336

STATEMENT OF EVIDENCE

S 1/4 corner Sec. 26-104-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Survey Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1885 Clausen field notes indicate a stone at the N 1/4 corner of Section 35.

1966 Book A, Mower County Highway Department, indicates 3"x20" iron ferro magnetic monument inplace set by L. Sangstone, Reg. No. 5325. The following ties were taken in 1975:
37.40 ft SE to PP (nail & bottle cap)
51.08 ft SW to guy pole (nail & bottle cap)
Dist. to NW cor Sec 35 = 2660.42 ft
Dist. to NE cor Sec 35 = 2632.48 ft
Dist. to railroad = 1385.14 ft
Dist. to U.S. #63 = 1645.24 ft

1975 Book A, Mower County Highway Department, indicates new ties taken in April 1975 by Wallace, Holland, Kastler, Schmitz & Co. The following ties were taken:
50.00 ft NW to 'X' cut in concrete sidewalk
50.00 ft NE to 'X' cut in concrete sidewalk
40.25 ft SSN to top center valve in fire hydrant

1992 Jones, Haugh & Smith crew under the direction of John H. Schulte IV, dug on centerline centerline of CSAH #1, Township Road No. T-197 and Oak Avenue. Found 5/8" diameter iron and used two ties from L. Sangstone (RLS 5325) 1966 corner certificate notes and accepted as best evidence. Left 5/8" diameter iron inplace and set public land survey cast iron monument over at road surface.

This monument fits occupation and road centerlines within the section and is accepted as best evidence of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 79 PAGE 337

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER Corner of Section 26, Township 104 Range 14, 5th P.M.

STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch


☐ On 6/3/04 (DATE) found a 3/4" IRON ROD 0.5' BELOW GRAVEL SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

SEC 26–T104N–R14W

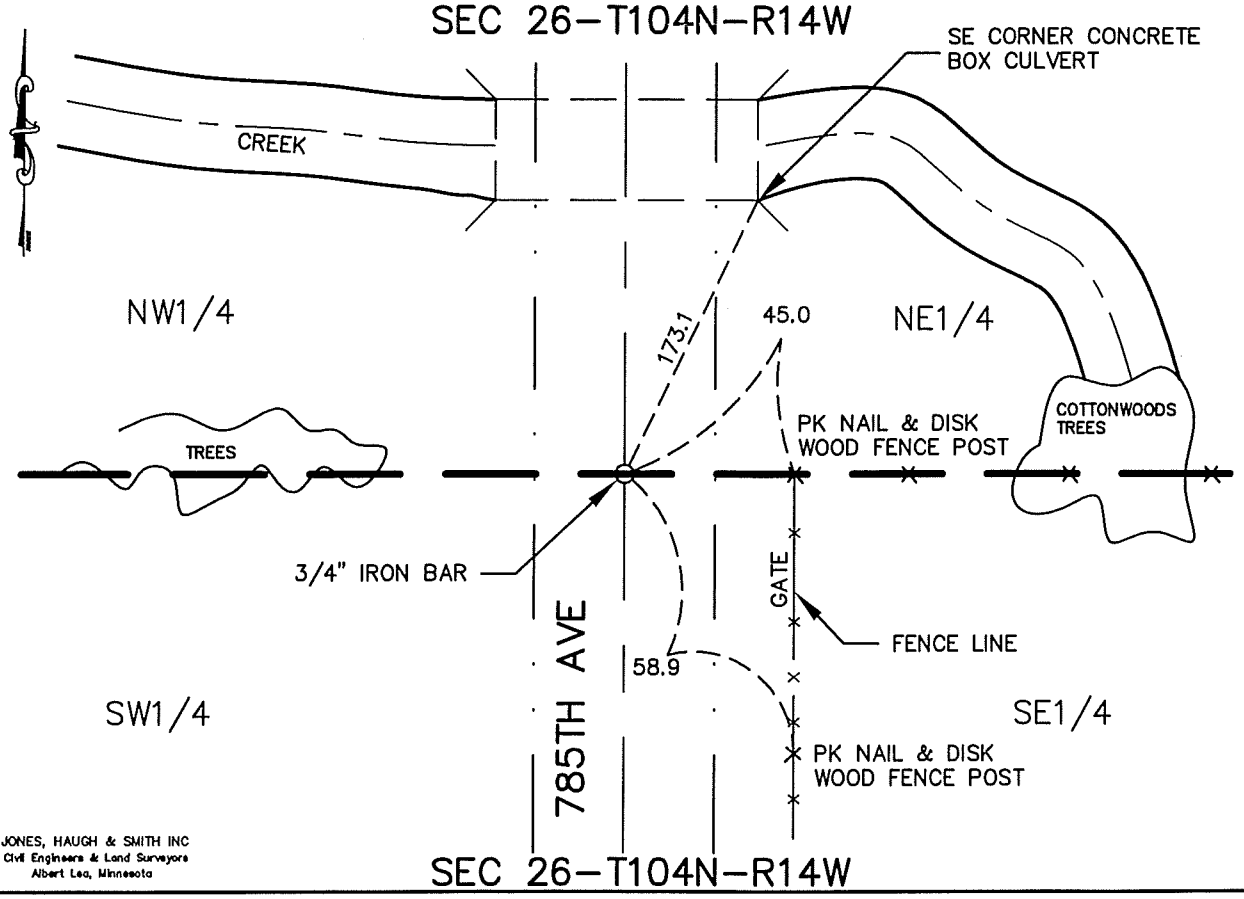

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

SEC 26–T104N–R14W

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 6-29-04
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Center Section 26-T104N-R14W

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices. Corner monument was not set in original PLS Government survey.

2004 Yaggy Associates found and iron rod at this location and traversed the section using GPS and found the monument is at the intersection of straight line drawn between the ¼ section corners in accordance with PLS instructions.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.