Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 35, Township 103N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/09/1994 (DATE) found a 3/4" IRON, 2" WOOD STAKE AND PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/09/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

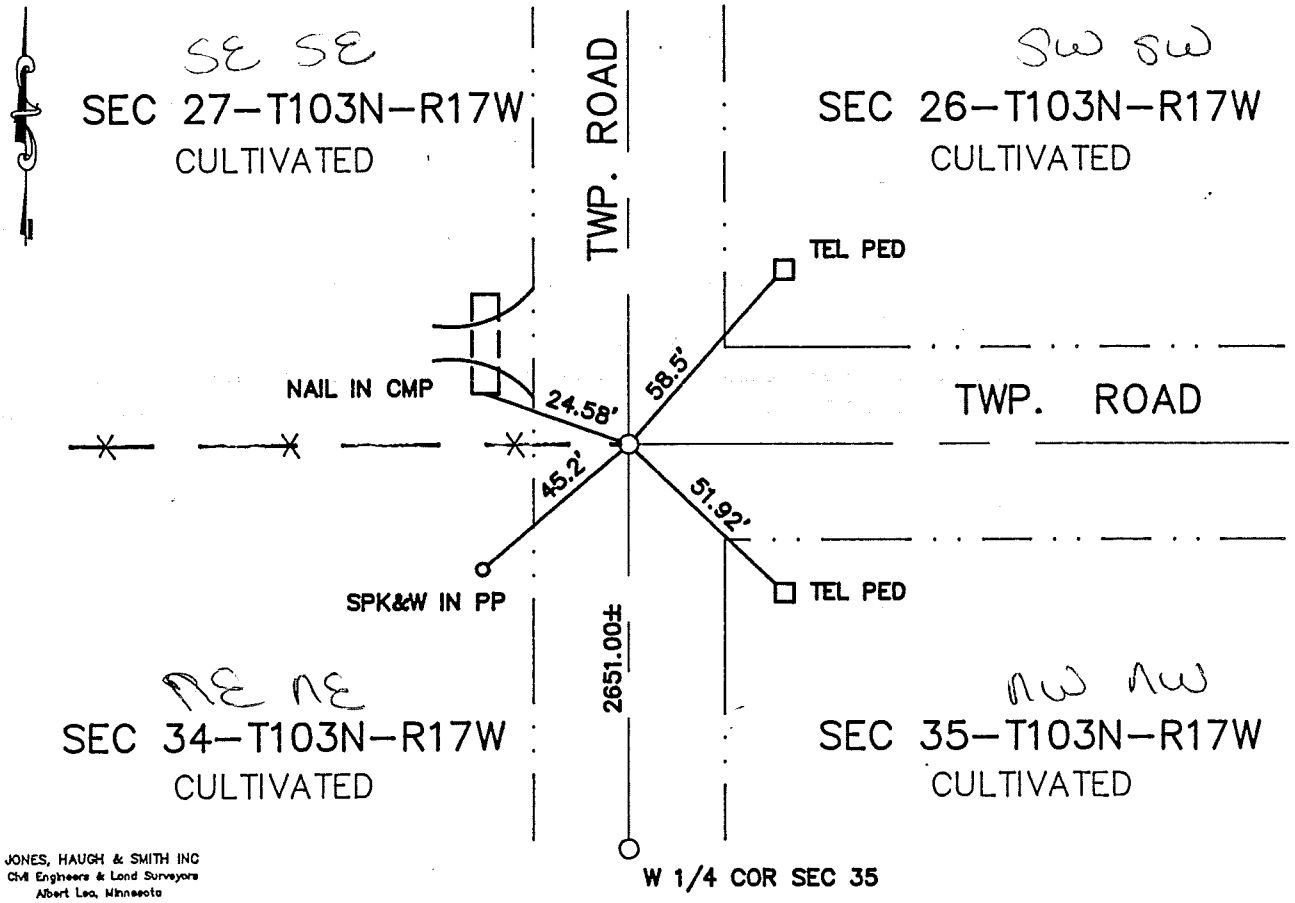

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-10-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4p .M. on the 11 day of Sept A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447786

M.H.D. FORM NO. 2105 BOOK 92 PAGE 401 Book 92 Misc Page 401

NW Cor SEC 35-103-17

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the location of 3/4" iron on road surface on the CL of township road N-S and east. Uncovered a 2" wood stake and pipe on the SW side of the wood stake. Wood stake and pipe were 2.6' south of the 3/4" iron on the road surface. Placed a cast iron monument over the wood stake 0.5"+- below the road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.