CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 3, Township 103N Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-5-90 found 1 1/8" IRON BAR 2.3' BELOW THE SURFACE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed COUNTY CAP ON 3/4" REBAR OVER IRON BAR

SKETCH OF REFERENCE TIES

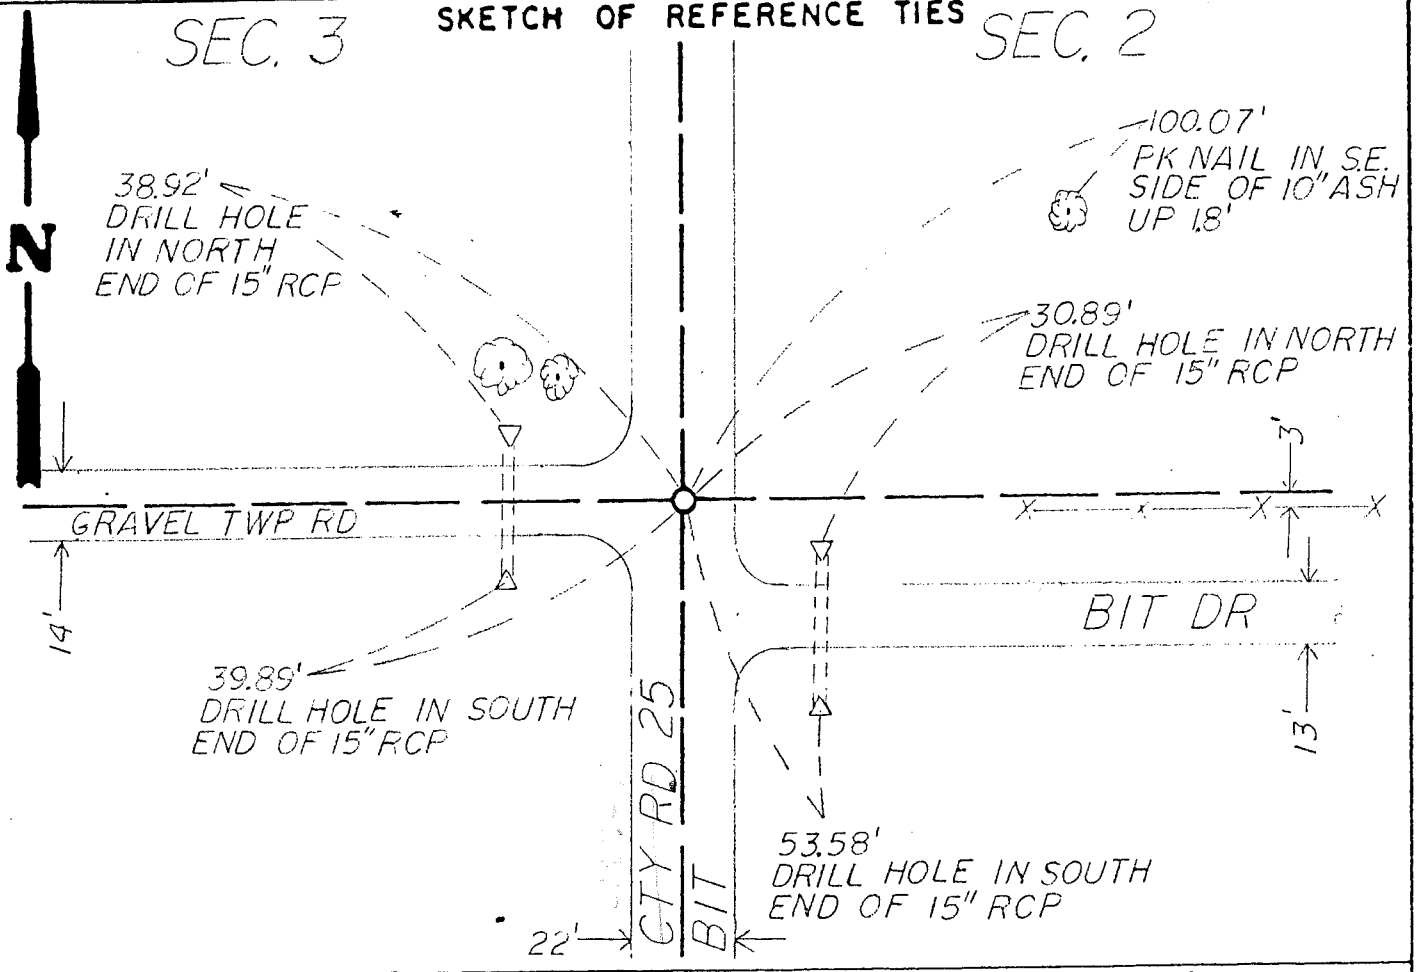

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk·Read·Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 3, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5TH P.M.

July, 1854 — William J. Anderson, Deputy Surveyor, set a post at quarter section corner, deposited charred stake and made mound with trench and pits as per instructions.

June 1884 — Government post shown in Clausen field notes on Page 104, and used to subdivide Section 3.

1936 — County Engineer's Plans shows no stone found.

July 5, 1990 — Steven J. Thompson, Zenk Read Trygstad & Associates excavated with a backhoe 1 foot East to 3 feet West of centerline and 3 feet South to 8 feet North of Centerline of road to the West and 5.6 feet deep to clayey sand about 2.5 feet below original ground, and found a 1-1/8 inches square x 1.3 feet long iron bar 2.3 feet deep in mottled soil. A 5/8 inch x 1.5 feet rebar with cap # 13807 was found 0.4 foot deep and 0.9 foot Southwest of iron bar.

Testimony from Clifford Strong, a longtime resident of the area, stated that the Rebar was set by prorational measure and that the bar was never found by the party who set the rebar.

An analysis of the record data gives no indication of the origin of the iron bar. The bar was found below the gravel in black dirt. The bar agrees with the occupation lines defined by the road centerline and is accepted as marking the location of the original Public Land Survey Corner.

(F) P.100 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 4, Township 103 N, Range 18 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On AUGUST 15,1978 (DATE) found a 3/4 INCH IRON PIN FLUSH (SET FROM TIES AUGUST 31, 1977)

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On AUGUST 31,1977 (DATE) placed a 3/4 INCH IRON PIN FLUSH.

SKETCH OF REFERENCE TIES

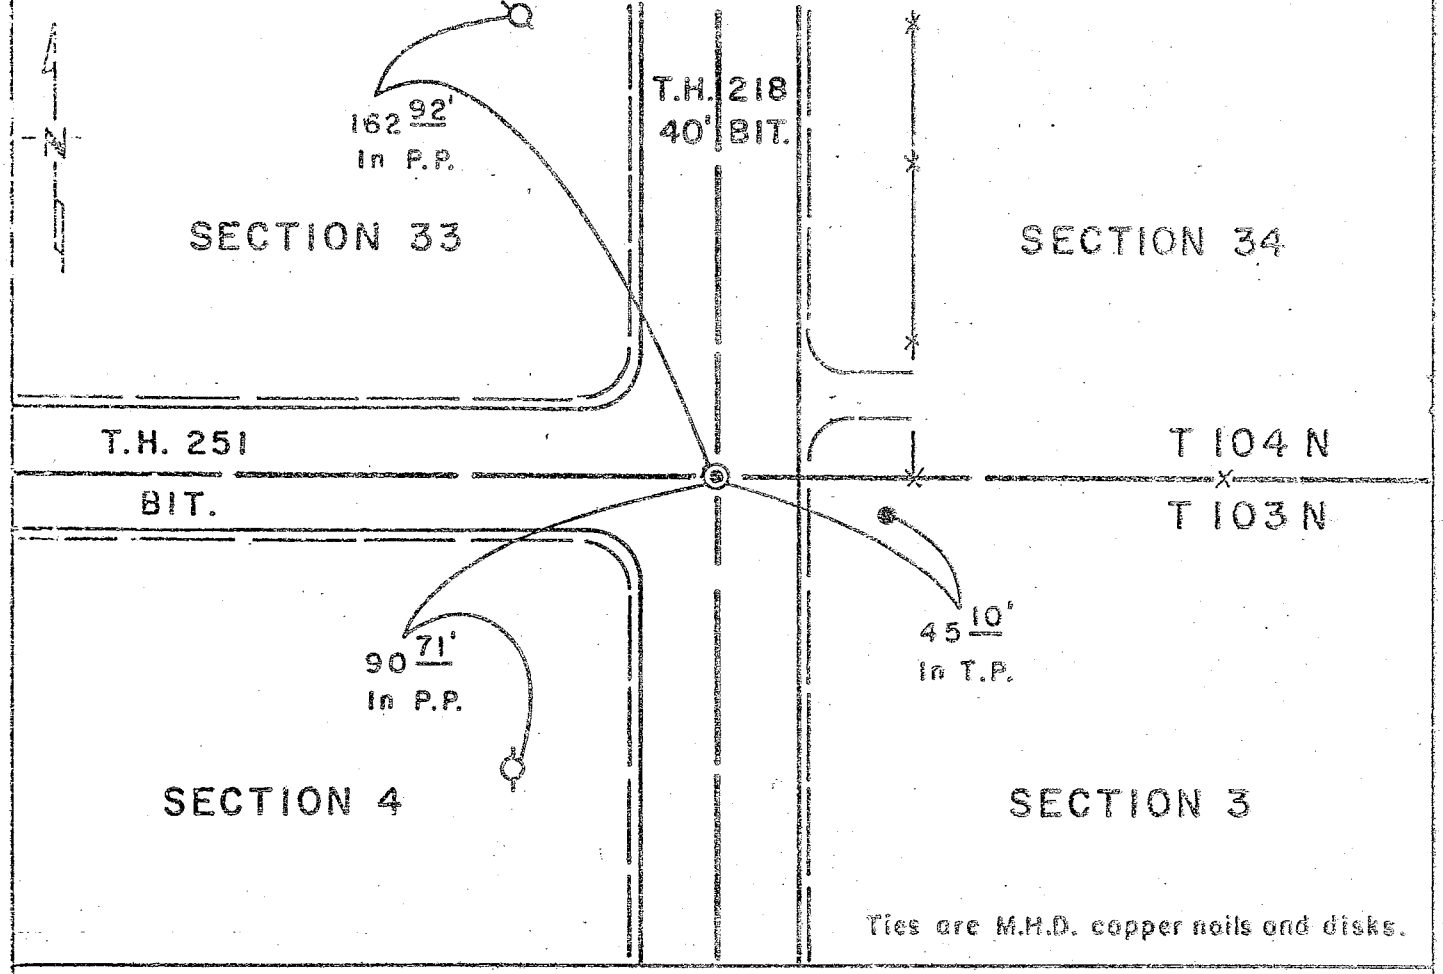

Ties are M.H.D. copper nails and disks.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan 10/25/78
SIGNATURE DATE

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P.M. on the 25 day of OCTOBER A.D., 1978

County Recorder CHARLES ENGER

By DOROTHY JOHNSON, Deputy

DOCUMENT NO. 336623
Book 47 of Misc. Page 167

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER OF SECTION 4, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5th P.M.

JULY, 1854 — J. B. Reyman, Deputy Surveyor, deposited charcoal, made mound with pits and trench at the corner during the original Public Land Survey.

1926 — Minnesota Highway Department placed P.I. 1132+40.3 at the intersection of the existing occupation lines.

1978 — Minnesota Department of Transportation found a 3/4 inch iron pin in the bituminous overlay of T.H. 218.

An analysis of the record and survey data indicates the 1926 position has been perpetuated throughout the years and has marked the corner for over 50 years. The iron pin is therefore, accepted as marking the Public Land Corner.

For details of the electronic survey data, contact the Minnesota Department of Transportation, Surveying and Mapping Section, Rochester District Office.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 7, Township 103N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-24-90 (DATE) found a 3"Øx12" pipe over a 5"x 6"x 18" pointed field stone in a nest of stones in virgin soil.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-24-90 (DATE) placed a 5/8"Ø iron capped (13807) over monument found.

SKETCH OF REFERENCE TIES

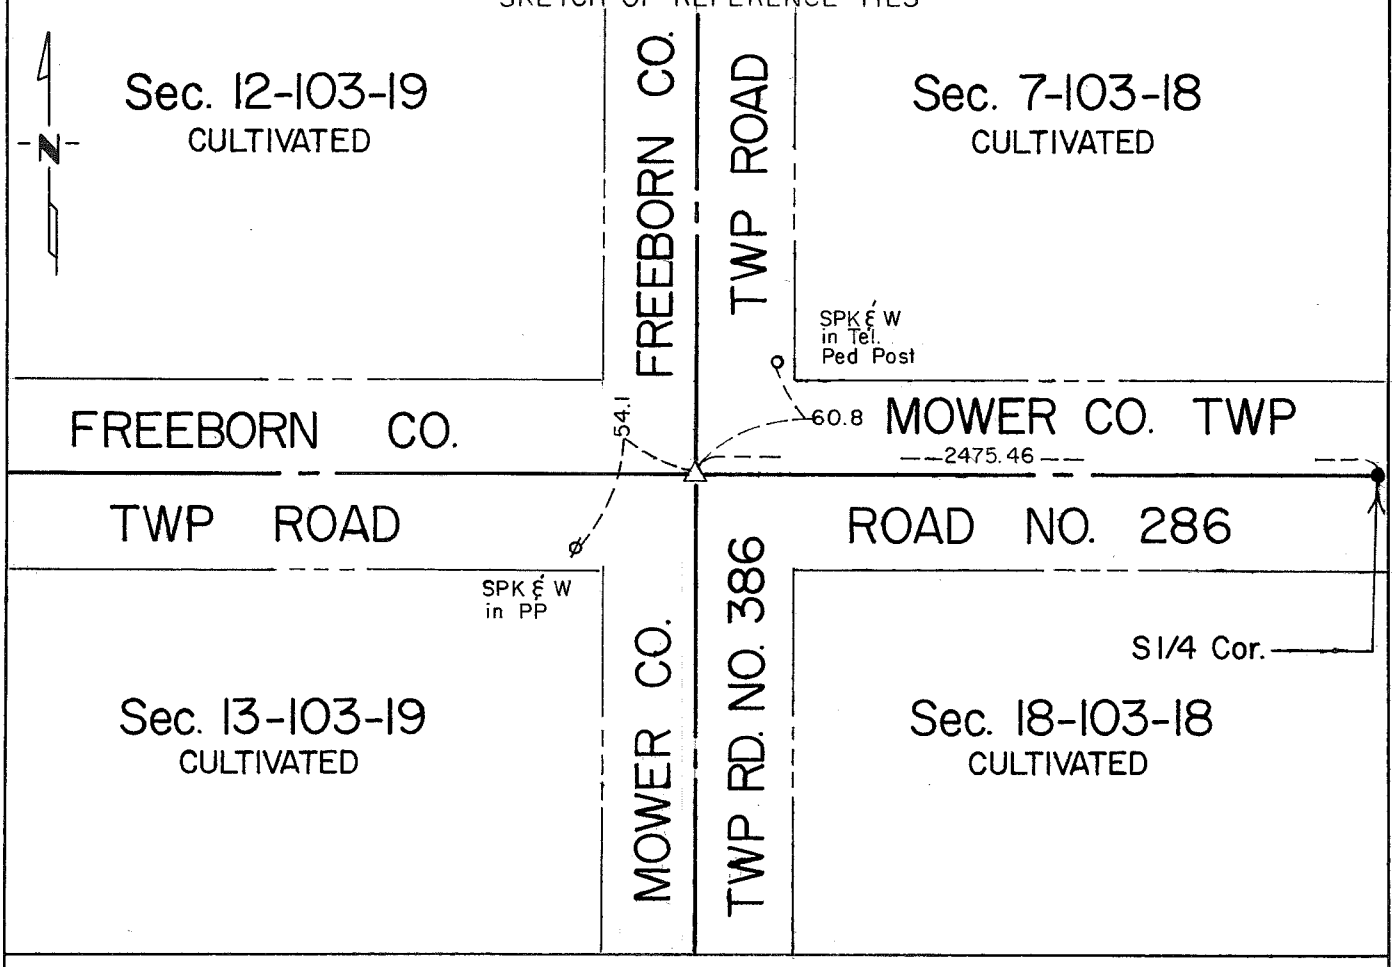

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 9-18-90
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 7-103-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post. The following ties were taken:

10"	Burr Oak	N 35° W	88 links	(58.08 feet)
10"	Burr Oak	N 43° E	79 links	(52.14 feet)
12"	Burr Oak	S 88° E	78 links	(51.48 feet)
10"	Burr Oak	S 37° W	158 links	(104.28 feet)

The following were contacted for section corner information:

Freeborn County Engineering Department
Mower County Engineering Department
Mower County Recorder's Office

1938 John Nielsen, Freeborn County Highway Department, uncovered a stone in approximate center of intersection. Placed gas pipe above stone. The following ties were taken:

Spk & W in Power pole	40.7	SE
Spk & W in Telephone pole	73.8	ENE
NE cor of school house (porch)	101.1	WSW
SE cor of school house (Main Bldg)	117.7	SW

1990 Jones, Haugh & Smith crew dug with the Mower County backhoe on centerline centerline of north-south-east-west roads and uncovered a 3/4" diameter x 12" pipe 2 feet deep. Continued digging and found a 5"x6"x18" pointed field stone in a nest of small stones at a depth of 3.0 feet in virgin soil. Placed 5/8" diameter capped iron on south side of stone and 5/8" diameter iron at road surface.

Corner found is in agreement with 1938 records from John Nielson and fits road centerlines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

SW COR SEC 7 T103N - R18W
NW COR. SEC. 18 T103N - R18W

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 13, Township 103N, Range 19W, 5th P.M.

STATE OF MINNESOTA, County of FREEBORN


At the corner location shown on the sketch:

☐ On 8-24-90 (DATE) found a 3"Ø x 12" pipe over a 5"x 6"x 18" pointed field stone in a nest of stones in virgin soil.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-24-90 (DATE) placed a 5/8"Ø iron capped (13807) over monument found.

SKETCH OF REFERENCE TIES

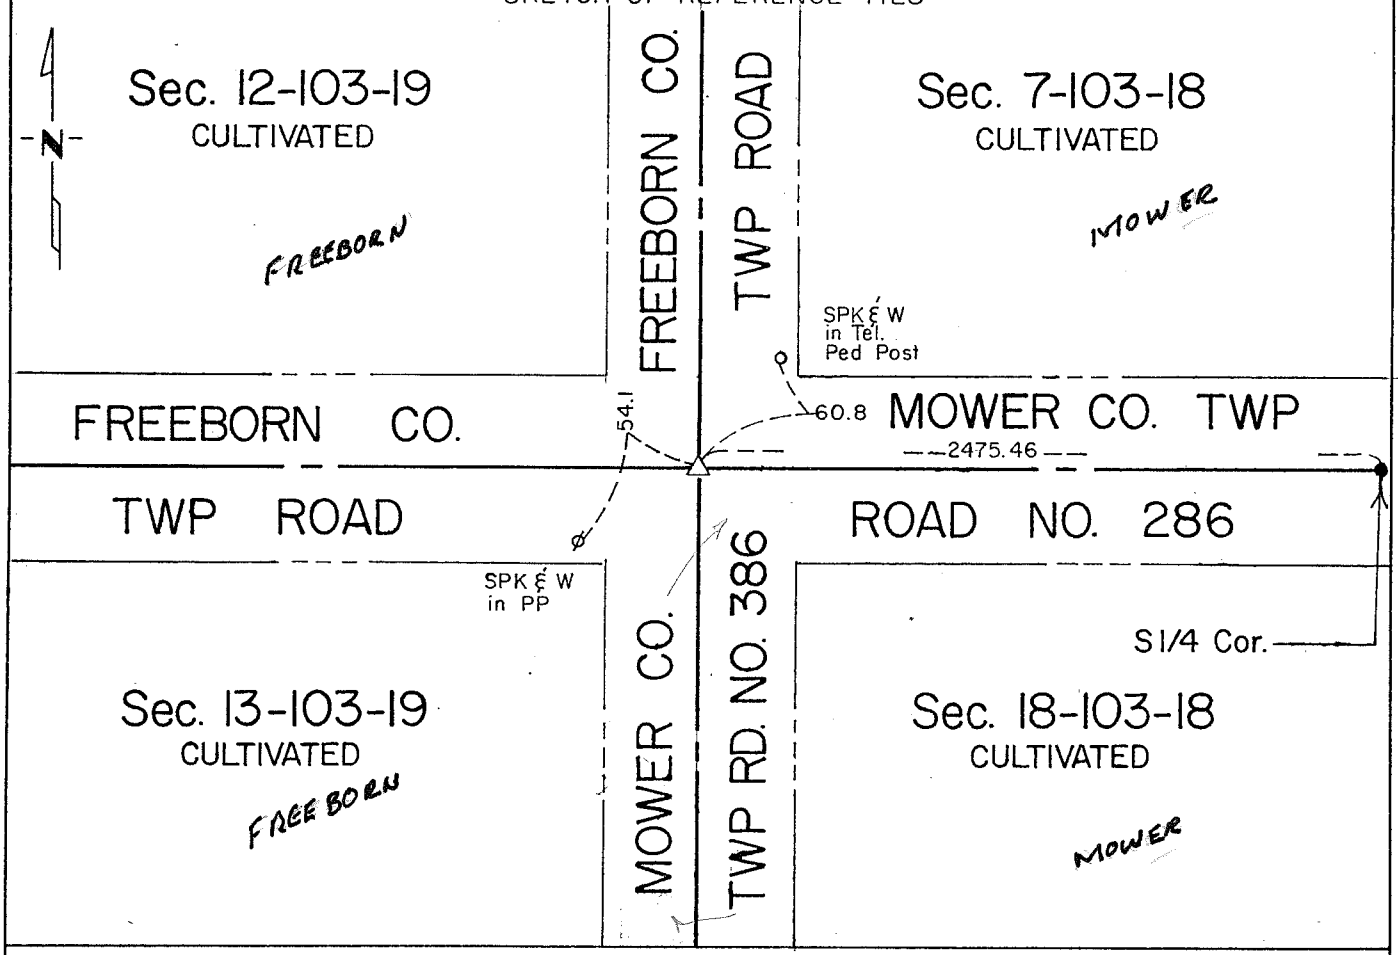

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 13-103-19

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post. The following ties were taken:

10"	Burr Oak	N 35° W	88 links	(58.08 feet)
10"	Burr Oak	N 43° E	79 links	(52.14 feet)
12"	Burr Oak	S 88° E	78 links	(51.48 feet)
10"	Burr Oak	S 37° W	158 links	(104.28 feet)

The following were contacted for section corner information:

Freeborn County Engineering Department
Mower County Engineering Department
Mower County Recorder's Office

1938 John Nielsen, Freeborn County Highway Department, uncovered a stone in approximate center of intersection. Placed gas pipe above stone. The following ties were taken:

Spk & W in Power pole	40.7	SE
Spk & W in Telephone pole	73.8	ENE
NE cor of school house (porch)	101.1	WSW
SE cor of school house (Main Bldg)	117.7	SW

1990 Jones, Haugh & Smith crew dug with the Mower County backhoe on centerline centerline of north-south-east-west roads and uncovered a 3/4" diameter x 12" pipe 2 feet deep. Continued digging and found a 5"x6"x18" pointed field stone in a nest of small stones at a depth of 3.0 feet in virgin soil. Placed 5/8" diameter capped iron on south side of stone and 5/8" diameter iron at road surface.

Corner found is in agreement with 1938 records from John Nielson and fits road centerlines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 7, Township 103 Range 18, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5-18-94 (DATE) found nothing

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-20-94 (DATE) placed a Cast iron monument at intersection of fence N-S and county road centerline

SKETCH OF REFERENCE TIES

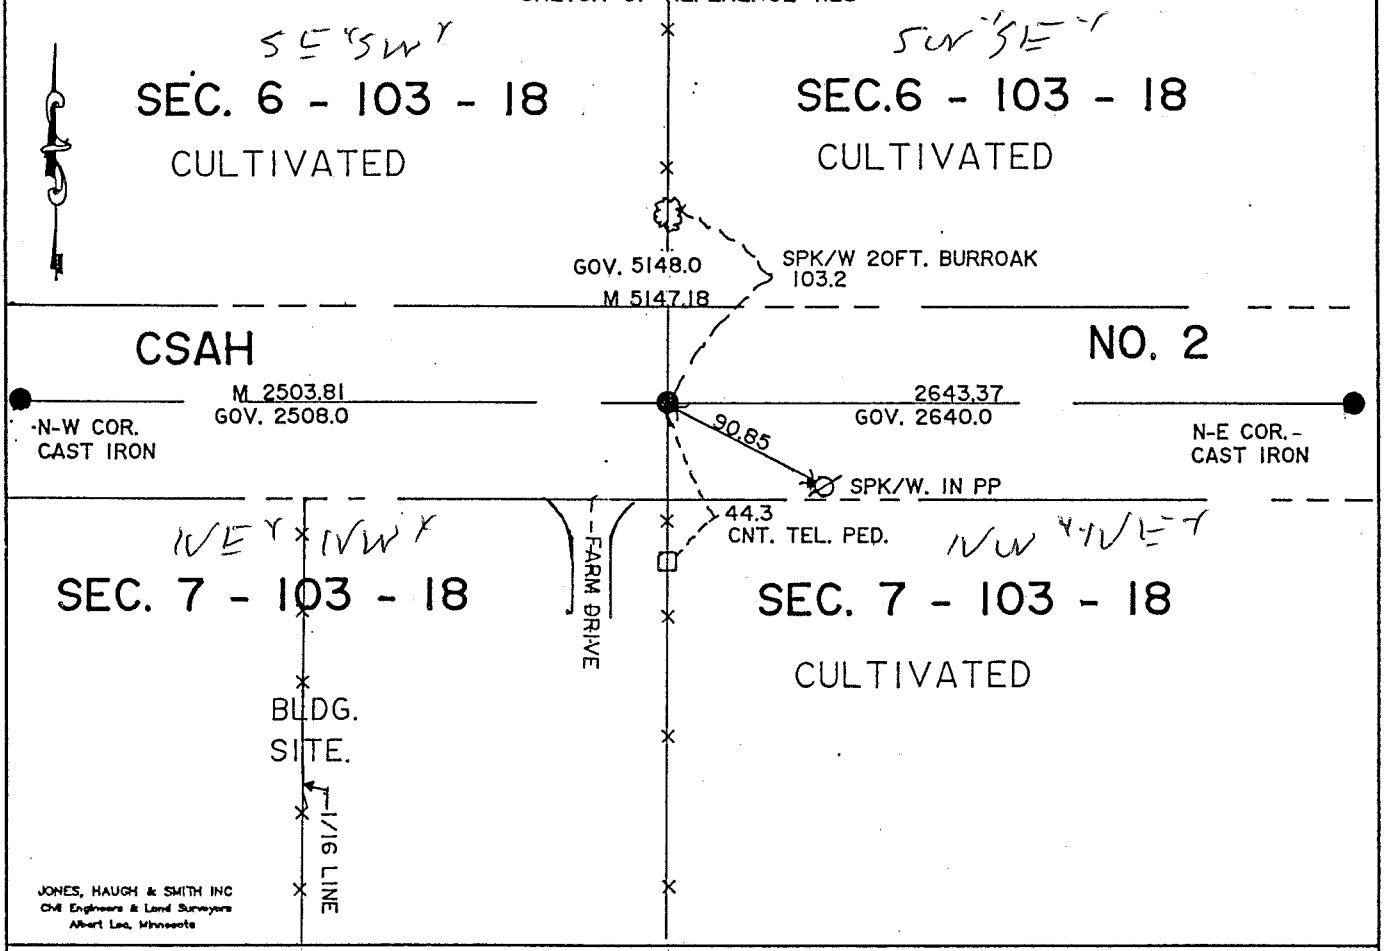

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A.M. on the 21 day of June A.D., 1994

COUNTY RECORDER Charles Engan

By Marlene Manton, Deputy

DOCUMENT NO. 430121

Book 83 Misc Pg 483

M.H.D. FORM NO. 2105

BOOK 83 PAGE 483

STATEMENT OF EVIDENCE

N 1/4 cor 7-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and charred stake and a trench with a mound of earth.

16" Burr Oak	S 12°30' E	67 links (44.22 feet)
14" Burr Oak	N 68° W	60 links (39.6 feet)

The following were contacted for section corner information:

Mower County Engineering Department

The following information was obtained to support evidence of the original public land survey corner or a perpetuation thereof:

1885 Clausen field notes show a government post at the corner.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated a trench with a backhoe and found no evidence of the original public land survey corner.

The location of the intersection of the fence lines north and south and county road centerline agrees with the 1/16th line fence in the NW 1/4. The position also agrees with the distance found by Clausen on the north line of the NW 1/4.

The intersection of occupation lines are accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 83 PAGE 484

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 7, Township 103 Range 18, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5-18-94 (DATE) found a CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-20-94 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

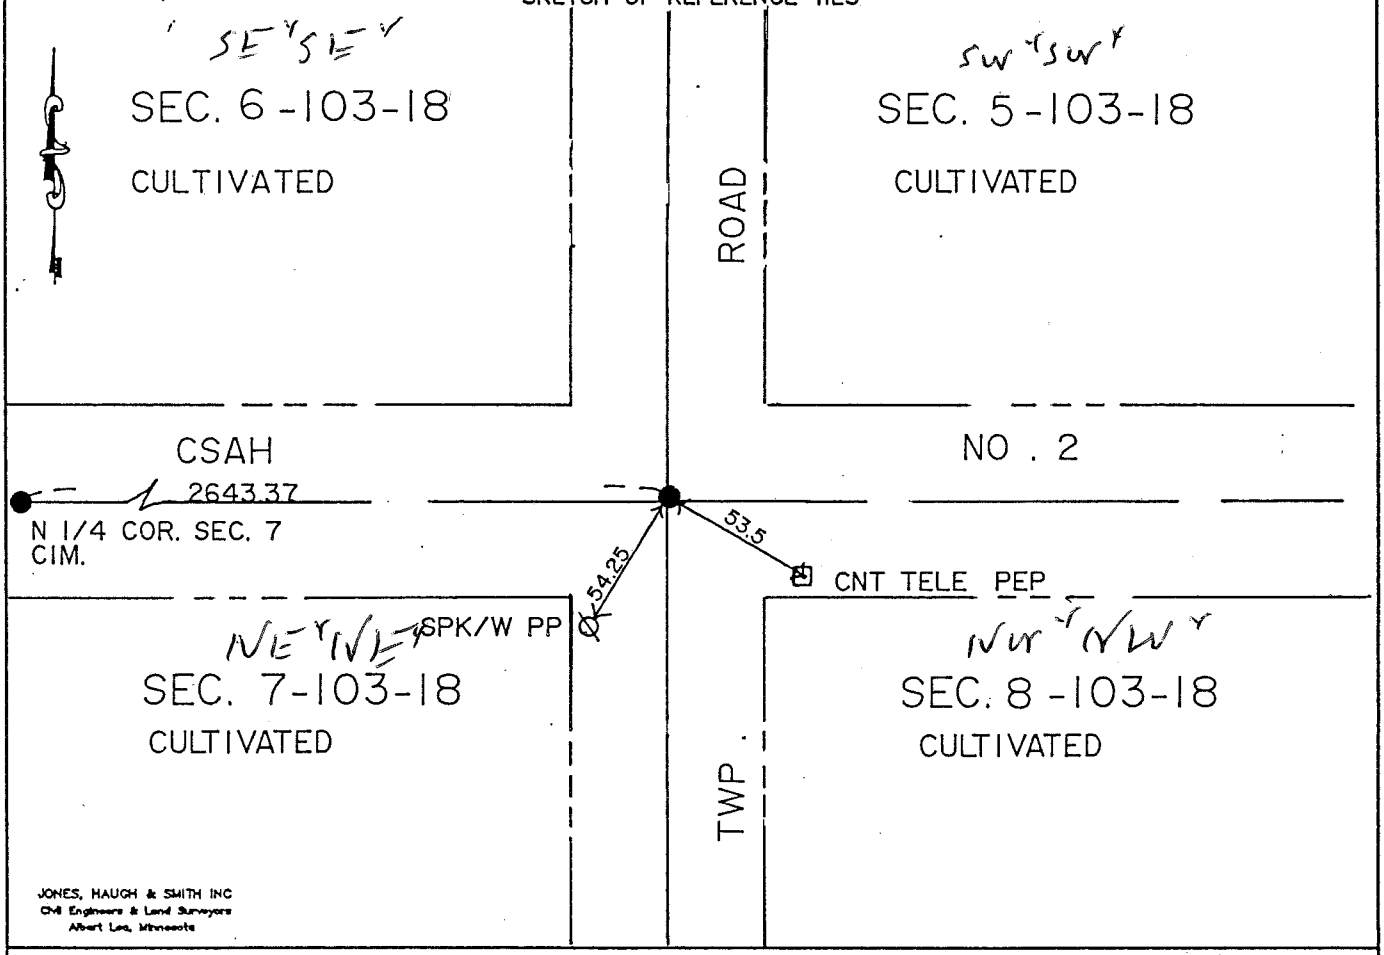

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

BOOK 83 PAGE 481

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 A.M. on the 21 day of June A.D., 1994

COUNTY RECORDER Charles Enger

By Marlene Martin, Deputy

DOCUMENT NO. 400120

Book 83 Misc Page 481

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE cor 7-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and charred stake and a trench with a mound of earth.

8" Burr Oak	S 71° W	785 links (518.1 feet)
10" Burr Oak	S 12° E	360 links (237.6 feet)

The following were contacted for section corner information:

Mower County Engineering Department

The following information was obtained to support evidence of the original public land survey corner or a perpetuation thereof:

1945 Mower County Highway Department grading plans show concrete monument inplace.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated a trench with a backhoe and found the concrete monument over a 4" diameter wood post.

The concrete monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 83 PAGE 482

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 7, Township 103N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-24-90 (DATE) found a 4"x6"x4' charred wood post 5' below road surface in virgin soil. on ℄ of E-W roads.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-24-90 (DATE) placed a 5/8"Ø iron capped 13807 over monument found.

SKETCH OF REFERENCE TIES

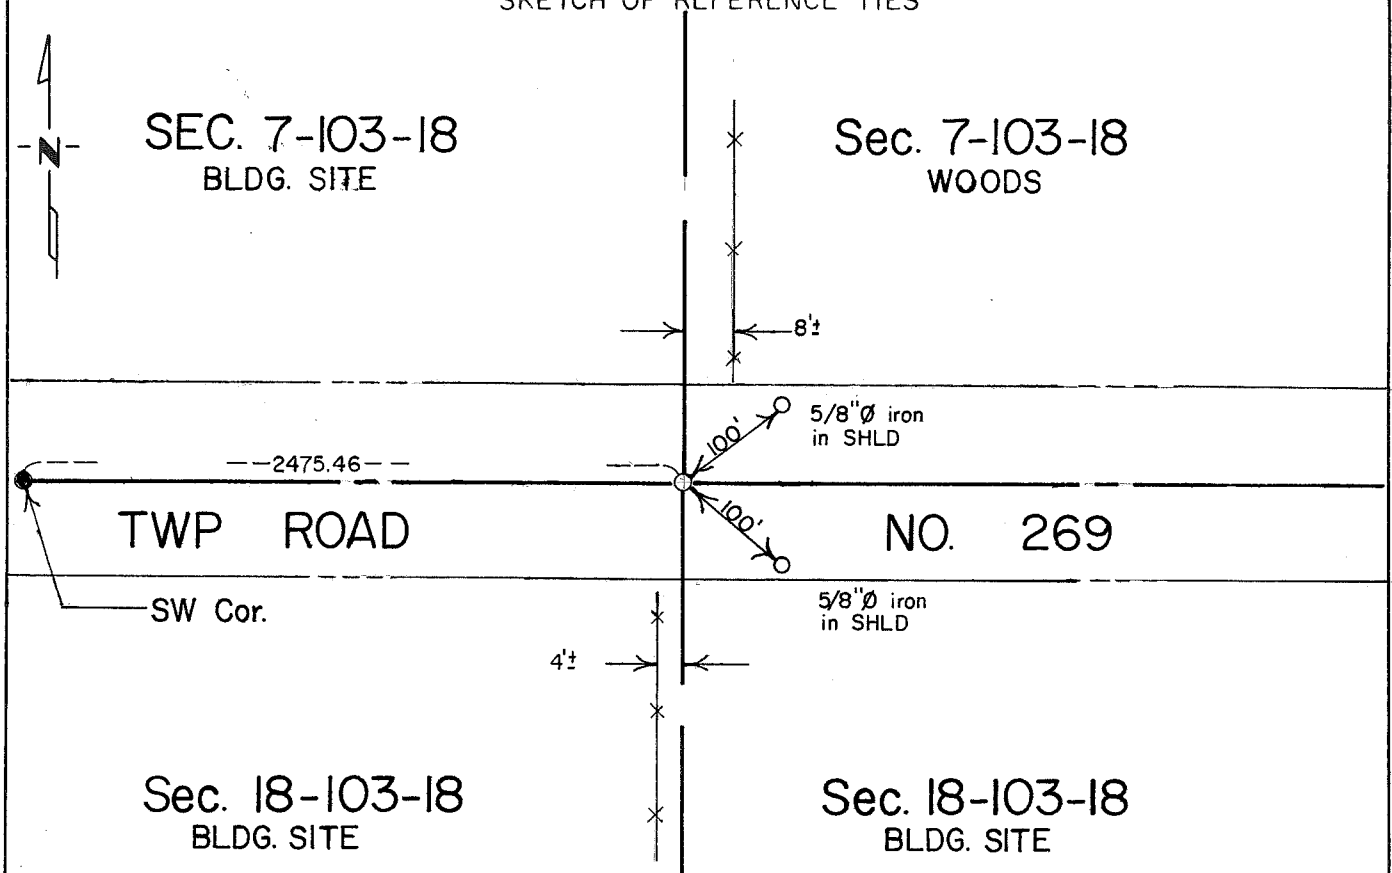

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 7-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post. The following ties were taken:

7"	Burr Oak	S 67° W	170 links	(112.20 feet)
6"	Burr Oak	N 37° E	102 links	(67.32 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew dug with the Mower County backhoe on centerline of east-west road a 20'x7'x6' deep hole and uncovered a 4"x6"x4' long charred post five feet deep in virgin soil. 8 feet west of fence north and 4 feet east of fence south. Placed a 5/8" diameter iron capped (13807) over post on road surface.

Corner found fits road centerlines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW 1/4 Corner of Section 9, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/14/2002 (DATE) placed a 5/8" X 16" IRON

SKETCH OF REFERENCE TIES

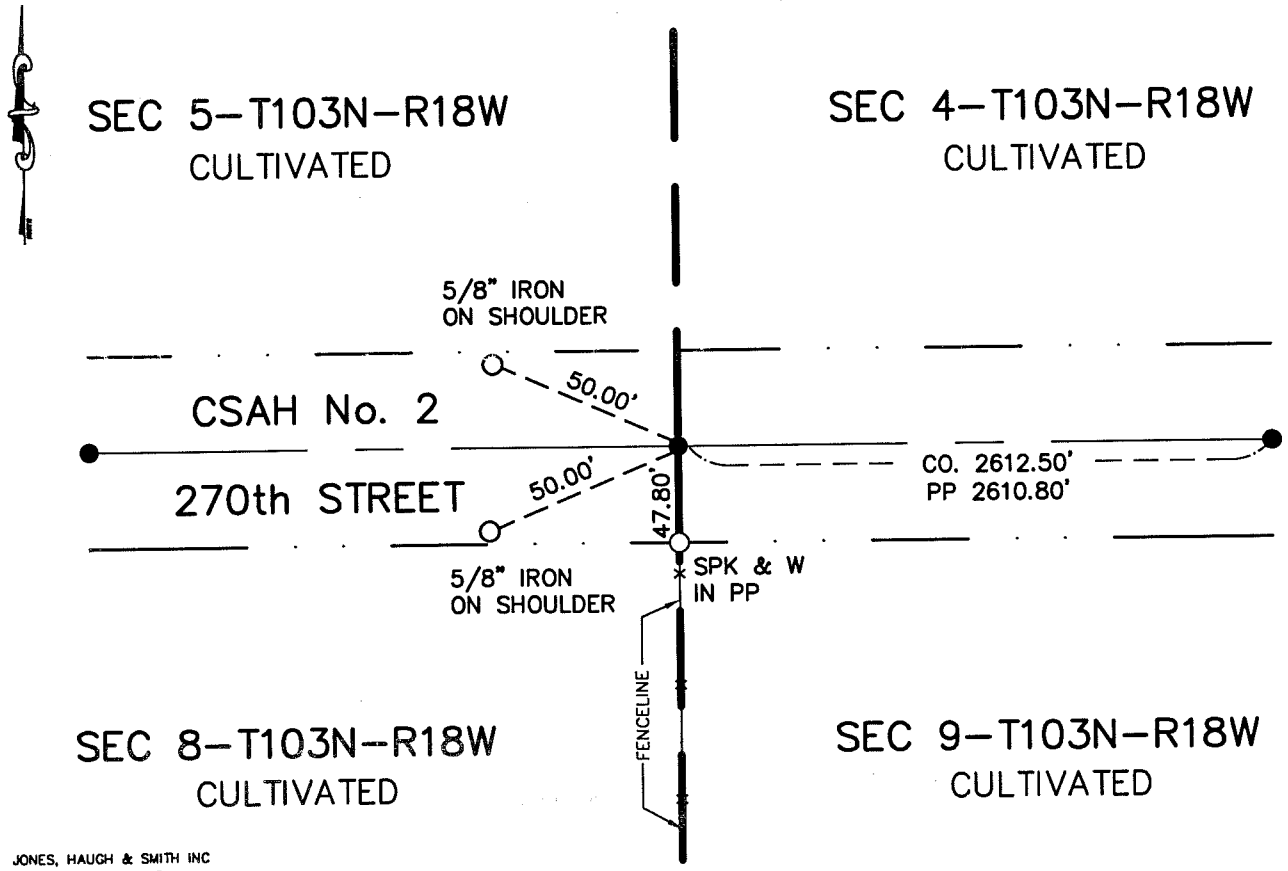

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-1-02 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

NW Cor Sec 9-103-18

Deputy Surveyor William I. Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe and found no evidence of corner at this location. C.S.A.H. No. 2 road plan shows a corner and station at this location but does not state what was in place. Jones Haugh and Smith crew set 5/8" capped 13807 on centerline of road in line with fence south.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 9, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/14/2002 (DATE) placed a 5/8" X 16" IRON CAPPED

SKETCH OF REFERENCE TIES

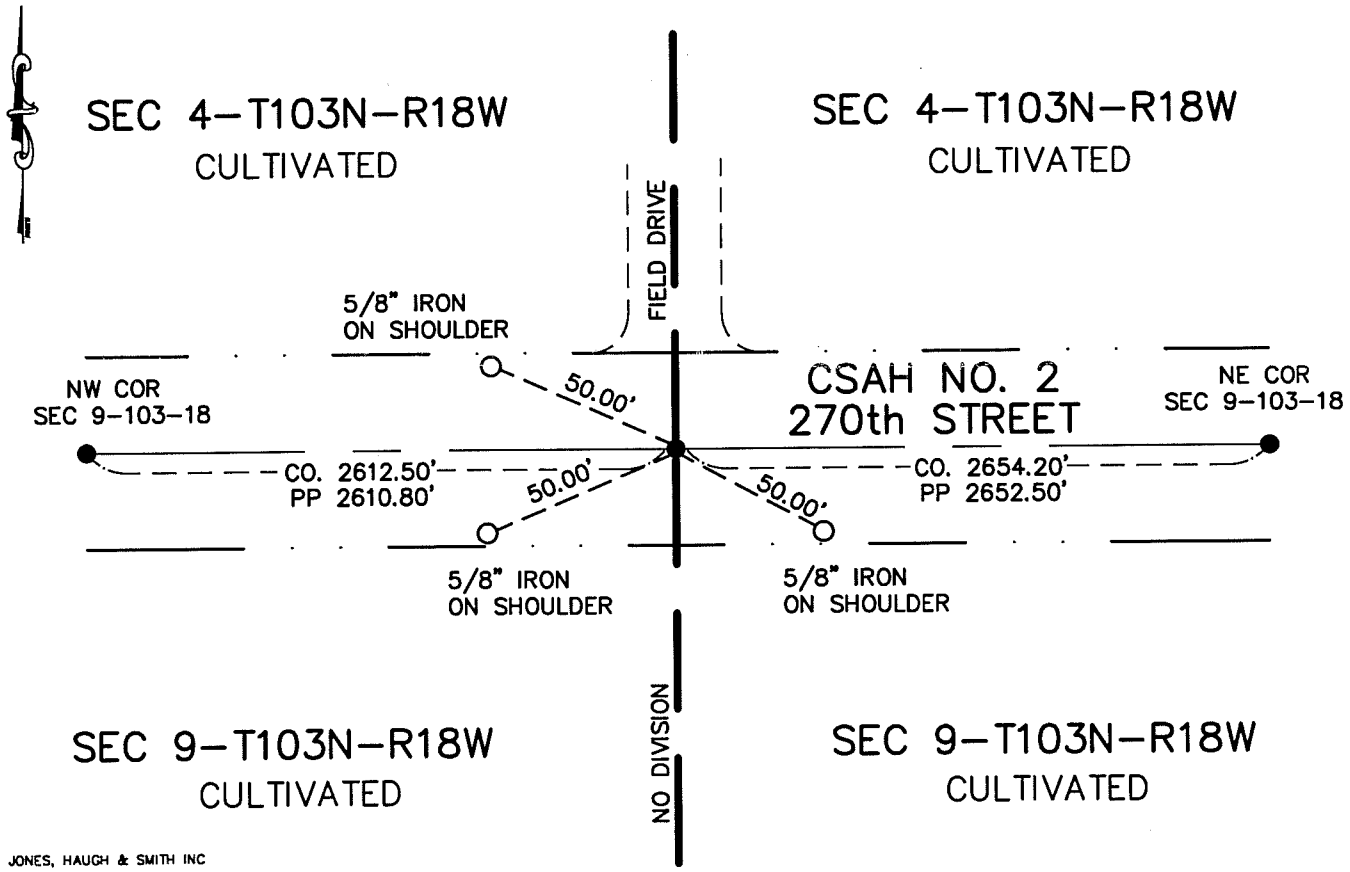

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 11-1-02
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

N1/4 Cor Sec 9-103-18

Deputy Surveyor William I. Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe found no evidence of PLS corner at this location. The 1924 C.S.A.H. No. 2 road plan showed no information of a corner at this location. 1940 C.S.A.H. No. 2 road plan showed a station on a fenceline to south at a distance of 2654.20 feet west of the northeast corner of Section 9. We measured the distance between the northeast and northwest section corners and found 5262.60 feet verses County Plan of 5266.70 feet. We proportioned the mile to county distance and set the corner at a distance of 2652.50 feet west of the northeast corner of Section 9.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

P100 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 9, Township 103 N, Range 18 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On SEPT. 15, 1978 (DATE) placed a RAILROAD SPIKE WITH PUNCH HOLE.

SKETCH OF REFERENCE TIES

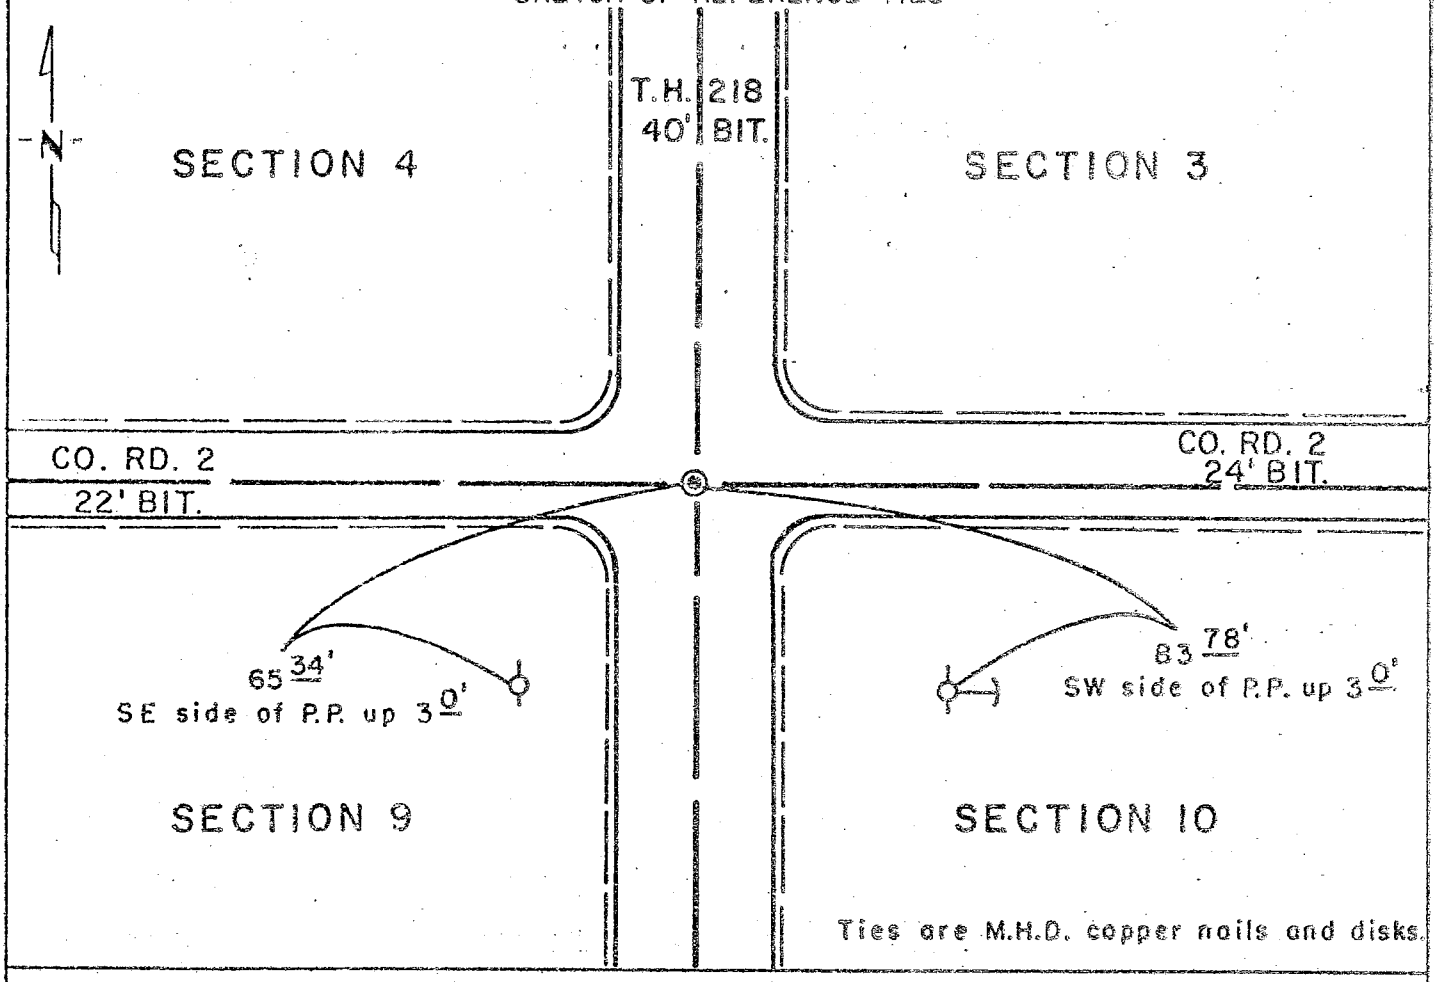

Ties are M.H.D. copper nails and disks.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan 10/25/78
SIGNATURE DATE

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P.M. on the 25 day of OCTOBER A.D., 19 78

County Recorder CHARLES ENGER

By DOROTHY JOHNSON, Deputy

DOCUMENT NO. 336624
Book 47 of Misc. Page 169

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER OF SECTION 9, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5th P.M.

AUGUST, 1854 — William I. Anderson, Deputy Surveyor, set a post, deposited charred stake, made mound with trench and pits during the original Public Land Survey.

1926 — Minnesota Highway Department placed P.I. 1079+17.1 at the intersection of the crossroads.

1978 — Minnesota Department of Transportation electronically re-established P.I. 1079+17.1 between perpetuated P.I. 1026+18.2 and P.I. 1132+40.3.

An analysis of the record and survey data indicates that P.I. 1079+17.1 is in agreement with lines of occupation of long standing. It istherefore, accepted as marking the Public Land Survey Corner.

For details of the electronic survey data, contact the Minnesota Department of Transportation, Surveying and Mapping Section, Rochester District Office.

TIE BOOK p. 100 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 9, Township 103 N, Range 18 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On SEPT. 15, 1978 (DATE) placed a RAILROAD SPIKE WITH PUNCH HOLE.

SKETCH OF REFERENCE TIES

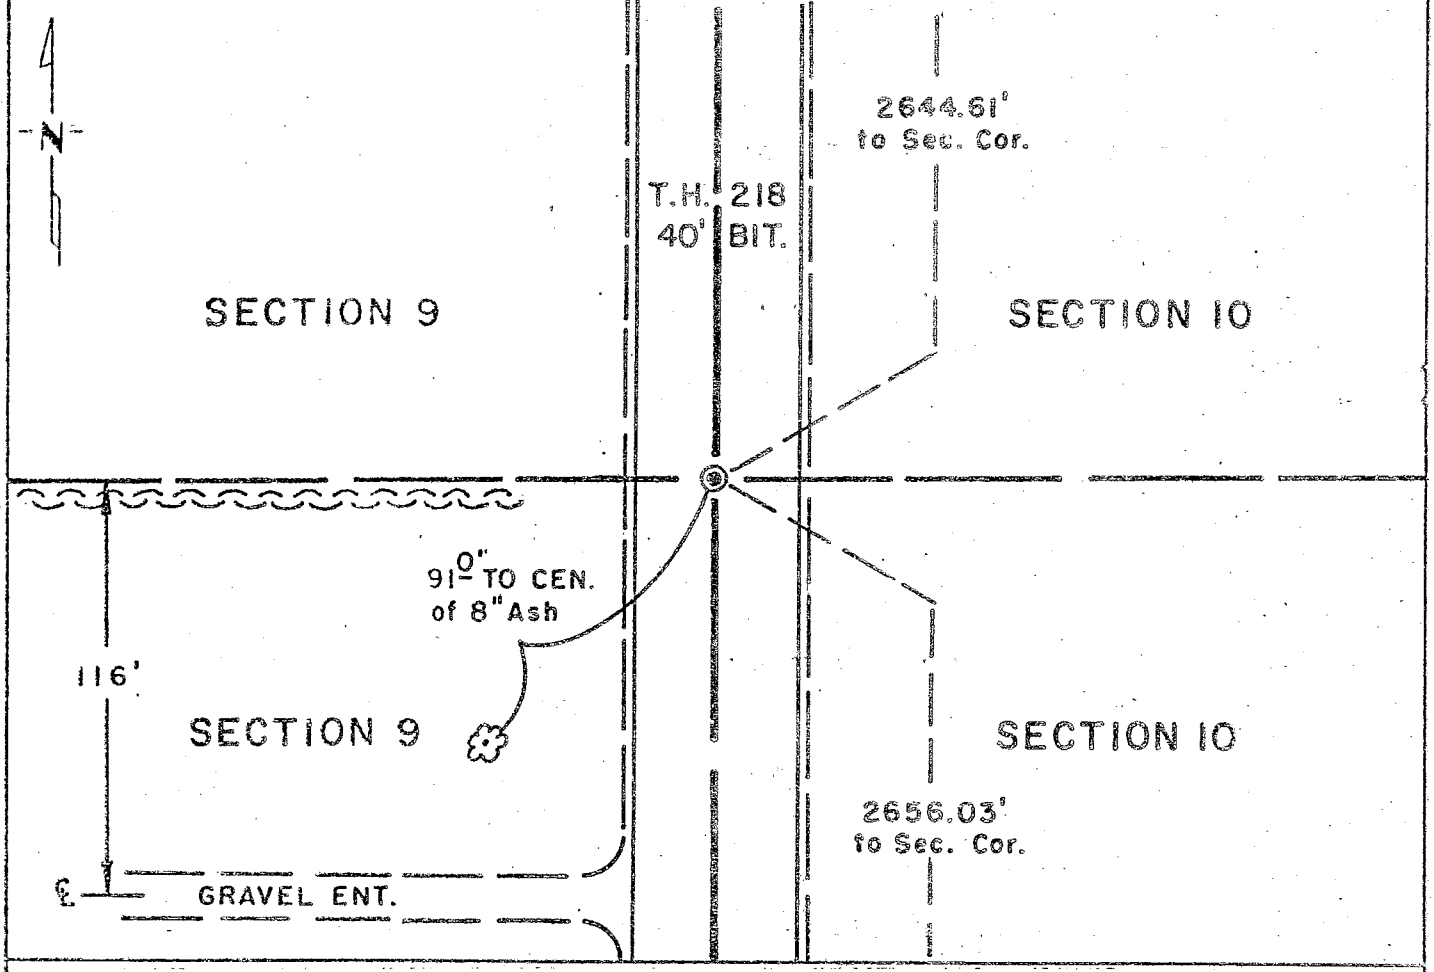

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan 10/25/78
SIGNATURE DATE

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P.M. on the 25 day of OCTOBER A.D., 19 78

County Recorder CHARLES ENGER

By DOROTHY JOHNSON, Deputy

DOCUMENT NO. 336625
Book 47 of Misc. Page 171

MHD FORM NO. 2105

Statement of Evidence:

EAST QUARTER CORNER SECTION 9, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5th P.M.

AUGUST, 1854 — William I. Anderson, Deputy Surveyor, set a post at the quarter corner during the original Public Land Survey.

1926 — Minnesota Highway Department referenced an east-west fence to a centerline P.O.T. by station and angle.

MAY,6, 1953 — L. H. Edison, Land Surveyor, used this corner for a plat recorded in Book of Plats, page 15 in the County Recorders Office.

An analysis of the record and survey data indicates that the monumented north line of the recorded plat is in agreement with the 1926 occupation lines. The corner was set at the intersection of the monumented plat line and the centerline of T.H. 218 and is accepted as marking the Public Land Survey Corner.

For details of the electronic survey data, contact the Minnesota Department of Transporation, Surveying and Mapping Section, Rochester District Office.

"H" TIC Book P. 100 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 10, Township 103 N, Range 18 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On AUGUST 16, 1978 (DATE) found a 3/4 INCH INSIDE DIAMETER IRON PIPE, DOWN 1.6 FEET.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On SEPT. 13, 1978 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT 0.1 FEET BELOW SURFACE OF ROAD.

SKETCH OF REFERENCE TIES

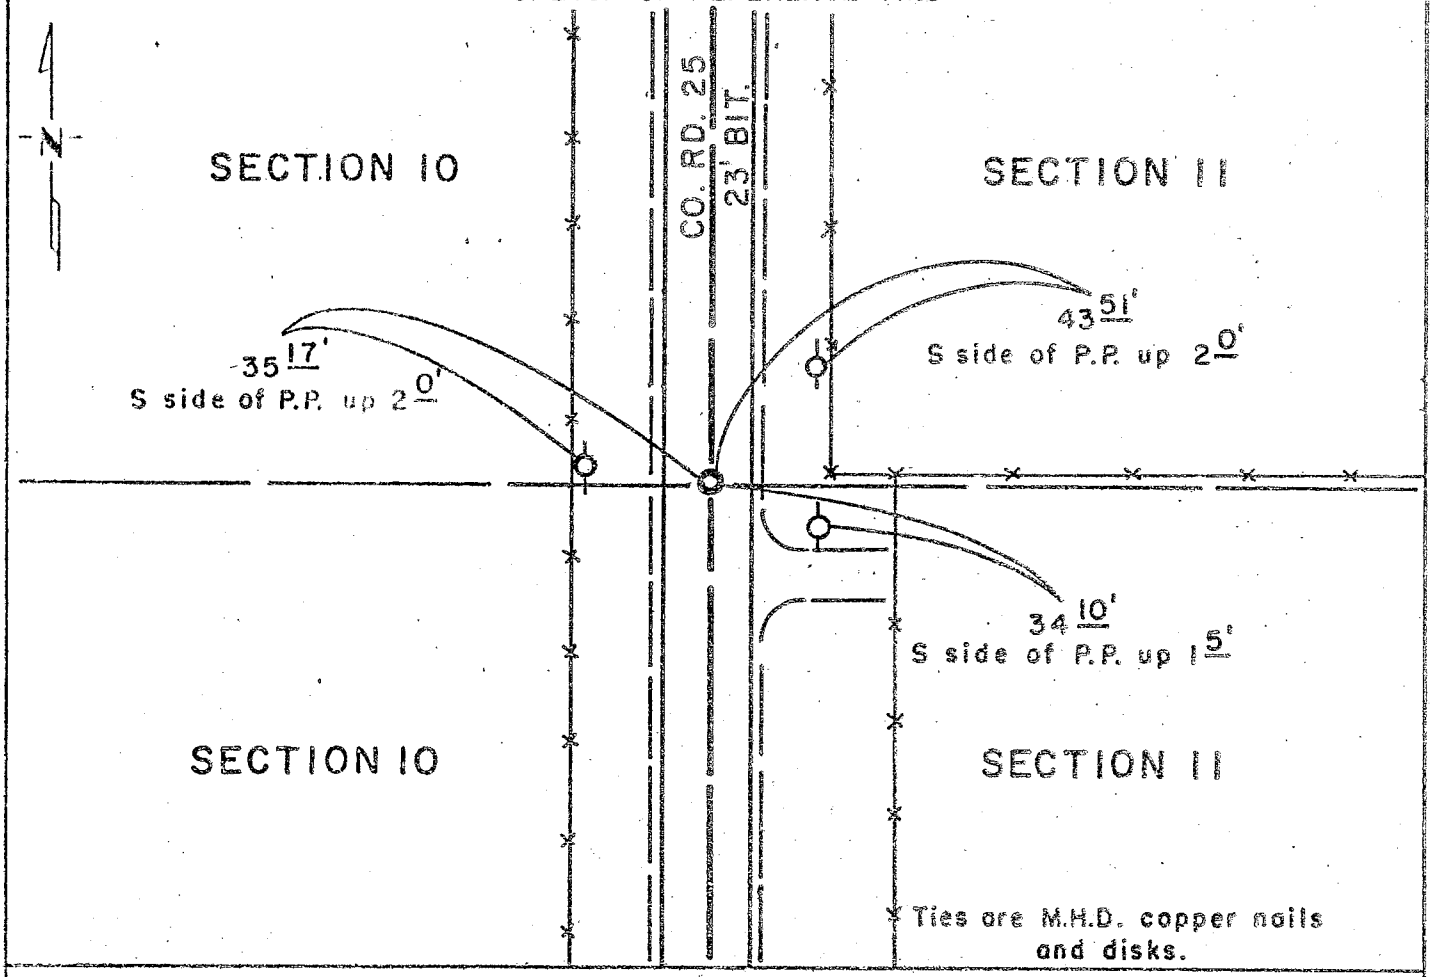

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan (SIGNATURE) 10/25/78 (DATE)

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P.M. on the 25 day of OCTOBER A.D., 1978

County Recorder CHARLES ENGER

By DOROTHY JOHNSON, Deputy

DOCUMENT NO. 336627
Book 47 of Misc. Page 175

M.H.D. FORM NO. 2105

Statement of Evidence:

EAST QUARTER CORNER OF SECTION 10, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5th P.M.

AUGUST, 1854 — William I. Anderson, Deputy Surveyor, set a post at the quarter corner during the original Public Land Survey.

1958 — Mower County regrading plans for county road 25 show P.I. 106+64.5 as the quarter corner and placed a concrete monument at the location.

1978 — Minnesota Department of Transportation also found a 5/8 inch re-rod (0.2 foot down) on the centerline of the road and fenceline east. This re-rod is 1.6 feet north and 1.5 feet west of the found pipe.

An analysis of the record and survey data indicates that the re-rod is the county road P.I. and the origin of the pipe is not of record. The position of the pipe indicates it pre-exists the regrading of the county road and it is similar to adjacent monuments inplace in the late 1920's. The pipe is accepted as marking the Public Land Survey corner.

For details of the electronic survey data, contact the Minnesota Department of Transportation, Surveying and Mapping Section, Rochester District Office.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 10, Township 103N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/06/1995 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 02/06/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

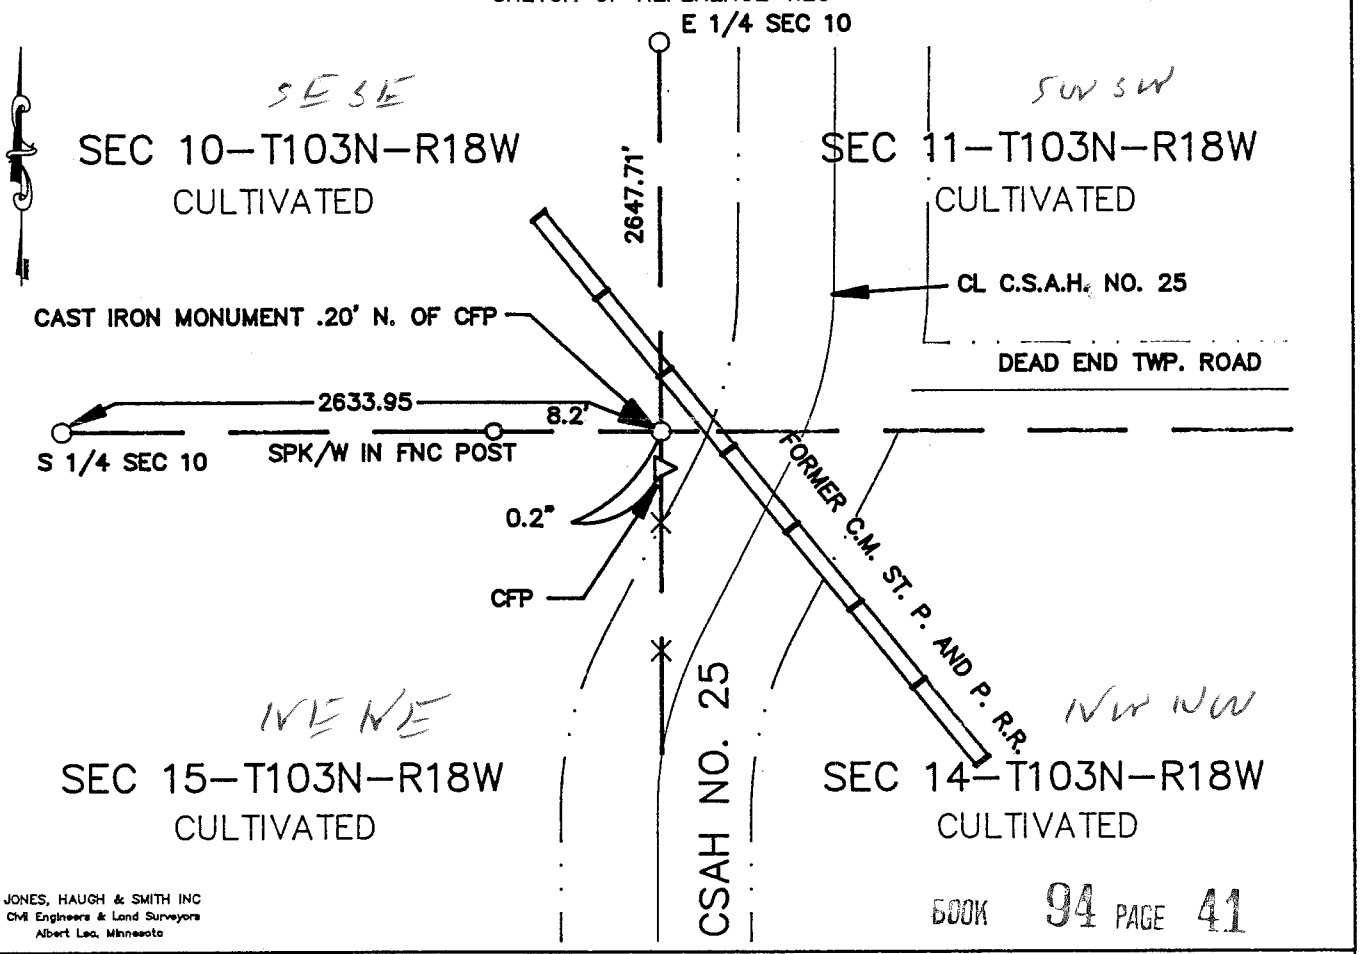

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 41

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-17-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 5 P .M. on the 23 day of Jan A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 450689

M.H.D. FORM NO. 2105

Book 94 Misc Page 41

SE Cor SEC 10-103-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Highway Department CSAH #25 road plans show a corner at this location.

1992 Jones Haugh and Smith crew set a 5/8" iron 0.2' north of CFP.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a 5/8" iron .20' north of fence corner post. Iron fits CL alignment of CSAH No. 25 and fence line west and east. Placed a cast iron monument at ground level on top or 5/8" iron set in 1992.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 10, Township 103N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-6-90 found A GROUP OF STONES AND STAKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed 3/4" REBAR AND COUNTY CAP OVER STONES AND STAKE

SKETCH OF REFERENCE TIES

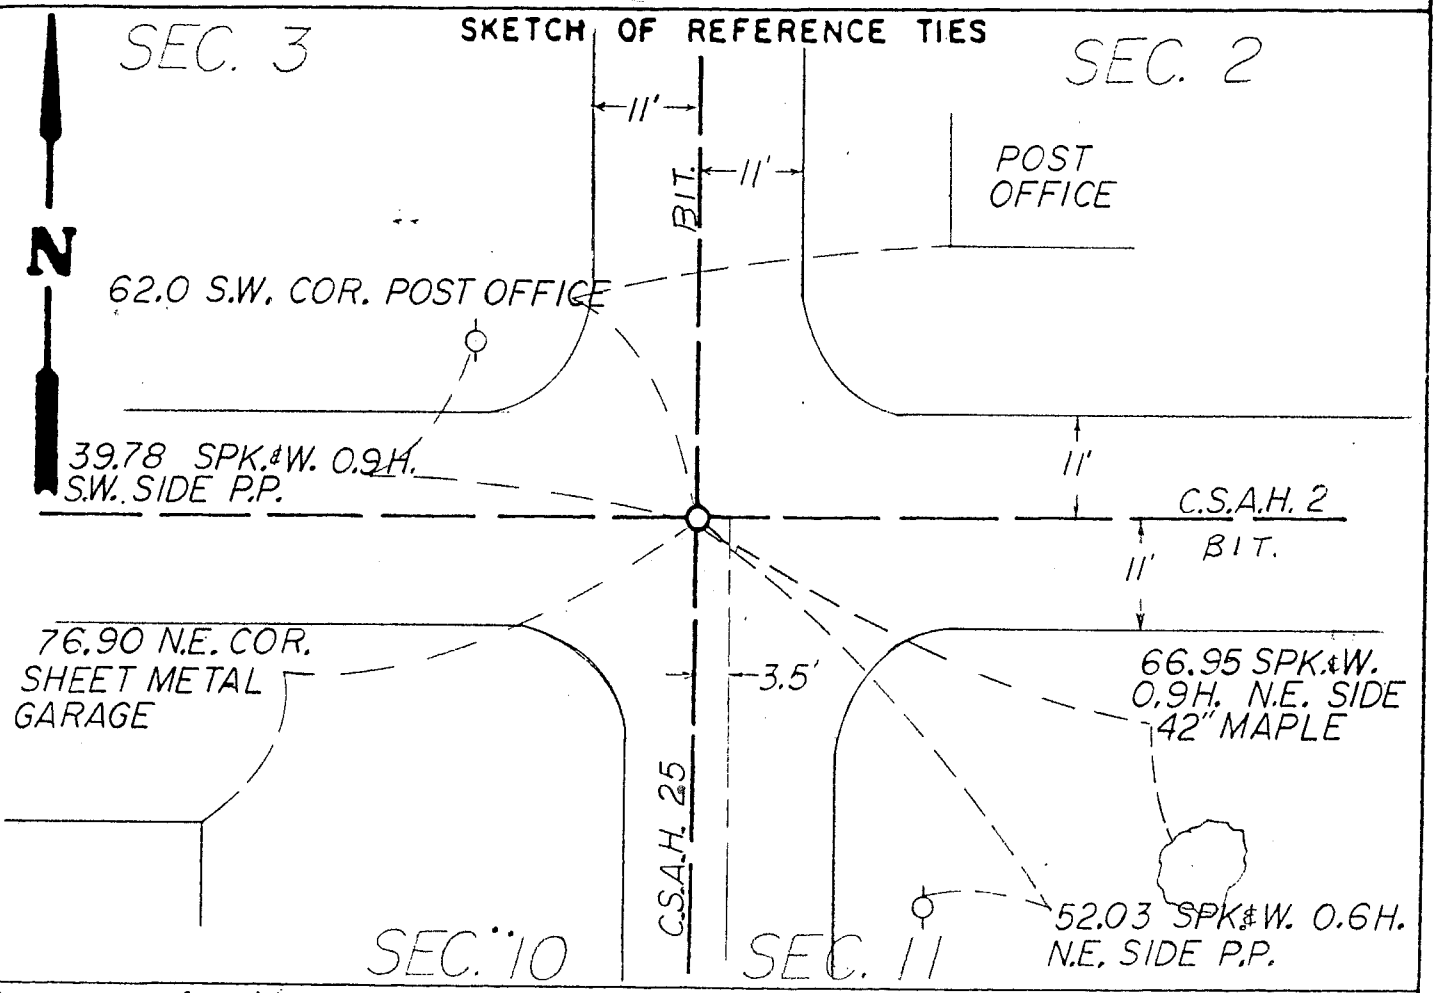

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHEAST CORNER SECTION 10, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5TH P.M.

Aug., 1854	William J. Anderson, Deputy Surveyor, set a post at the corner, raised mound with trench and pits, and deposited charred stake as per instructions.
1935	County Engineers Plans show a stone and iron pin inplace.
1964	Jones & Haugh survey crew found a 1/2 inch pin.
1977	Jones & Haugh found 1/2" pipe at the intersection of centerlines of County Road 25 and 2.
1978	Minnesota Department of Transportation found a 3/8 inch rebar and a 1-1/2 inch pipe, and used the pipe.
August, 1981	Zenk Read Trygstad & Associates Survey Crew found 3/8 inch Rerod.
July 6, 1990	Zenk Read Trygstad & Associates excavated a trench 2 feet West to 6 feet East of Centerline from Centerline to 4 feet South by 5.5 feet deep. A groups of three stones was found with wood pieces in the center 5.7 feet below the surface. A 1-1/2 inch by 6 inch pipe, a 3/4 inch rebar and a 1-1/4 inch pipe were found above the wood and stone. A 1.1 foot H by 0.8 foot by 1.7 foot sandstone was found on the Southwest side of the pipes. A 3/8 inch rebar and 1/2 inch eyepin were found on the North side of the 1-1/4 inch pipe. A spike and washer was found on the surface over the iron pin. A 1-1/2 inch pipe driven in a 4 inch x 6 inch well casing was found 3.5 feet East of the stones. An analysis of the record data gives no indication of the origin of the stones and stake. The many monuments found above them indicate this location was used and preserved as the corner for many years. The stake is accepted as marking the location of the original Public Land Survey Corner.

TIE BOOK P. 100 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 10, Township 103 N, Range 18 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On AUGUST 15, 1978 (DATE) found a SPIKE WITH TIN DISC DOWN 0.2 FEET.

☐ left monument as found, ☒ lowered monument, ☐ removed monument (explain)

☒ On SEPT. 13, 1978 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT 0.1 FEET BELOW THE SURFACE OF THE ROAD.

SKETCH OF REFERENCE TIES

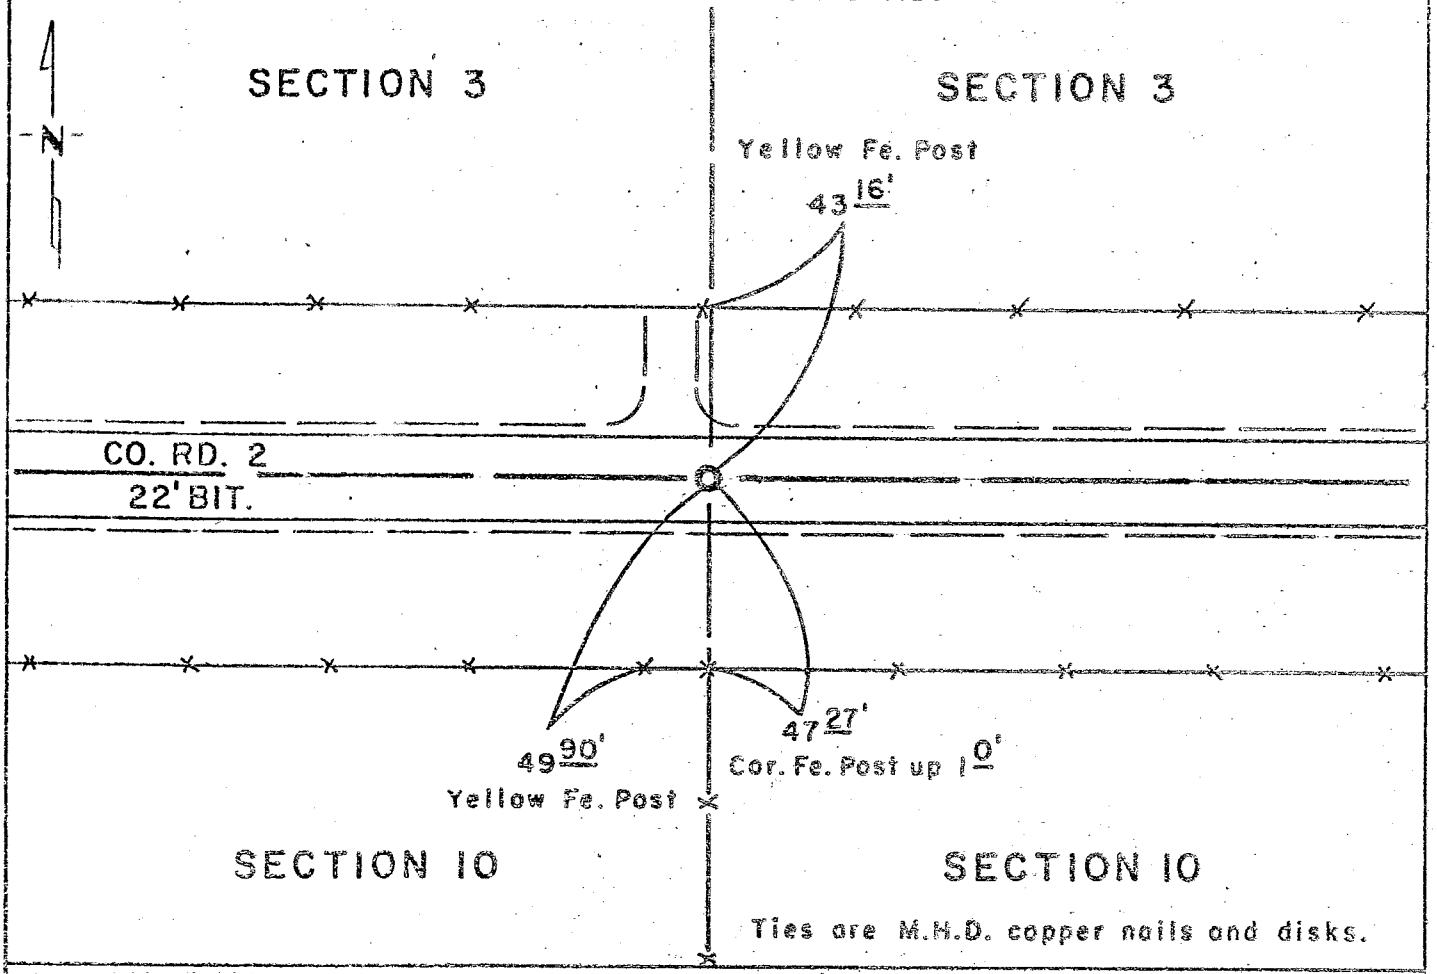

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan (SIGNATURE) 10/25/78 (DATE)

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P.M. on the 25 day of OCTOBER A.D., 1978

County Recorder CHARLES ENGER

By DOROTHY JOHNSON, Deputy

DOCUMENT NO. 336626
Book 47 of Misc. Page 173

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTH QUARTER CORNER OF SECTION 10, TOWNSHIP 103 NORTH, RANGE 18 WEST, 5thP.M.

AUGUST, 1854 — William I. Anderson, Deputy Surveyor, set a post at the quarter corner, deposited charred stake, made mound with trench and pits during the original Public Land Survey.

1940 — Mower County Highway Department's 1940 road plans show the corner at the intersection of the east-west road and north-south fence lines. No monument is indicated.

1978 — Minnesota Department of Transportation recovered a spike and disc at the 1940 occupation lines.

An analysis of the record and survey data indicates that the 1940 intersection is in harmony with adjacent occupation lines and interior lines of occupation in Section 10. It is accepted as marking the Public Land Survey Corner.

For details of the electronic survey data, contact the Minnesota Department of Transportation, Surveying and Mapping Section, Rochester District Office.