Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 7, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-90 (DATE) found a wood post 3 1/2"Ø on the east side of a 6"x 6"x 14" pointed field 4.0' below road surface in virgin soil on ℄ of N-S road in line with fence west.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-90 (DATE) placed a 5/8"Ø iron in wood post and over post at road surface.

SKETCH OF REFERENCE TIES

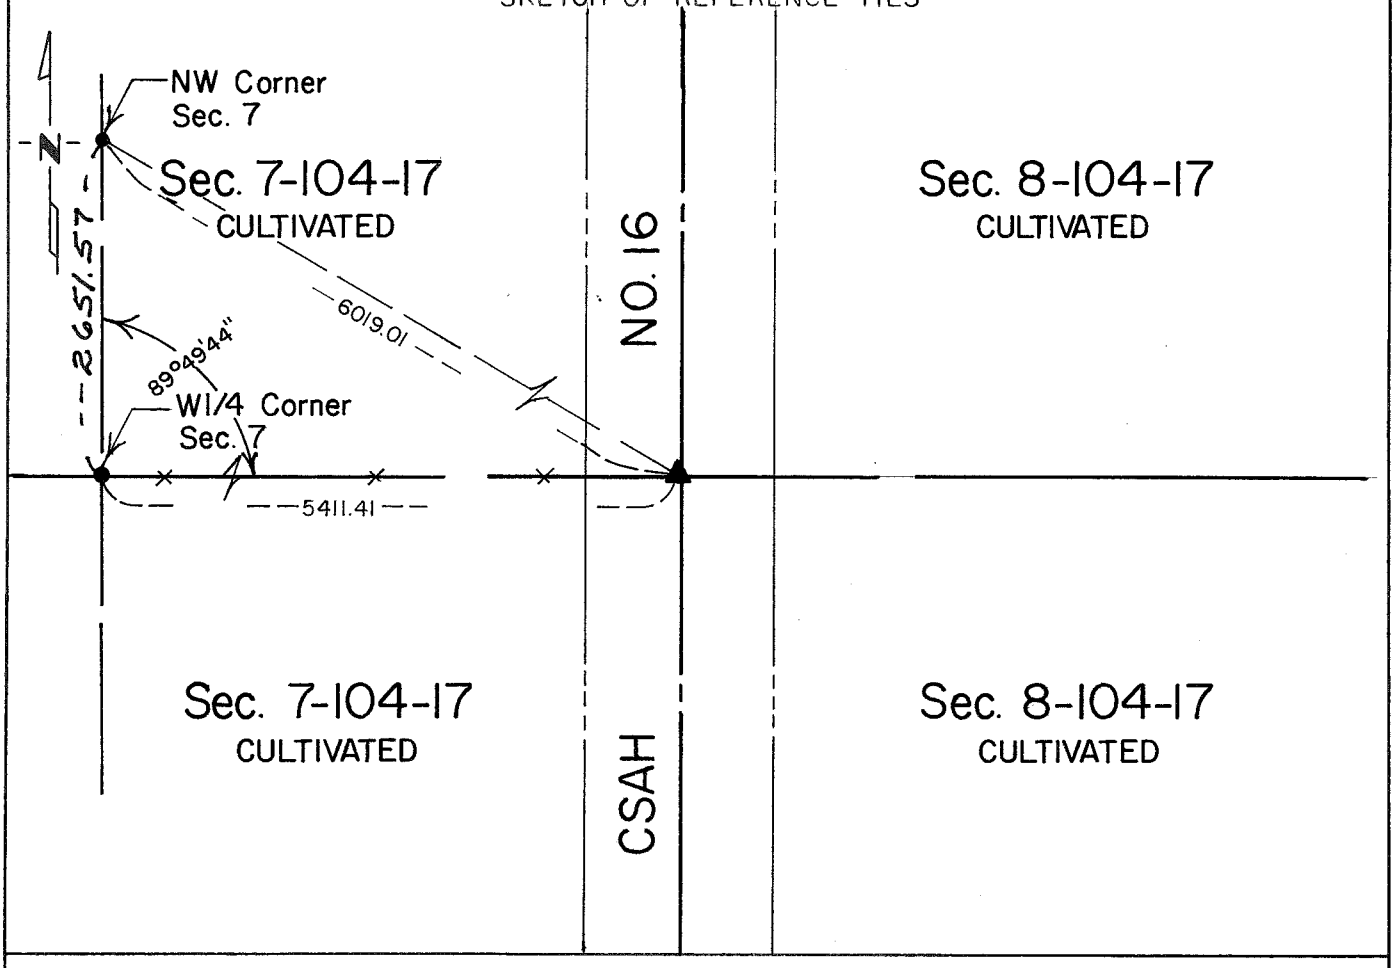

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 9-18-90
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Section 7-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post and a trench with a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew together with the Mower County backhoe dug on centerline of north-south road in line with fence west and uncovered 3 1/2" diameter wood post on the east side of a 6"x6"x14" pointed field stone 4.0 feet below road surface in virgin soil. Placed a 5/8" diameter iron in wood post and over post on road surface.

Corner found fits occupation and road centerlines and is in agreement with 1853 records of John Fitzpatrick and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 7, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-90 (DATE) found a 1"Ø pipe 1.0' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-90 (DATE) placed a capped 5/8"Ø (13807) iron at location of pipe.

SKETCH OF REFERENCE TIES

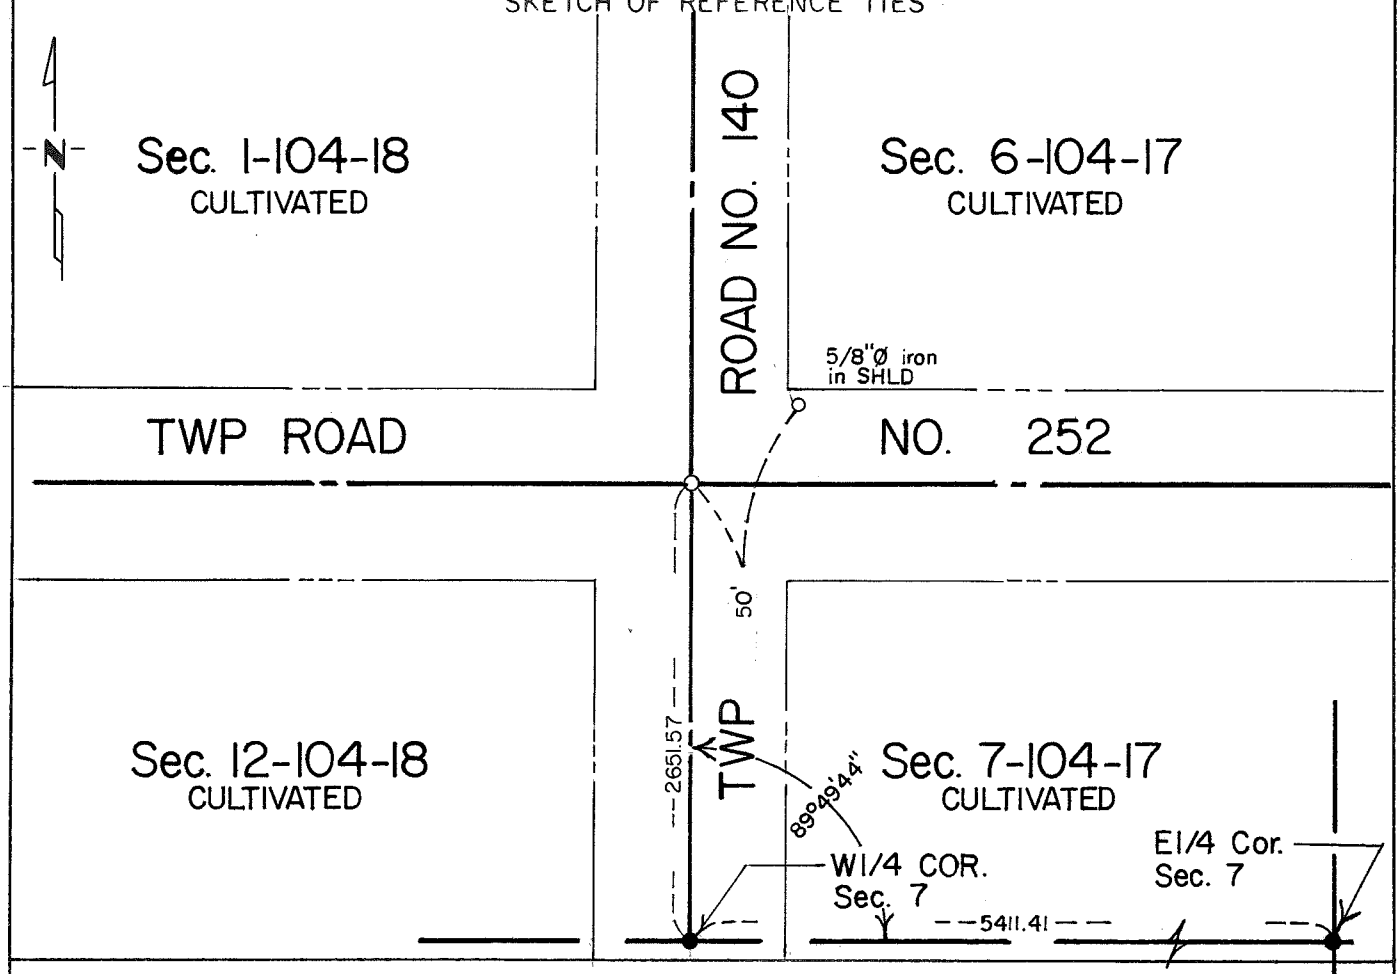

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 7-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post, a trench with a mound of earth and a charred stake in center.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1931 V.A. Nason uncovered a concrete monument one foot below road surface and took ties. It was recorded in Book 'A' at the County Engineer's Office.

1940 Mower County Grading Plan shows a 1" diameter pipe was placed.

1990 Jones, Haugh & Smith crew together with the Mower County backhoe dug on centerline centerline of north-south-east-west roads and uncovered 1" diameter pipe 1.0 feet below road surface. Continued digging and found no further evidence. Reset capped 5/8" diameter iron at location of monument found.

Corner found fits road centerlines and Mower County Grading Plan and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 7, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-90 (DATE) found ~~a~~ no evidence

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-90 (DATE) placed a 5/8"Ø iron at the split between NW & SW corners.

SKETCH OF REFERENCE TIES

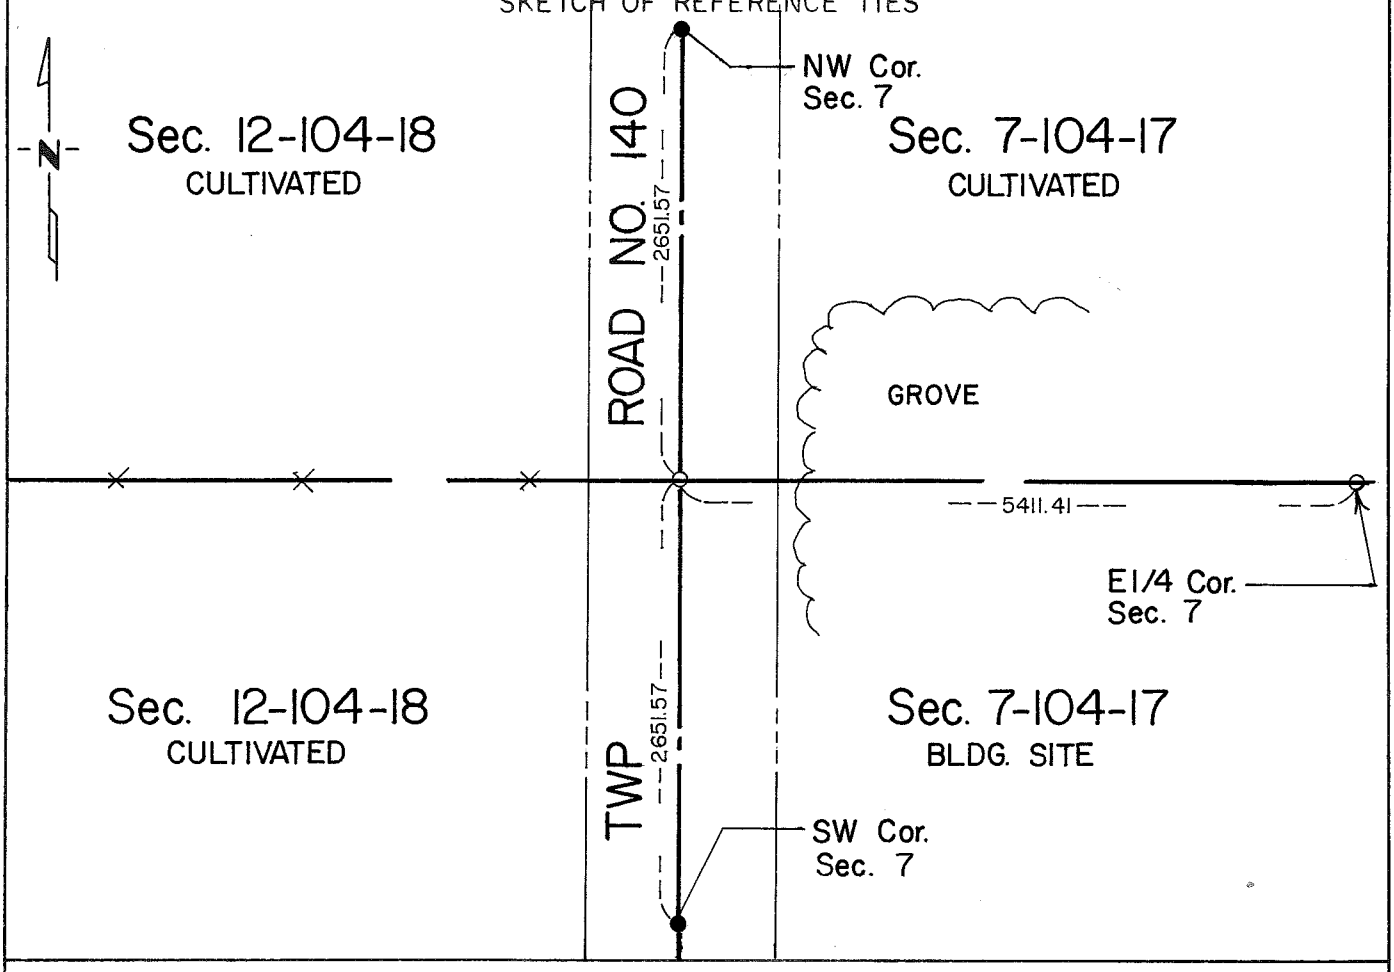

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 7-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post. The following section corner ties were taken:

5"	Black Oak	S 71° W	115 links (75.9 feet)
12"	Burr Oak	S 72° E	188 links (124.08 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith crew together with the Mower County backhoe dug on centerline of north-south road in line with fence west and found no evidence or a perpetuation of the public land survey corner. A 5/8" diameter iron capped (13807) was placed on a straight line at the midpoint between the Northwest and Southwest corners of Section 7-T104N-R17W.

Monument set fits occupation and road centerlines and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 7, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-90 (DATE) found a 6"Ø concrete monument with 1/2"Ø iron 4' below road surface on ℄℄ of N-S-E-W roads.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-90 (DATE) placed a 5/8"Ø iron capped (13807) over monument found.

SKETCH OF REFERENCE TIES

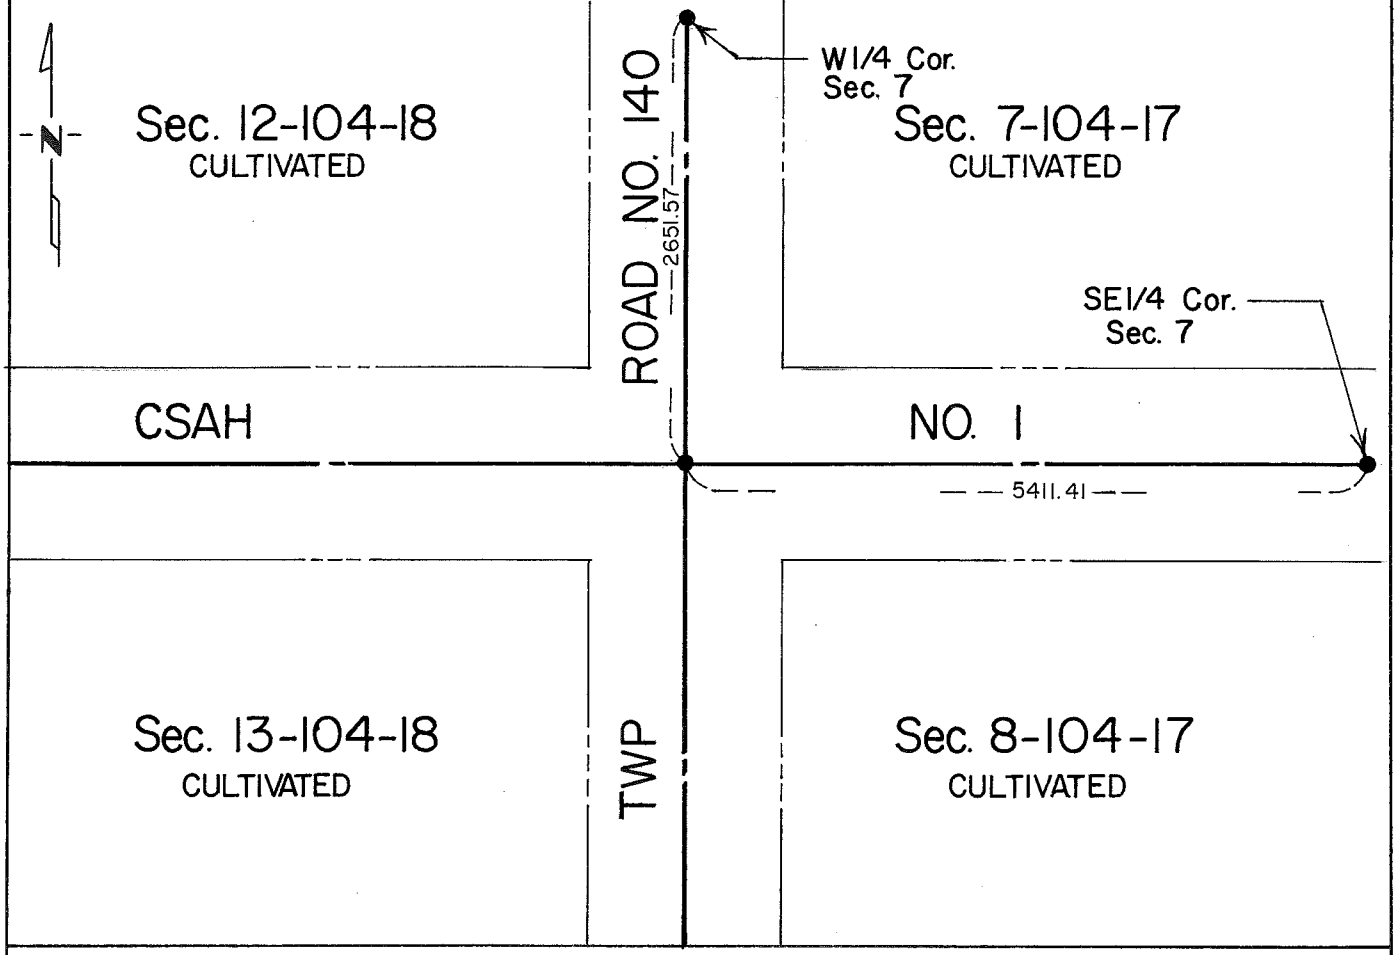

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-17-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 7-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a charred stake and a trench and a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1931 V.A. Nason uncovered a pointed field stone and ties were taken and recorded in Book 'A' in the County Engineer's Office.

1990 Jones, Haugh & Smith crew together with the Mower County backhoe dug on centerline centerline of north-south-east-west roads and uncovered a 6" diameter concrete monument with 1/2" diameter 4.0 feet below road surface. Placed a 5/8" diameter iron capped (13807) over monument found.

Corner found fits road centerlines and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 8, Township 104 Range 17, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/04/1995 (DATE) found a SPK/W .30 BELOW ROAD SURFACE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/04/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

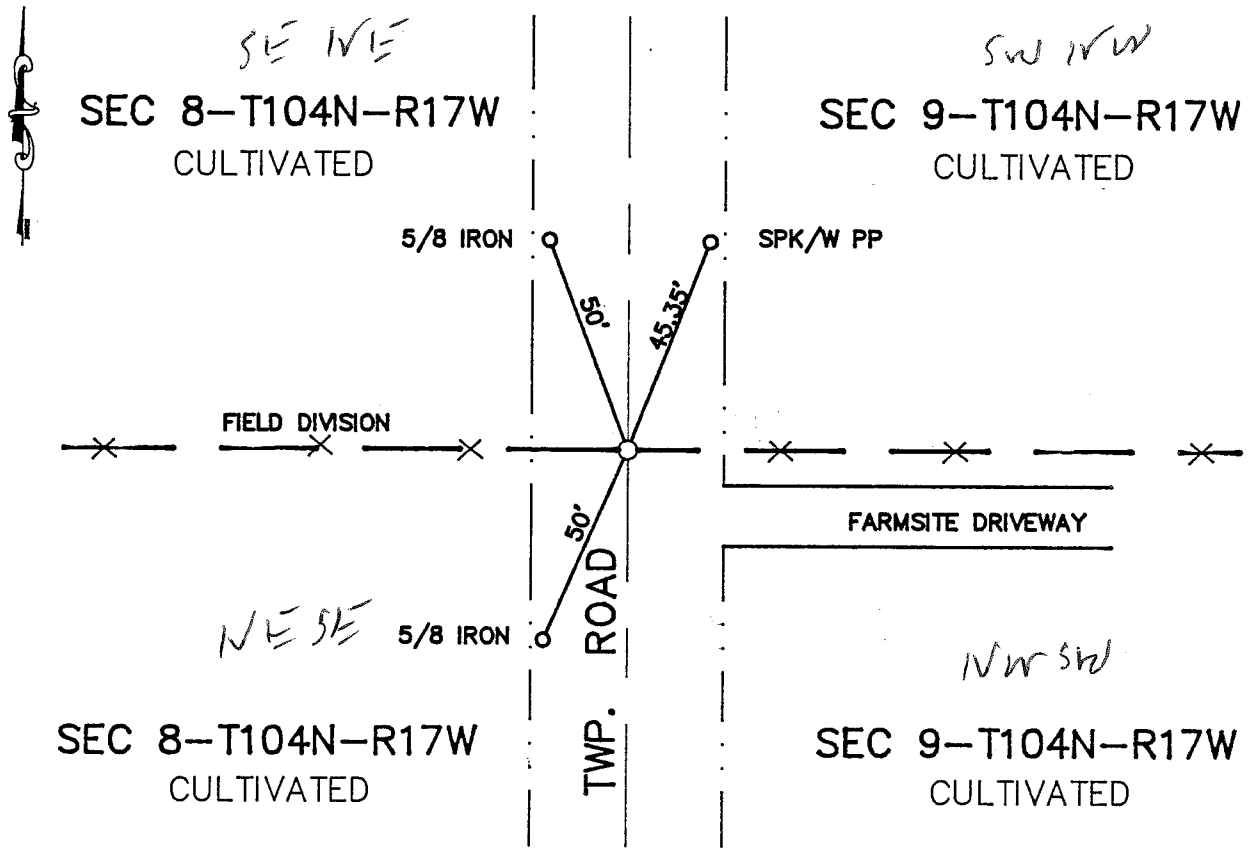

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-27-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 3 day of Jan A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 441731

M.H.D. FORM NO. 2105

BOOK 89 PAGE 576 Book 89 Misc Page 576

E 1/4 Cor SEC 8-104-17

This corner was originally established by Deputy Surveyor John Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post and deposited a stone with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road and in line with field division West. Uncovered a spike and washer 0.30' below road surface. Continued digging to virgin soil and found no other evidence of original PLS corner. Spike and washer fit CL of road and was in line with field division to the West. Placed a cast iron monument in place of spike.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Recorded at Registers of Deeds 4-21-77 Index No. TIE B 001C P.60

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 9, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 9-18-75 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT (FLUSH) OVER AN 8 INCH IRON PIN.

SKETCH OF REFERENCE TIES

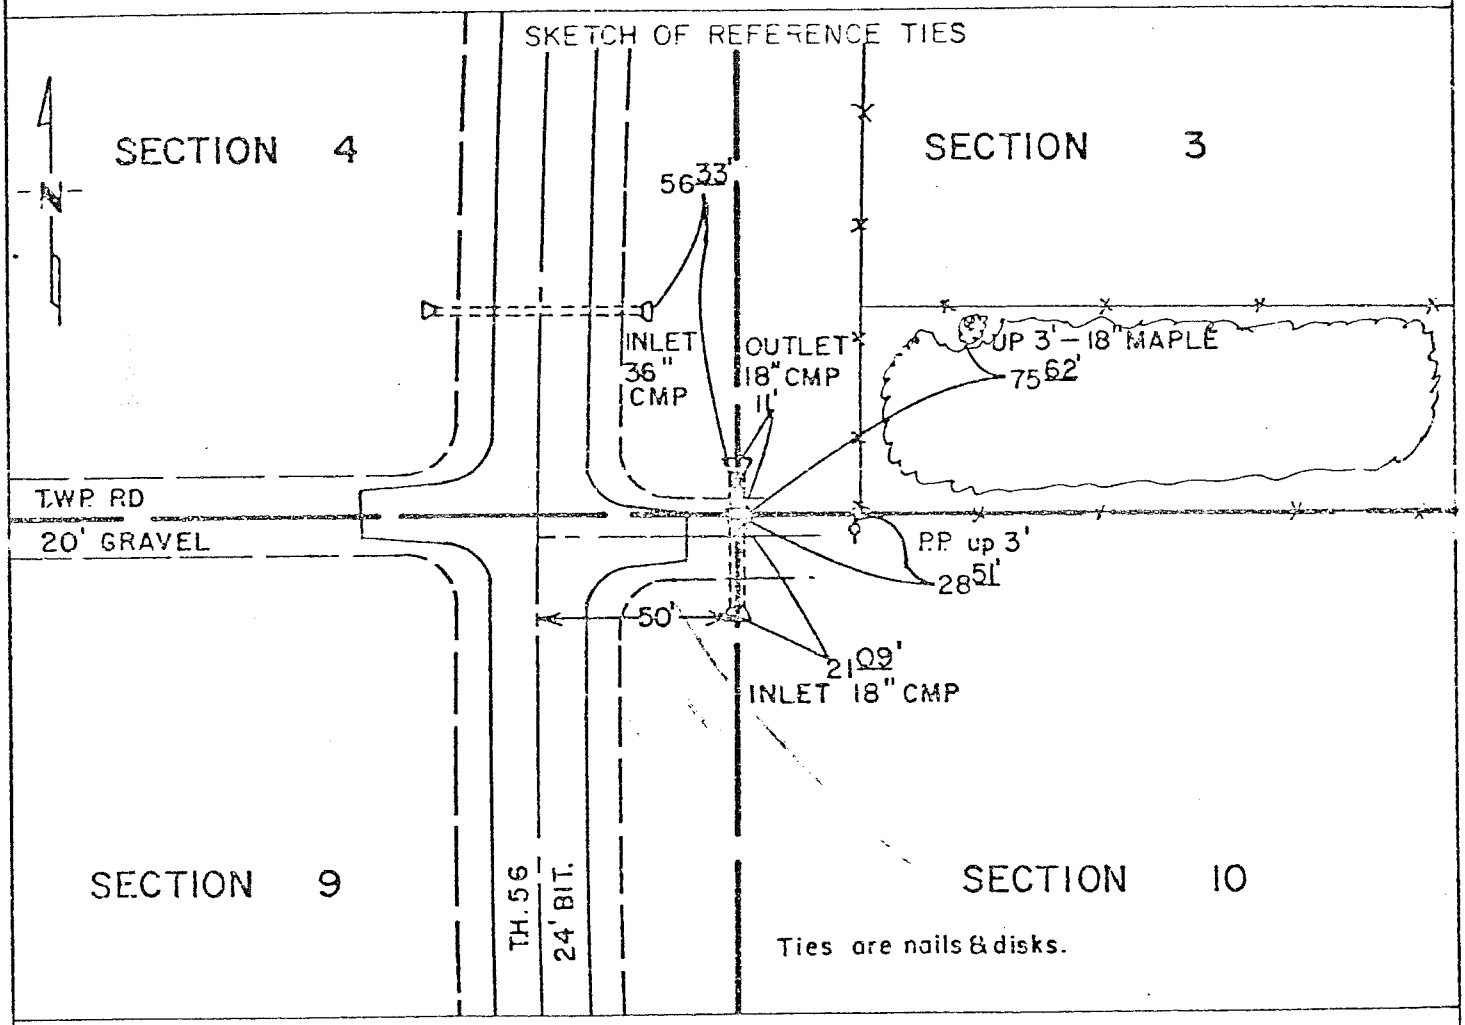

Ties are nails & disks.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Donald R Beheading 9/23/75
SIGNATURE DATE

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19__

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER OF SECTION 9, TOWNSHIP 104N, RANGE 17W, 5th P.M.

Nov. 1853 — John Fitzpatrick, Deputy Surveyor, set post, deposited stone, made mound of earth and sod with trench and pits for the corner during the Original Public Land Survey.

1929 — C. Aasland, Minnesota Highway Department Engineer, found no corner, used same point as location party in center of road intersection.

1941 — O. J. Gerner, Minnesota Highway Department Engineer, assumed corner in center of X-road 53.1 feet east of POT 1367+40.2.

1955 — E. L. Pearson, Minnesota Highway Department Engineer, found the corner as high point of a field stone 50.0 feet East of POT 1367+43.5 and took ties to a 10 inch maple NE at 75.62 feet and a power pole SE at 28.51 feet.

1975 — Don Borcherding, Minnesota Highway Department Registered Land Surveyor recovered the 1955 ties.

An analysis of the record and survey data indicates the stone found by Pearson in 1955 was in the old road intersection as assumed by Aasland in 1929. The corner was destroyed by road construction in 1955 and was reset by obliterated methods using the 1955 ties. This position fits the occupation lines and is accepted as a perpetuation of the Public Land Survey Corner.

For details of the survey data, contact the Minnesota Highway Departments District Surveying and Mapping Section, Rochester.

Recorded at Register of Deeds 4-21-77 Index No. TIE BOOK P. 60

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 9, Township 104 N, Range 17 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-10-72 (DATE) found a 6 INCH BY 6 INCH CONCRETE MONUMENT DOWN 1 FOOT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-29-75 (DATE) placed a MINNESOTA HIGHWAY DEPARTMENT CAST IRON MONUMENT ABOVE CONCRETE MONUMENT 1/2 INCH BELOW SURFACE.

SKETCH OF REFERENCE TIES

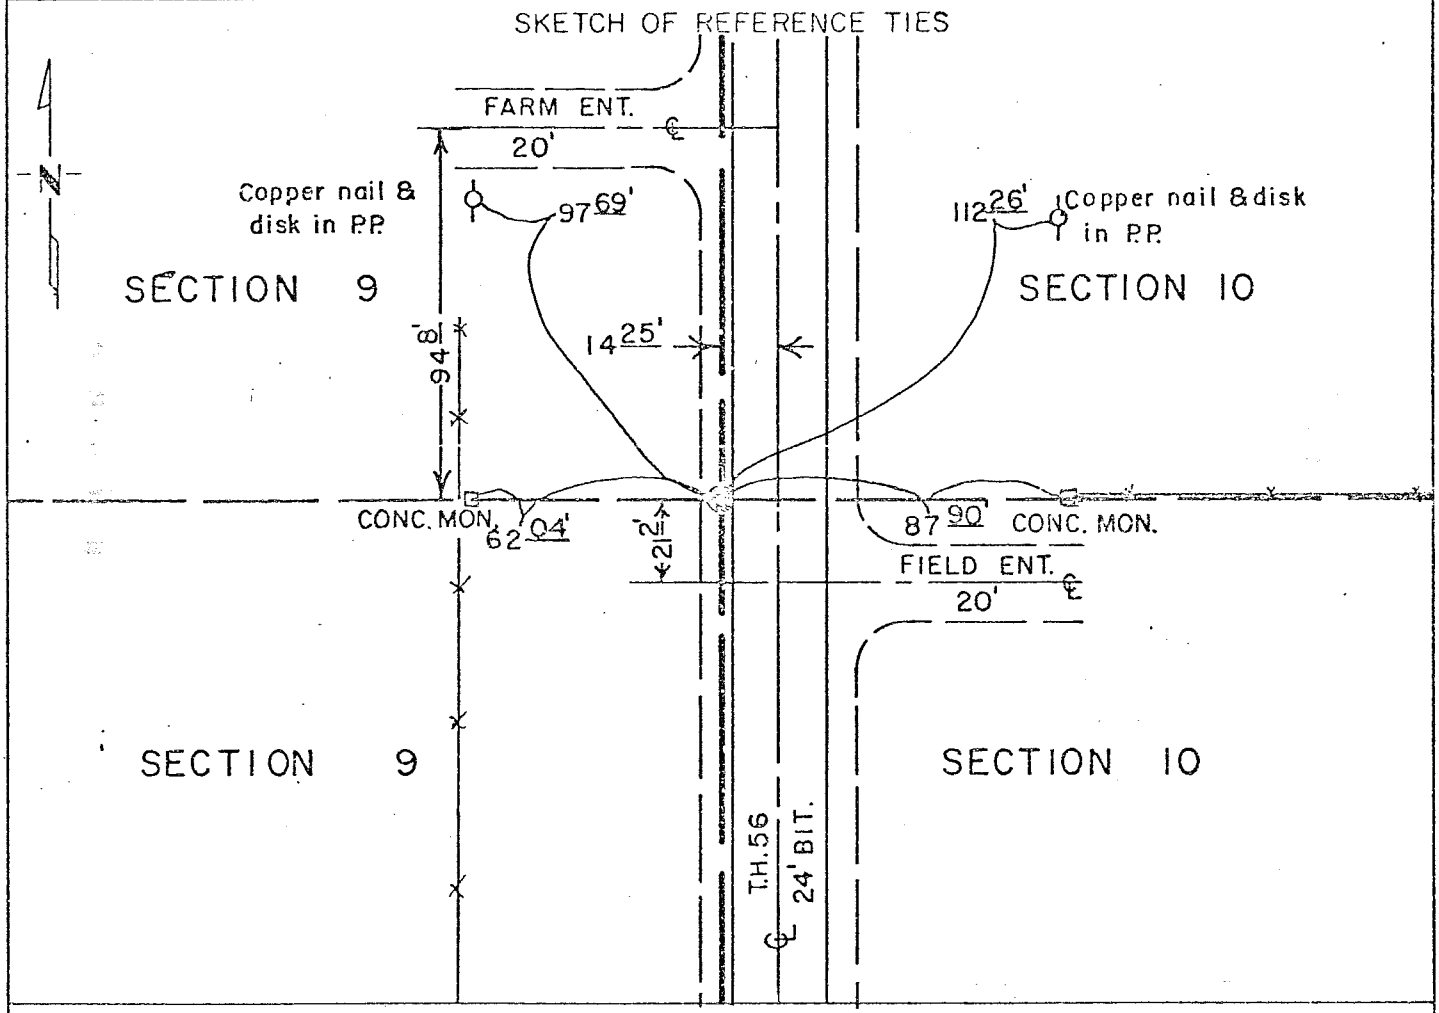

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald R Blessing (SIGNATURE) 9/8/75 (DATE)

Registration No. 10162

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ___

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

Statement of Evidence:

EAST QUARTER CORNER OF SECTION 9, TOWNSHIP 104N, RANGE 17 W, 5th P.M.

November 1853 — John Fitzpatrick, Deputy Surveyor, set post, deposited stone, made a mound of earth and sod with trench and pits for the corner during the Original Public Land Survey.

July 1929 — C. Aasland, M.H. D. Engineer, found a stone 14.5 feet west of the PI 1340+85.2 for the corner and replaced with a 6 inch by 6 inch by 18 inch concrete marked on May 5, 1930.

1941 — O. J. Gerner, M.H.D. Engineer found a 6 inch by 6 inch concrete monument 14.5 feet west of the PI 1340+85.2 inplace 20 inches below the surface.

July 1972 — A. L. Sotebeer, M.H.D. Engineer found a 6 inch by 6 inch concrete monument, 1.0 foot below surface, 14.25 feet west of PI 1340+85.2.

April 1975 — M.H.D. placed a Cast Iron Monument above the 6 inch by 6 inch concrete monument 1/2 inch below road surface for the corner.

An analysis of the record data indicates the concrete monument was set in 1930 to replace the stone found in 1929. The concrete monument is accepted as a perpetuation of the Public Land Survey Corner.

For details of the survey data, contact the Minnesota Highway Department's District Surveying and Mapping Section, Rochester.