
E COR SEC 14-101-14

NO INFORMATION AVAILIBLE FROM MOWER COUNTY SURVEYOR.

6-23-98 JERRY AND GREG SCHWARZ DUG W/ BACKHOE IN THE ℄ OF N-S TWP. ROAD ON LINE W/ FENCE LINE EAST. THIS WAS ONLY OCCUPATION. THE FENCE LINE RUNNING EAST WAS ON EVEN SPLIT BETWEEN THE ℄ ℄ AT THE NE COR OF SEC 14 AND THE CORNER OF LOCATION AT THE SE COR OF SEC 14. WE DUG A 5½' x 11' x 3.5' DEEP HOLE. WE DUG 12' BELOW 2ND ROADBED INTO UNDISTURBED TOPSOIL. FOUND NOTHING. SET ½" IRON PIPE FOR CORNER.

NOTES FROM JERRY SCHWARZ
7-14-98

6-23-88

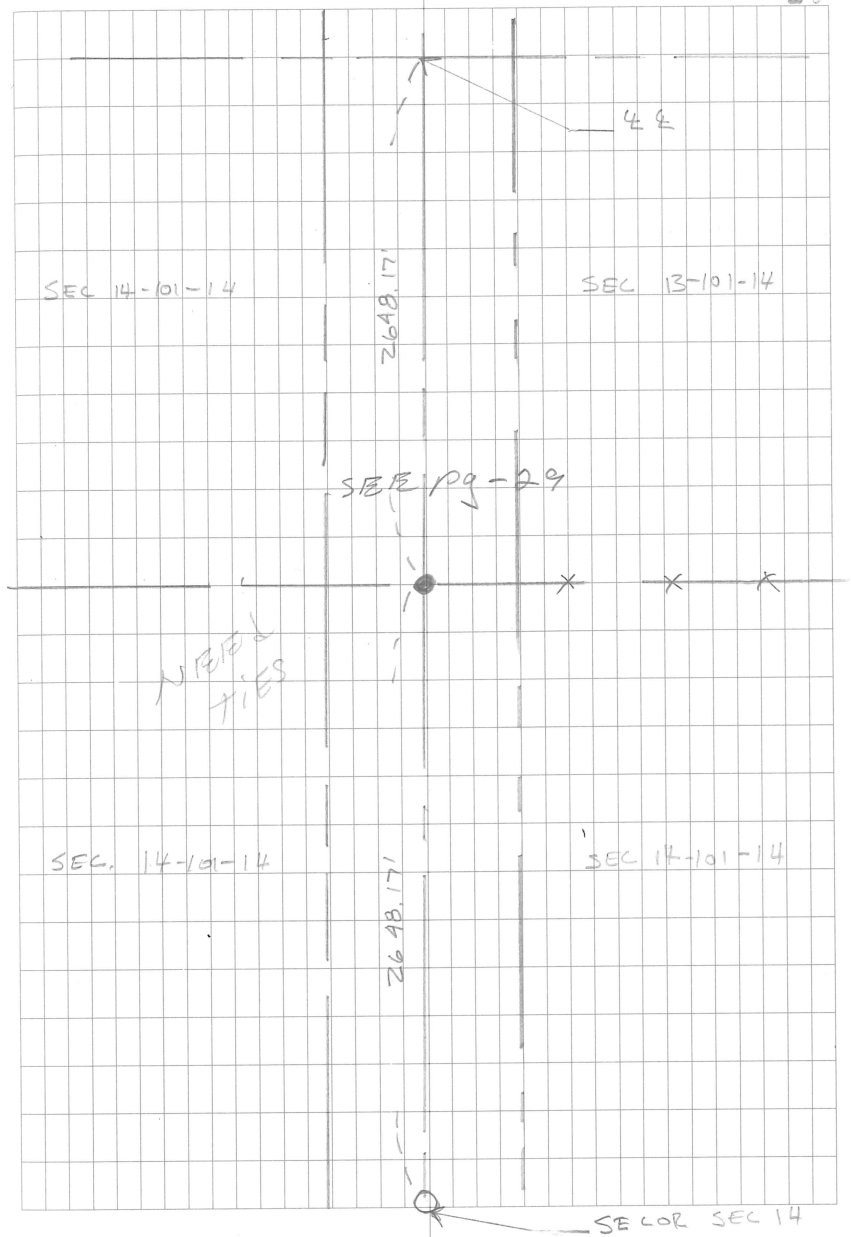

E¼ cor SEC. 14-101-14

NO CORNER INFORMATION AVAILABLE FROM MOWER CO. SURVEYOR.

6-23-98 JERRY & GREG SCHWARZ DUG WITH A BACKHOE IN THE ℄ of N-S ROAD AND ON LINE WITH FENCE LINE RUNNING EAST, THIS WAS THE ONLY OCCUPATION. THE FENCE LINE RUNNING EAST WAS ON AN EVEN SPLIT BETWEEN THE ℄℄ AT THE NE cor of SEC. 14 AND THE CORNER LOCATION AT THE SE cor of SEC. 14, WE DUG A 5½' X 11' X 3.5' DEEP HOLE. WE DUG ± 2' BELOW 2ND ROAD BED INTO UNDISTURBED TOP SOIL, FOUND NOTHING, SET ½" IRON PIPE FOR CORNER.

THIS WAS COPIED FROM JERRY SCHWARZ NOTES, THAT WERE SENT TO JHS. NO TIES WERE GIVEN. JUST DIST. BETWEEN CORNERS.

6-23-98 HLS

29

