N 1/4 COR SEC 24-101-14


N/O CORNER INFO. FROM KNOWER CO. SURVEYOR.

6-23-98 JERRY AND GREG SCHWARZ DUG W/ BACKHOE IN ¼ OF AN E-W TWP. ROAD, AND AT A POINT EQUAL DISTANCE FROM THE SW COR OF SEC 13 AND THE SE COR SEC 13, WE DUG A 6'x7'x3' DEEP HOLE. WE DUG ± 2' BELOW 2ND ROADBED INTO UNDISTURBED TOPSOIL. FOUND NOTHING. SET ½" IRON PIPE FOR CORNER HALFWAY AND ON LINE BETWEEN SECTION CORNERS E-W. CORNER FALLS IN ¼ OF E-W TWP. ROAD. THERE ARE NO OCCUPATION LINES RUNNING NORTH OR SOUTH OF CORNER AREA.

NOTES FROM JERRY SCHWARZ 7-14-98

6-23-98

SEC 13-101-14

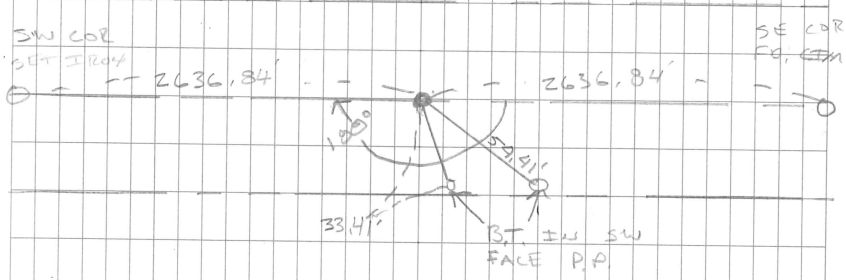

SEC 24-101-14