Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 9, Township T10IN, Range R14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-25-94 (DATE) found a GRANITE ROCK WITH CONC. MON. ABOVE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-25-94 (DATE) placed a CASTIRON MON., AT ROAD SURFACE

SKETCH OF REFERENCE TIES

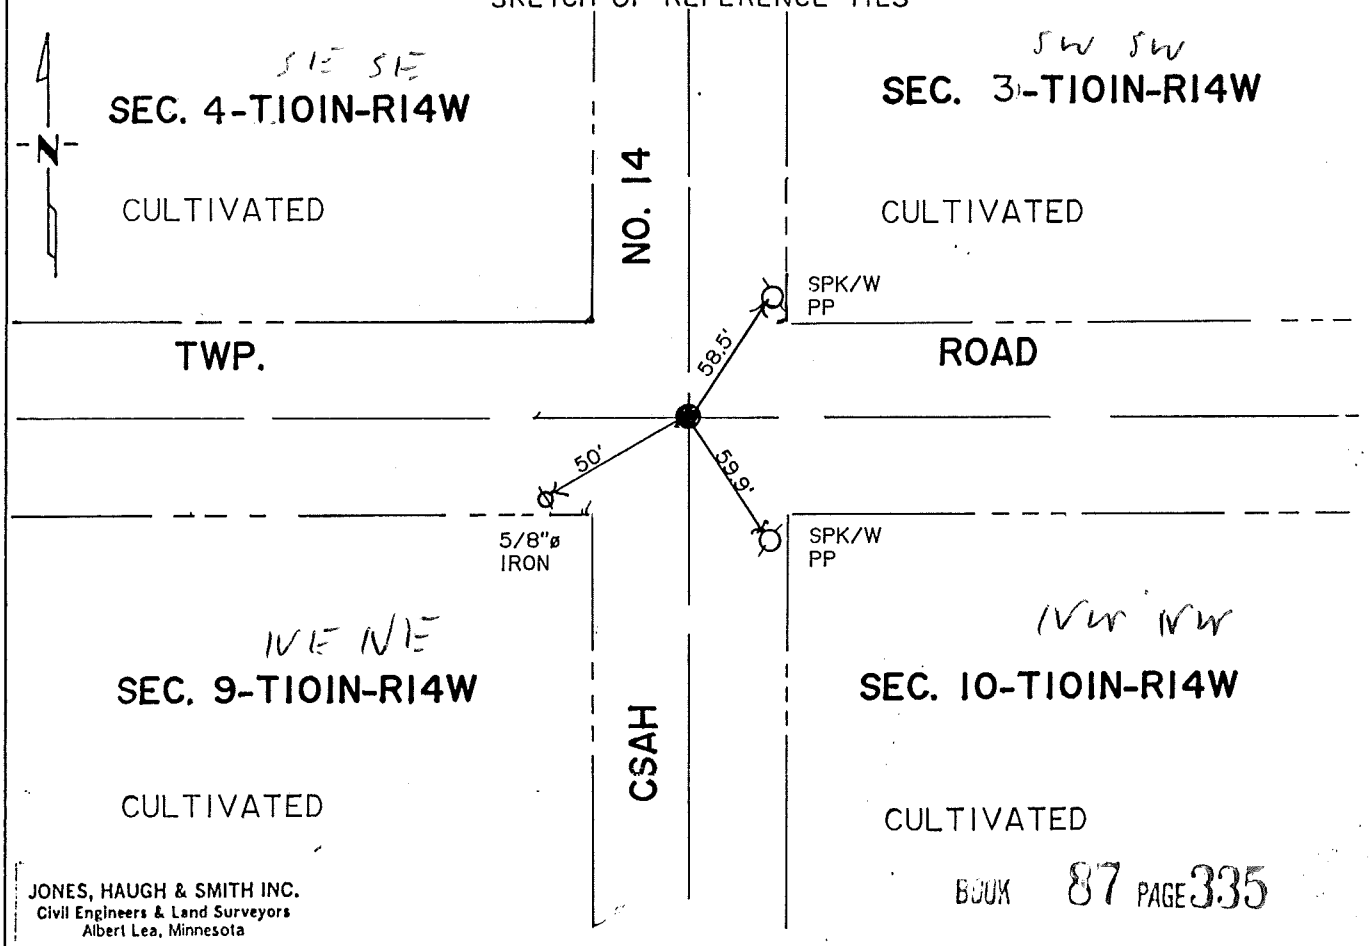

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 87 PAGE 335

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] (SIGNATURE) 6-12-95 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 19 day of June A.D., 1995

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 437345

Book 87 Misc Pg. 335

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE 1/4 SEC 9-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1854. The government notes show this corner was marked by a charred stake with a mound and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1951 Mower Co. Highway Dept. Records state Granite rock in place under concrete monument.

1994 Jones, Haugh and Smith crew, under the direction of John Schulte, Freeborn Co. Surveyor, RLS 13807, dug with county backhoe a 4' X 4' X 1.8' deep hole to old road bed on CL N-S-E-W roads. Located wood hub, continued digging. Found clay tile with iron pin cemented in tile, with granite rock under tile. Left monuments in place, set a CIM over monuments at road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 87 PAGE 336