Index No. "F" p 63

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 2, Township 101N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-16-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-16-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

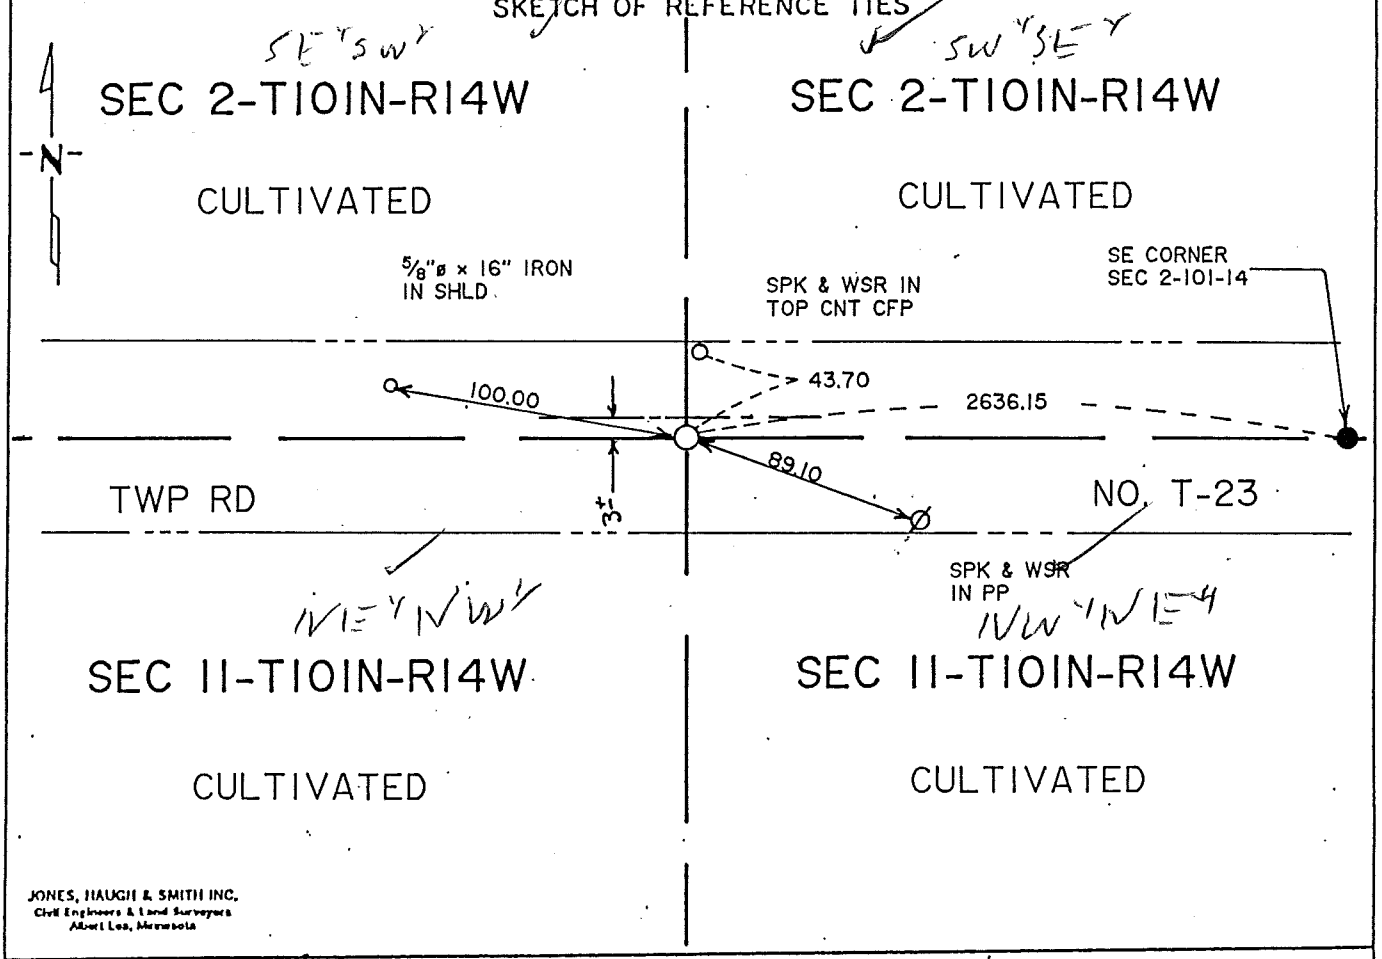

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 7-23-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 26th day of July A.D., 19 93

COUNTY RECORDER Charles Enge

By Marlene Marten, Deputy

DOCUMENT NO. 423404

Bk 80 Misc Pg. 375

M.H.D. FORM NO. 2105 BOOK 80 PAGE 375

STATEMENT OF EVIDENCE

S 1/4 corner Section 2-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1882 Clausen, Mower County Surveyor, notes indicate a government post at this location.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, dug a 5'x12'x3.5' deep hole with the County backhoe on the centerline of the east-west township roads and in line with fence running south. We dug to a depth of 3.5 feet which was into clay soil and found no evidence of a perpetuation of corner or the original public land survey corner. Therefore we set a cast iron monument near road surface on a straight line between the southeast corner of Section 2-101-14 and the centerline centerline intersection of the southwest corner of Section 2 and also in line with fence running south.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 376