Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 15, Township 101N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-7-91 (DATE) found a 5"Ø concrete monument over two 3/8"Ø irons over a large pointed stone with 4 wood posts.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-7-91 (DATE) placed a 5/8"Ø iron on North side of stone and set cast iron monument on surface over stone.

SKETCH OF REFERENCE TIES

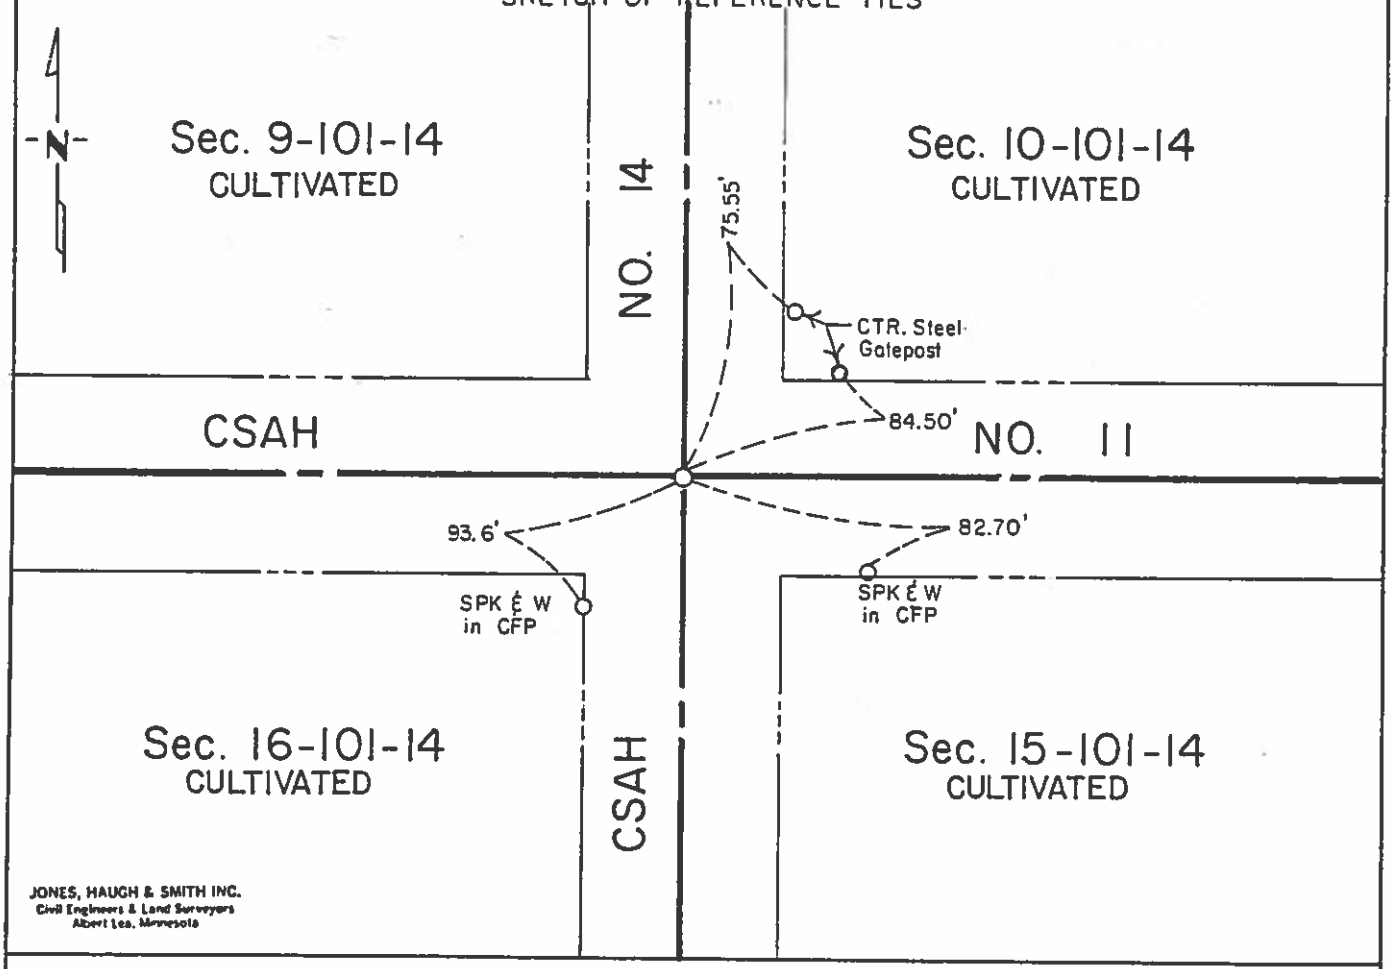

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 15-101-14

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1950 County Grading Plan shows a concrete monument inplace and ties were taken and recorded in Book "A" in the office of the County Engineer.

1991 Jones, Haugh and Smith crew, under the direction of John H. Schulte, dug with the County backhoe on the centerline of County roads for bituminous overlay project CP #50-91-08-14. Dug a 6' x 8' x 4' deep hole and uncovered the following: Below road surface uncovered a 6" concrete monument in clay tile with a 1/2" diameter iron cast in center. Removed monument and continued digging and found a 3/8" cast iron side by side over a large 10" x 18" pointed field stone 4' deep in virgin soil. At base of stone uncovered 4 wood posts in the 4 cardinal directions. Left stone monument as found and placed a 5/8" diameter iron on north side of stone and set cast iron monument over stone on road surface. The concrete monument found on surface was 0.4'W & 0.4'S of the center of field stone.

The monument agrees with past records and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.