Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 20, Township 101N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 5/22/96 (DATE) found a Refer to Statement of Evidence

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

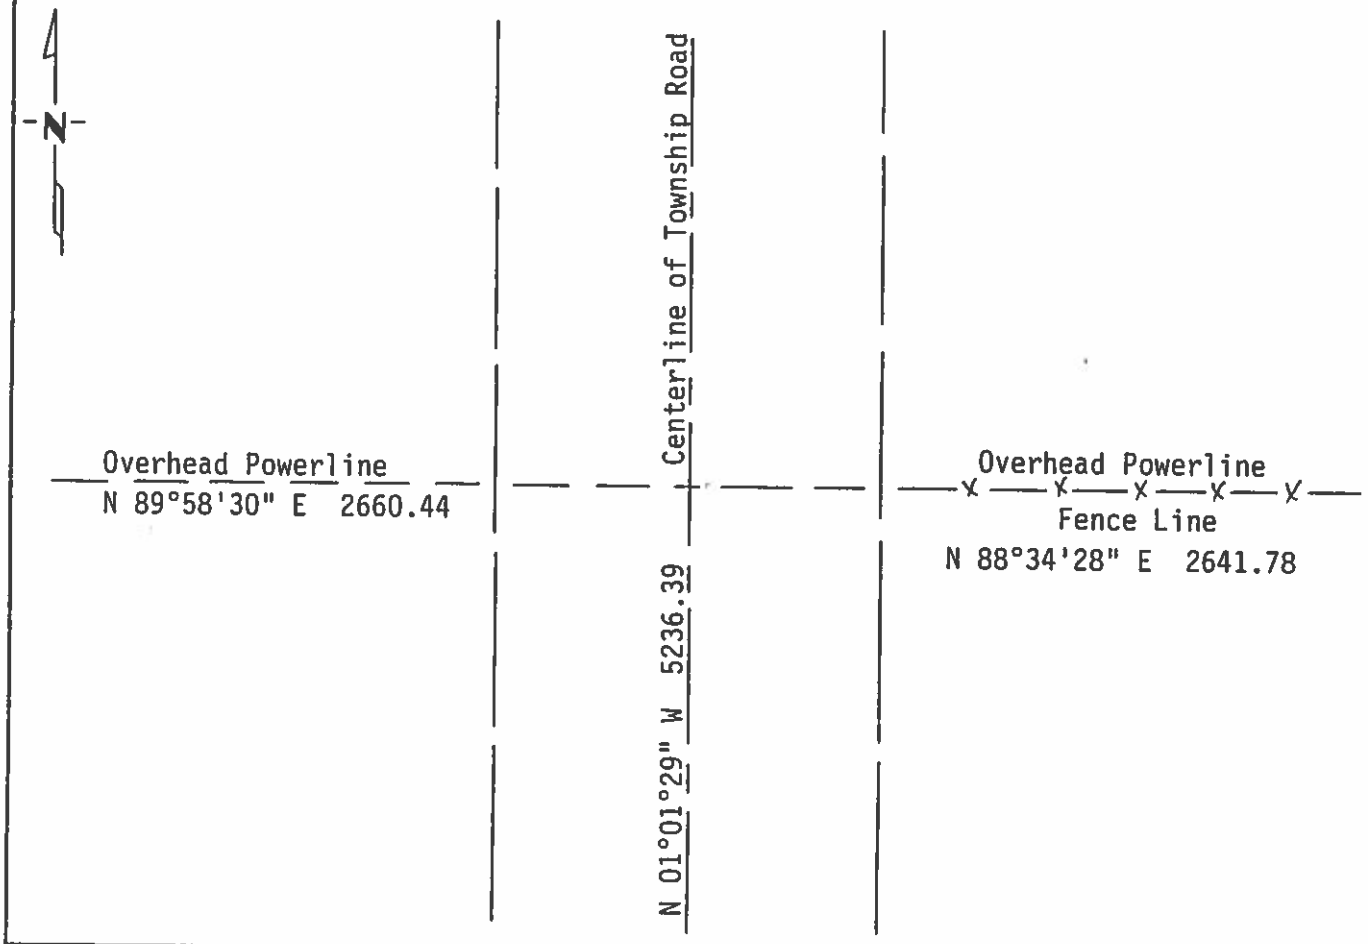

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Chris S. Ihle — 6/11/99
SIGNATURE — DATE

Registration No. 15229

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of _____

I hereby certify that this document was filed in the Reg. of Deeds office at _____ .M. on the _____ day of _____ A.D., 19 ___

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

N ¼ Corner Section 20-101-14

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information:

Mower County Surveyor
Mower County Highway Dept.
Mower County Recorder
MN Dept. of Transportation
MN DNR

No record of this corner was obtained from the above mentioned offices.

Land Consultants personnel searched area with a magnetic locator. The mathematical location is based on the longstanding occupation being the centerline of the N/S Township Road and on line with old fence line to East (over-head powerline to East and to West). Electronic measurements were taken to the adjoining land corners. The measurements on the northerly lines of Sections 19,20, and 21 are equitable to accept the occupation as the perpetuation of the Public Land Survey in an East/West location. The North/South location creates a substantial defection on the northerly line of Section 20. This occupation is 32.4 feet southerly of a straight line between the Northeast corner and the Northwest corner. More research/measurements would be required to substantiate the North/South position. The mathematical location was used to establish the North line of S ½, S ½ of SW ¼ and S ½, S ½ of SE ¼. The N/S position of the N ¼ corner has no consequence on the location of this 1/64th line.