Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 21, Township 101N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-1-90 (DATE) found a 2"Ø capped brass pipe stamped RLS 4423 on centerline N-S road, fence E-W

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

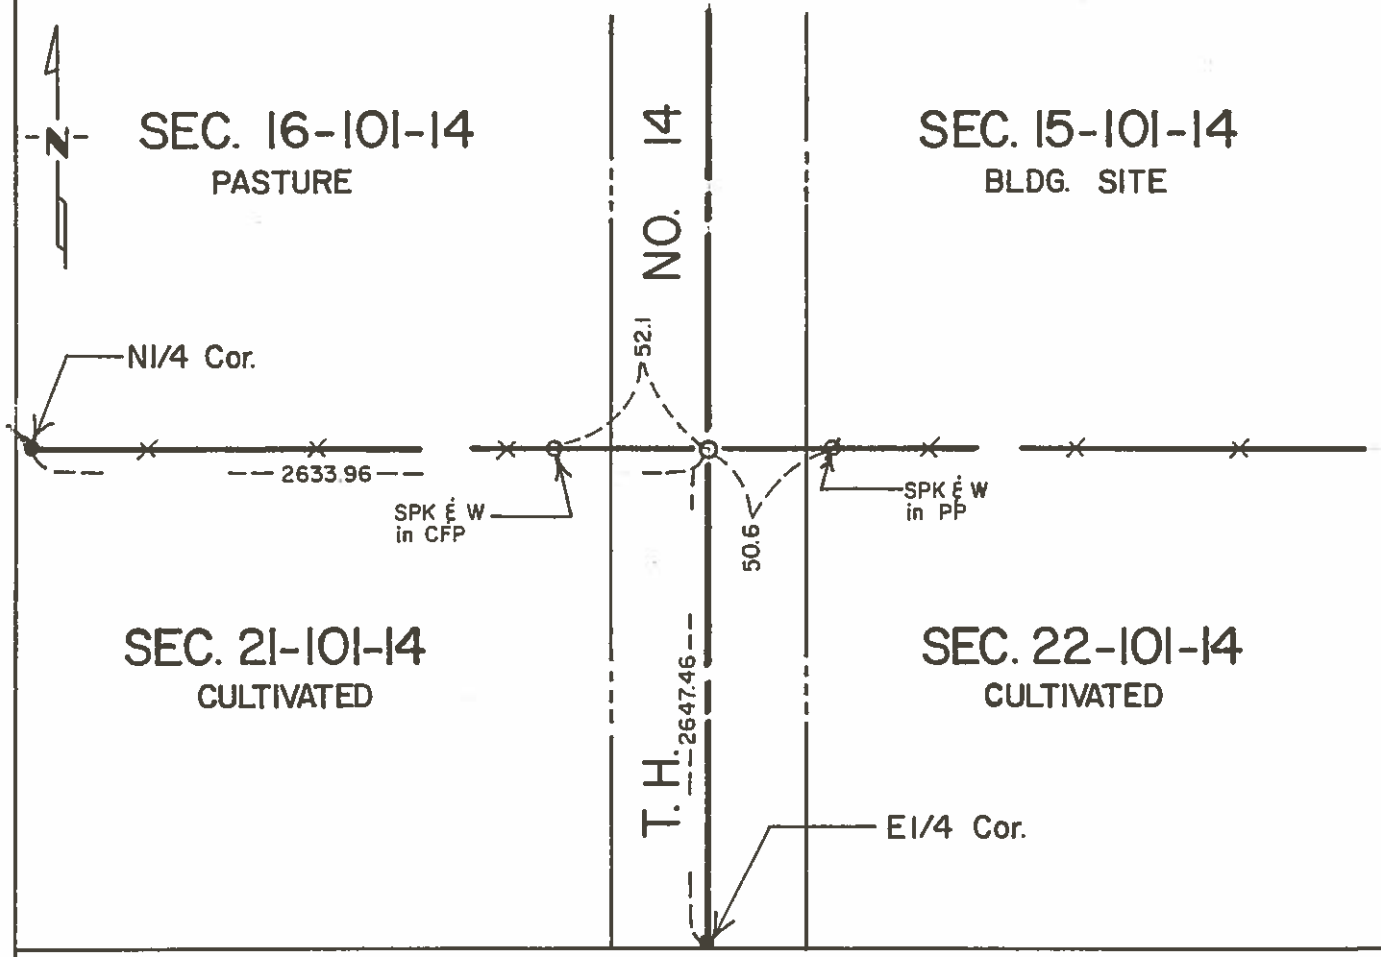

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Section 21-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show this corner was marked with a wood post in a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office
C.D. Hosfield RLS 4423

1940 Mower County Highway Grading Plan shows monument in place.

1967 C.D. Hosfield RLS 4423 placed a capped 2" diameter brass monument.

Record Book 'A' in the County Engineer's Office shows a brass capped pipe st flush over a concrete monument.

1990 Jones, Haugh & Smith crew found a 2" diameter capped brass pipe stamped RLS 4423 on centerline of Trunk Highway No. 14 in line with fence east and west.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.