CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 25, Township 101, Range 14,

5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 6-7-90 found a One large stone 1.5' x 1.1' x 1.3' at a depth of 3.8 feet

☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☐ On 6-7-90 placed a 3/4" iron with County Cap above stone.

SKETCH OF REFERENCE TIES

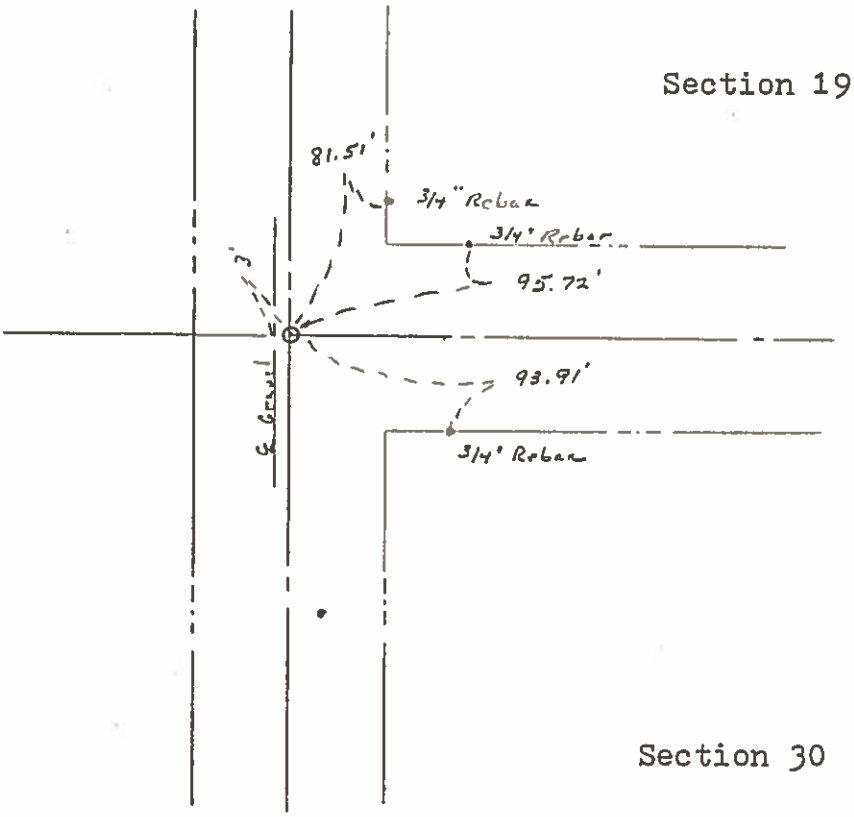

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond J. Tuma — Signature

6-25-90 — Date

Registration No. 15471

☒ Land Surveyor, ☐ Prof. Engineer

☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER SECTION 25 - T101N - R14W

1853 - John Ball, Deputy Surveyor, set a corner section post, drove a charred stake and raised mound per instructions and planted osage orange seeds in SE corner during the Original Public Land Survey.

1982 - Mower County Highway Department notes show they found three large rocks.

1990 - Mower County Highway Department Notes show they found three large rockes inplaced.

June 1990 - Raymond J. Tucker, R.L.S., assisted by the Mower County Highway Department personnel found one large stone 1.5' x 1.1' x 1.3' at a depth of 3.8 feet after a large excavation of 8' East-West and 16 feet North-South, 4 feet deep. Set 3/4" iron with County Cap above stone.

The above corner agrees with a electronis survey made of monumntes and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electronic survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.