CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter Corner of Section 26, Township 101, Range 14, 5th P.M. STATE OF MINNESOTA, County of Mower

At the corner location shown on the sketch:

☐ On 6-6-90 found a 4" diameter cast iron monument 0.6 feet below with a 1/2" iron beneath.
☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☐ On _____ placed a _____

SKETCH OF REFERENCE TIES

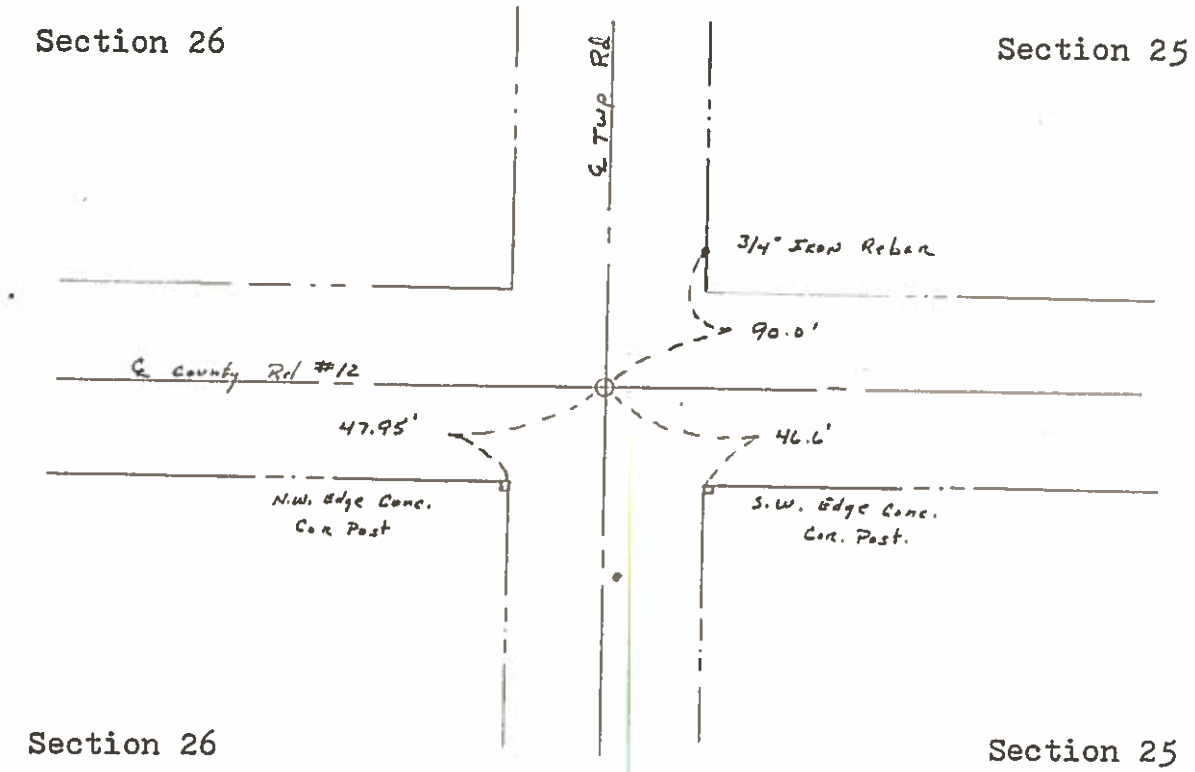

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond R Tucker — Signature
6-25-90 — Date

Registration No. 15471
☒ Land Surveyor, ☐ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

EAST QUARTER CORNER SECTION 26 - T101N - R14W

1853 - John Parker, Deputy Surveyor, set a quarter section post during the Original Public Land Survey.

1934 - Mower County Highway Department notes show inplaced tile.

1990 - Mower County Highway Department placed a magnetic corner.

June 1990 - Raymond J. Tucker, R.L.S., assisted by Mower County Highway Department personnel found a 4" diameter cast iron monument 0.6 feet below with a 1/2" iron beneath.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electric survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.