CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 27, Township 101, Range 14, 5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 6-6-90 found a cast iron monument 0.6 feet below with 3/4" iron beneath 2.3 feet below.
☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☐ On _____ placed a _____

_____

SKETCH OF REFERENCE TIES

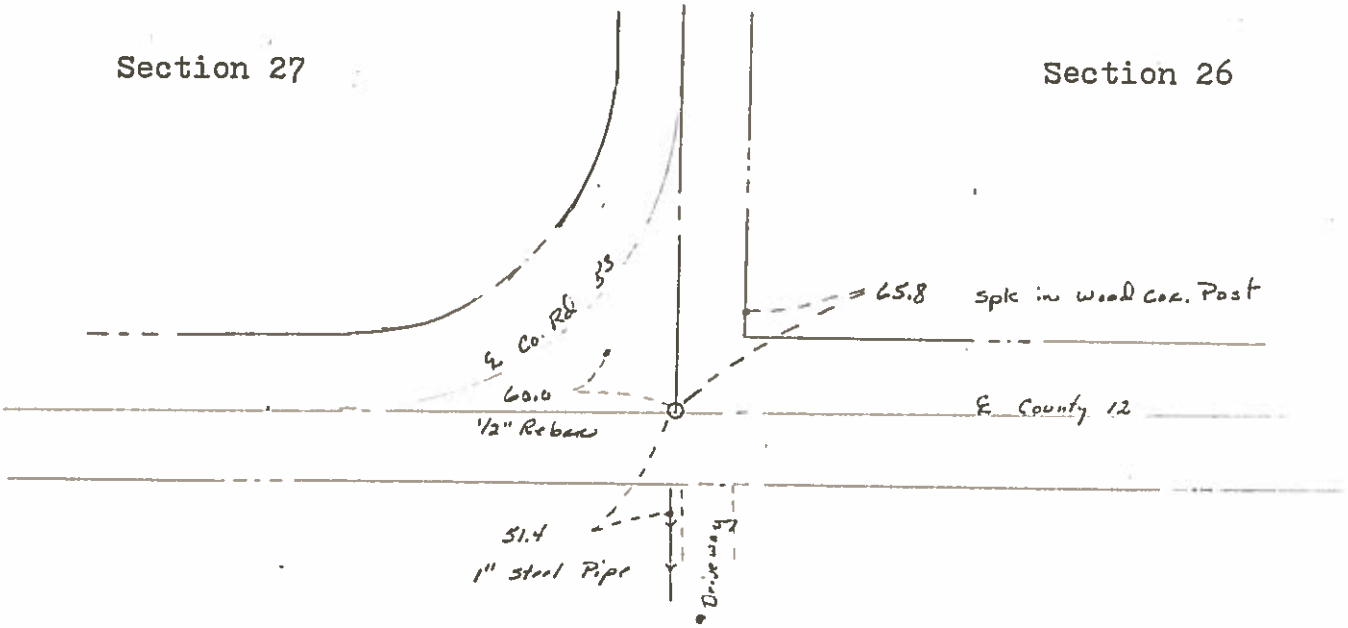

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond A. Tucker — Signature
6-25-90 — Date

Registration No. 15471
☒ Land Surveyor, ☐ Prof. Engineer
☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

EAST QUARTER CORNER SECTION 27 - T101N - R14W

1853 - John Parker, Deputy Surveyor, set a quarter section post, deposited a mound of earth and sod, cut a trench and planted osage orange seeds during the Original Public Land Survey.

1934 - Mower County Highway Department placed a concrete monument.

1990 - Mower County Highway Department placed a magnetic corner.

June 1990 - Raymond J. Tucker, R.L.S., assisted by Mower County Highway Department found a cast iron monument 0.6 feet below with 3/4" iron beneath 2.3 feet below.

The above corner agrees with a electornis survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electronic survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.