Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 21, Township 101N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-1-90 (DATE) found a 2"Ø capped (RLS 4423) brass pipe

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

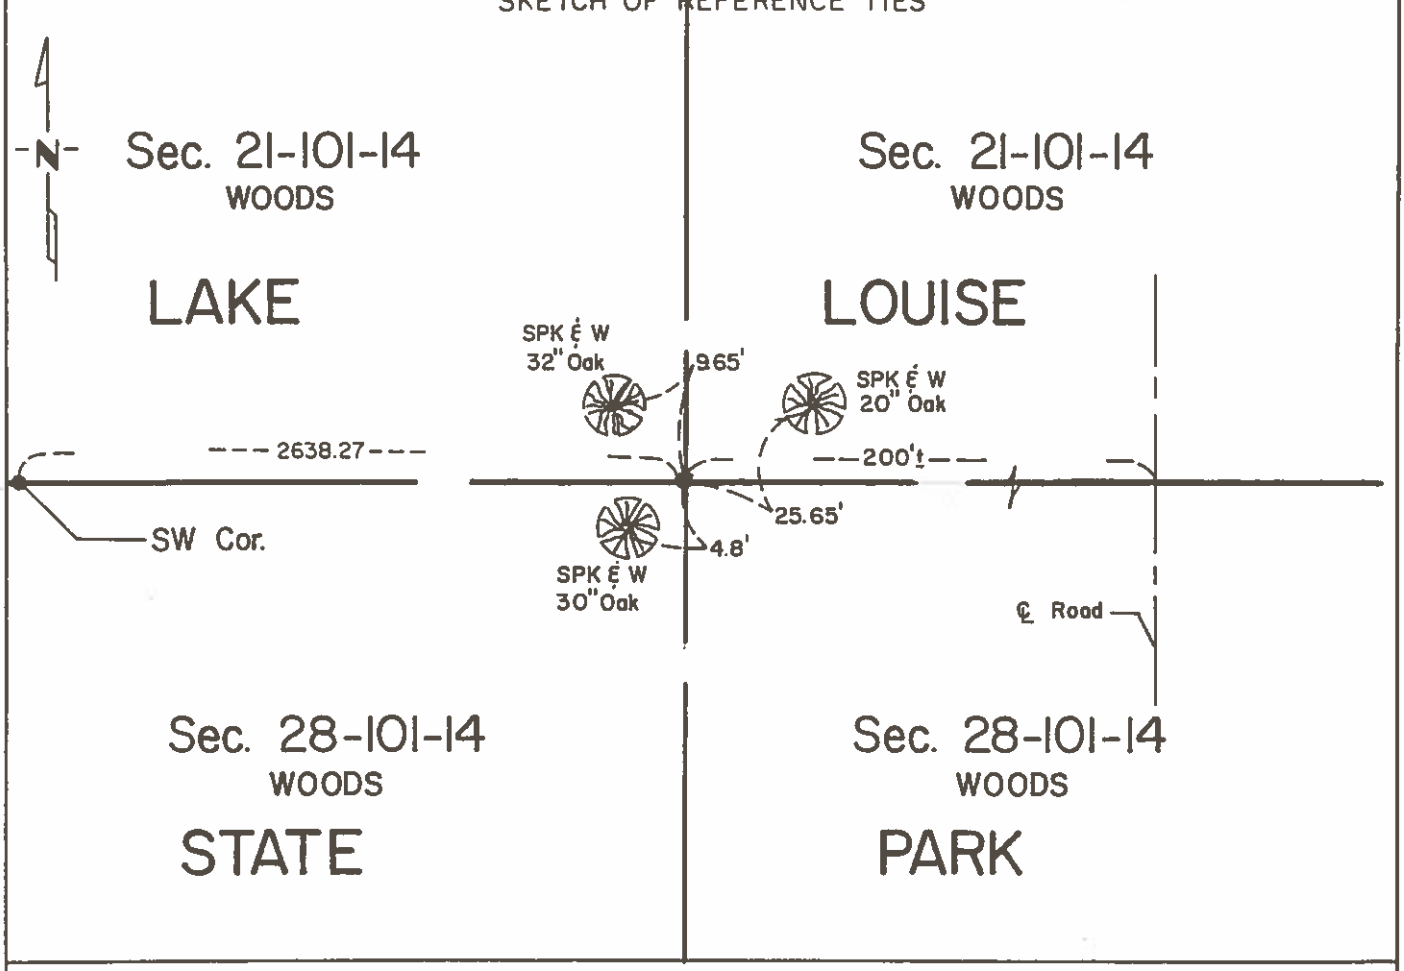

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-10-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 21-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show this corner was marked with a wood post. The following ties were taken:

18"	Oak	N 111° W	50 links	(33.0 feet)
18"	Oak	S 21 3/4° E	40 links	(14.36 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office
C.D. Hosfield RLS 4423

1967 C.D. Hosfield RLS 4423 placed a capped 2" diameter brass monument.

Recorded in Book 'A' in the County Engineer's Office shows a 2" diameter brass capped pipe was found and the following ties were taken:

6.1'	SSW to 24" Oak
10.8'	NW to 20" Oak
26.6'	ENE to 14" Oak

1990 Jones, Haugh & Smith crew uncovered a 2" diameter capped (RLS 4423) brass pipe.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.