Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 19, Township 101N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/1/98 (DATE) placed a MAGNETIC NAIL

SKETCH OF REFERENCE TIES

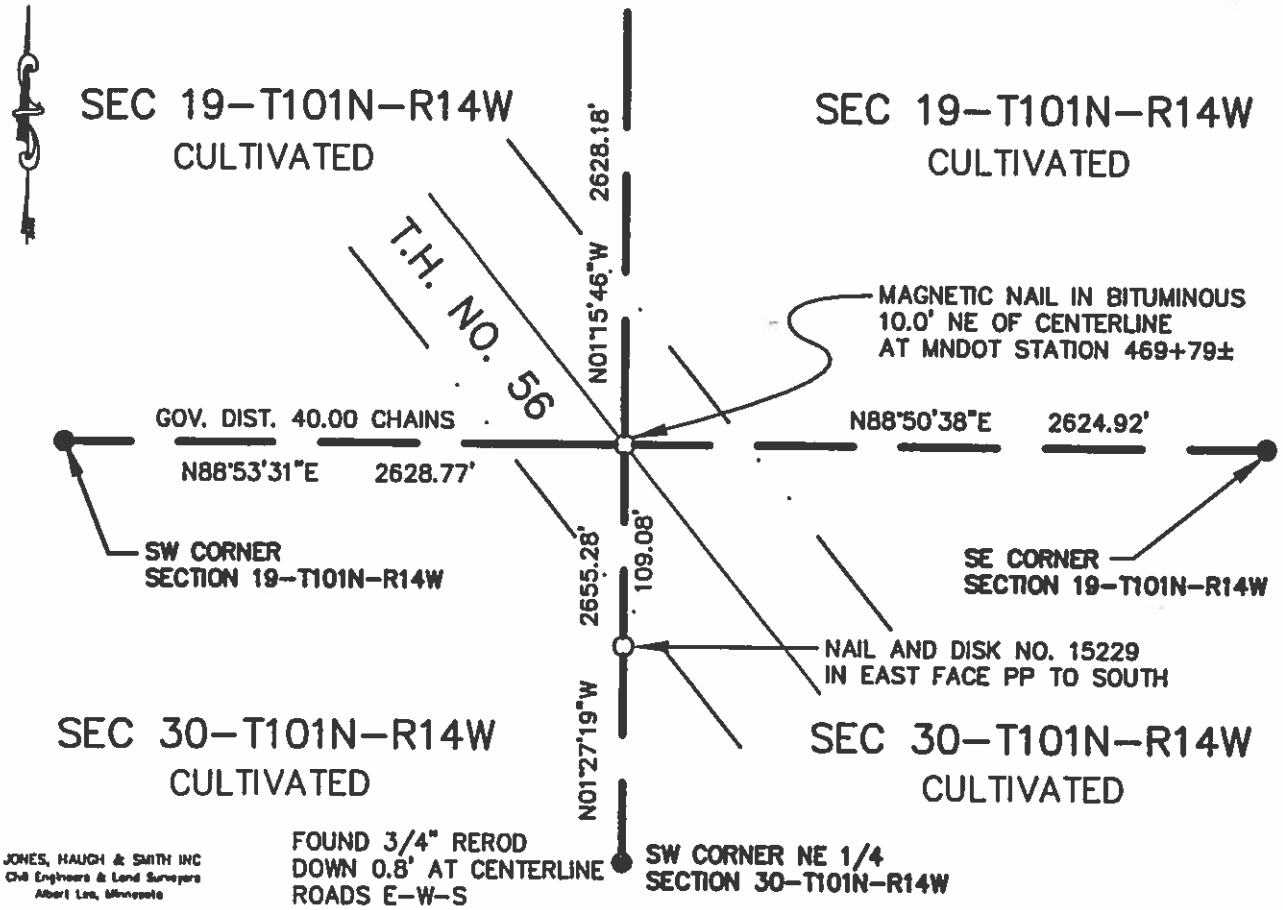

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

Cedric Schultz (SIGNATURE) 5/21/99 (DATE)

Registration No. 15229

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor Sec 19-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder

No record of this corner was obtained from the above mentioned offices.

1999

Land Consultants personnel searched area with a magnetic locator. The corner is in Trunk Highway No. 56 right of way and the area was disturbed by the construction of the roadway. The Minnesota Department of Transportation has no location for this corner. This corner is reestablished at intersection of the line prolonged from the South-Quarter corner of Section 30-101-14 (county mon.) through the center of Section 30-101-14 (3/4-inch rerod) and doubling the distance from the Northeast corner of the Northeast Quarter of Southwest Quarter and the fence line at the Southeast corner of the Northeast Quarter of Southwest Quarter of Section 19. This position is 1.1 feet South of a straight line between the Southeast corner and the Southwest corner of Section 19. This position is accepted as the perpetuation of the Public Land Survey corner.

For electronic survey data and analysis, contact the firm of Land Consultants of Southern Minnesota, Inc.