Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER Corner of Section 33, Township 101N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/17/97 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 04/17/97 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

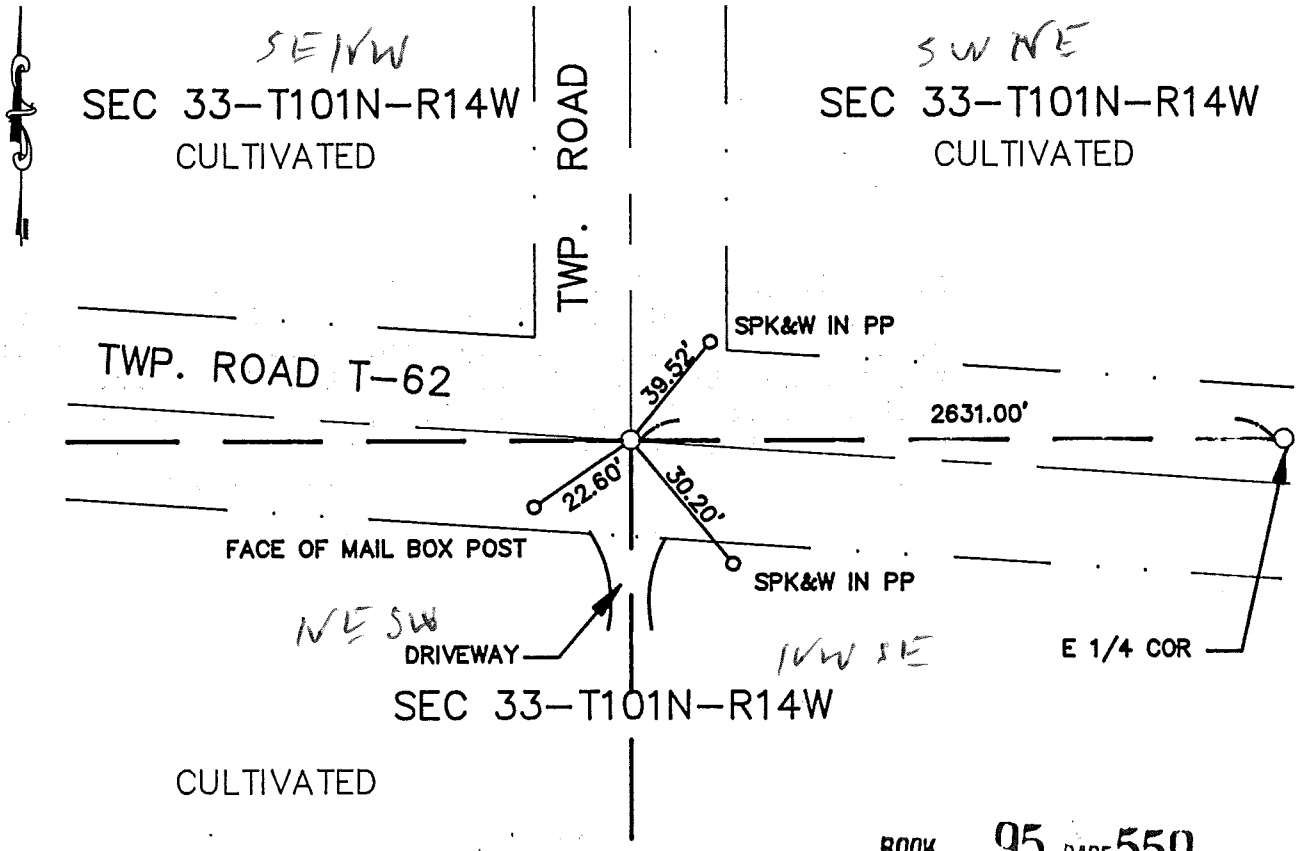

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 95 PAGE 559

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-10-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 15 day of July A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 454654

M.H.D. FORM NO. 2105

Book 95 Misc Page 559

Center SEC 33-101-14

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a 5/8" iron capped #13807 at the intersection of township road north and township road E-W. Removed cap and replaced it with a cast iron monument. Corner was located on a straight line by measuring a distance of 2631.00' from the E 1/4 corner of section 33.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.