Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 36, Township 101N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – _____ (DATE) found a – _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/03/2004 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

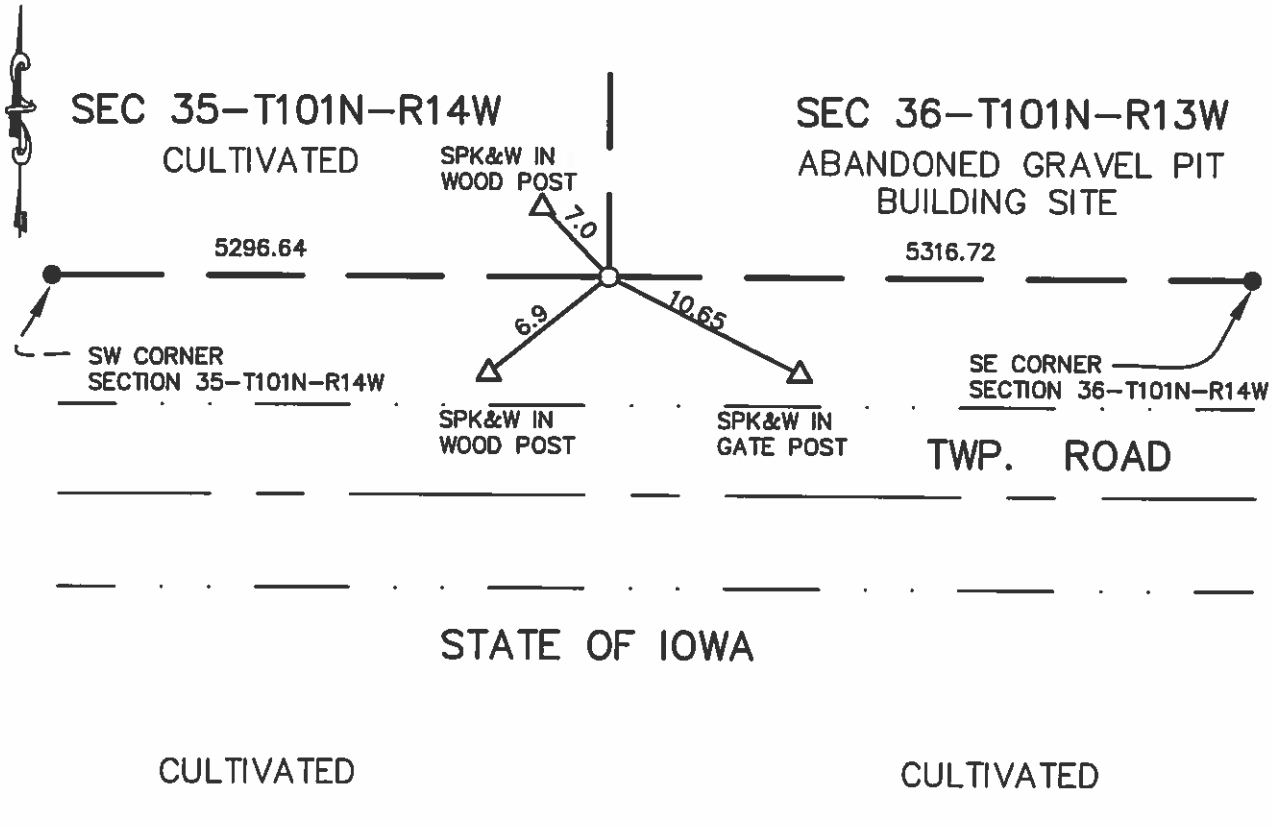

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-12-05 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SW Corner Section 36-T101N-R14W

Deputy Surveyor Andrew Talcott of the U.S. General Land Office originally established this corner in 1853 . The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

1982 Jones Haugh and Smith crew searched for the corner at the intersection of fence lines north and the north right-of-way line of township road. Found no evidence of the original PLS corner.

2000 Jones Haugh and Smith crew traversed from the southeast corner of the section 36 to the southwest corner of section 35 and tied in the existing occupation and searched for PLS corners. In the search for this corner it was determined that the corner was destroyed during township road construction. JHS then computed a position for this corner on a straight line between the two said corners in line with fence line north. This method fits existing occupation.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, placed a 5/8"x16" rebar with cast iron monument at the above mentioned position.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.