Index No. "G" p 63

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 2, Township 101N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-16-93 (DATE) found a 6" × 12" × 16" CONC MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-16-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

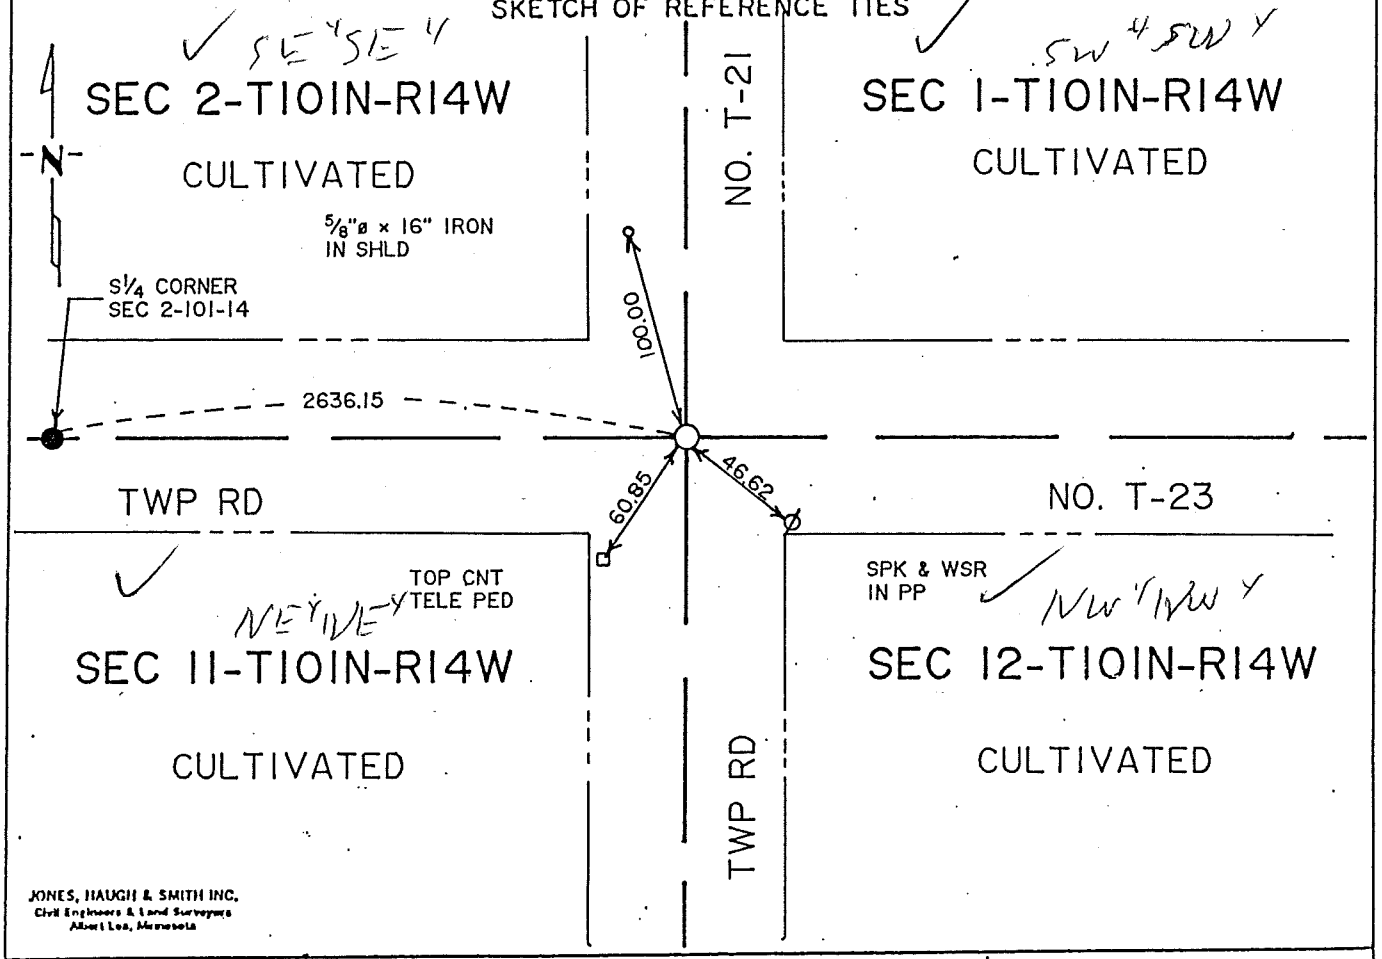


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 7-23-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 26 day of July A.D., 1993

COUNTY RECORDER Amanda Engan

By Marlene Martin, Deputy

DOCUMENT NO. 420195

Bk 80 Misc Pg 397

M.H.D. FORM NO. 2105 BOOK 81 PAGE 377

STATEMENT OF EVIDENCE

SE corner Section 2-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, dug with the County backhoe a 5'x12'x5' deep hole on the centerline centerline intersection of Township Road T-23 and T-21. We found a 6"x12'x16" deep concrete monument which rested at virgin soil depth and was on centerline centerline of said intersection. We continued digging to clay soil and found no other evidence. Therefore we reset concrete monument as found and set a 5/8" diameter x 16" iron capped RLS 13807 on the north side of monument and a cast iron monument near road surface above monument found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 89 PAGE 378

Index No. "F" p 63

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 2, Township 101N Range 14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-16-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-16-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

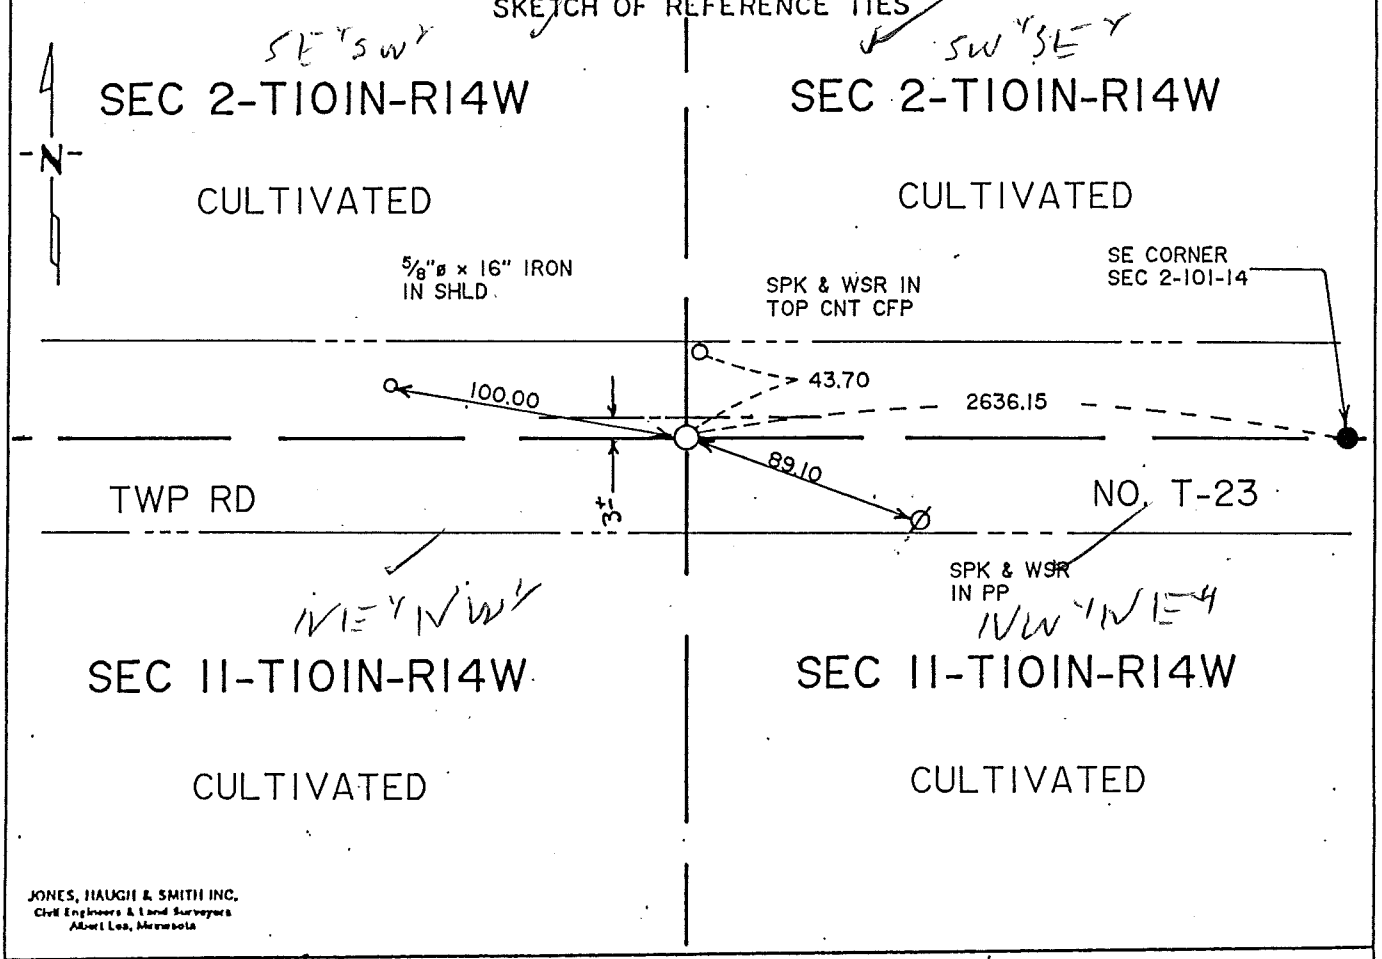


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 7-23-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 26th day of July A.D., 19 93

COUNTY RECORDER Charles Enge

By Marlene Marten, Deputy

DOCUMENT NO. 423404

Bk 80 Misc Pg. 375

M.H.D. FORM NO. 2105 BOOK 80 PAGE 375

STATEMENT OF EVIDENCE

S 1/4 corner Section 2-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1882 Clausen, Mower County Surveyor, notes indicate a government post at this location.

1993 Jones, Haugh & Smith Inc crew under the direction of John Schulte, RLS 13807, dug a 5'x12'x3.5' deep hole with the County backhoe on the centerline of the east-west township roads and in line with fence running south. We dug to a depth of 3.5 feet which was into clay soil and found no evidence of a perpetuation of corner or the original public land survey corner. Therefore we set a cast iron monument near road surface on a straight line between the southeast corner of Section 2-101-14 and the centerline centerline intersection of the southwest corner of Section 2 and also in line with fence running south.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 376

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 4, Township 101N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/14/1994 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/14/1994 (DATE) placed a 5/8" IRON CAPPED #13807

SKETCH OF REFERENCE TIES

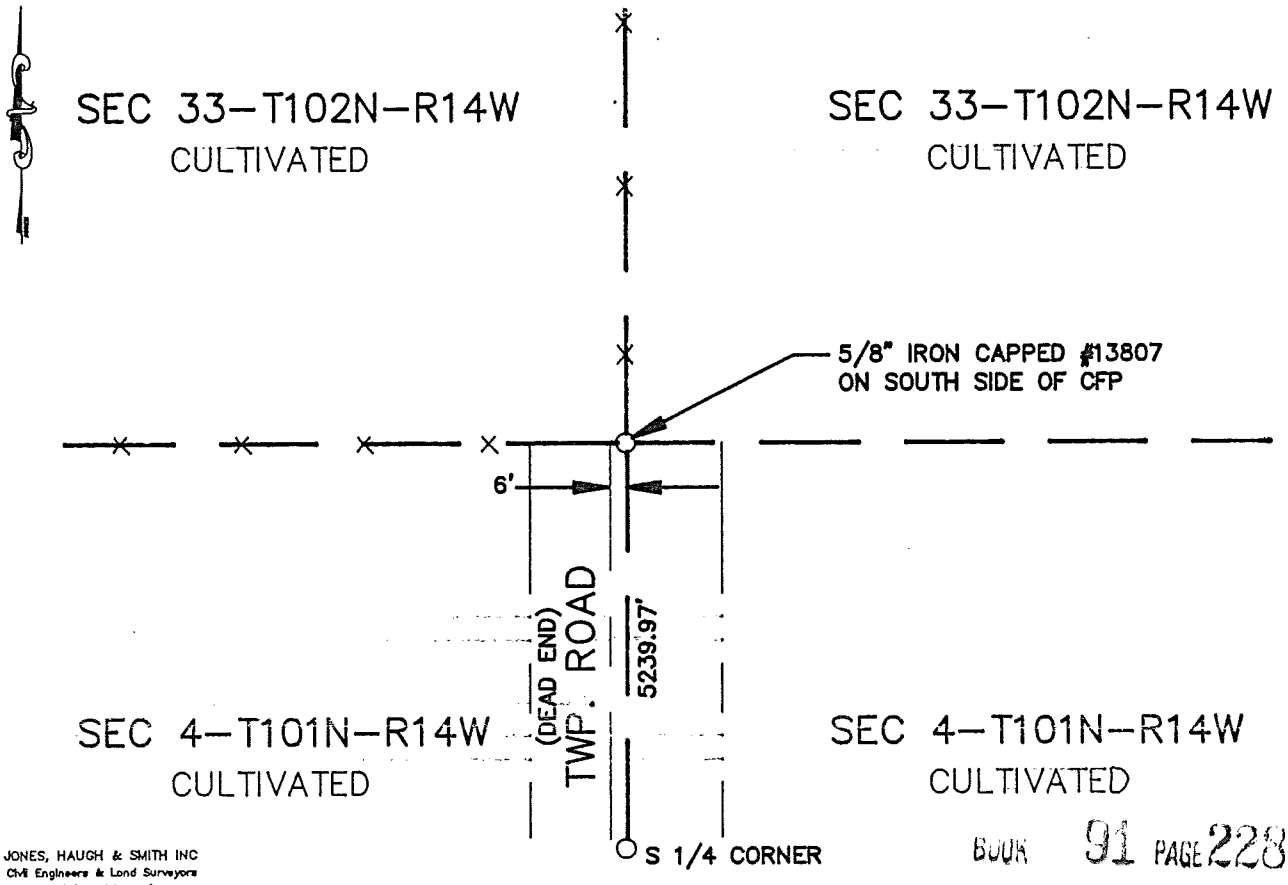


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 91 PAGE 228

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 20 day of May A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 444801

M.H.D. FORM NO. 2105

Book 91 Misc Page 228

N 1/4 Cor SEC 4-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located corner post of line fence north and line fence west. We then measured a distance of 5239.97' from S 1/4 corner to 5/8" iron to N 1/4 corner this is within 8' of the original government measurement, and placed a 5/8" iron capped #13807 on the south side of post found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

DAVE KNUTSON
FILLMORE CO SURVEYOR
NO. 10937
CORRECTED

Section Corner

"S" 1985

| | | |
|---|---|---|
| Sec. 25-36 | T101N-R14W | Mower |
| Sec. 30-31 | T101N-R13W | Fillmore |

Inplace large granite stone buried 1.0 feet 1.5 ft. west of ℄ in rock road with 5"x1¼" iron top - left inplace. Added magnetic corner section on top (0.3' below grade surface). August 18, 1982.

Ties:

| | |
|---|---|
| (Replaced New) | 45.73' Westerly to P.K. in old blazed 24" Burr Oak |
| (Checked) | 100.47' N.W. to P.K. in P.P. |
| (Checked) | 32.70' W. to P.K. in N. of F.P. |
| (Replaced New) | 72.30' W.S.W. to P.K. in top of 2nd wood fence post of F.E. (Driveway) |
| (Checked) | 53.55' S.E. to P.K. in top of north wood gate post |

Measured 2642.3 N. to ¼ corner on Line.

Section Corner

"U" 1985

| | | |
|---|---|---|
| Sec. 13-24 | T101N-R14W | Mower |
| Sec. 18-19 | T101N-R13W | Fillmore |

Found large granite stone down 2.6+ in Centerline and Centerline of Township Roads and C.S.A.H. No. 26 Fillmore. Found lathe -(left in place). Placed magnetic corner (full section) with 1'-3/4" Ø iron on top (0.2' below grade surface). August 19, 1982.

Ties:

| | |
|---|---|
| (New) | 39.40' N.W. to S.E. Face of 3" Diameter Iron Corner Post. |
| (New) | 51.16' N.E. to P.K. in top of F.P. (wood) |
| (New) | 42.80' S.E. to P.K. in N.E. of P.P. |
| (New) | 66.90' S.W. to P.K. in top of F.P. (wood) |

Corner

"C" 1985

C.S.A.H. No. 12 - Sta. 106+17.3 - ¼ Sec. Corner P.I.

| | | |
|---|---|---|
| Sec. 25 | T101N-R14W | Mower County |
| Sec. 30 | T101N-R13W | Fillmore |

Found 1" Pipe inside 4" clay tile (left in place) Placed magnetic corner over 1" pipe. (o.2' deep). August 18, 1982.

Ties:

| | |
|---|---|
| (New) | 77.99' S.W. to P.K. in P.P. |
| (Checked) | 130.20' W.N.W. to P.K. Nail in P.P. |
| (New) | 29.85' E to S. Edge Rib Section S. Post, Double Arrow Sign. |
| (New) | 75.00' S.W. to 3/4" Ø Iron Rod along Twp. Road East R/W. |
| (New) | 38.75' N.E. to S.E. Corner Tug Box. |

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 9, Township 101N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/25/1994 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/25/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

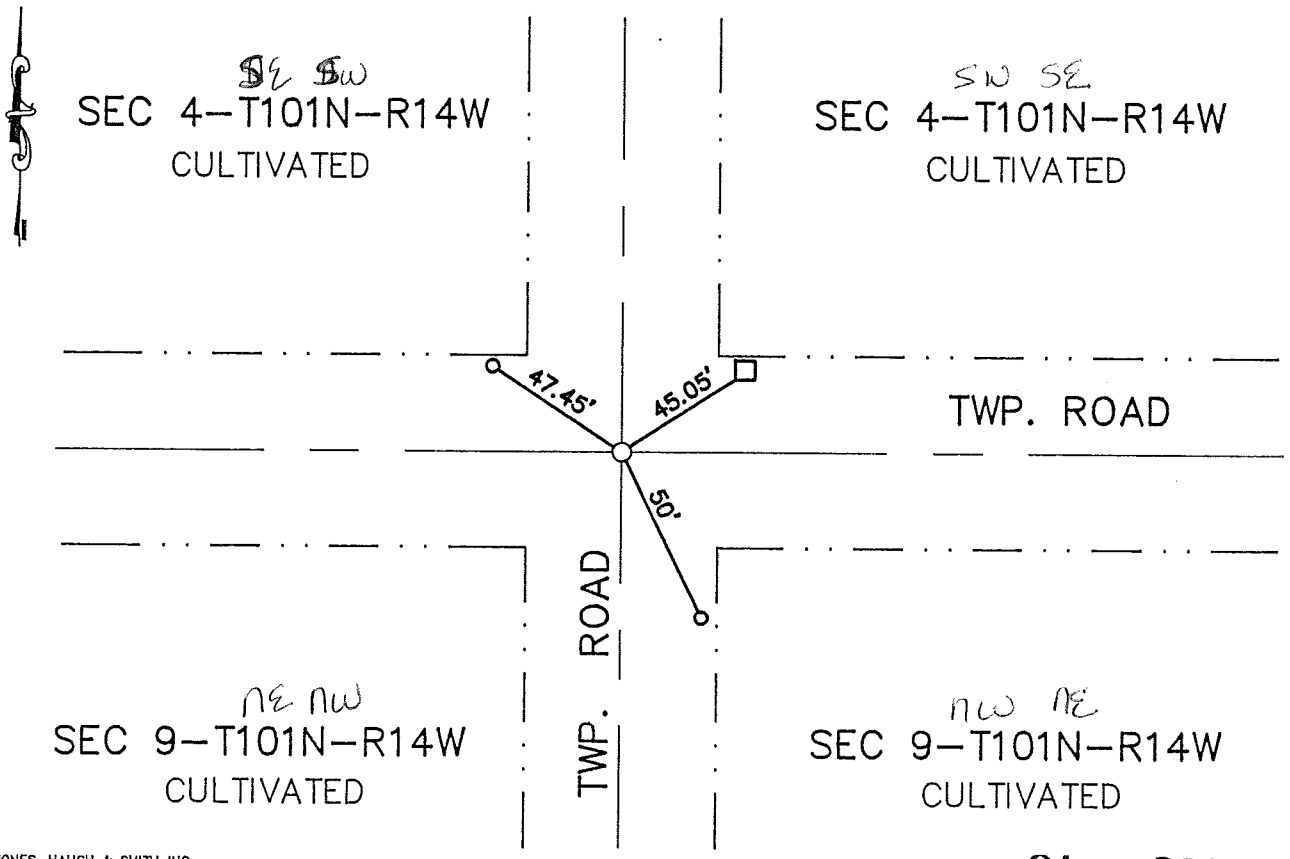


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 91 PAGE 230

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 20 day of May A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 444802

M.H.D. FORM NO. 2105

Book 91 Misc Page 230

N 1/4 Cor SEC 9-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and township road E-W. Found no evidence of original PLS corner. Placed a cast iron monument at the intersection of the above mentioned roads.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 9, Township 101N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/25/1994 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/25/1994 (DATE) placed a 5/8" IRON

SKETCH OF REFERENCE TIES

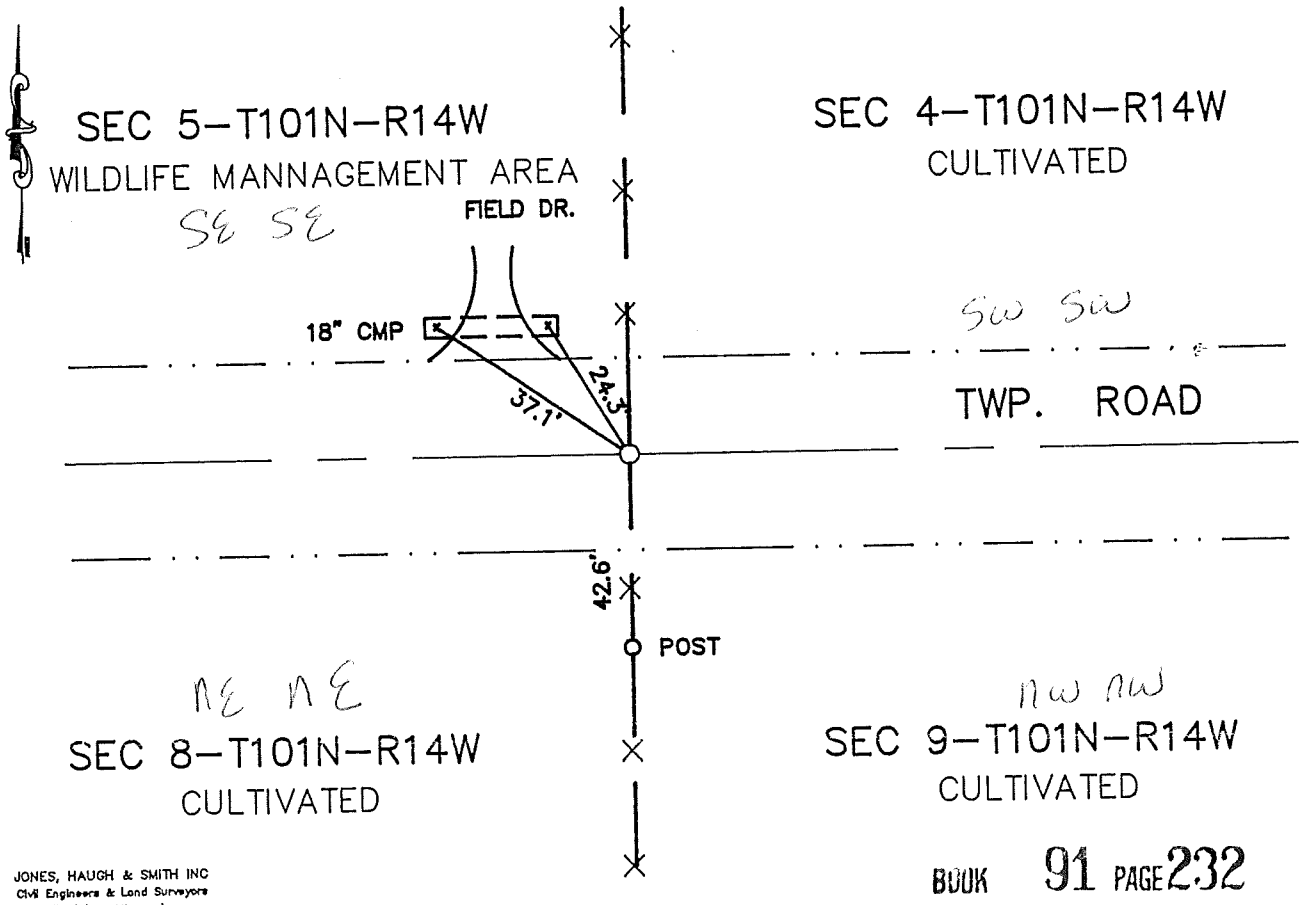


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 91 PAGE 232

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 20 day of May A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 444803

M.H.D. FORM NO. 2105

Book 91 Misc Page 232

NW Cor SEC 9-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and in line with line fence south. Found no evidence of original PLS corner. Placed a 5/8" iron capped #13807 at the CL of road and in line with line fence south.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 9, Township 101N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/25/1994 (DATE) found a TILE MONUMENT WITH IRON PIN

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/25/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

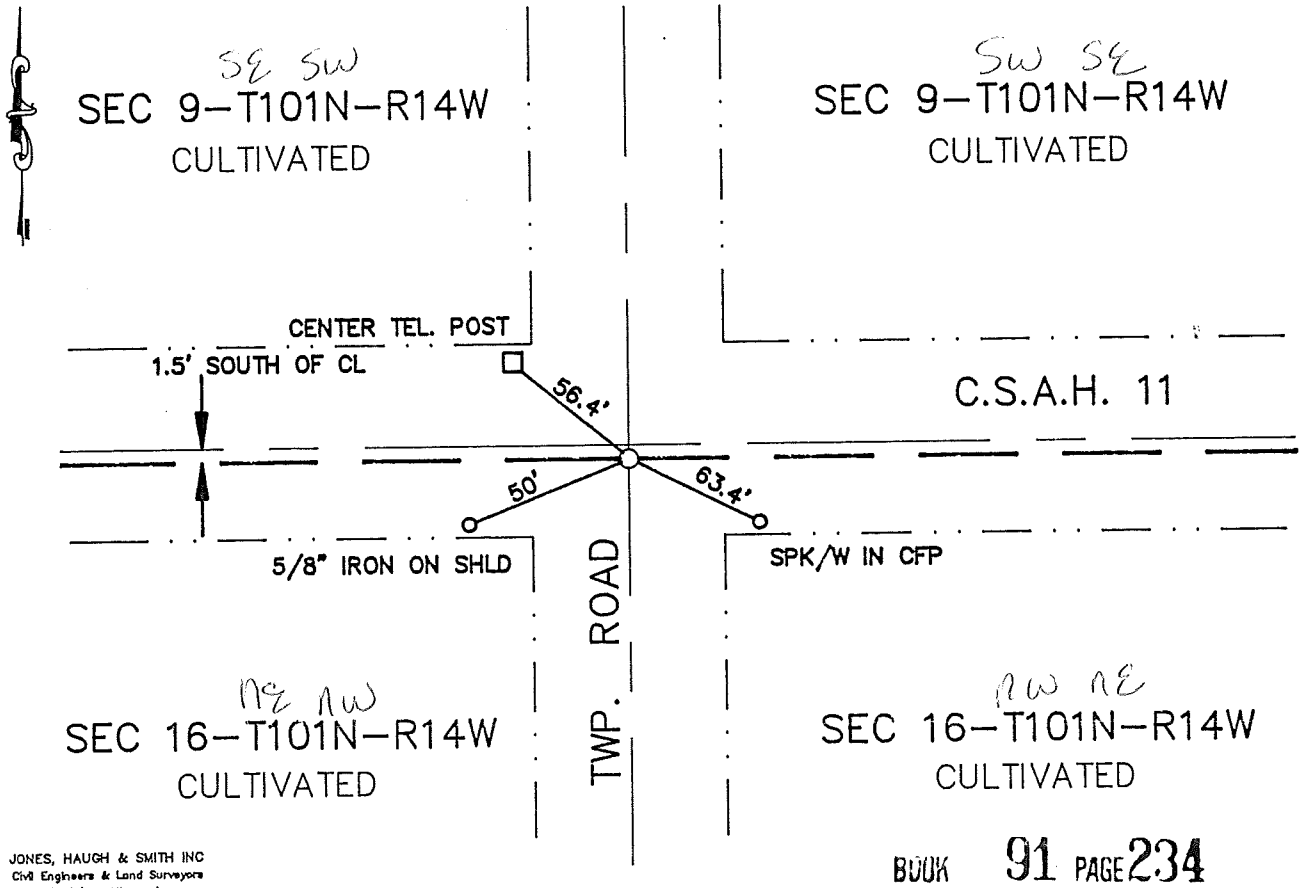


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 91 PAGE 234

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-13-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 20 day of May A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 444804

M.H.D. FORM NO. 2105

Book 91 Misc Page 234

S 1/4 Cor SEC 9-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1941 Mower County Highway Department records show inplaced tile monument.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the intersection of C.S.A.H. No. 11 and township road N-S. Uncovered a tile monument and pin 3' below the surface. Placed a cast iron monument over pin found. Corner is 1.5' south of the CL of C.S.A.H. No. 11.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 9, Township T10IN, Range R14W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-25-94 (DATE) found a GRANITE ROCK WITH CONC. MON. ABOVE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-25-94 (DATE) placed a CASTIRON MON., AT ROAD SURFACE

SKETCH OF REFERENCE TIES

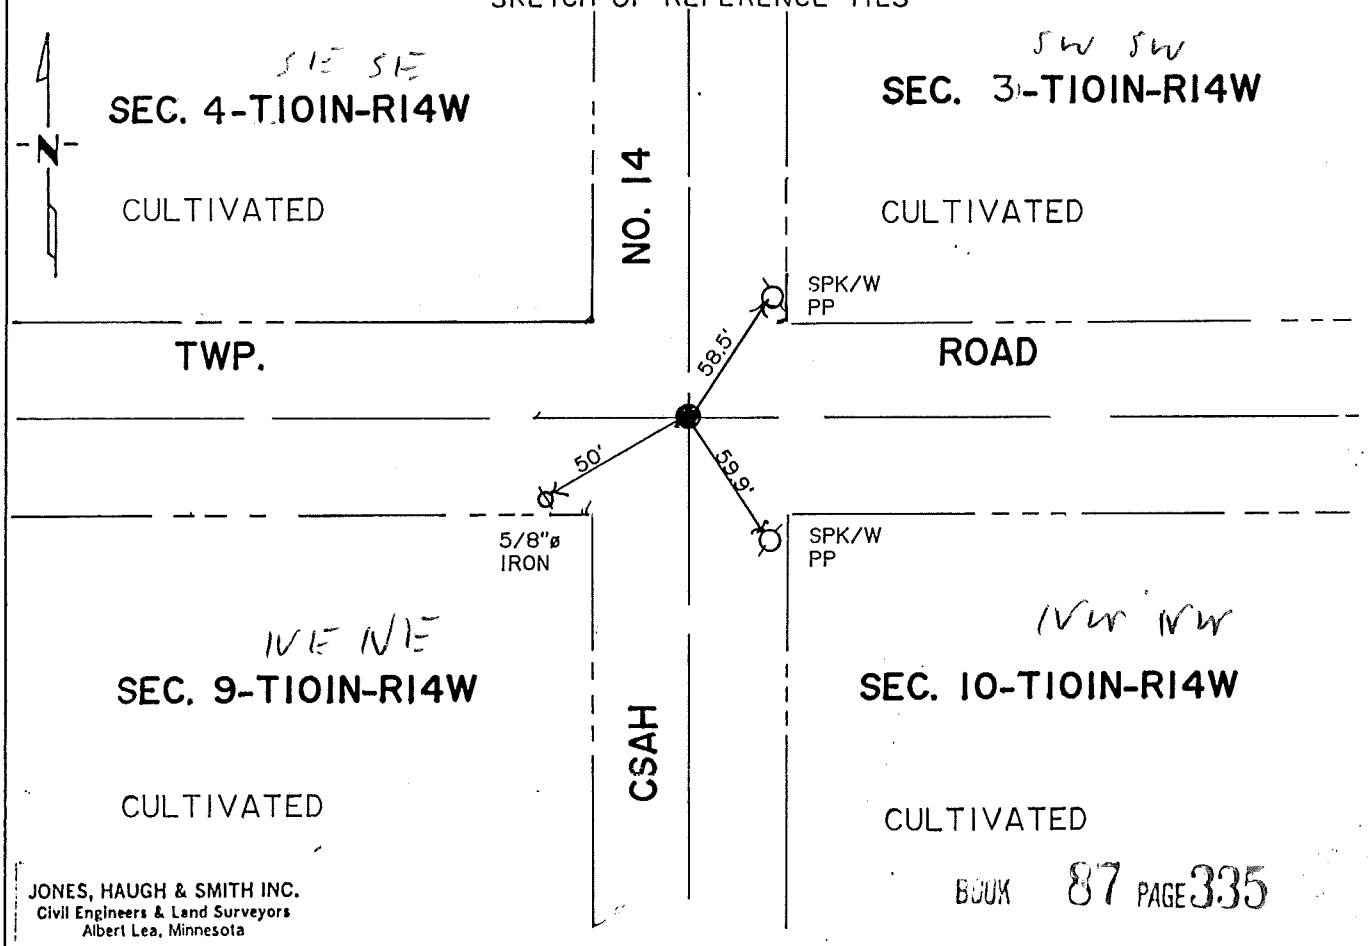


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 87 PAGE 335

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] (SIGNATURE) 6-12-95 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 19 day of June A.D., 1995

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 437345

Book 87 Misc Pg. 335

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE 1/4 SEC 9-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1854. The government notes show this corner was marked by a charred stake with a mound and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1951 Mower Co. Highway Dept. Records state Granite rock in place under concrete monument.

1994 Jones, Haugh and Smith crew, under the direction of John Schulte, Freeborn Co. Surveyor, RLS 13807, dug with county backhoe a 4' X 4' X 1.8' deep hole to old road bed on CL N-S-E-W roads. Located wood hub, continued digging. Found clay tile with iron pin cemented in tile, with granite rock under tile. Left monuments in place, set a CIM over monuments at road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 87 PAGE 336

"O" TIE BOOK P 24

Index No. 127

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHWEST Corner of Section 19, Township 101, Range 13, 5TH P.M.

STATE OF MINNESOTA, County of FILLMORE - Mower

NE Cor Sec 24 } T101N-R14W
SE Cor Sec 13 }
SW Cor Sec 18 T101N-R13W


At the corner location shown on the sketch:

☒ On 8/2/74 (DATE) found a Large granite stone down 2.6 in Centerline-Centerline of rock roads; found lath and "v" shaped iron pipe on top of granite.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

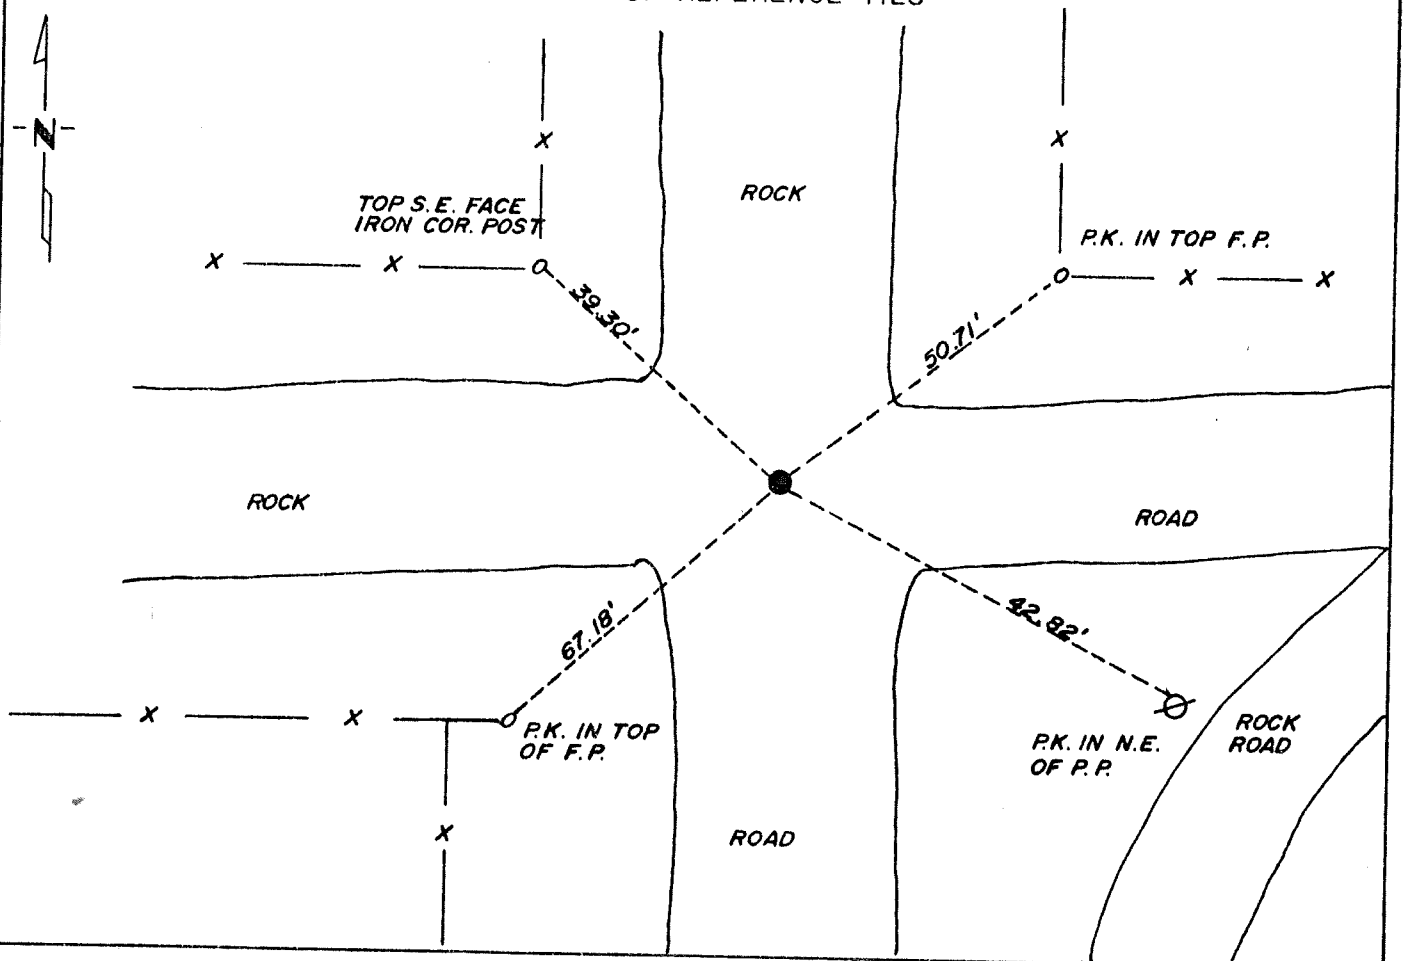


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David J. Knutson (SIGNATURE) 3/4/77 (DATE)

Registration No. 10937

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE ~~REGISTER OF DEEDS~~ COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the ~~Reg. of Deeds~~ COUNTY RECORDER office at 11:20 A.M. on the 4th day of March A.D., 1977

~~Register of Deeds~~ COUNTY RECORDER D. H. Lyndahl,

By Pearl A. Murphy, Deputy

DOCUMENT NO. 212354

M.H.D. FORM NO. 2105

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 22, Township 101N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 12/12/1996 (DATE) found a CFP

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 12/12/1996 (DATE) placed a CAPPED 5/8" IRON #22705

SKETCH OF REFERENCE TIE

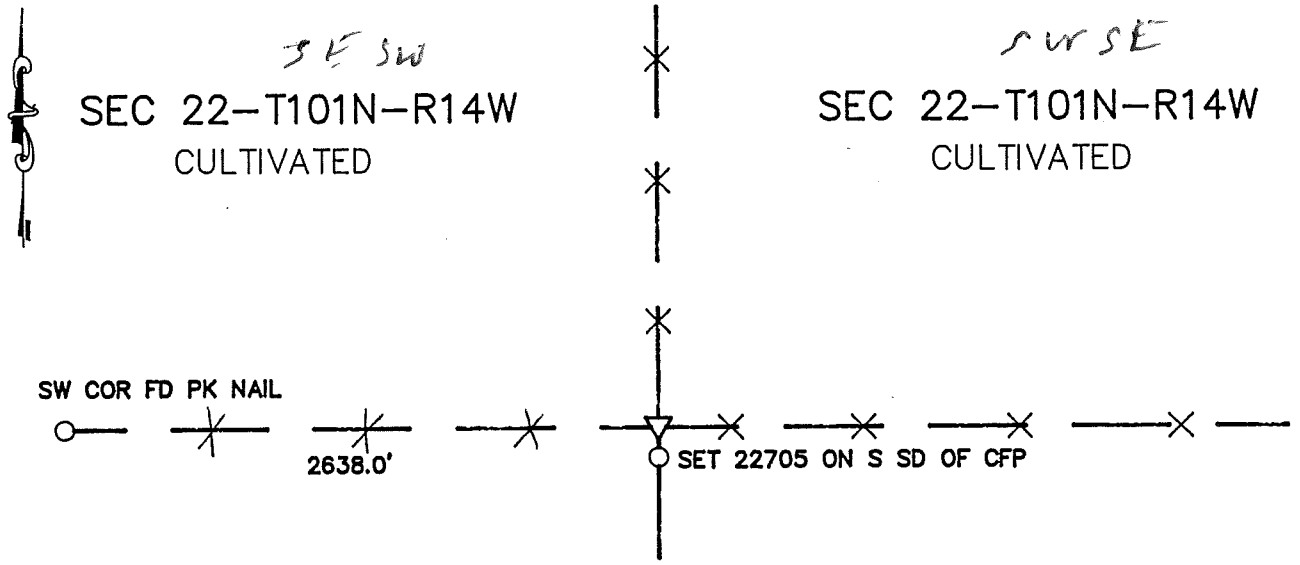


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 95 PAGE 557

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] (SIGNATURE) 7-10-97 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 15 day of July A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 454653

M.H.D. FORM NO. 2105

Book 95 Misc Page 557

S 1/4 Cor SEC 22-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, searched area with locator and probed by hand around fence corner. Found many stones. Farmer said the fence corner has been used for 60+ years. Accepted fence corner as marking original location of PLS corner. Set 5/8" iron with cap number 22705 on south side of post.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

TIE BOOK P. 24'

Index No. 124

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

WEST QUARTER Corner of Section 30, Township 101, Range 13, 5TH P.M.

STATE OF MINNESOTA, County of FILLMORE - MOWER E 1/4 Cor. Sec. 25 T104N-R14W


At the corner location shown on the sketch:

☒ On 8/2/74 (DATE) found a 1½ inch inside diameter iron pipe set inside a sewer pipe (tile) and down 1.1 feet in rock road.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

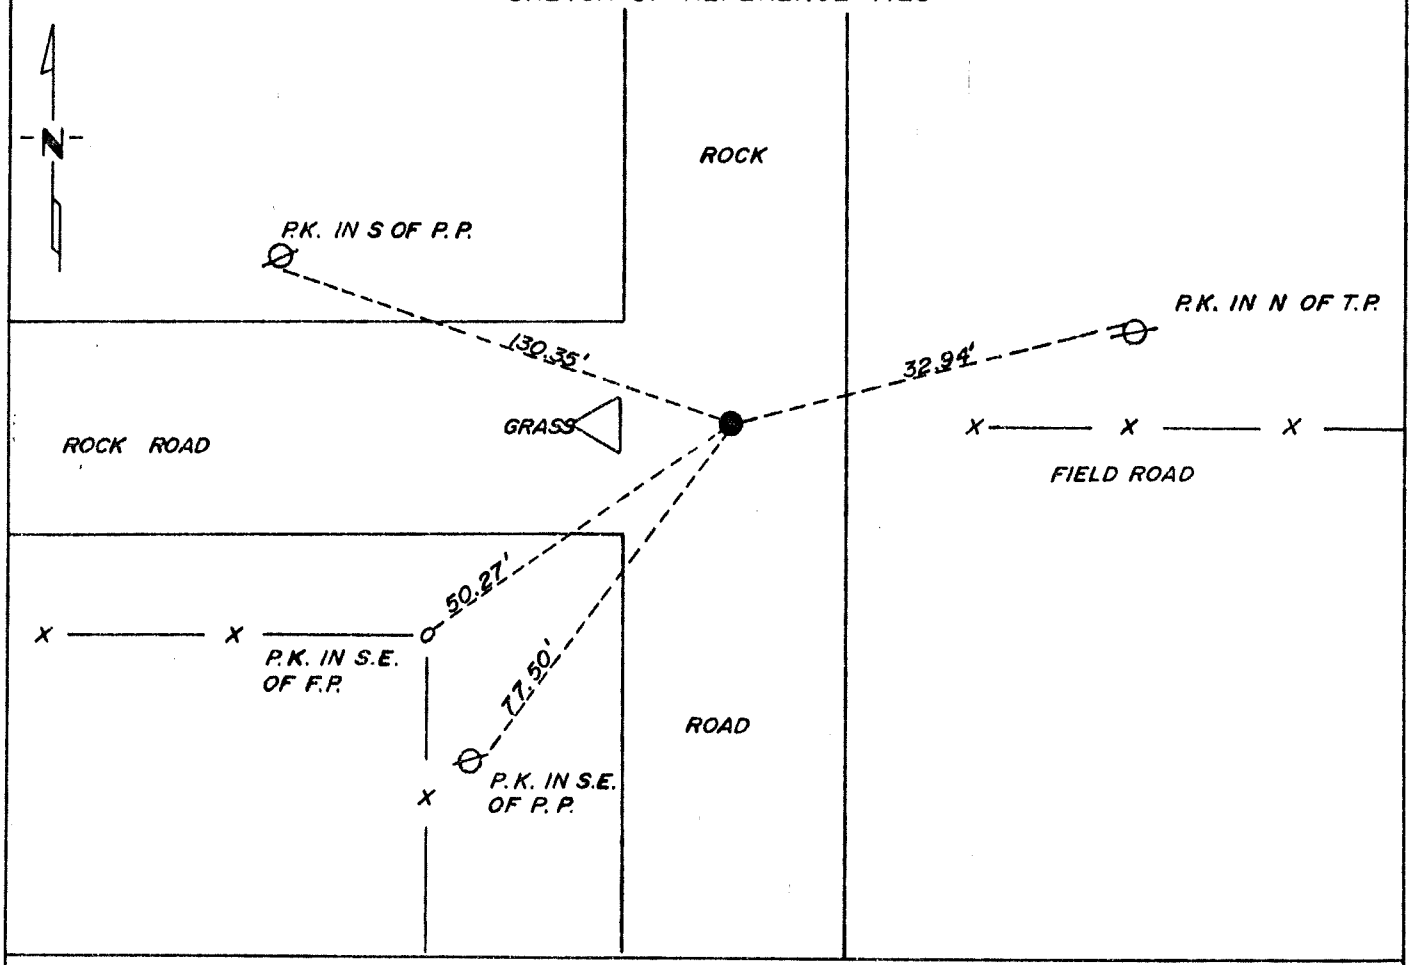


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David J. Knutson (SIGNATURE) 3/4/77 (DATE)

Registration No. 10937

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE ~~REGISTER OF DEEDS~~ COUNTY RECORDER

County of Fillmore

I hereby certify that this document was filed in the ~~Reg. of Deeds~~ COUNTY RECORDER office at 1:15 A.M. on the 4th day of March A.D., 1977

~~Register of Deeds~~ COUNTY RECORDER O. A. Lindahl

By Pearl A. Murphy, Deputy

DOCUMENT NO. 212350

M.H.D. FORM NO. 2105

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 30, Township 101N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch

☐ On 08/07/1997 (DATE) found a 5/8"X2' IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/07/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES



SE NE
SEC 30–T101N–R14W
CULTIVATED

SW NW
SEC 29–T101N–R14W
CULTIVATED

SPK&W IN TOP FC POST

SPK&W IN TOP FC POST

43.6'

41.25'

33.45'

TWP. ROAD

SPK&W IN TOP FC POST

NE SE
SEC 30–T101N–R14W
CULTIVATED

NW SW
SEC 29–T101N–R14W
CULTIVATED

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 285

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 10 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 455997

M.H.D. FORM NO. 2105

Book 96 Misc Page 285

E 1/4 Cor SEC 30-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the county backhoe at the CL of township road E-W at location determined by D.N.R. personnel from a recent traverse they had done in section 29. Located a 5/8"x2' iron 0.2' below road surface. Continued digging and found no other evidence of original PLS corner. Reset 5/8" iron and placed a cast iron monument above iron found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc. and D.N.R.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 32, Township 101N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-18-94 (DATE) found a cast iron monument. Monument removed because of road construction.

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☒ On 8-23-94 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

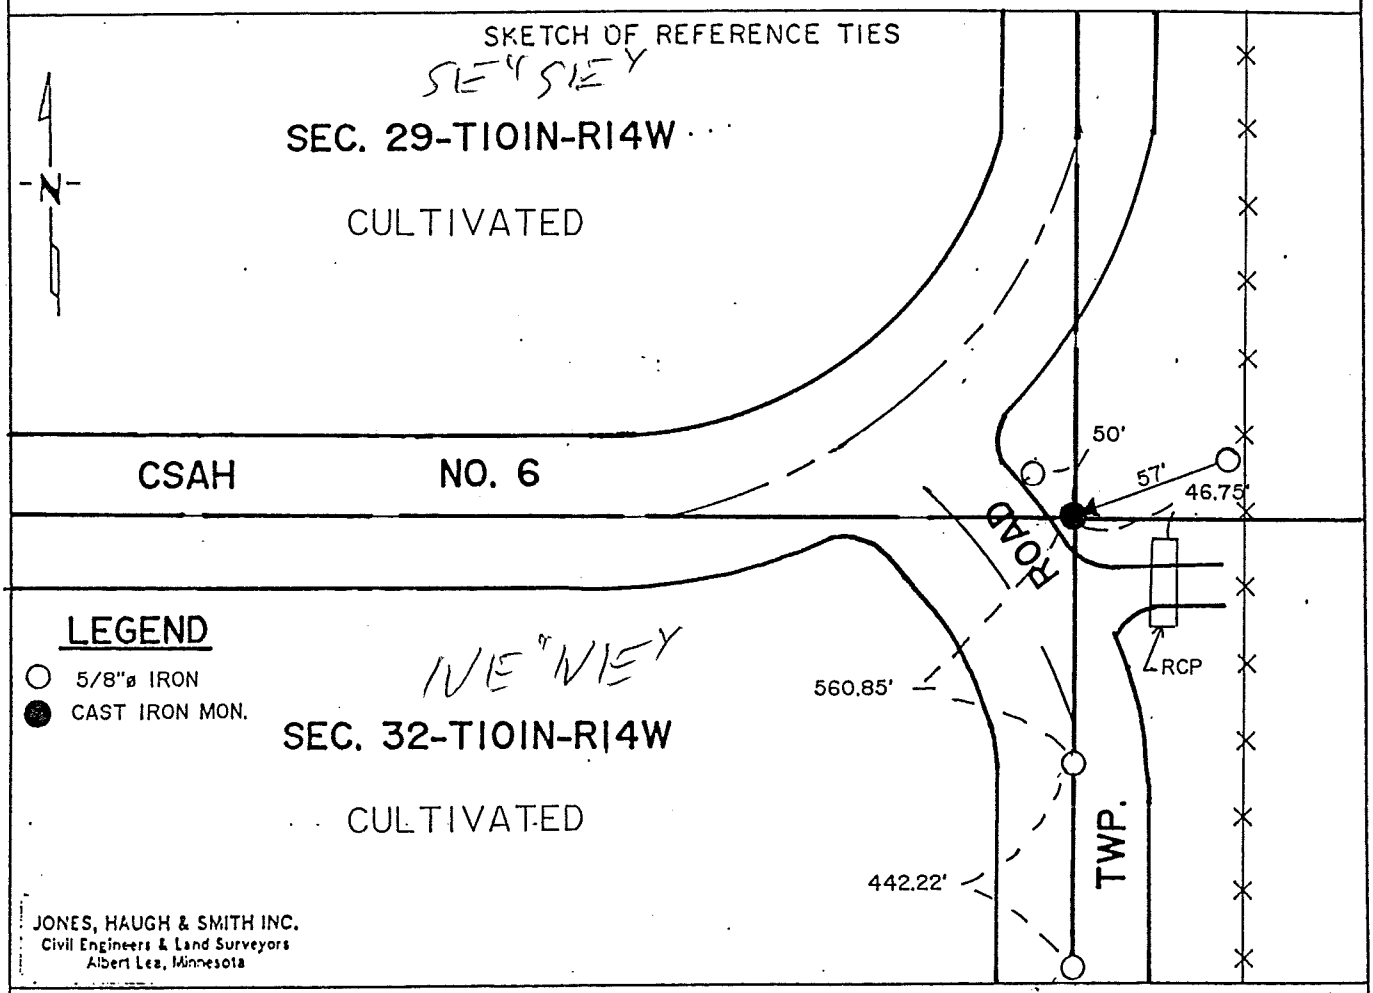


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-12-94

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 13 day of Sept A.D., 1994

COUNTY RECORDER Charles Enger

By Marlene Martin, Deputy

DOCUMENT NO. 431941

Bk 84 Pg. 458

M.H.D. FORM NO. 2105

BOOK 84 PAGE 458

STATEMENT OF EVIDENCE

N 1/4 corner Section 32-101-14

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Highway Department grading plans show a concrete monument at the corner.

Oct 1991 Jones, Haugh & Smith crew dug with County backhoe and found large old bridge spike driven into old wood post two feet deep in virgin soil. Set cast iron monument over found spike.

July 1994 Corner was to be destroyed by County State Aid Highway No. 6 road grading. Therefore we located the corner and retied it.

Aug 1994 Jones, Haugh & Smith crew re-set corner using ties from 7/18/94 and placed 5/8" diameter cast iron monument over on shoulder of Township Road.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 81 PAGE 459

TIE BOOK P24

Index No. 123

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHWEST Corner of Section 31, Township 101, Range 13, 5TH P.M.

STATE OF MINNESOTA, County of FILLMORE - MOWER

N. E SEC. 36 } T101N-R14W
S. E SEC. 25 }


At the corner location shown on the sketch:

☒ On 8/2/74 (DATE) found a large granite stone buried 1.0 feet in the centerline of a rock road with a 5" x 1¼" iron on top.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

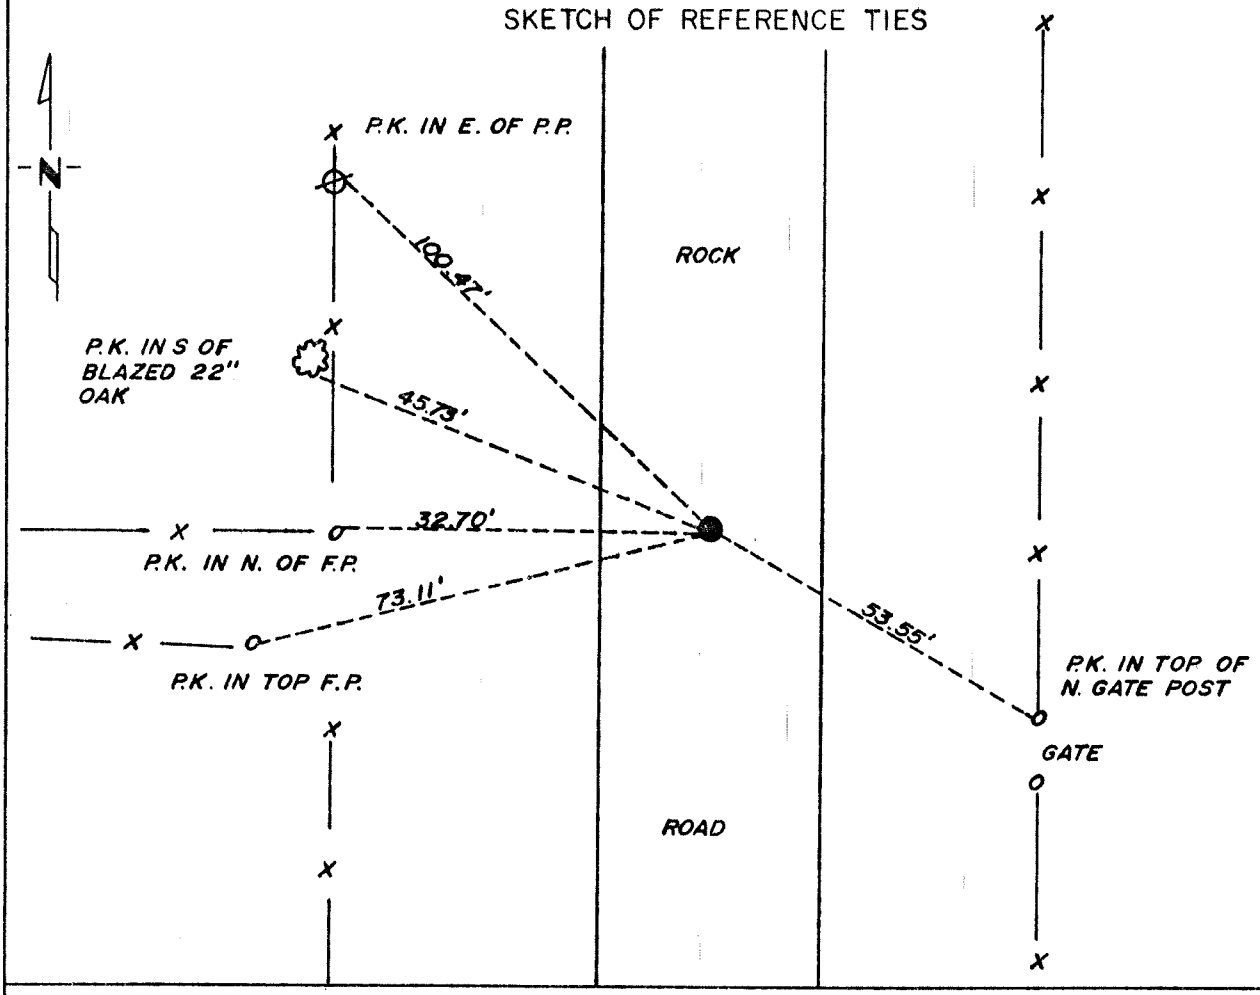


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David J. Knutson (SIGNATURE) 3/4/77 (DATE)

Registration No. 10937

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE ~~REGISTER OF DEEDS~~ COUNTY RECORDER
County of Fillmore

I hereby certify that this document was filed in the ~~Reg. of Deeds~~ (COUNTY RECORDER) office at 11:10 A.M. on the 4th day of March A.D., 1977

~~Register of Deeds~~ (COUNTY RECORDER) O. H. Lindahl,

By Pearl A. Murphy, Deputy

DOCUMENT NO. A 13470

M.H.D. FORM NO. 2105

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 32, Township 101N, Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/16/1991 (DATE) found a 5/8" ø IRON OVER 1"ø x 15" PIPE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10/16/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

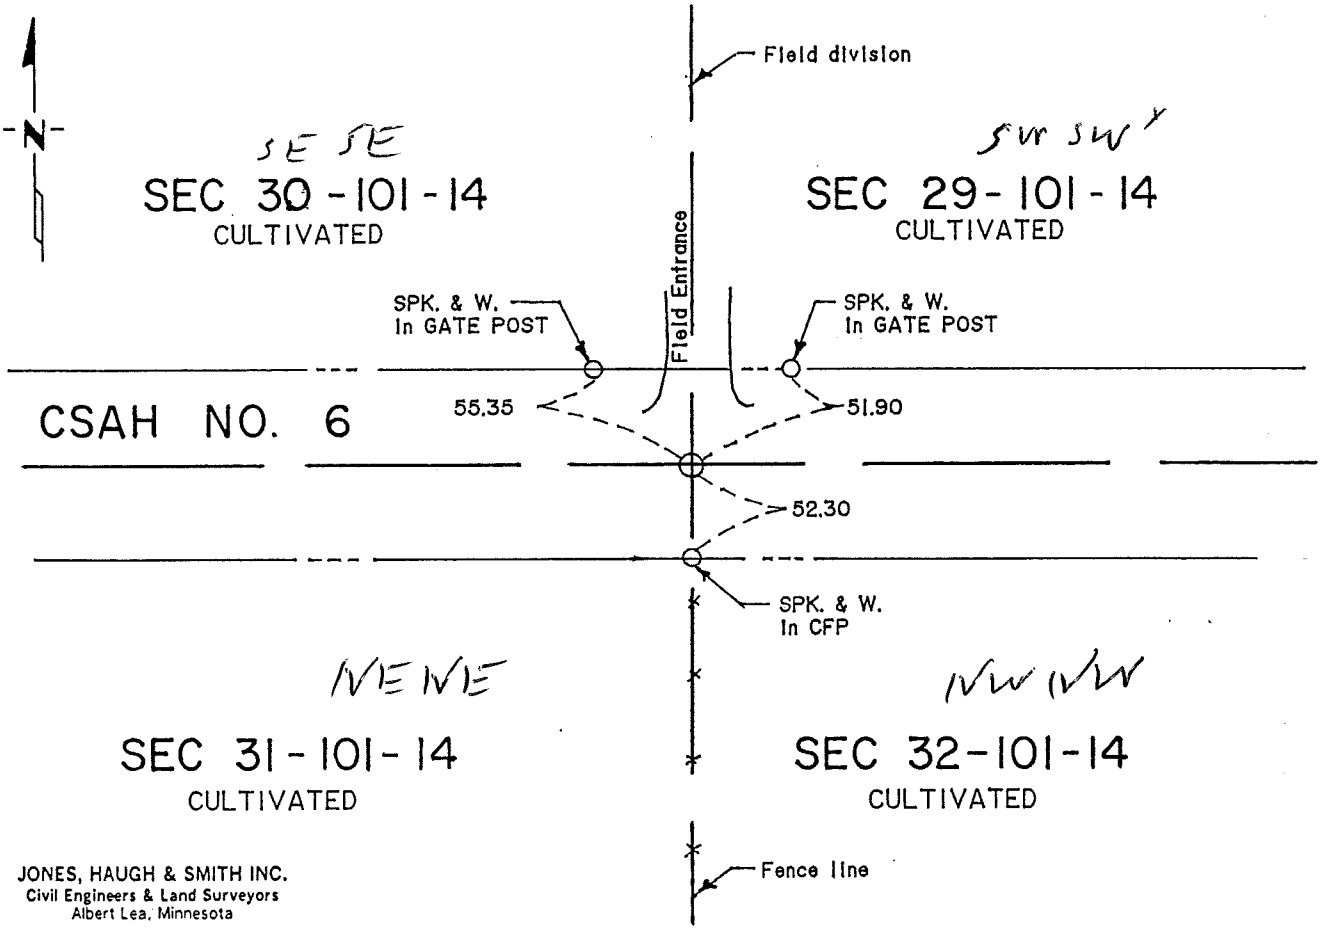


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-25-94

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 1 day of August A.D., 1994

COUNTY RECORDER Charles Evans

By Marlene Martin, Deputy

DOCUMENT NO. 431038

BOOK 84 PAGE 159 Book 84 Misc Pg 159

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 32-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

Mower County Highway Department tie book shows a concrete monument inplace and has the following ties:
50.1' NNE to gate post
51.0' NNW to gate post

1991 Jones, Haugh & Smith crew dug with County backhoe and found a 5/8" diameter iron over a 1" diameter pipe. Left monuments as found and set cast iron monument near road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER Corner of Section 33, Township 101N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/17/97 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 04/17/97 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

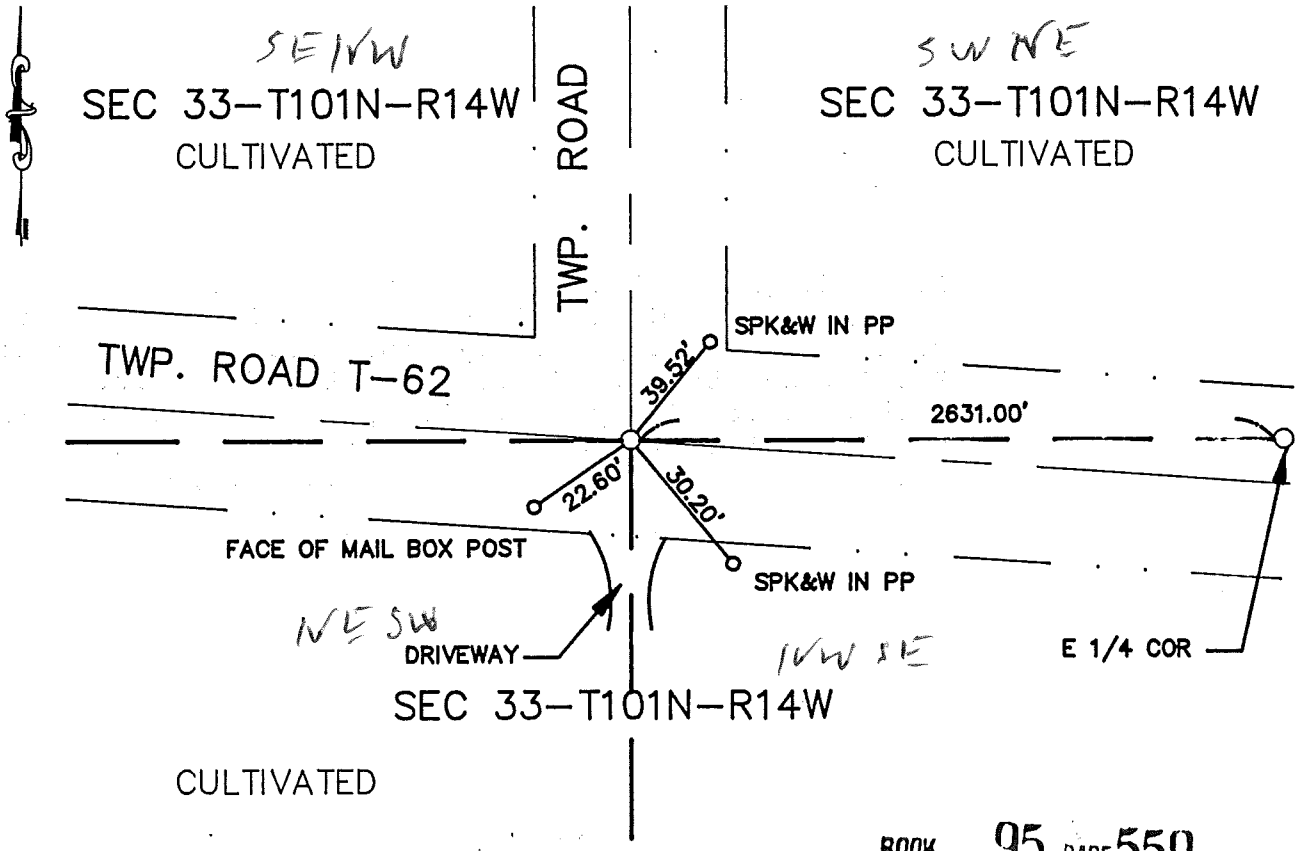


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 95 PAGE 559

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-10-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 15 day of July A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 454654

M.H.D. FORM NO. 2105

Book 95 Misc Page 559

Center SEC 33-101-14

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a 5/8" iron capped #13807 at the intersection of township road north and township road E-W. Removed cap and replaced it with a cast iron monument. Corner was located on a straight line by measuring a distance of 2631.00' from the E 1/4 corner of section 33.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 31, Township 101 Range 14, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5-26-55 (DATE) found a 2' CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-15-03 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

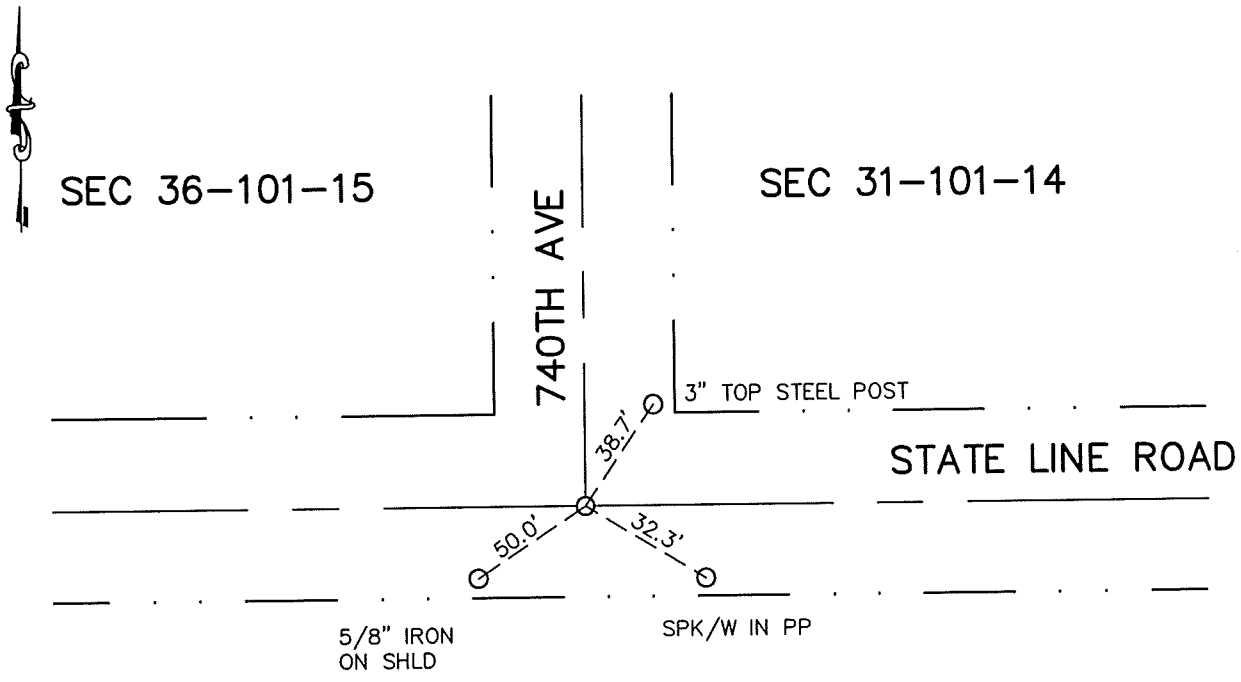


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE 8-13-03 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SW Cor Sec 31-101-14

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1955 Mower County notes state in place concrete monument 10" below surface.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with backhoe on centerline of east and west road and centerline of 740th Ave north. Uncovered a concrete monument with 5/8" iron in center, one foot below road surface. Placed a cast iron monument over 5/8" iron in concrete monument. Monument is accepted as a perpetuation of the original PLS corner. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

M TIE BOOK p 24

CHAPTER 359 LAWS OF 1921

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Corner of Sec. 21 T. 101 N. R. 14 W.

STATE OF MINNESOTA } ss.
County of Mower }

I hereby certify that on 29th day of June 19 67
I found the—established E 1/4 Corner of said section
which was evidenced by concrete monument implace

and I further certify that to perpetuate the locaton of such corner I did at the exact location thereof place a permanent marker consisting of 2" X 15" Brass capped iron pipe flush with blacktop

I further certify that I established three
reference or witness monuments consisting of
which reference or witness monuments are located in the manner following:

| | | |
|---|---|---|
| Brass disc in S. side of power pole | WNW | 66.80 feet |
| Brass disc in NW side of power pole | NE | 55.10 feet |
| Brass disc in W. side of power pole | SE | 116.30 feet |
| North and south road centerline | W | ~~6.0~~ 5.2' feet |
| Road centerline to west | S | 1.0 feet |
| Road centerline to east | N | 1.0 feet |

Said corner is on line between NE cor. & SE. cor. of said Section 21

Dated at Owatonna, Minn., this 27th day of July 19 67

C. D. Hosfield ~~County Surveyor~~
Registered Land Surveyor

OFFICE OF REGISTER OF DEEDS } ss.
County of }

I hereby certify that the within instrument was filed in this office for record on the
day of A. D. 19 at o'clock M.

Register of Deeds

By Deputy