Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 14, Township 101N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/12/1997 (DATE) found a PK NAIL

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/12/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

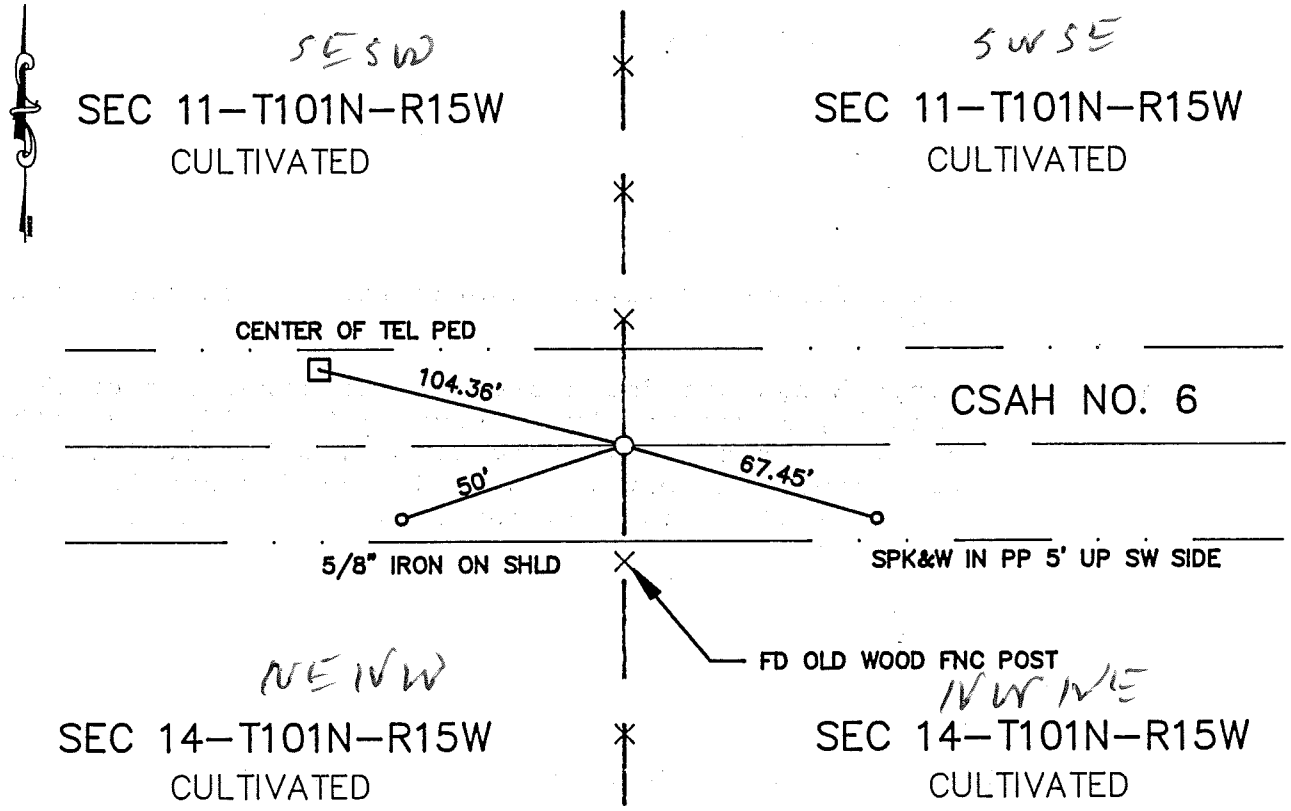

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 95 PAGE 565

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 7-10-97 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P. M. on the 15 day of July A.D., 1997

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 454657

M.H.D. FORM NO. 2105

Book 95 Misc Page 565

N 1/4 Cor SEC 14-101-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853 The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1891 Clausen notes show a stone at this corner.

1949 Mower County Surveyor records show an inplace stone.

1995 Jones Haugh and Smith records show a spike and washer at this corner.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL of CSAH No. 6 and in line with line fence N-S. Found no evidence of original PLS corner. Accepted PK found at road surface as best evidence of location of corner. Placed a cast iron monument inplace of PK nail.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.