Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 19, Township 101N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☒ On 5/22/96 (DATE) found a LARGE ANGLE IRON

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – (DATE) placed a –

SKETCH OF REFERENCE TIES

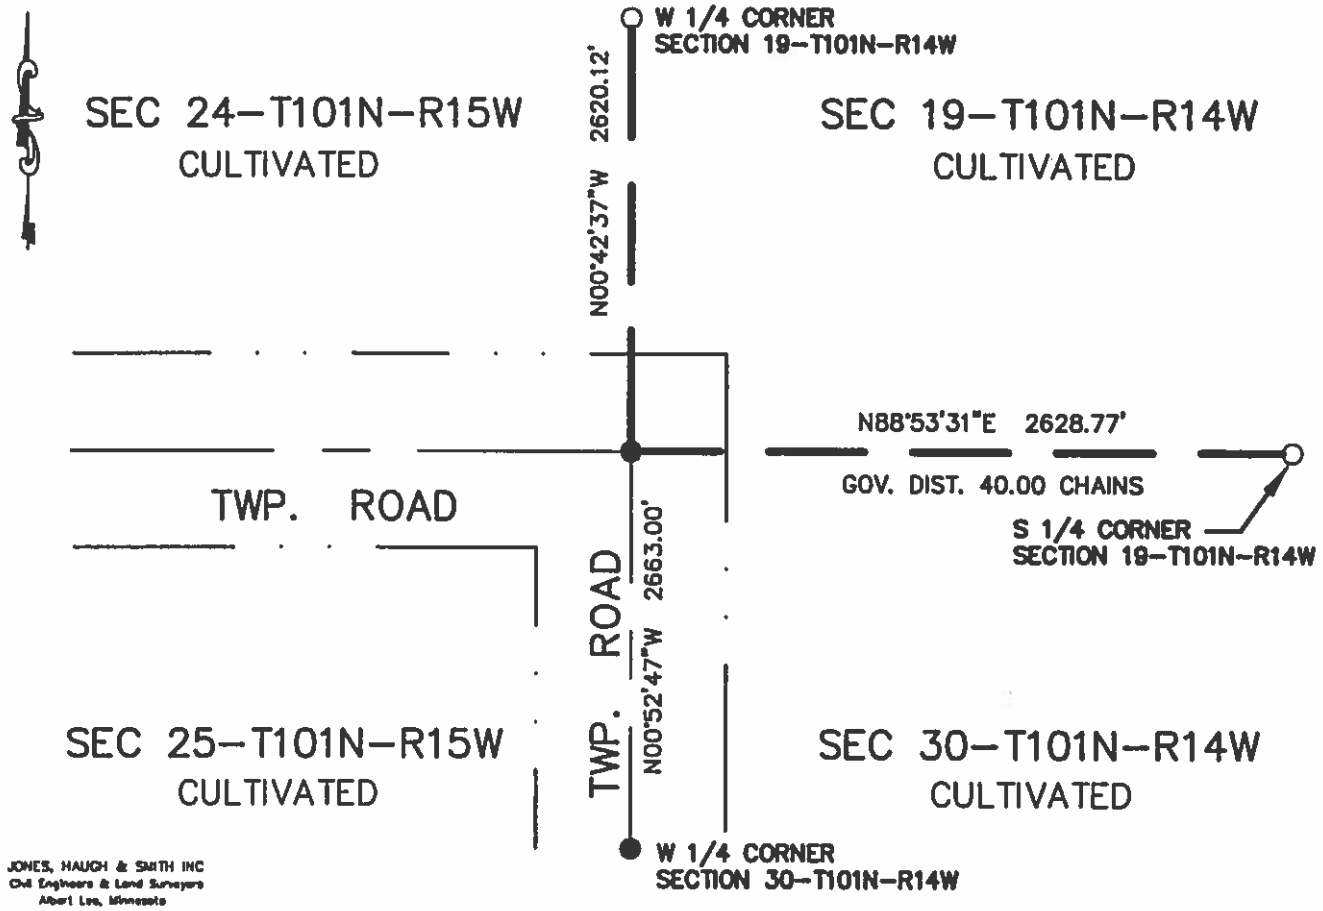

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

Cedric Schmitz (SIGNATURE) 5/24/99 (DATE)

Registration No. 15229

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SW Cor Sec 19-101-14

This corner was originally established by Deputy Surveyor John Taylor of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder

No record of this corner was obtained from the above mentioned offices.

1999
Land Consultants personnel searched area with a magnetic locator and found a 2-inch by 2-inch angle iron that is in line with the centerlines of a Township Road to West and South. Electronic measurements to adjoining land corners and property splits indicate that position is accepted perpetuation of the Public Land Survey corner.

For electronic survey data and analysis, contact the firm of Land Consultants of Southern Minnesota, Inc.