Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 28, Township 101N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/06/2004 (DATE) found a POINTED STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/06/2004 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

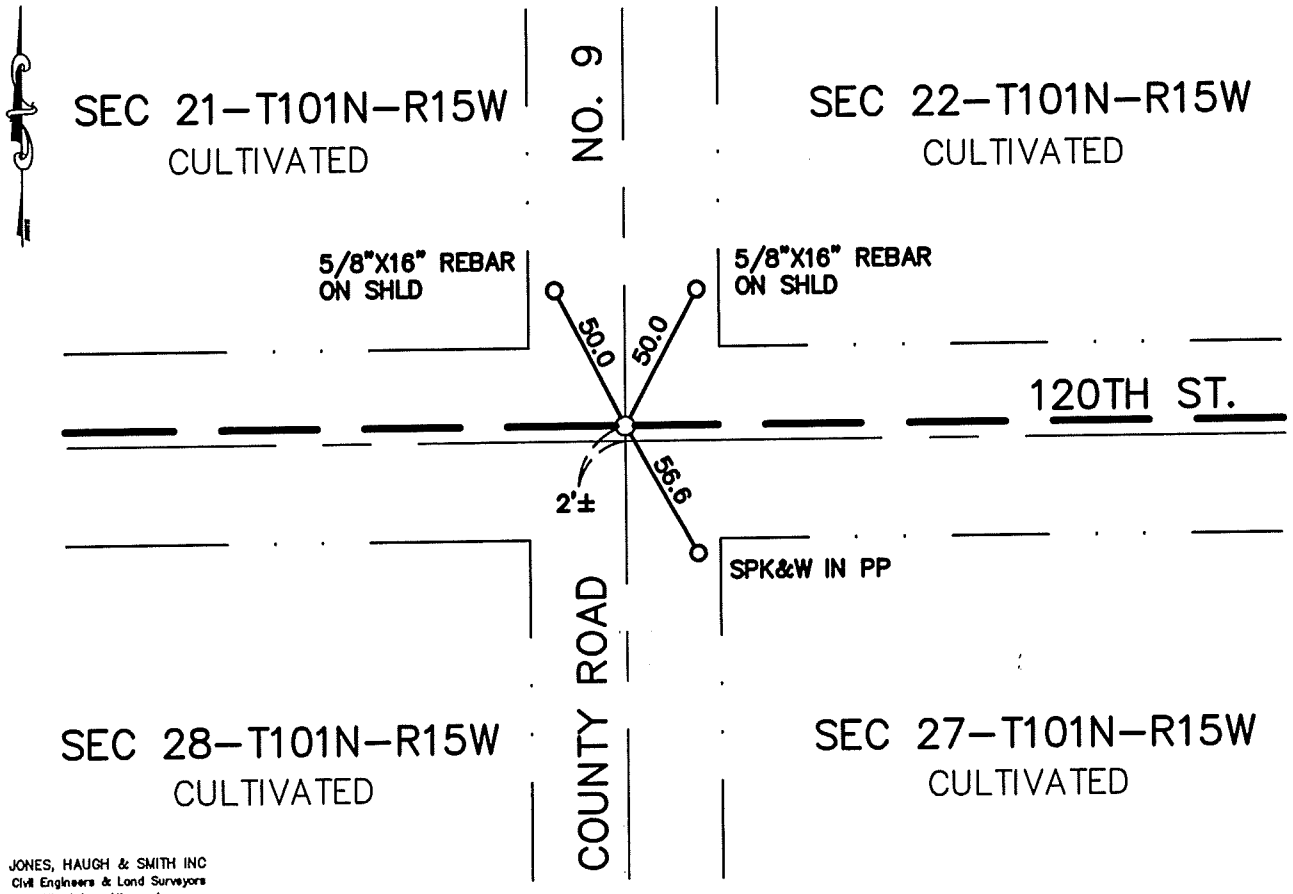

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-24-04

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Corner Section 28-T101N-R15W

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

1926 Mower County Road Plan shows a corner at this location.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the centerline of County Road Number 9 and township road east-west. Uncovered a pointed stone 2.5' +/- below road surface in agreement with Mower County 1926 record. Placed a 5/8"x16" rebar capped #13807 on the east side of stone found. Placed a 5/8"x16" rebar with cast iron monument 0.60' +/- below road surface above stone.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 28, Township 103N, Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-21-82 (DATE) placed a MHD Cast Iron Monument (down 0.5 foot)

SKETCH OF REFERENCE TIES

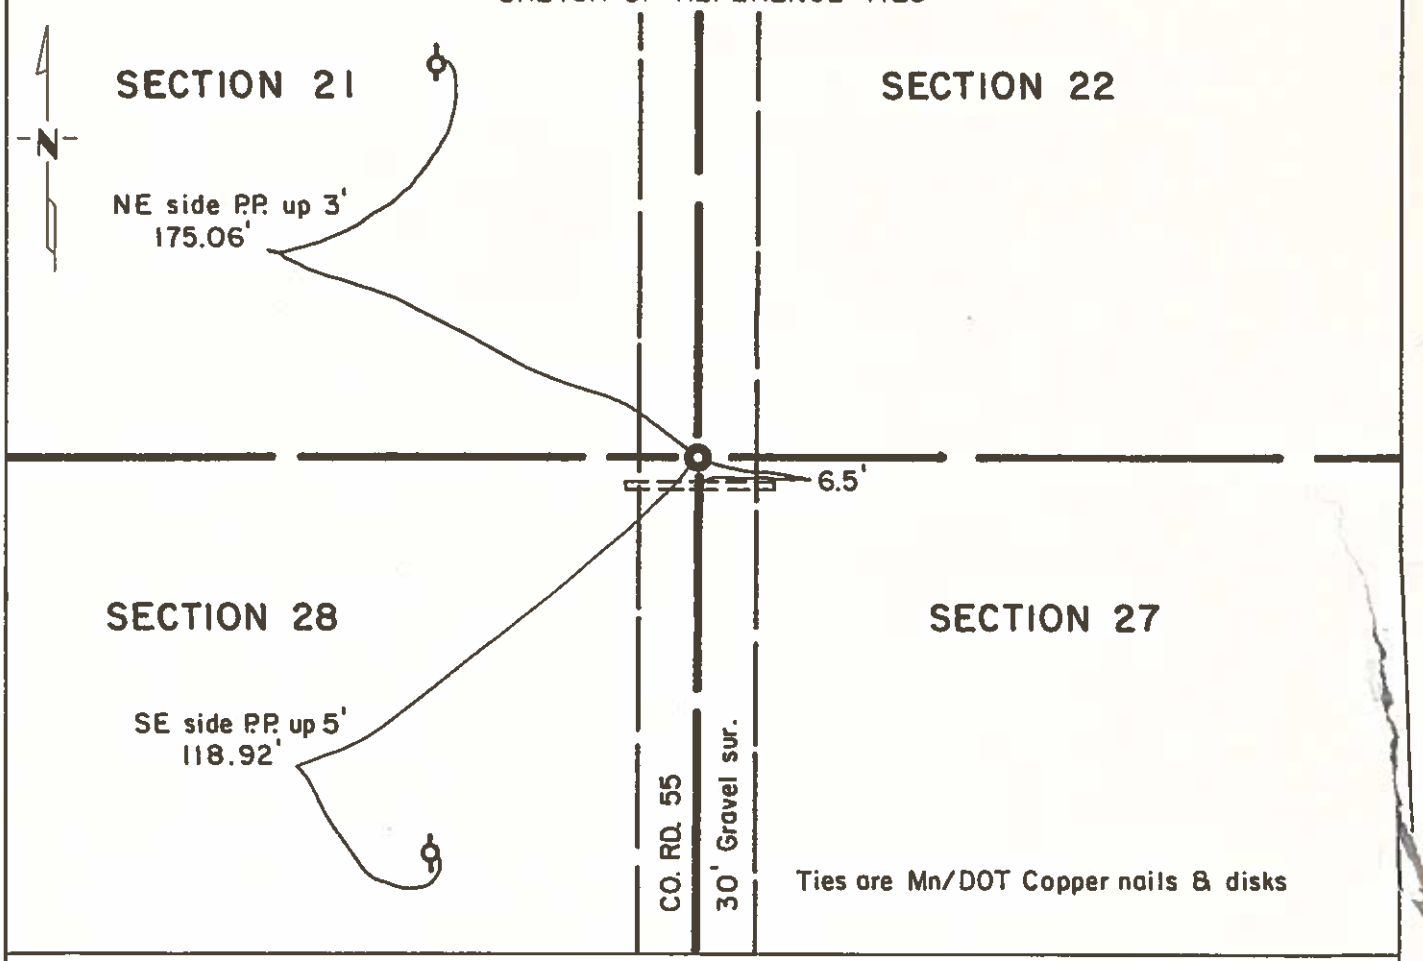

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

BOOK 55 PAGE 573

Marlow R. McGowan (SIGNATURE) 1-6-83 (DATE)

Registration No. 11527

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of MOWER

I hereby certify that this document was filed in the Co. Recorders office at 2 P. .M. on the 19 day of JAN. A.D., 1983

County Recorder Charles Enger

By Dorothy Johnson, Deputy

DOCUMENT NO. 355588

In Book CC of Misc'l Pg. 573

Mn/DOT 2105 (4-77)

Statement of Evidence:

Northeast Corner Section 28 T103N R15W

July 27, 1853 — John Quigley, Deputy Surveyor, set a post in a mound for the corner during the original Public Land Survey.

1973 — Mower County regraded the road. The plans show east and west fences inplace prior to the regrading. A new centerline culvert was placed within seven feet of the corner position.

An analysis of the record and survey data indicates that the center of county road and east-west fence intersection is the best evidence of the obliterated position of the corner. A cast iron monument was set at this position 6.5 feet north of the culvert to mark the corner.

For details of the electronic survey, contact the Surveying and Mapping Section of the Department of Transportation, Rochester.

BOOK 55 PAGE 574