Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 27, Township 101N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-28-94 (DATE) found a HARRISON MON. AND 3/4" IRON ON TOP CAPPED WITH A ALUMINUM- MOWER CO.MON.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-28-94 (DATE) placed a CASTIRON MON. OVER MON. FOUND

SKETCH OF REFERENCE TIES

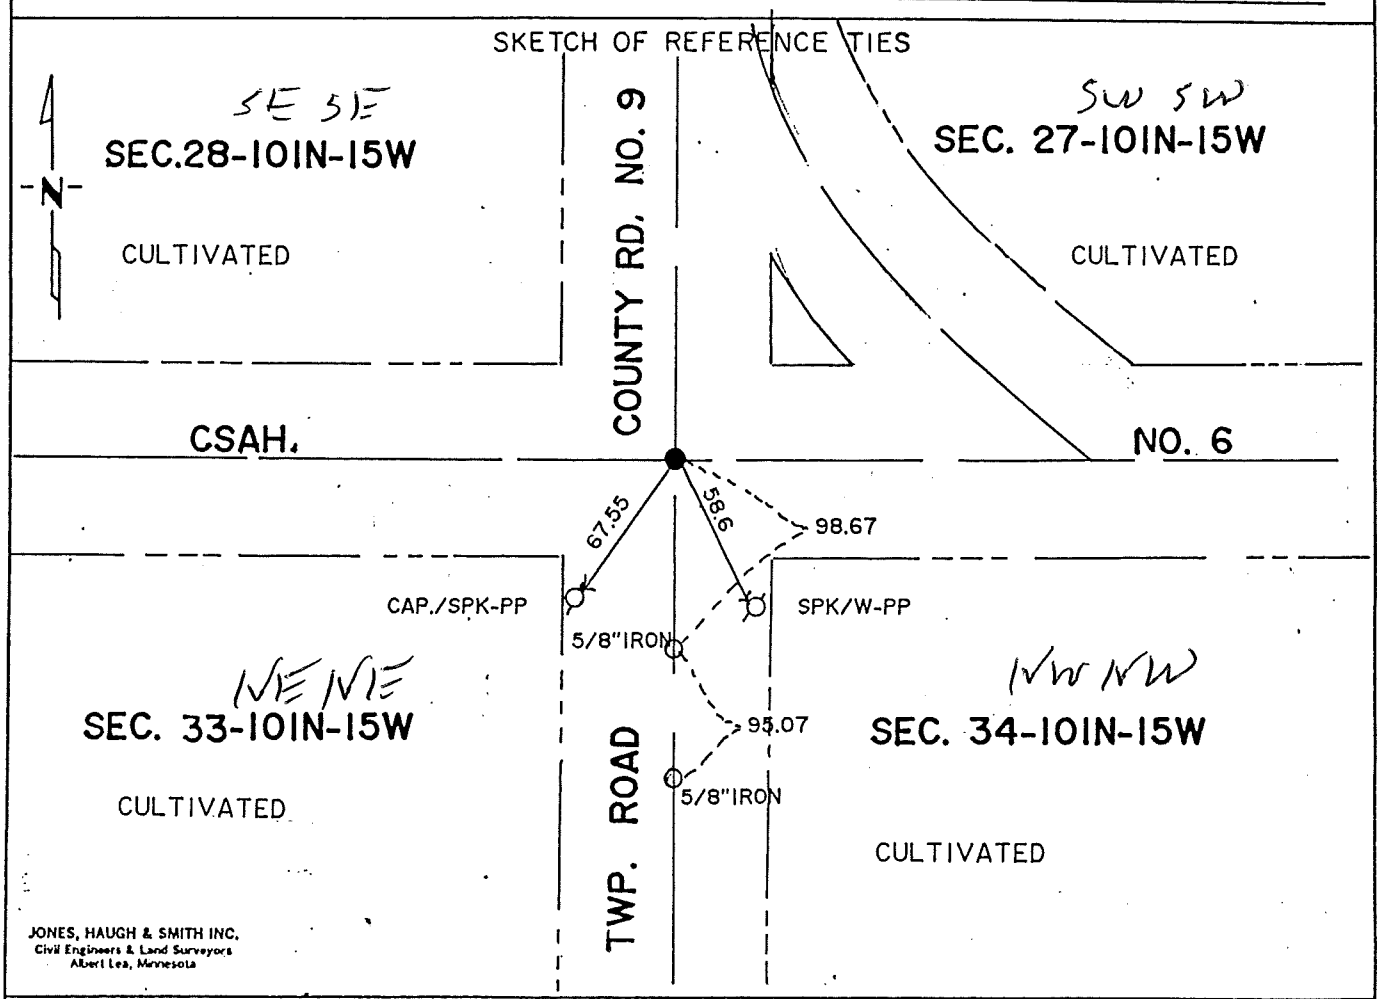

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 7-22-94
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 A.M. on the 1 day of Aug A.D., 1994

COUNTY RECORDER Amanda Enger

By Marlene Manton, Deputy

DOCUMENT NO. 431043

Book 84 Misc Page 167

M.H.D. FORM NO. 2105

BOOK 84 PAGE 167

STATEMENT OF EVIDENCE

SW cor Sec 27-101-15

The following were contacted for section corner information:
Mower County Recorder

1941 Mower County Highway Department records show a concrete monument at this location.

1994 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug with the county backhoe on centerline centerline of CSAH No. 6 and County Road No. 9. Found 3/4" iron one inch long with aluminum Mower County cap over a Harrison cast iron monument. Continued digging four feet to virgin soil and found no evidence of concrete monument. Re-set Harrison monument and 3/4" iron with aluminum Mower County cap as found. Cap four inches below bituminous surface. Set cast iron head over monuments found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 8 168