Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 36, Township 101 N, Range 15 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10/16/1991 (DATE) found a 5"ø CONCRETE MONUMENT WITH ½"ø IRON

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10/16/1991 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

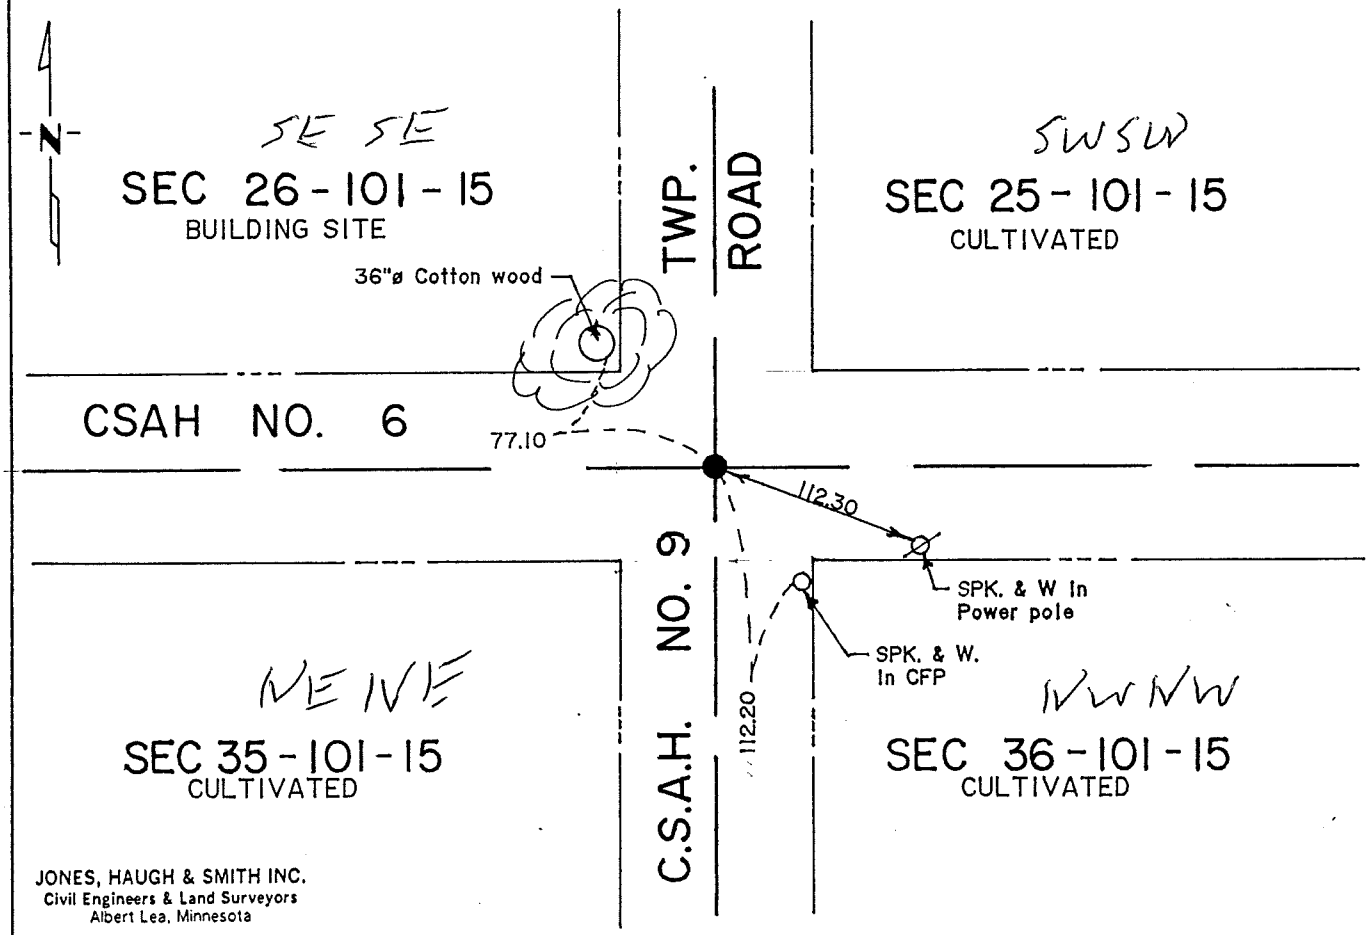

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-25-94

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 1 day of Aug. A.D., 19 94

COUNTY RECORDER Chantal Engen

By Marlene Martin, Deputy

DOCUMENT NO. 431044

PAGE Book 84 Misc Page 169

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 36-101-15

This corner was originally established by Deputy Surveyor Andrew Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

1932 Mower County Highway Department plans show a monument on centerline of roads east-west.

1958 Mower County Highway Department plans show a monument on centerline of roads east-west.

1965 Mower County Highway Department tie book shows a concrete monument at this corner.

1991 Jones, Haugh & Smith crew dug with County backhoe on centerline of roads north-south and east-west and found a 1/2" diameter iron and 5" diameter concrete monument. Left monuments as found and set cast iron monument near road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith Inc.

BOOK 84 PAGE 170