Index No. P106 "F"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 36, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-13-92 (DATE) found a 3/4 X 12" IRON OVER 6" DIAMETER CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-13-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

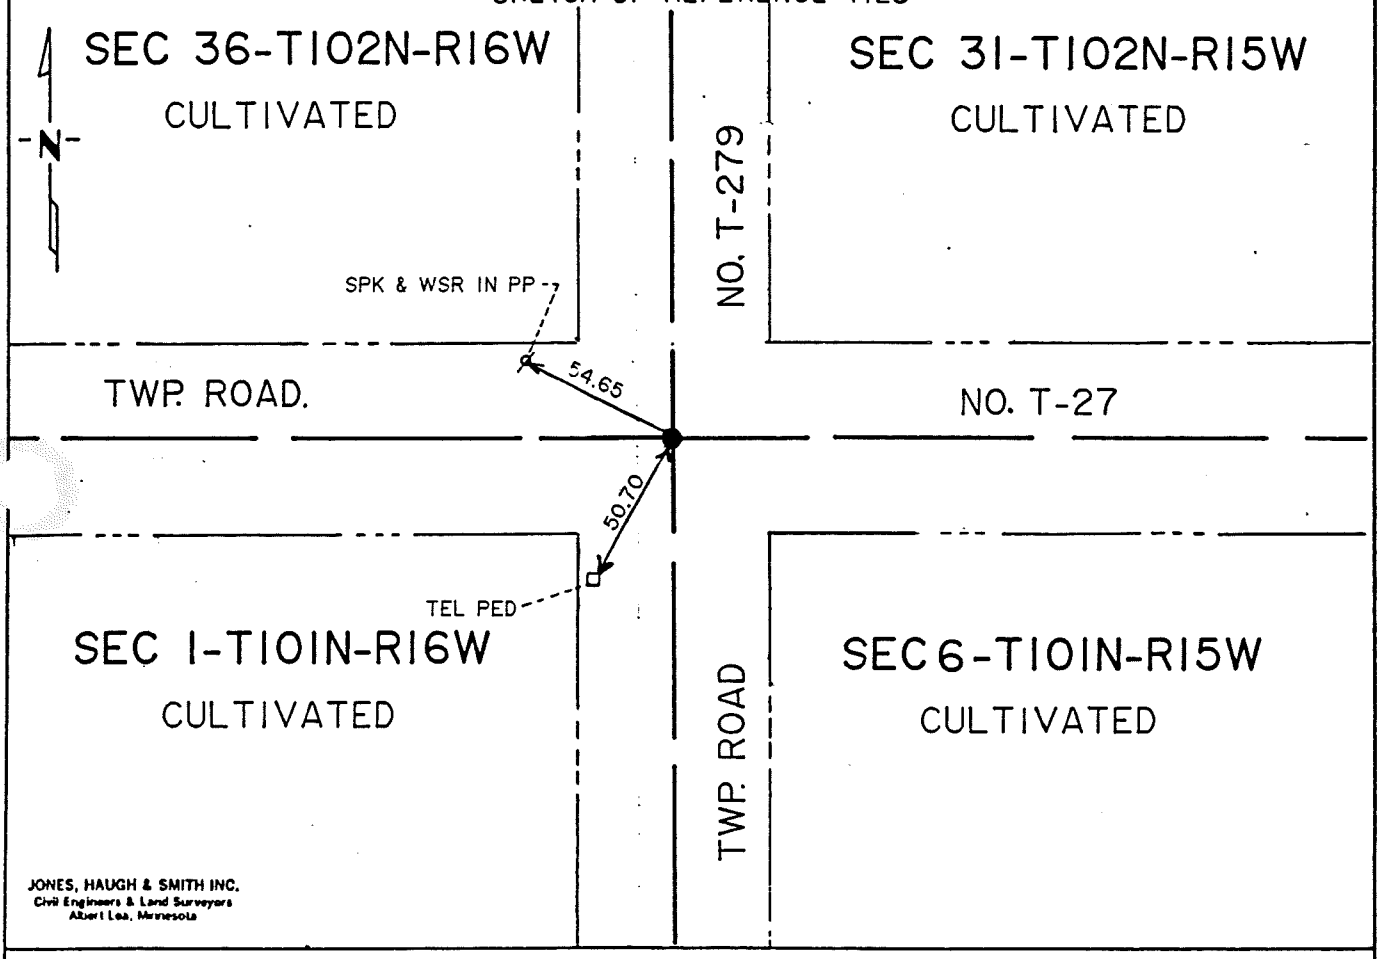

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 12-16-92
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec 36-102-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

12" Black Oak	N 53 1/2° E	95 links (62.70 ft)
10" Burr Oak	N 77° W	558 links (368.28 ft)
10" Burr Oak	S 48° W	565 links (372.90 ft)
11" Burr Oak	S 44° E	357 links (235.62 ft)

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1879 Clausen notes indicate a post set at the SW corner Section 31-102-15, Clayton Township.

1954 Book A of the Mower County Highway Department indicates a 2' long concrete monument 8" under road surface over a stone at the southeast corner of Section 36-102-16. The following ties were taken:
56.7' WNW to blazed 10" Oak
43.7' SW to blazed PP
45.7' SE to tele pole
48.0' NE to cor fence post

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with Mower County backhoe and uncovered a 3/4" diameter x 12" long iron over a 6" diameter concrete monument 2.5 feet deep in virgin soil. Left concrete monument as found and set cast iron monument on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.