Index No. P 125 "S"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 33, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-13-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-13-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

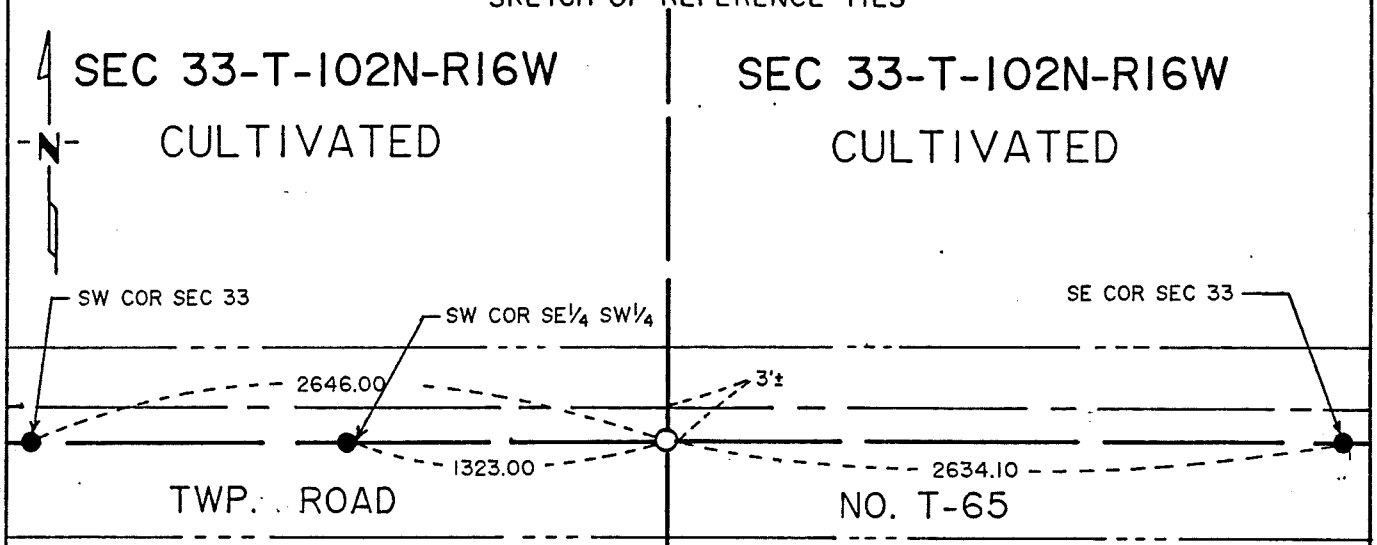

SEC 4-T-101N-RI6W
CULTIVATED

SEC 4-T-101N-RI6W
CULTIVATED

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-16-92 DATE

Registration No. 13007

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec 33-102-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1886 Clausen field notes indicate a government post.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug a 6'x8'x4' deep hole and found nothing. Set cast iron monument on straight line between southeast and southwest corners and in line with fence line south. This position fits existing 1/16 line fences along the south line of the section.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.