Index No. P 123 "B," P124 "B" P125 "B"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 33, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-13-92 (DATE) found a MOWER CO. HWY. DEPT./ ALUM. MONUMENT AND UNCOVERED LARGE POINTED FIELD STONE PIECES CLAY TILE AROUND STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-13-92 (DATE) placed a _____

SKETCH OF REFERENCE TIES

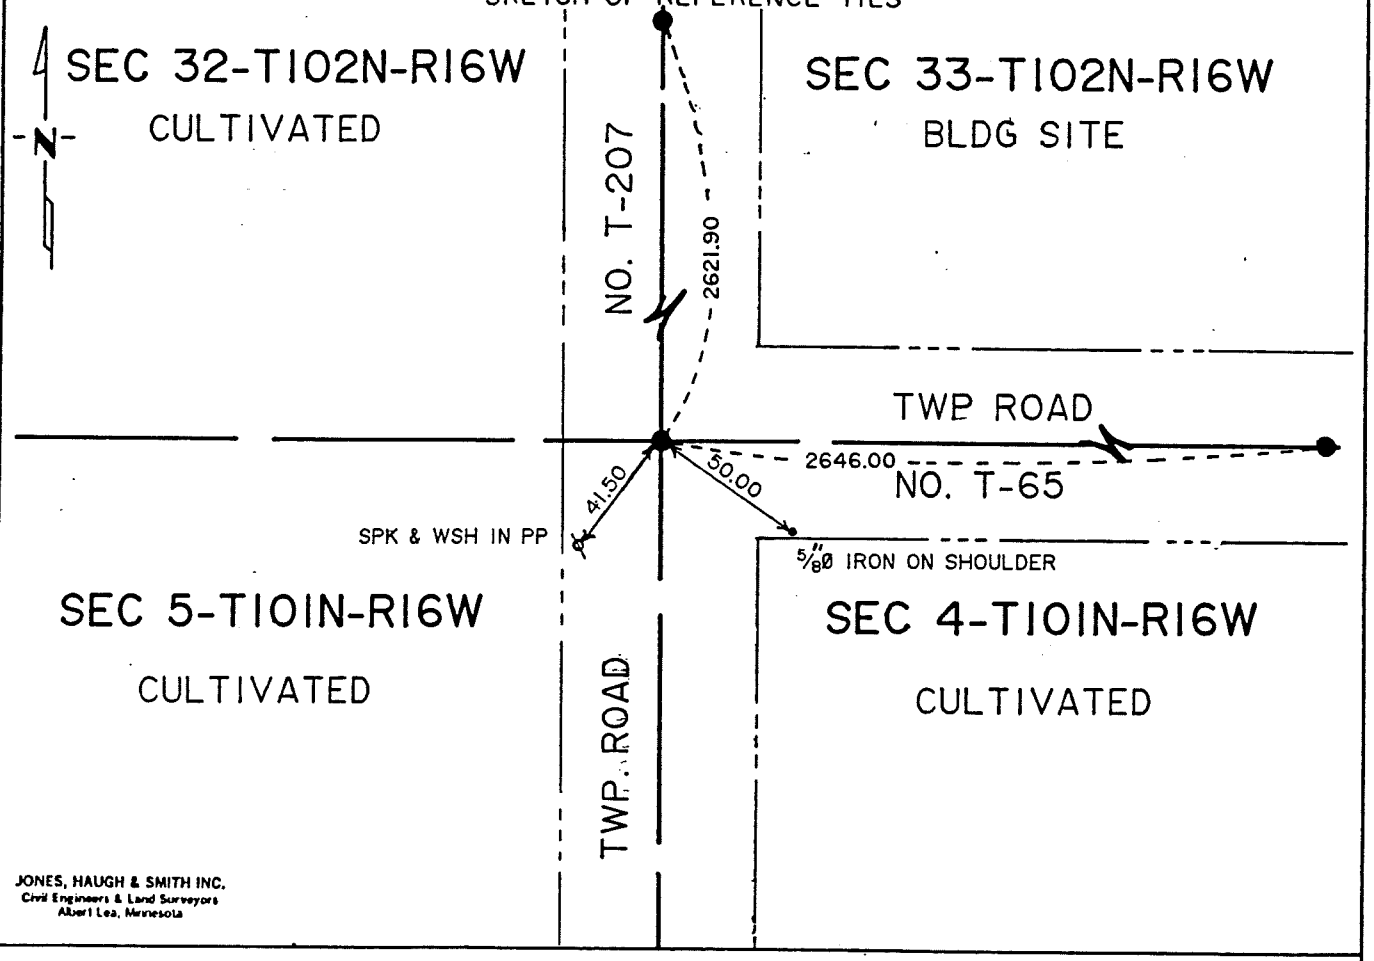

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-16-92 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 33-102-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1886 Clausen field notes indicates a post.

Book A in the Office of Mower County Highway Department indicates a section corner rock at the SE corner Section 32. The following ties were taken:
WNW 27.7' to cor fence post
ENE 48.5' to 2nd willow
SE 77.2' to cor fence post
WSW 44.7' to 10' Ash

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug at location of alum. monument marked "Mower Co Hwy Dept". Found a large pointed field stone with pieces of clay tile around stone three feet deep in virgin soil. Left monuments as found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.