Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 27, Township 101N, Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-93 (DATE) found a HARRISON CIM AND A 3/4"ø x 18" IRON NEXT TO A OLD STAKE

■ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

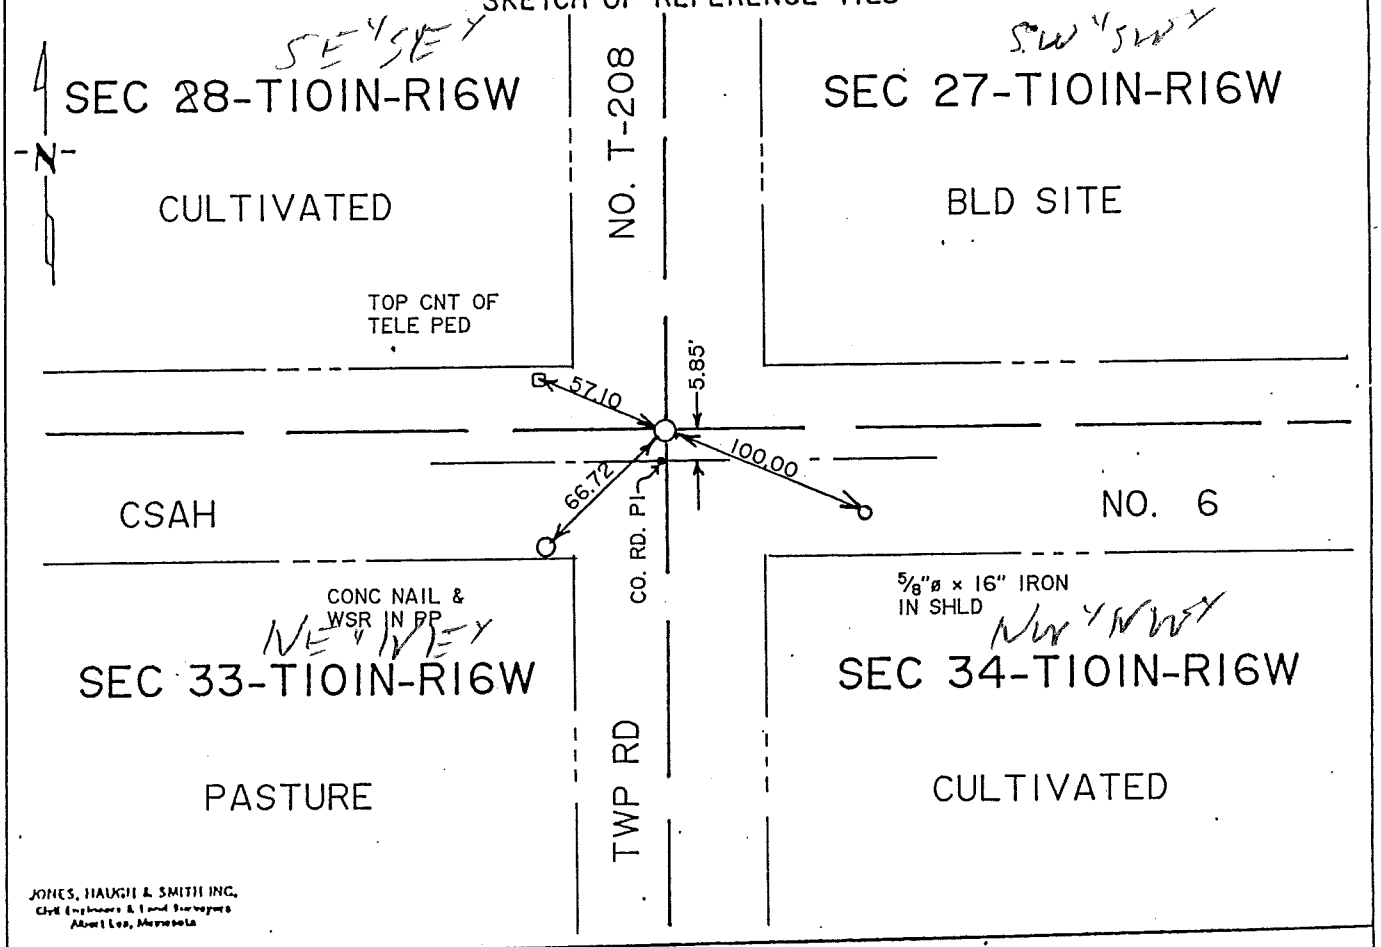

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-18-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 P .M. on the 25 day of June A.D. 19 93

COUNTY RECORDER Charles Engel

By Marlene Martin, Deputy

DOCUMENT NO. A21746

By SD Pg. 135

M.H.D. FORM NO. 2105

BOOK 80 PAGE 135

STATEMENT OF EVIDENCE

SW cor Sec 27-101-16

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1891 Clausen, Mower County Surveyor, notes indicate a government post at this corner.

1956 Mower County Highway Department County Road Plans indicate a magnetic monument inplace 5.85 feet north of County Road PI and centerline.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 3'x3'x8' hole six feet north of County Road PI and centerline of County State Aid Highway No. 6 and also in line with centerline of Township Road No. T-208. Found a Harrison cast iron monument one foot down and a 3/4" diameter x 18" iron next to an old wood stake at a depth of three feet which is at original ground level. The monuments found were 5.85 feet north of County Road PI and centerline of County State Aid Highway No. 6. Therefore we accepted monuments found as the perpetuation of the public land survey corner. Reset monuments as found and set a cast iron monument near road surface above monuments found.

The monument found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.