Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 35, Township 101N, Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-3-93 (DATE) found a NEST OF LARGE STONES

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-3-93 (DATE) placed a 5/8"ø x 16" IRON AND A CIM

SKETCH OF REFERENCE TIES

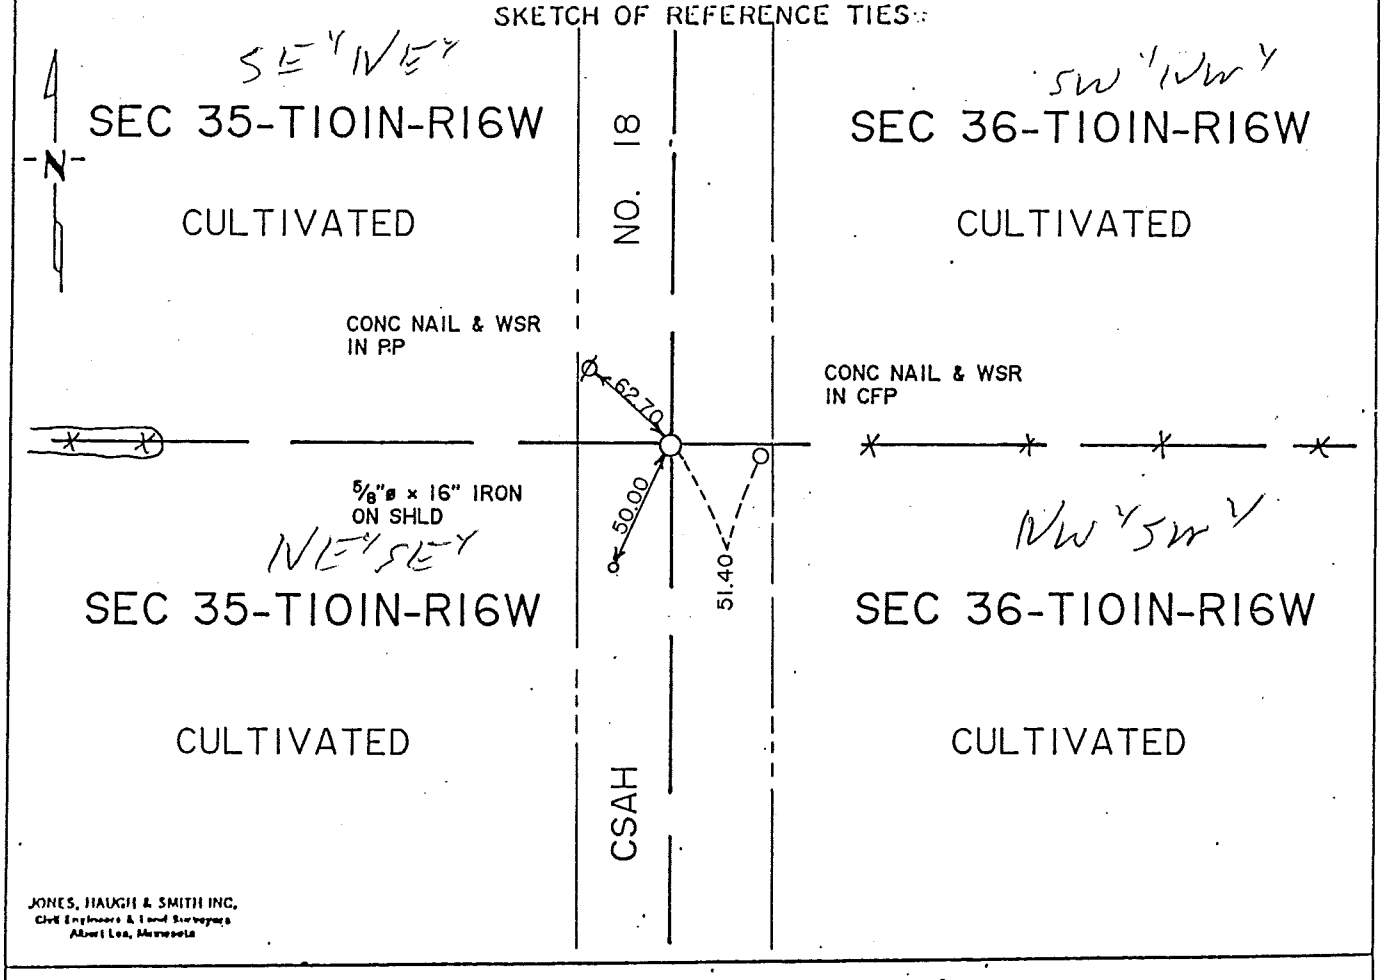

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-14-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 23 day of June A.D., 19 93

COUNTY RECORDER Amanda Enger

By Marlene Marten, Deputy

DOCUMENT NO. 421683

Bk 80 Misc. Pg. 18

M.H.D. FORM NO. 2105

BOOK 80 PAGE 18

STATEMENT OF EVIDENCE

E 1/4 cor Sec 35-101-16

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 3'x4'x10' hole on the centerline of County State Aid Highway No. 18 and in line with the east-west line fences. We found nest of large stones at a depth of four feet which is into virgin soil. The stones found were on centerline of County State Aid Highway No. 18 and also in line with east-west line fences. Therefore we set a 5/8" diameter x 16 iron in center of stones and a cast iron monument near road surface above stones.

The monument found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 19