Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 25, Township 101 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5/26/04 (DATE) found a 10" X 16" STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5/25/04 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

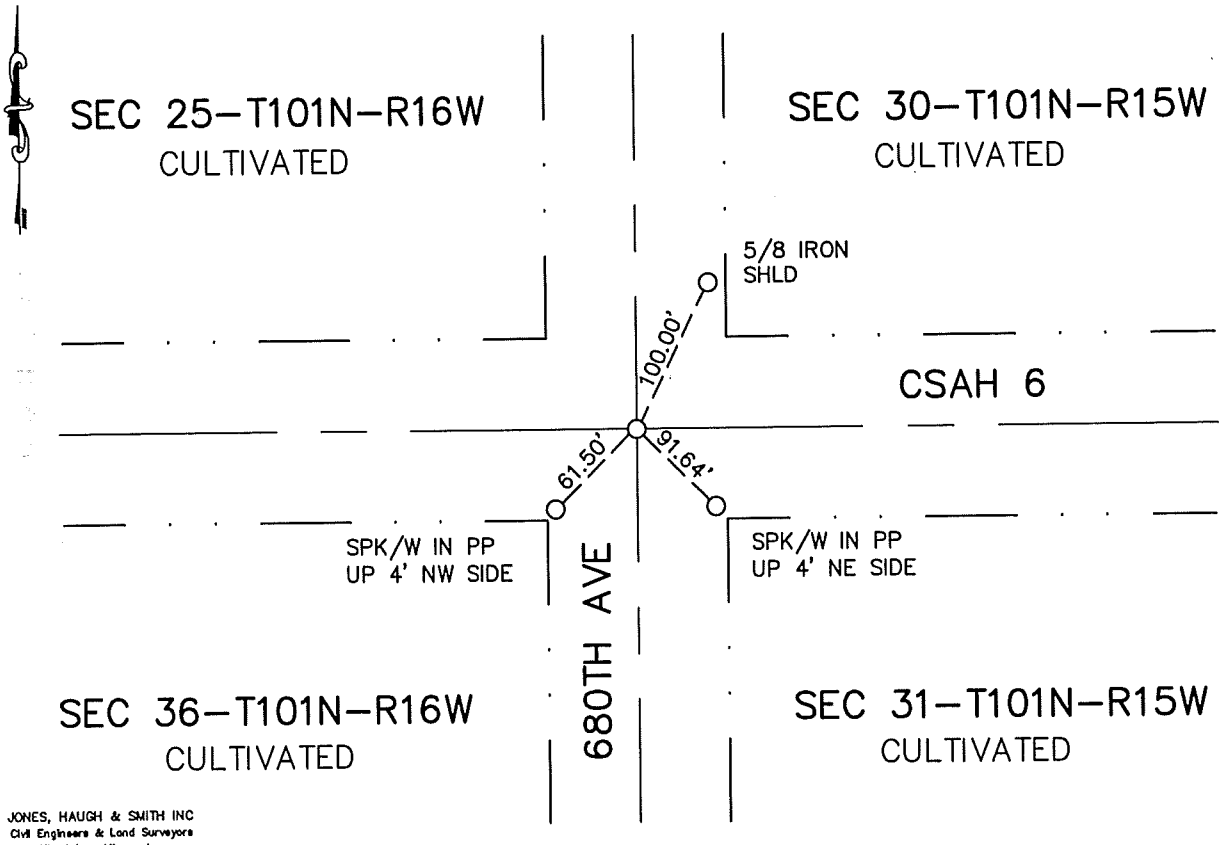

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 6.4.04
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Corner Section 25-T101N-R16W

Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1973 Mower County highway plans show ties to corner.

1989 Clausen field notes show Government post at corner.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug 7.5' E-W x 2.5' N-S x 7' deep trench with Mower County backhoe at centerline crossing. Found a nail at the surface, then found a 10" x 16" stone six feet deep at original ground. Set 5/8" iron on the North side of stone and CIM over stone at road surface. Accepted stone as marking original PLS corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.