Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 1, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/21/99 (DATE) found a 1" PIPE ON CENTERLINE OF E-W TWP. ROAD AND 10' EAST OF TWP. ROAD NORTH

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

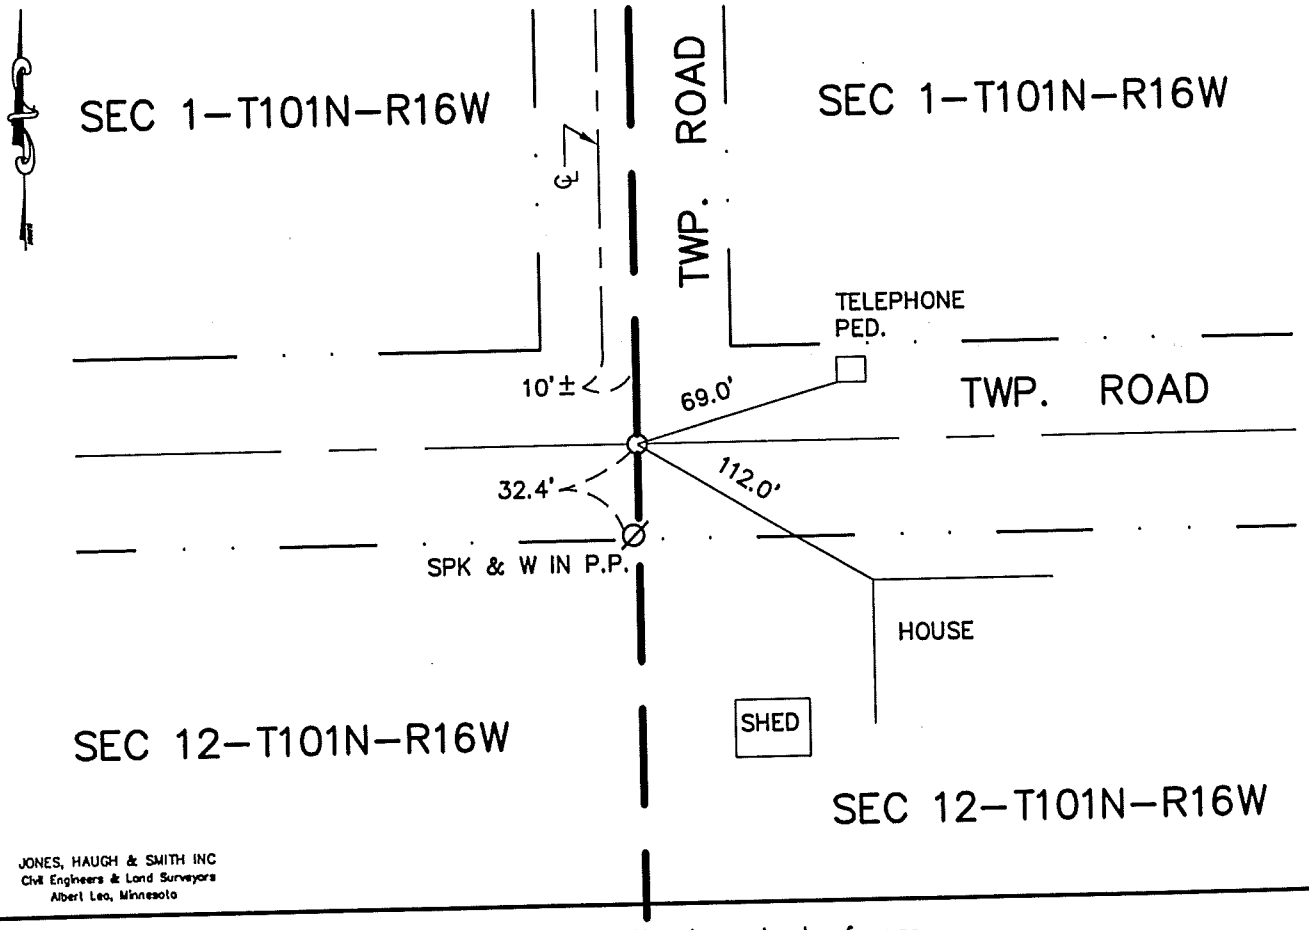

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) Dec 1999 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor Sec 1-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered a 1" pipe on the centerline of east-west township road and 10'+/- east of intersection of the centerline of township road going north. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 8, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/19/99 (DATE) found a HARRISON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/19/99 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

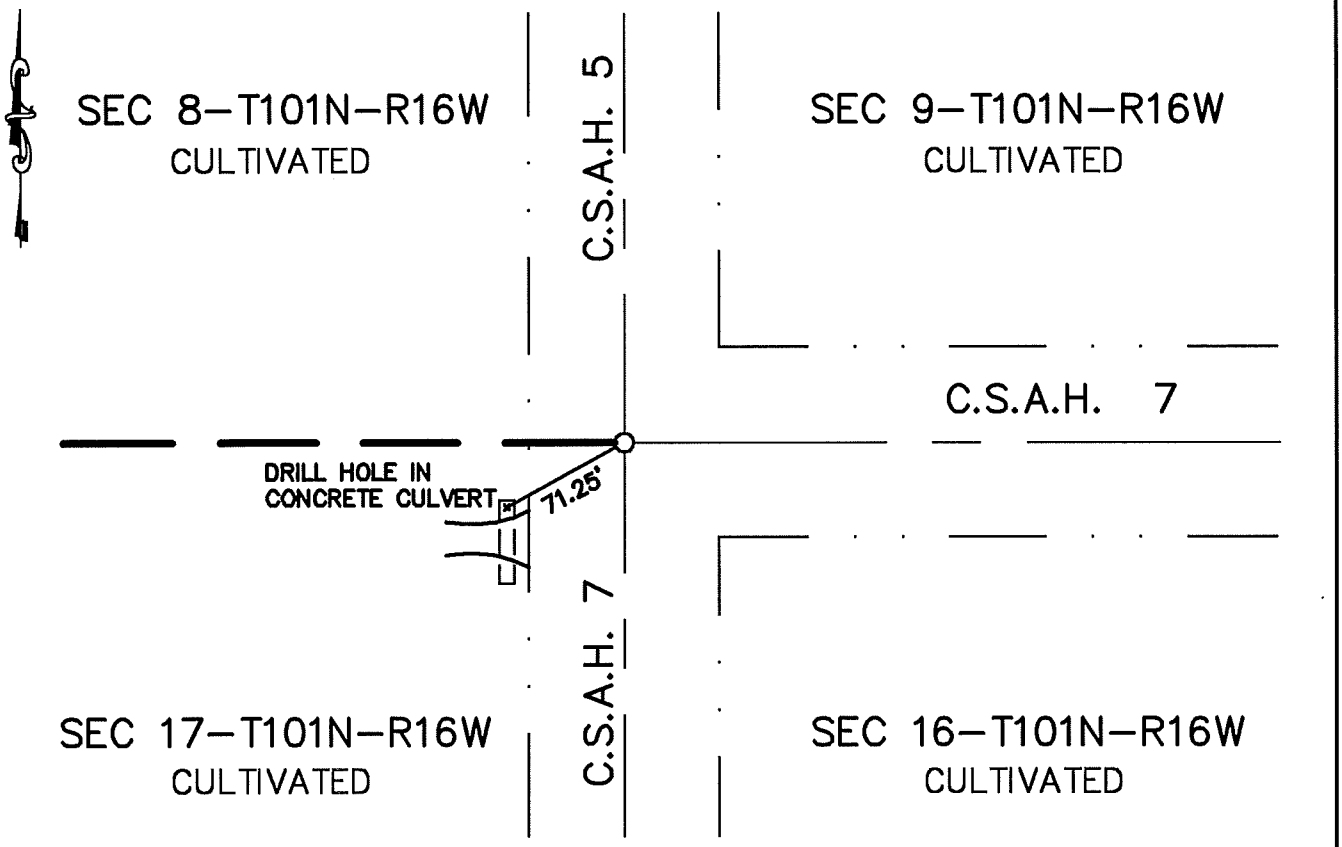

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-10-99

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

SE Cor Sec 8-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County Highway Department road plan show an inplace iron rod.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of C.S.A.H. No. 7 south and east and C.S.A.H. No. 5 north. Located a Harrison monument 1.6' below road surface. Placed a cast iron monument above monument found at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh, and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 9, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/16/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/16/1996 (DATE) placed a CAPPED 5/8" IRON #13807

SKETCH OF REFERENCE TIES

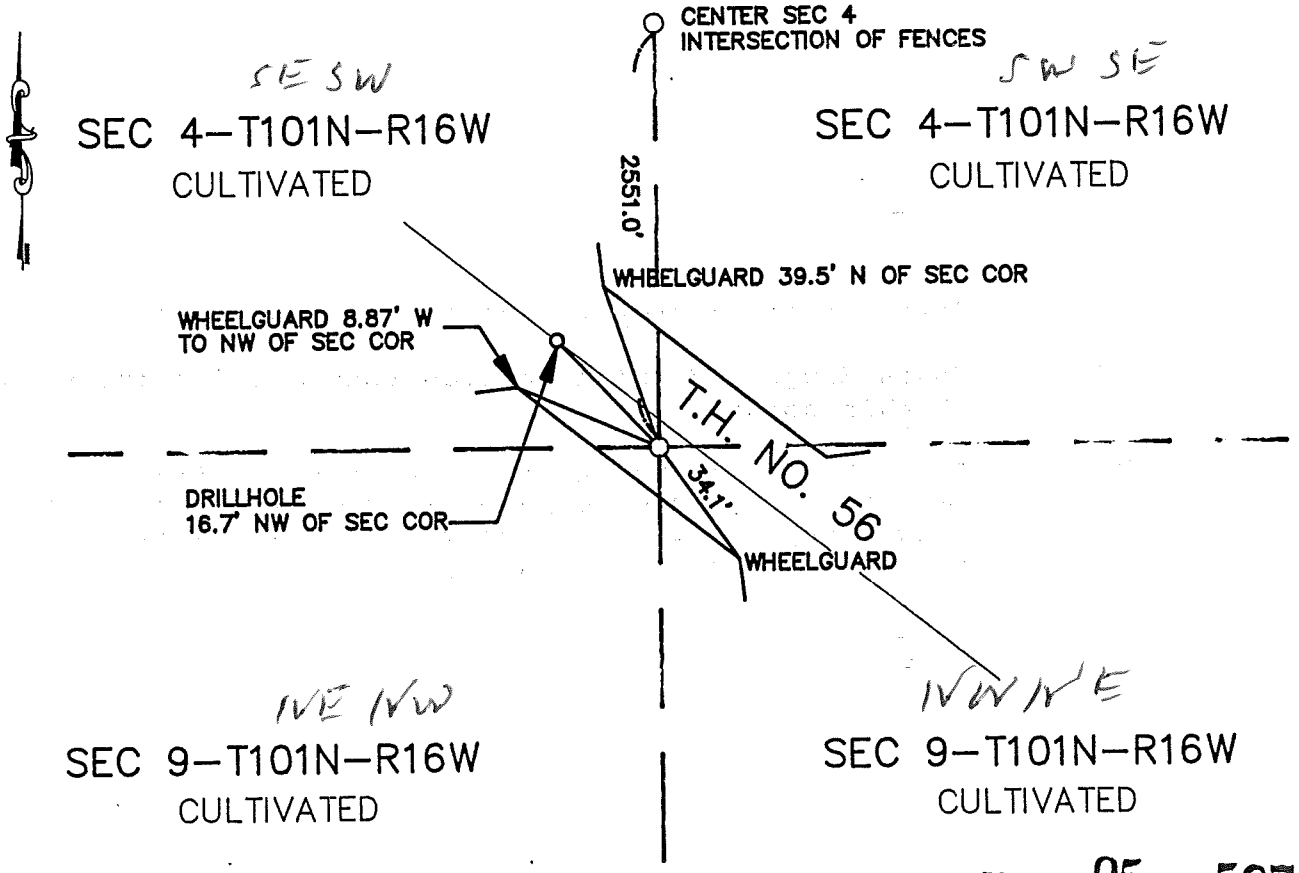

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 95 PAGE 567

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 7-10-97 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 15 day of July A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 454658

M.H.D. FORM NO. 2105

Book 95 Misc Page 567

N 1/4 Cor SEC 9-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Minnesota Department of Transportation
Mower County Highway Dept.
Mower County Recorder

MNDOT R/W map shows a location for this corner in relation to the centerline of TH No. 56.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, set corner using information from TH No. 56 MNDOT R/W map. Placed a 5/8" iron capped 13807 in bridge deck.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 9, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/02/1996 (DATE) found a PK NAIL, FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/02/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

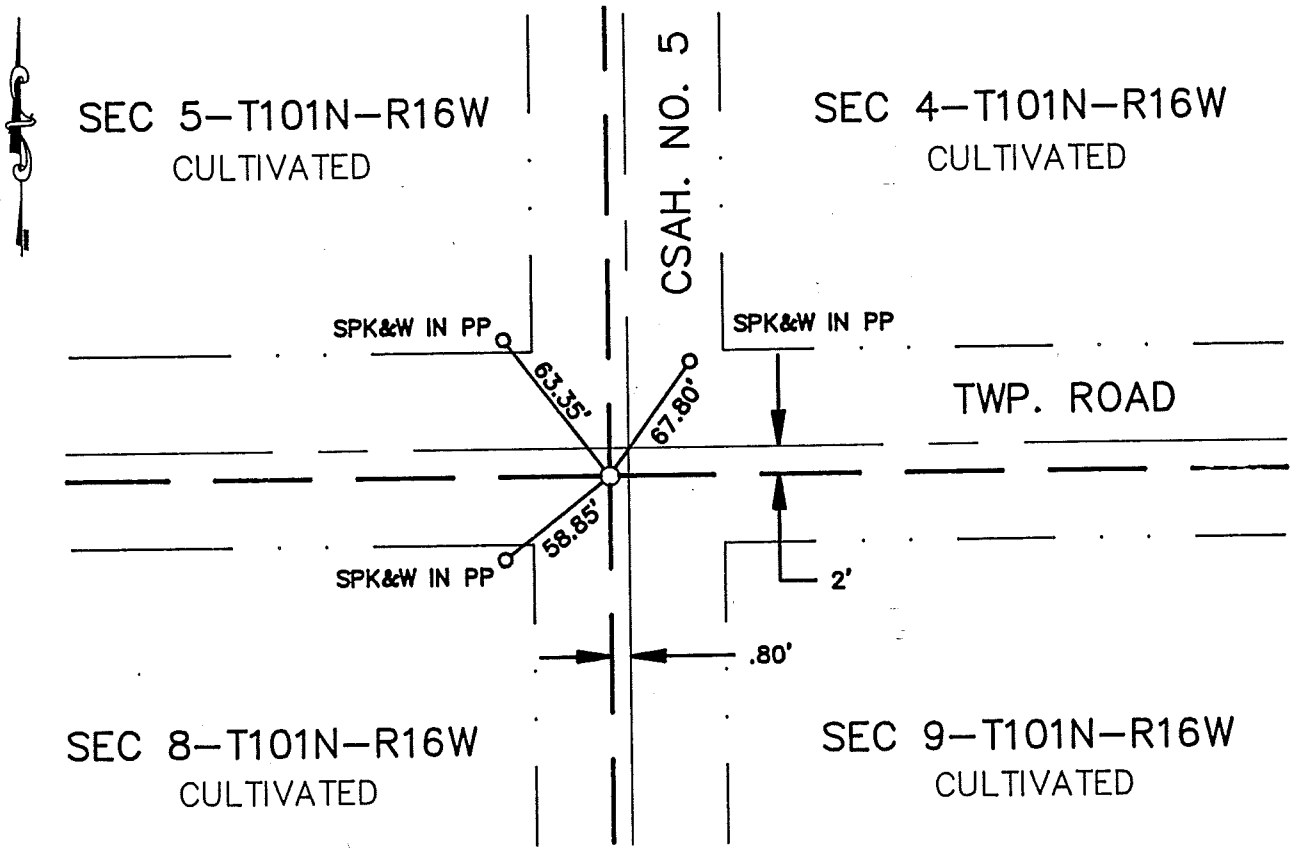

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 a .M. on the 23 day of June A.D., 1997

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. 454032

M.H.D. FORM NO. 2105

BOOK 85 PAGE 857

NW Cor SEC 9-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1996 Mower County records show concrete monument in place. Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on centerline of road N-S and centerline of township road E-W. Found PK nail in bituminous 2" deep. Continued digging and uncovered field stone at 5.50' deep which was 2'+/- below old road bed. Stone in same location as PK nail. Set 5/8" x 16" iron with cast iron monument in place of PK nail 0.40' below road surface. Monument 0.8' west of centerline of CSAH no. 5 and 2' south of centerline of township road east on centerline of township road west.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 9, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/29/2000 (DATE) found a CAST IRON MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a –

SKETCH OF REFERENCE TIES

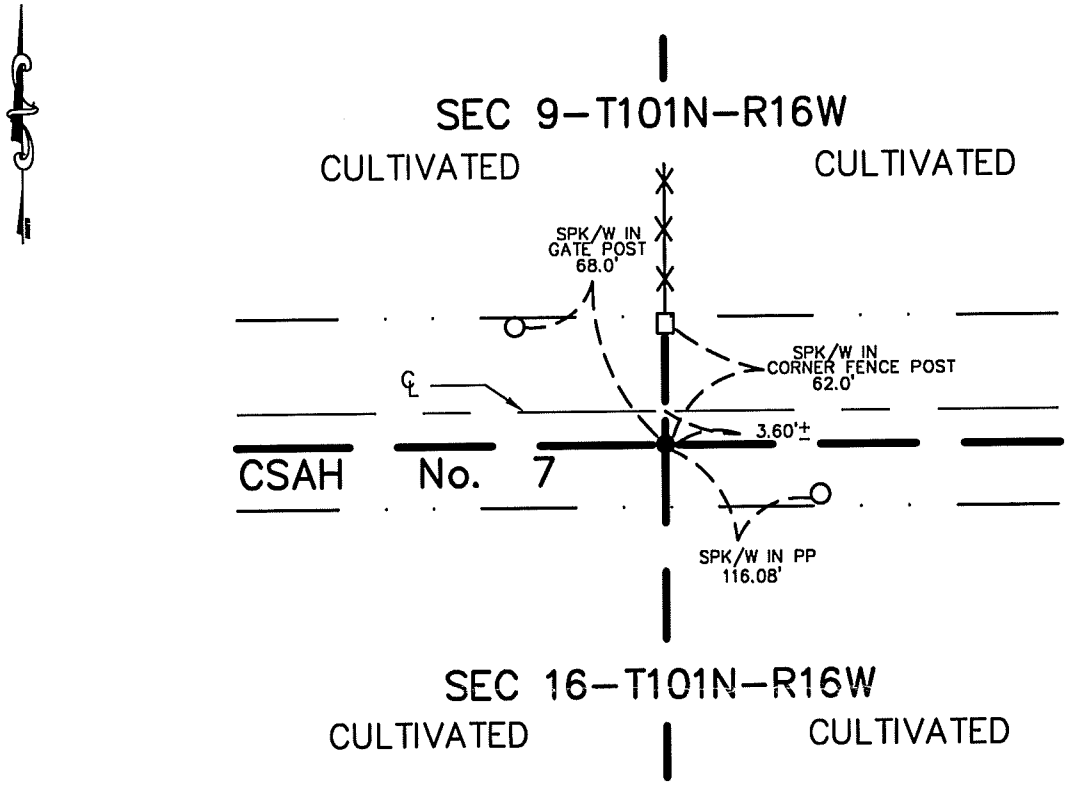

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 4-12-00 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor Sec 9-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1981 Mower Co. Highway Dept. personnel located this corner during regrading project, and reset it after grading project was completed.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered a Cast Iron Monument 3.60' South of centerline of bituminous surface and inline with fence to the North. This location is in agreement with 1981 Mower Co. notes.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 9, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 4/10/2000 (DATE) found a CONCRETE MONUMENT WITH IRON PIN IN CENTER

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4/10/2000 (DATE) placed a 5/8" IRON WITH CAST IRON MONUMENT @ ROAD SURFACE

SKETCH OF REFERENCE TIES

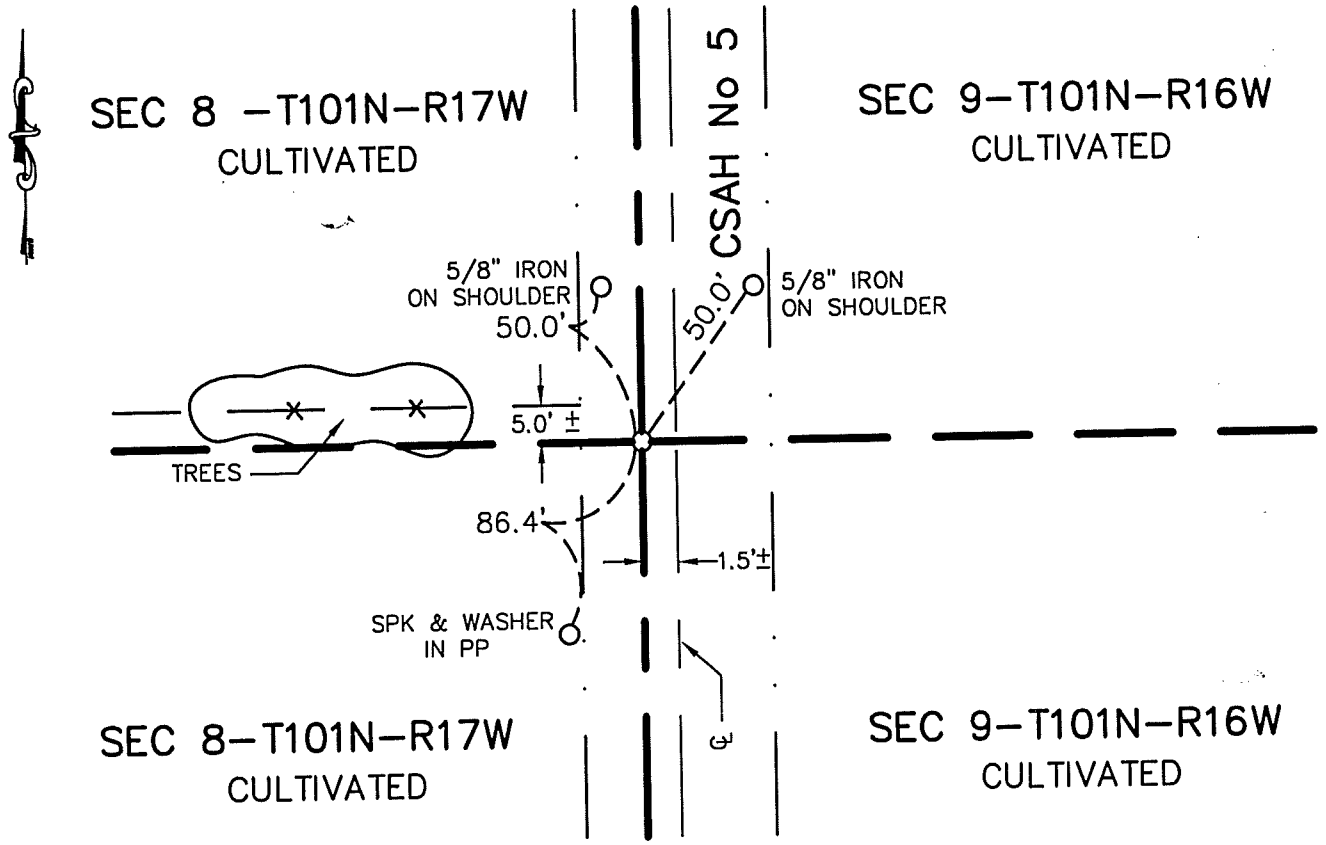

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 5-11-00
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Cor Sec 9-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1951 Mower County records state a concrete monument was in place.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe, a 3'x7' hole on centerline of CSAH No 5 and 5.0' South of line fence to the West. They uncovered a concrete monument with an iron pin in the center, 2.5' below road surface. Set a 5/8" iron capped 13807 on West Side of monument. Set a 5/8"x 16" iron with Cast Iron Monument flush with road surface. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 10, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/02/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/02/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

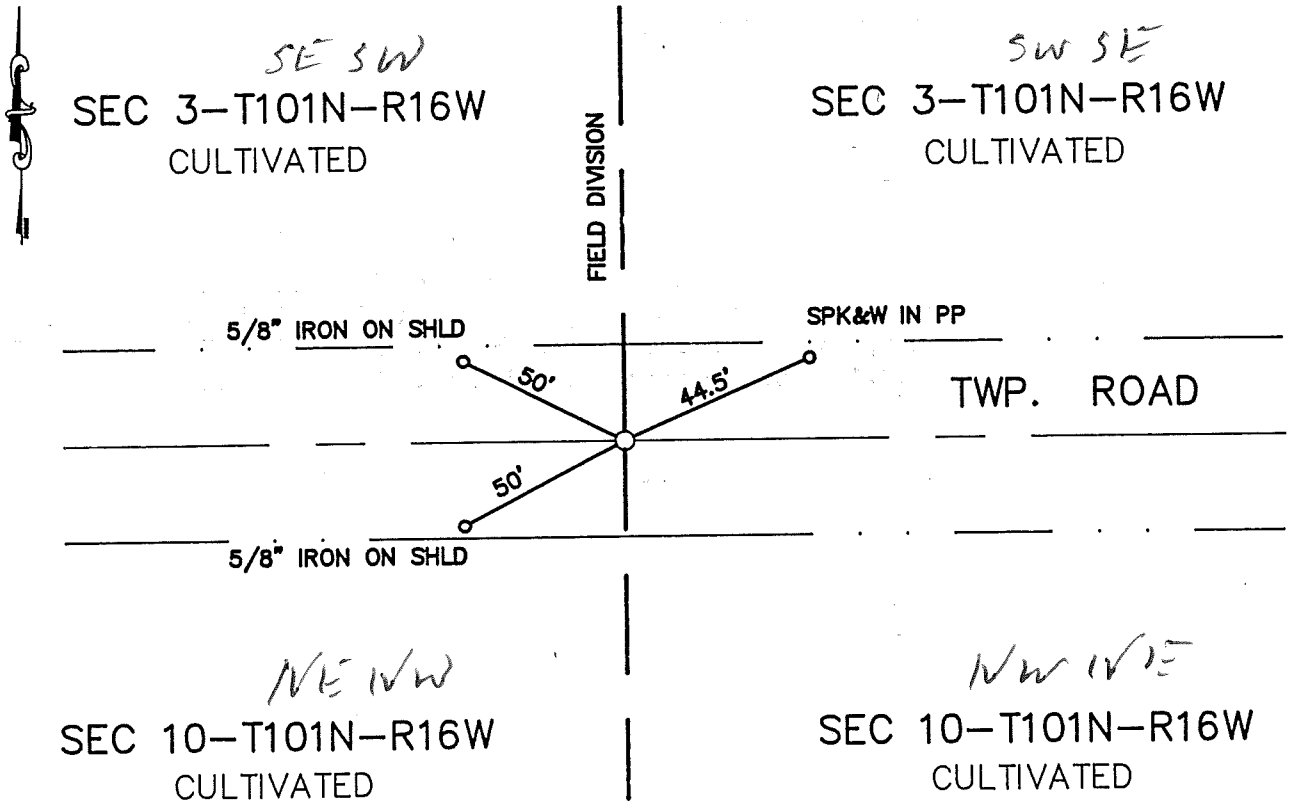

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 95 PAGE 569

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 7-10-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 15 day of July A.D., 1997

COUNTY RECORDER Charles Engen
By Susan M. Davis, Deputy
DOCUMENT NO. 454659

M.H.D. FORM NO. 2105

Book 95 Misc Page 569

N 1/4 Cor SEC 10-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on centerline of township road E-W and in line with line fence north. Dug a 4' x 8' hole 3' deep to virgin ground and found nothing. Set cast iron monument on centerline of township road in line with field drive north.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 11, Township 101 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5/21/81 (DATE) found a 1" DIA. PIPE OVER CONC. MONUMENT

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☐ On 11/29/04 placed a 5/8"ø IRON OVER CONC. MONUMENT

SKETCH OF REFERENCE TIES

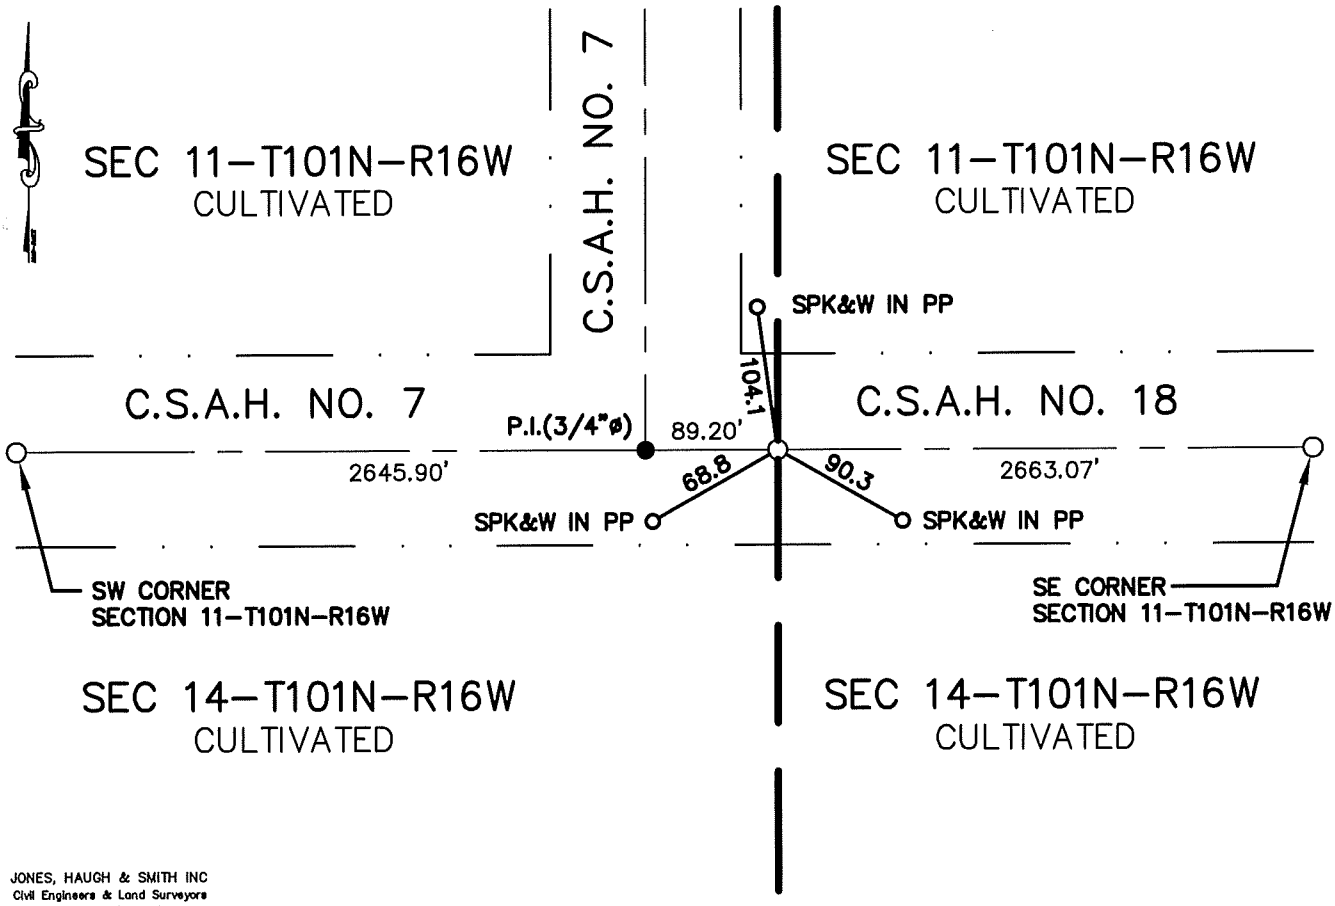

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-5-05

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor Sec 11-101-16

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1922 Mower County Highway Dept. road plans show a concrete monument at this corner.

1981 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and located 1"ø pipe over concrete monument and set 5/8"ø iron over concrete monument. This monument agrees with the 1922 County grading notes.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand located capped 5/8"ø 0.6± below surface, over concrete monument.

The monument fits occupation within the section is in agreement with the records and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 14, Township 101N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-5-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-5-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

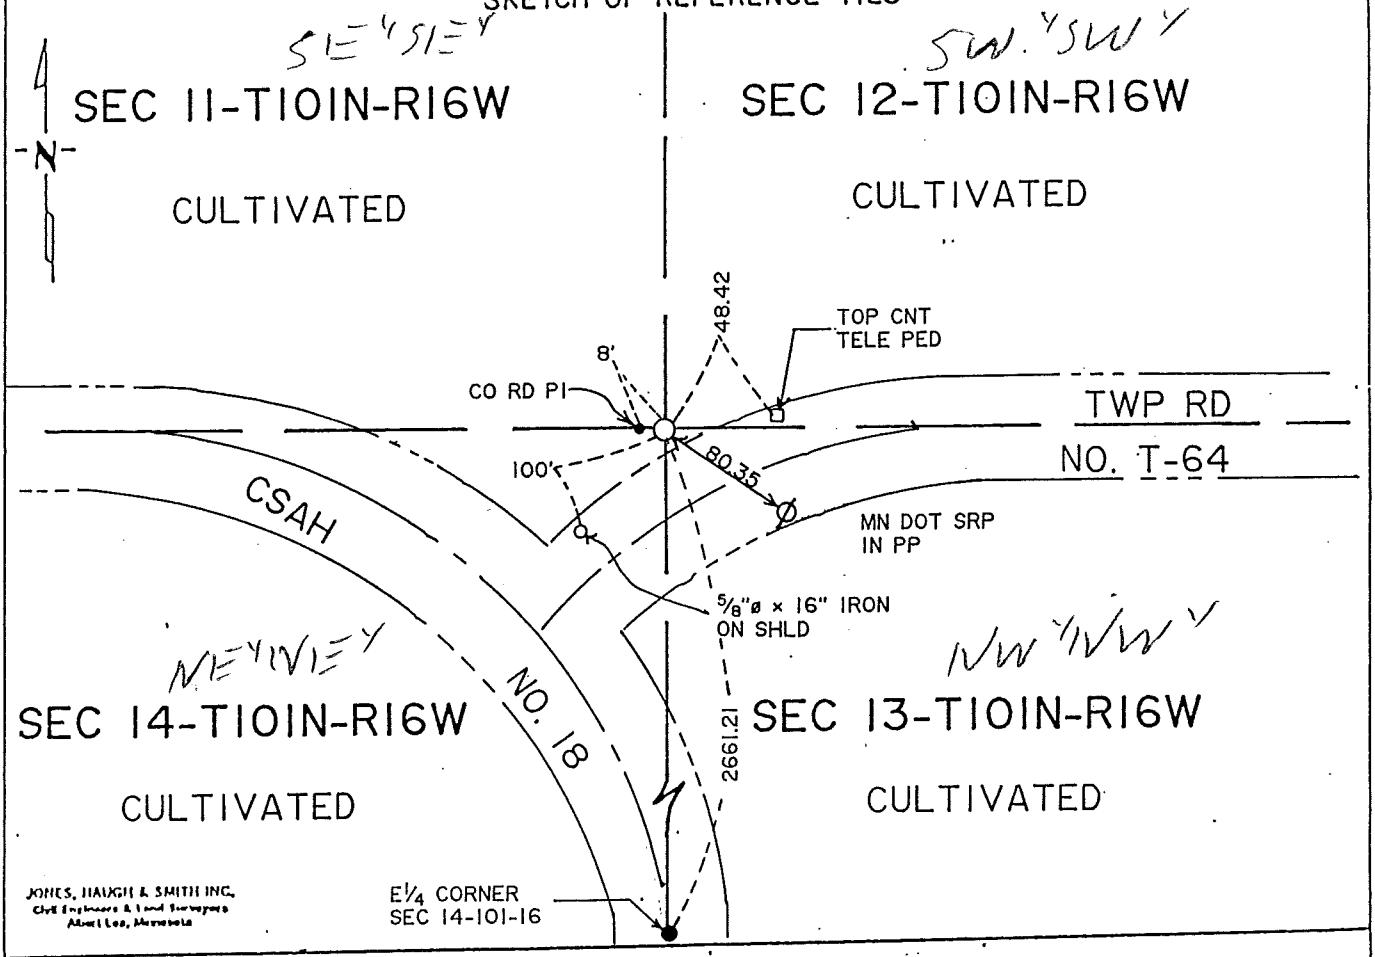

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-18-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 P .M. on the 25 day of June A.D., 19 93

COUNTY RECORDER Amanda Engen

By Marlene Marten, Deputy

DOCUMENT NO. 423749 Bk 80 Pg. 141

M.H.D. FORM NO. 2105

BOOK 80 PAGE 141

STATEMENT OF EVIDENCE

NE cor Sec 14-101-16

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1889 Clausen, Mower County Surveyor, indicates a government post at this corner which was 40.34 chains north of the W 1/4 corner of Section 14-101-16.

1958 Mower County Highway Department Book 1 and County State Aid Highway No. 18 Road Plans indicates a concrete monument in place at this location.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, searched area for corner and found no evidence of concrete monument in place noted in County State Aid Highway No. 18 Road Plans. Testimony of a Mower County Highway Department employee notes that road construction in the late 1980's would have destroyed any perpetuation of this corner or the original public land survey corner. Therefore we set this corner using a straight line extending from the S 1/4 corner of Section 11-101-16 through the County Road PI at a distance of eight feet east of County Road PI according to County State Aid Highway No. 18 Road Plans.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 14, Township 101N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-5-93 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-5-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

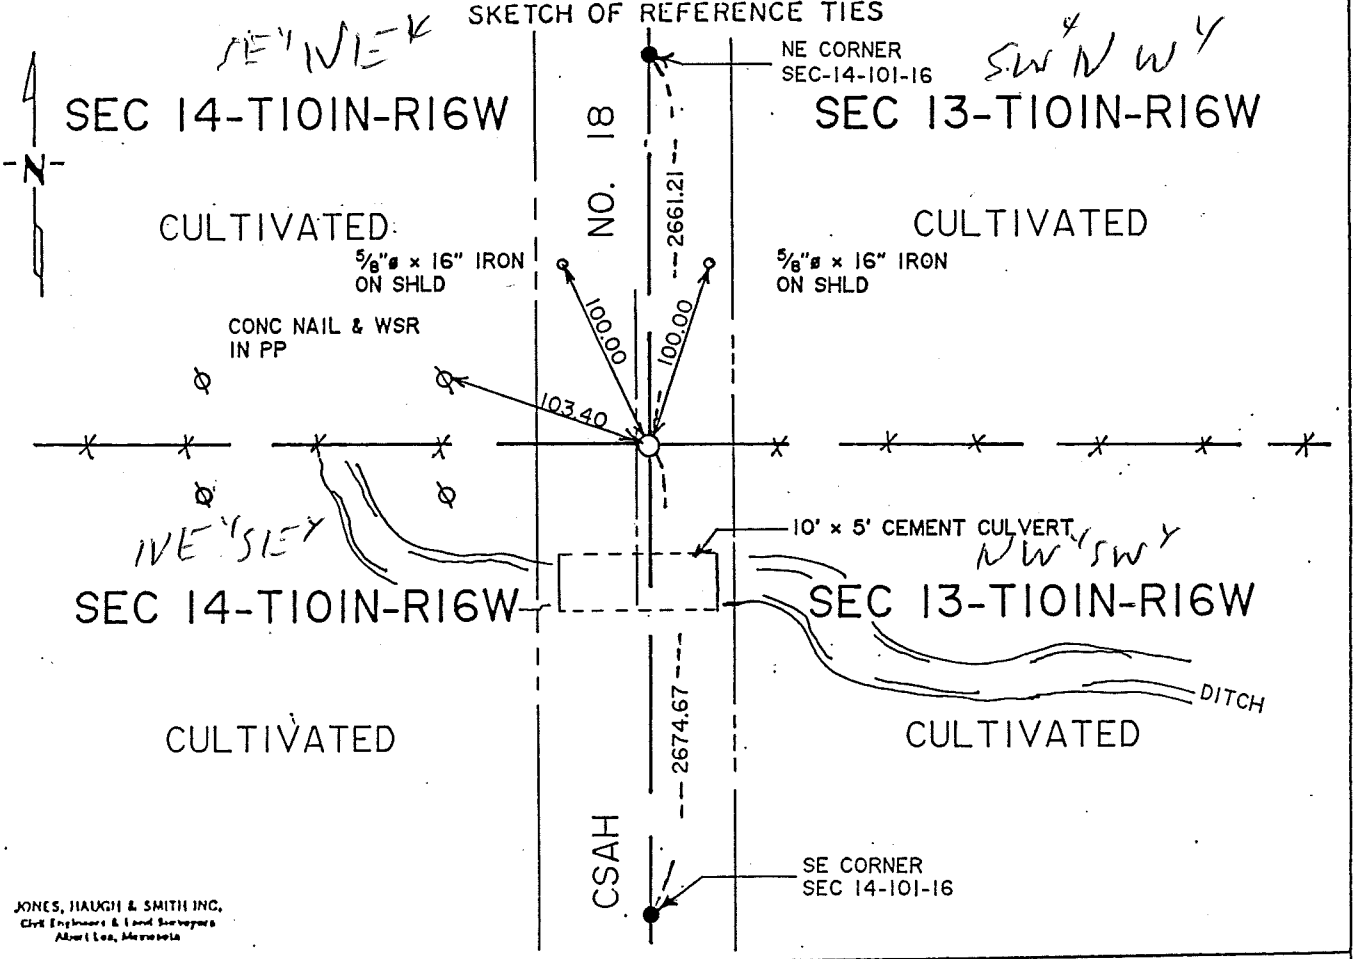

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-14-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 23 day of June A.D., 19 93

COUNTY RECORDER Amanda Conger

By Marlene Martin, Deputy

DOCUMENT NO. 421677

Bk 80 Misc. p. 6

M.H.D. FORM NO. 2105

BOOK 80 PAGE 6

STATEMENT OF EVIDENCE

E 1/4 cor Sec 14-101-16

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1889 Clausen, Mower County Surveyor, notes indicate a government post at this corner which was 40.34 chains north of the southeast corner of Section 14-101-16.

1958 Mower County Highway Department Book A and Road Plans for County State Aid Highway No. 18 indicate a concrete monument inplace.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, found no evidence of this corner. Concrete monument inplace in 1958 was destroyed by ditch construction. Therefore we set a cast iron monument using a straight line from the northeast corner of Section 14-101-16 and the southeast corner of said Section 14 and also in line with old east-west fence lines, as shown on the County Road Plans. Cast iron monument set is four feet east of centerline which agrees with 1958 County Road Plans.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

"O" P 183 TIC BOOK Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 15, Township 101N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 4/24/80 (DATE) found a steel rod in concrete monument removed during excavation.

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☐ On 5/7/80 (DATE) placed a Cast Iron Monument.

SKETCH OF REFERENCE TIES

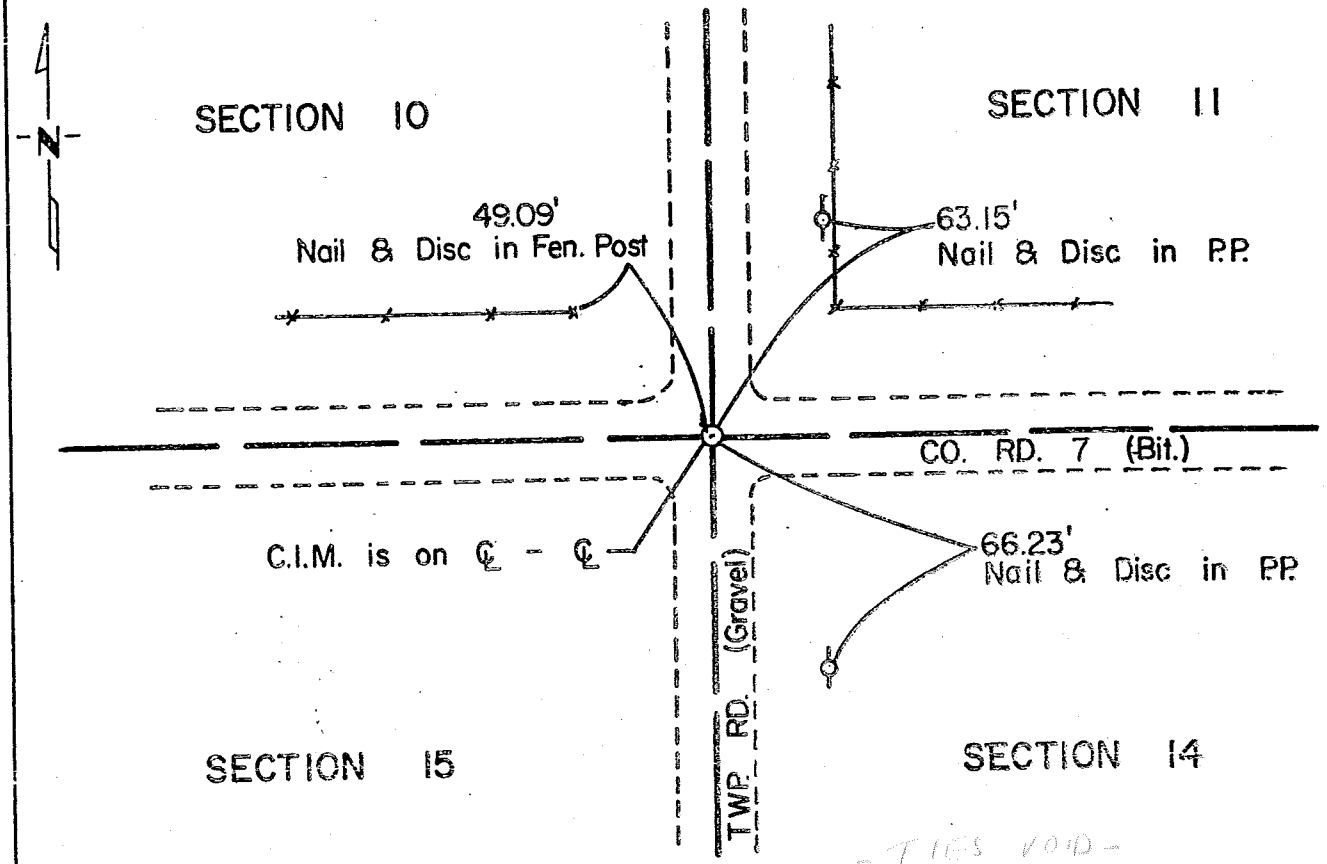

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson (SIGNATURE) 5-15-80 (DATE)

Registration No. 11009

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Mower

I hereby certify that this document was filed in the Reg. of Deeds office at 11 A. M. on the 16 day of May A.D., 19 80

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. 344583

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER SECTION 15, TOWNSHIP 101 NORTH, RANGE 16 WEST, 5 P.M.

1854 Edward Fitzpatrick, Deputy Surveyor, set a stone at the corner of the original Public Land Survey.

1893 M.N. Clausen, County Surveyor, reestablished the corner by measurement from the North 1/4 corner of Section 15 to the North 1/4 corner of Section 14 and from the East 1/4 corner of Section 10 to the East 1/4 corner of Section 15. An iron was set at the corner.

1929 Mower County Engineer measured from the Northeast corner of Section 16 to this corner according to plans on file in the County. No monumentation was indicated.

1975 Jones, Haugh & Smith, Inc., Albert Lea, Mn., set a 5/8 inch x 2 foot rebar at the corner. Clerk of Court file #19548.

1976 Mower County Engineer found a 3/4 inch rebar at the intersection of County Road No. 7 East-West and the township road North-South.

1980 McGhie & Betts Inc., Rochester, Mn., found the 5/8 inch diameter bar during a survey in Section 11.

1980 Ronald J. Olson, Registered Land Surveyor, found the 5/8 inch rebar at the intersection of the roads. A search of the area with a magnetic locator gave no indication of other iron monuments.
An excavation was made with a backhoe in cooperation with the Mower County Engineer. The excavation was 20 feet N-S by 7 feet E-W by 4.5 feet deep centered on the 5/8" rebar. A 7 inch diameter by 12 inch high concrete monument with an iron rod was found 1.7 feet below the surface of the road. The monument was 0.9 feet South and 0.9 feet West of the 5/8 inch rebar. No other evidence of monumentation was found within the excavation The concrete monument and 5/8 inch rebar were removed during the excavation.
An electronic survey was made for the subdivision of Section 10

An analysis of the record and survey data indicates the corner was re-established from government ties by the County Surveyor in 1893. The 1980 distances between concrete monuments on the north line of Section 15 agree within 0.5 feet of the distance whon by the County Engineer in 1929. The corner was reset at the location of the concrete monument. The location has been used and perpetuated for over 50 years and is accepted as the original Public Land Survey Corner.

For details of the analysis and electronic survey data, contact Zenk Engineering, Albert Lea, MN.

"N" Tie Book p 133 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 15, Township 101N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 5/7/80 (DATE) placed a Cast Iron Monument

SKETCH OF REFERENCE TIES

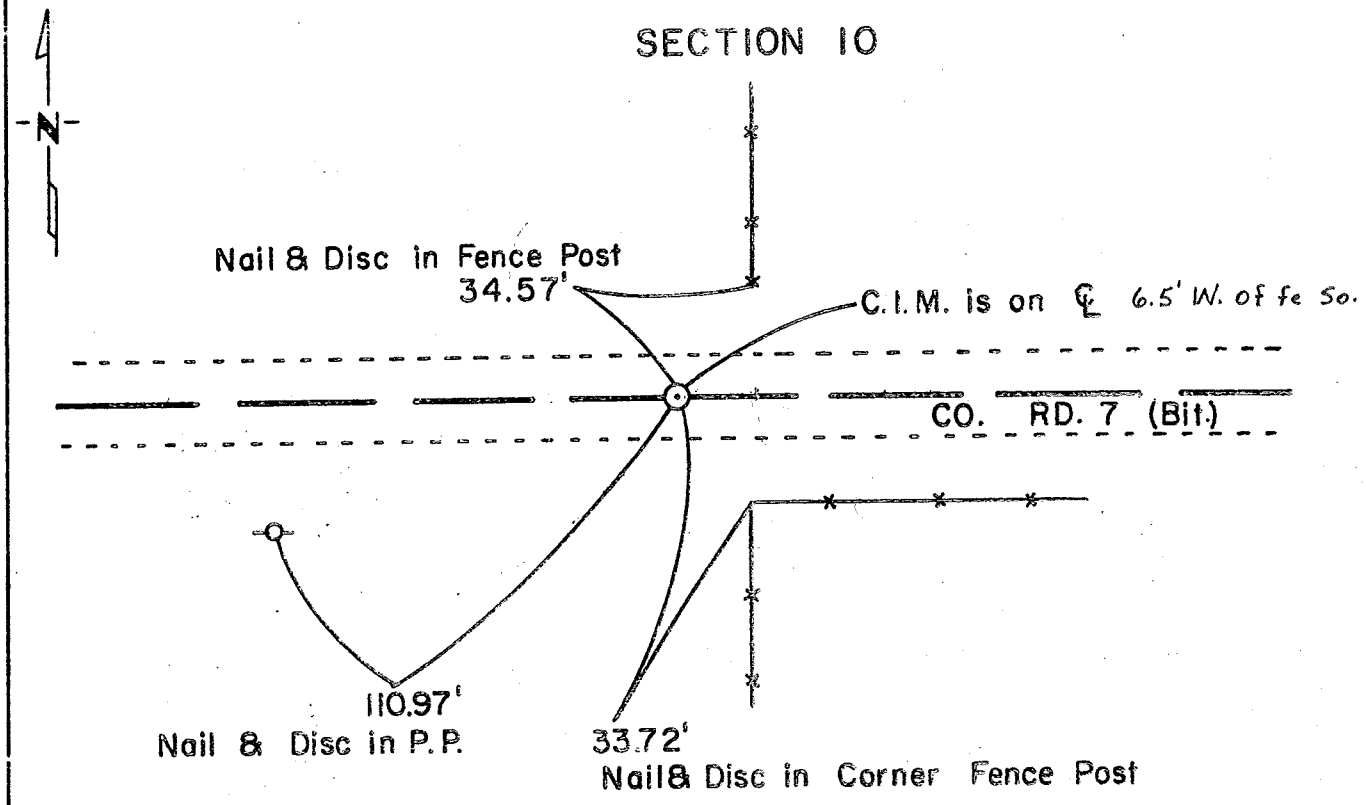

Tie Book - GPNDC 1981

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson (SIGNATURE) 5-15-80 (DATE)

Registration No. 11009

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Mower

I hereby certify that this document was filed in the Reg. of Deeds office at 11 A .M. on the 16 day of May A.D., 19 80

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. 344582

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTH QUARTER CORNER SECTION 15, TOWNSHIP 101 NORTH, RANGE 16 WEST,5 PM

1854 Edward Fitzpatrick, Deputy Surveyor, set a post and mound at the corner in the original Public Land Survey.

1893 M.N. Clausen, County Surveyor, set a stone from the stump of a government bearing tree.

1929 Mower County Engineer improved the road through this area. No monumentation or occupation lines were shown in this area.

1976 Mower County Engineer indicated the corner to be in the centerline of the road at the fence lines North and South.

1980 Ronald J. Olson, Registered Land Surveyor, searched the area with a magnetic locator and found a spike with a plastic washer on the centerline of the road and the fences north and south.
An excavation was made with a backhoe in cooperation with the Mower County Engineer. The excavation was 7 feet North-South by 20 feet East-West by 4 feet deep westerly of a point 3 feet east of the North-South fence and northerly of a point 3 feet southerly of centerline.
No evidence of monumentation was found. An electronic survey was made to analize the section.

An analysis of the record and electronic survey data gives no indication of monument perpetuation at this location. The corner was set on the centerline of the road and at the distance shown from the Southeast corner of Section 10 as measured by the County Surveyor in 1893. This location agrees with the occupied lines in Section 10 and is accepted as the corner of the Public Land Survey.

For additional details concerning the electronic survey and analysis, contact Zenk Engineering, Albert Lea, Minnesota.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 15, Township 101N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-22-91 (DATE) found no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-22-91 (DATE) placed a cast iron monument on ℄ of N-S road and power line East.

SKETCH OF REFERENCE TIES

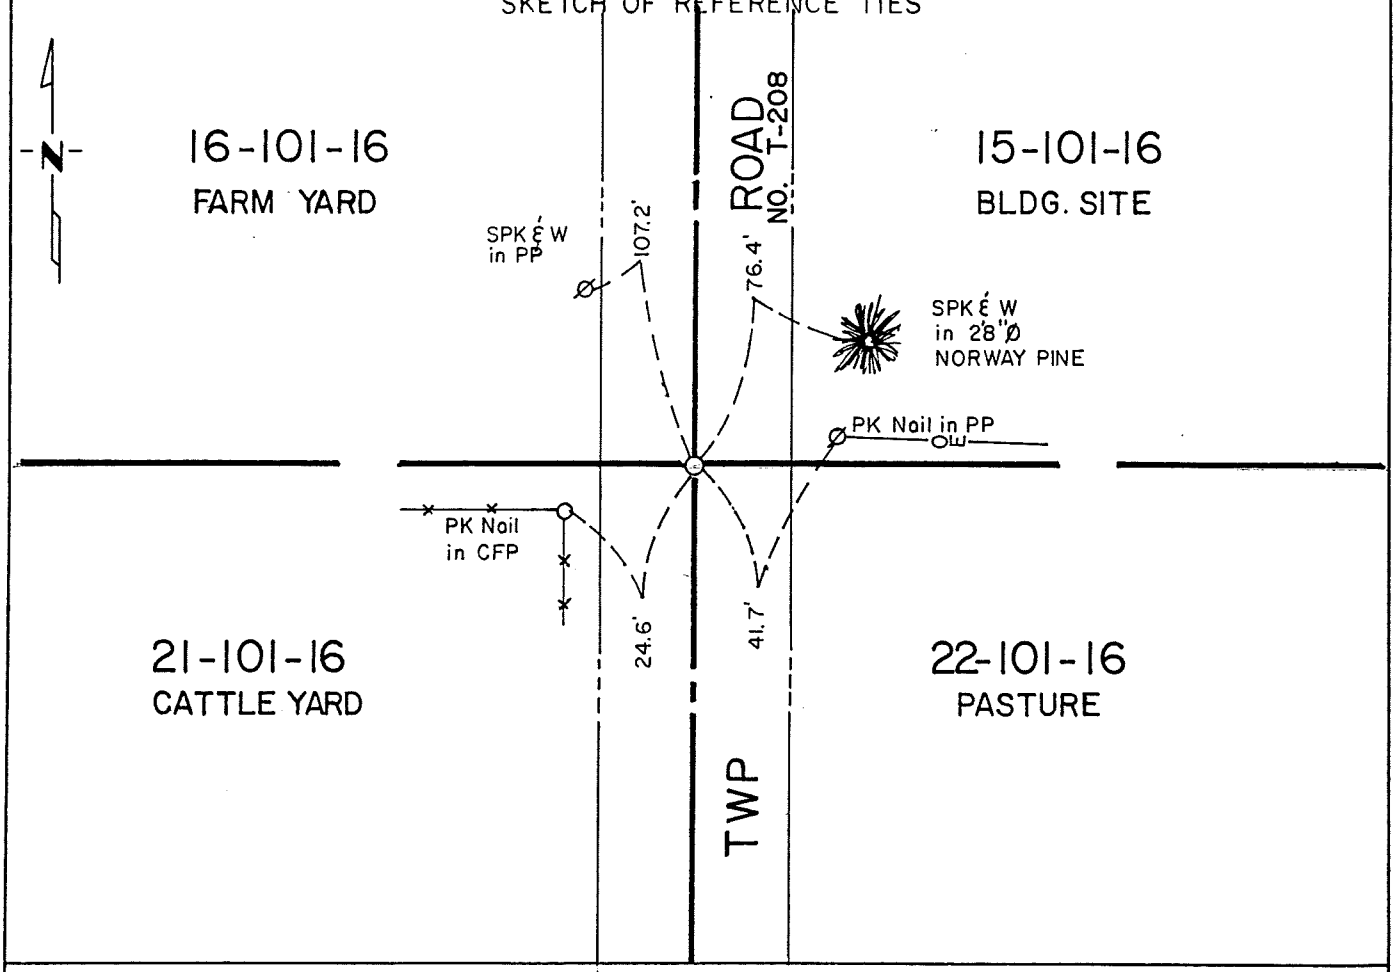

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-6-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 15-101-16

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith crew, under the direction of John H. Schulte IV, dug with County backhoe on centerline north-south road for Bridge Survey #2614. Dug a 4'x35'x5' deep hole and found no evidence of public land survey corner or a perpetuation thereof. Using testimony of Mr. Hanson, owner of 160 acres on each side of corner, in approximately 1950 a north-south-west cartway and old fence line east was at this position. In approximately 1960 the cartway west was removed and a power line constructed approximately two rods north of old cartway. The power line east of the road was constructed in old east-west fence which is now removed. Set cast iron monument in line with power line east and on centerline of north-south road.

The monument set fits occupation lines, fence lines and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

"MM" TIE BOOK p133 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 16, Township 101N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 4/24/80 (DATE) found a steel rod in concrete monument-removed during excavation.

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☒ On 5/7/80 (DATE) placed a Cast Iron Monument.

SKETCH OF REFERENCE TIES

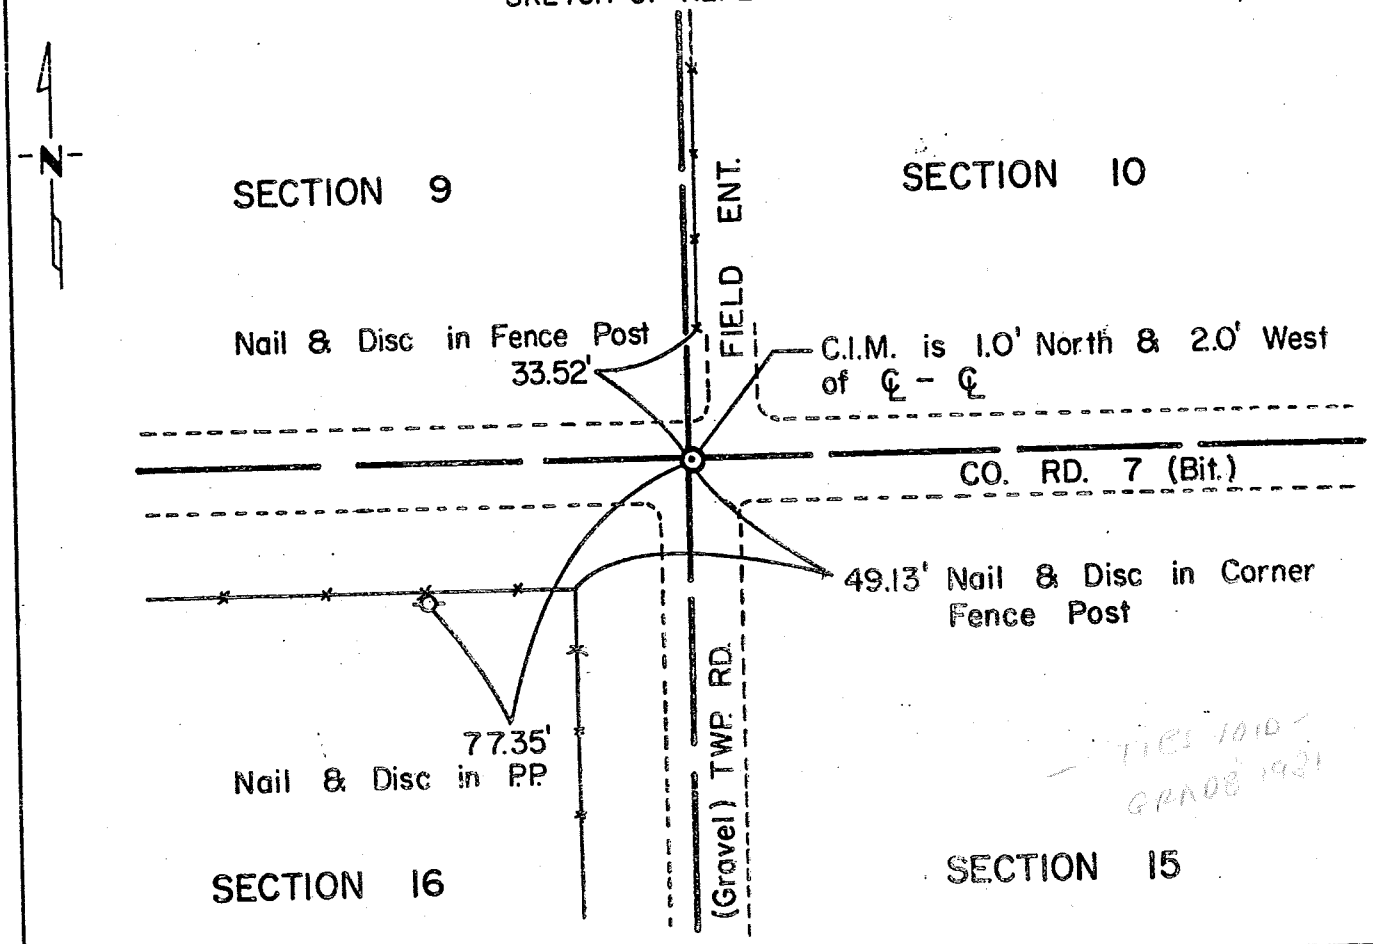

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald L. Olson (SIGNATURE) 5-15-80 (DATE)

Registration No. 11009

☒ Land Surveyor, ☒ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Mower

I hereby certify that this document was filed in the Reg. of Deeds office at 11 A .M. on the 16 day of May A.D., 19 80

Register of Deeds _____

By _____, Deputy

DOCUMENT NO. 344584

M.H.D. FORM NO. 2105

Statement of Evidence:

NORTHEAST CORNER SECTION 16, TOWNSHIP 101 NORTH, RANGE 16 WEST 5 PM

1854 Edward Fitzpatrick, Deputy Surveyor, set a stone at the corner during the original Public Land Survey.

1893 M.N. Clausen, County Surveyor, indicated the corner was obliterated during a survey in Section 10.

1929 Mower County Engineers plans shows a stone 105.0 feet north of the corner.

1976 Mower County Engineers location notes show that a 3/8 inch iron rod was set at the corner during a survey for the county road.

1980 Ronald Olson, Registered Land Surveyor, found a small concrete nail at the centerline of roads E-W&S and on fence line north. A search with a magnetic locator gave no further indication of any iron at the corner. An excavation was made with a backhoe in cooperation with the Mower County Engineer. The excavation was 6' N-S by 15' E-W by 4.5' deep on the ℄ of County Road No. 7. The east edge of the hole was 5' east of ℄-℄. A 7 inch diameter by 12 inch high concrete monument was found 3' west of ℄-℄ 15 inches below the bituminous surface and 3 inches below an old gravel roadbed. County construction stakes were the only other evidence found within the excavation area. A 12" round rock was found 104 feet northerly of ℄-℄ on the east side of the fence on the surface of the ground. An electronic survey was made for the subdivision of Section 10.

An analysis of the record and electronic survey data, indicates the corner was obliterated in 1893. The 1980 distances measured between the concrete monuments on the north line of Section 15 is within 0.5 feet of the 1929 distance by the County Engineer. This location has been used and perpetuated by the County for over 50 years and has been recognized as the corner.
The concrete monument was removed during the excavation. The Cast Iron Monument was set at the location of the concrete monument and is considered to be at the location of the original Public Land Survey corner.

For additional information concerning the electronic survey and analysis, contact Zenk Engineering, Albert Lea, Minnesota.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 17, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/19/99 (DATE) found a 3/4" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/19/99 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

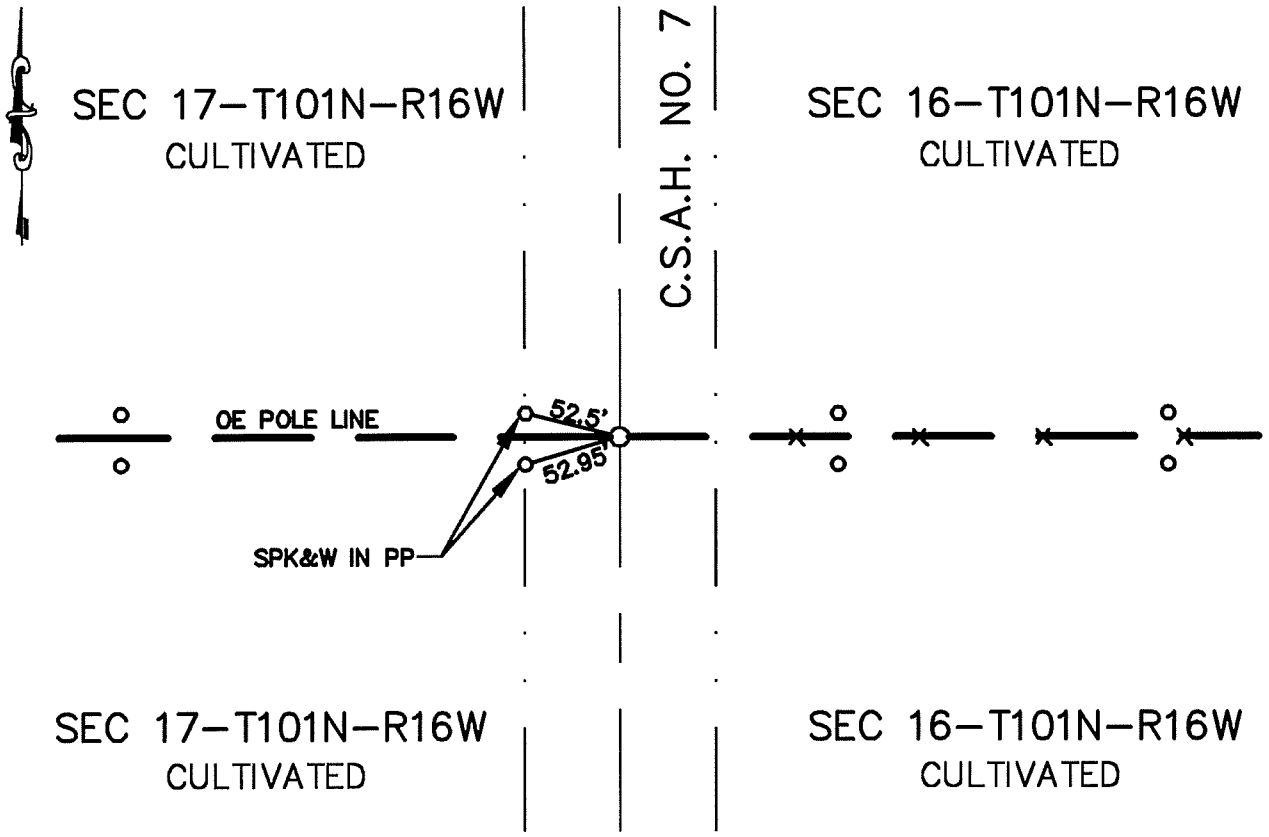

JONES, HAUGH & SMITH INC
CM Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 8-10-99
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

E 1/4 Cor Sec 17-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County Highway Department road plan shows an inplace 3/4" iron rod.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the centerline of C.S.A.H. No. 7 N-S and in line with line fence east. Dug to a depth of 1.5' and located a 3/4" iron. Placed a cast iron monument above iron found at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh, and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 17, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/19/99 (DATE) found a T IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/19/99 (DATE) placed a –

SKETCH OF REFERENCE TIES

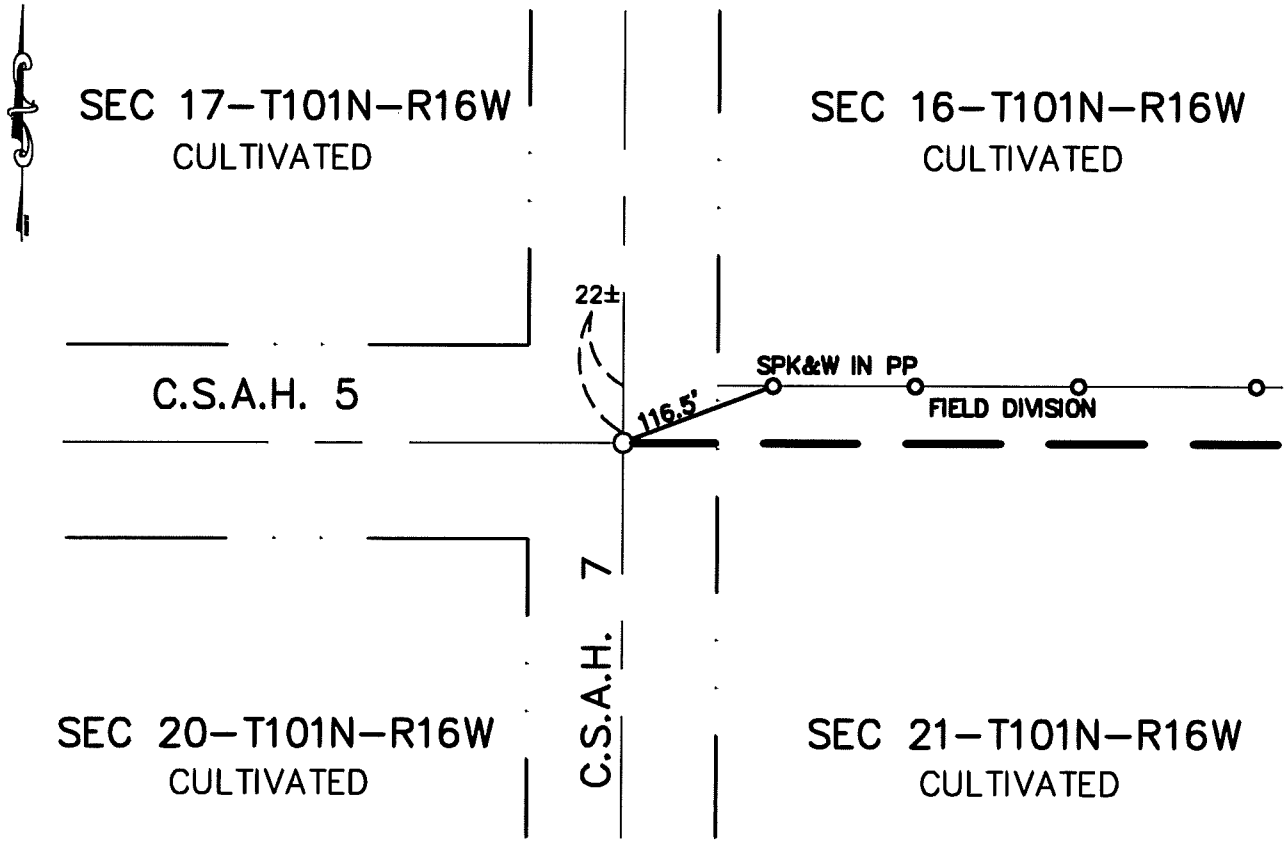

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ SIGNATURE 8-10-99 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Cor Sec 17-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County Highway Department road plans show an inplace iron rod.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the centerline of C.S.A.H. No. 7 N-S and the centerline C.S.A.H. No. 5 west. Located a T-iron at road surface. Accepted monument as original PLS corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh, and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 19, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 4/10/2000 (DATE) found a CONCRETE MONUMENT WITH IRON PIN IN CENTER

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4/10/2000 (DATE) placed a 5/8" IRON WITH CAST IRON MONUMENT @ ROAD SURFACE

SKETCH OF REFERENCE TIES

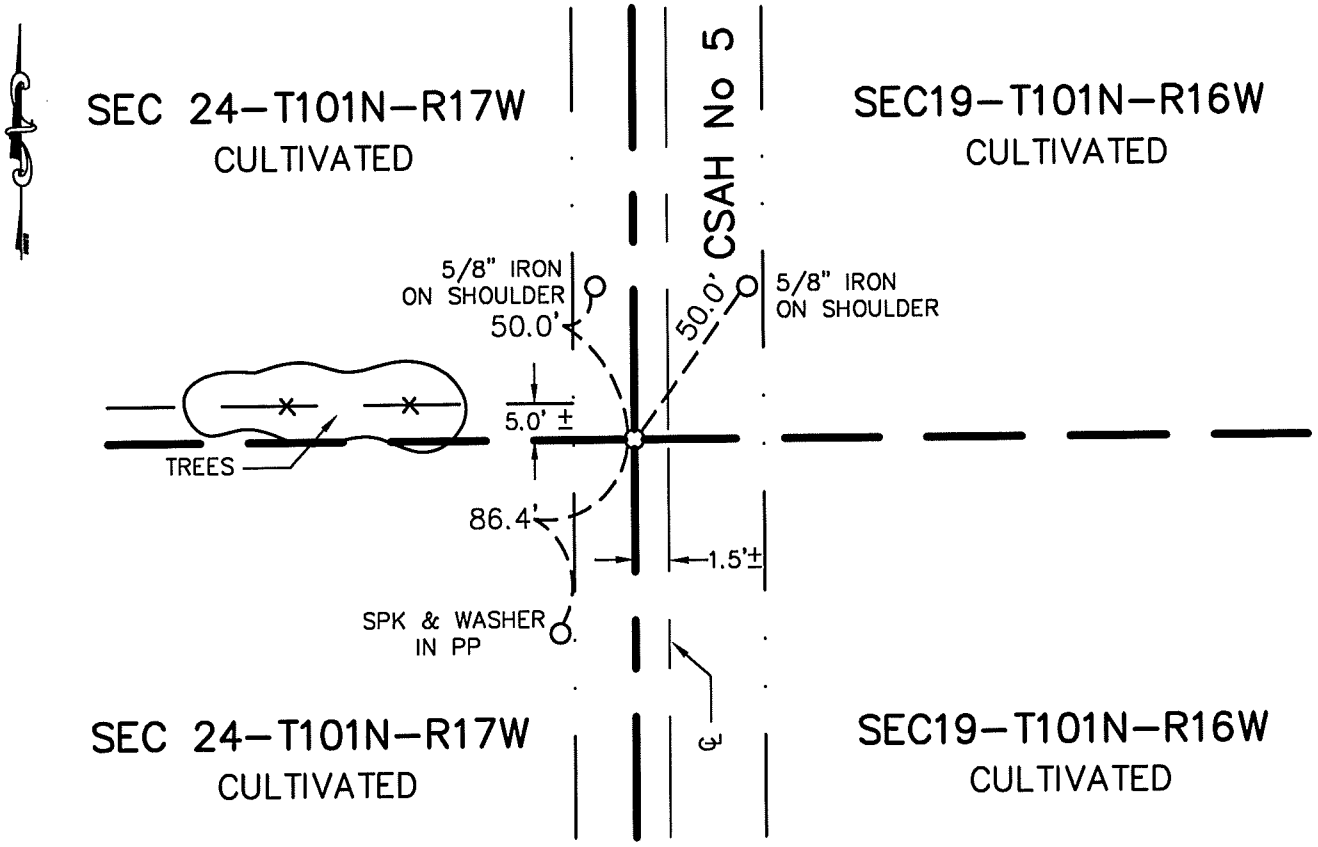

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 4-26-00
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Cor Sec 19-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1951 Mower County records state a concrete monument was in place.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe, a 3'x7' hole on centerline of CSAH No 5 and 5.0' South of line fence to the West. They uncovered a concrete monument with an iron pin in the center, 2.5' below road surface. Set a 5/8" iron capped 13807 on West Side of monument. Set a 5/8"x 16" iron with Cast Iron Monument flush with road surface. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 20, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/19/99 (DATE) found a HARRISON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/19/99 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

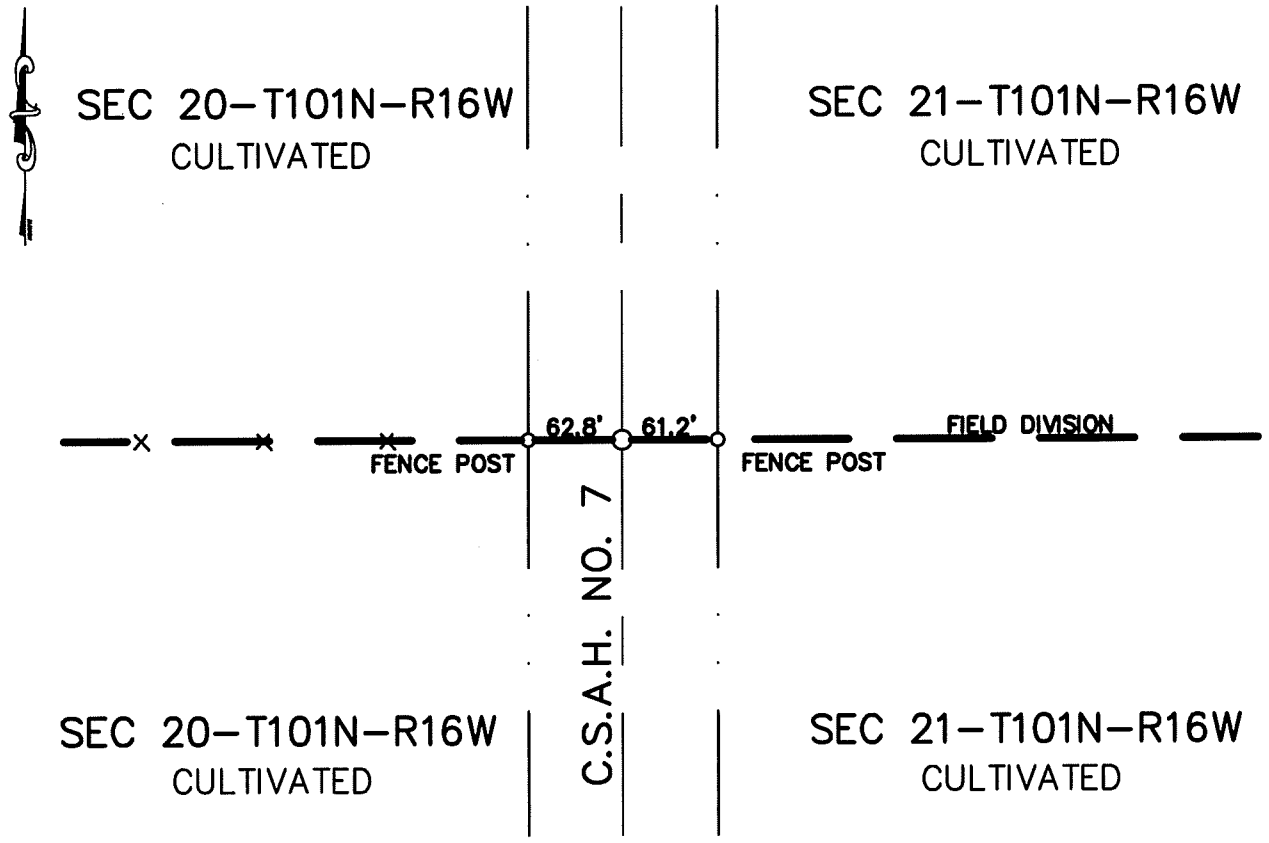

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ SIGNATURE

8-10-99 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Cor Sec 20-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County Highway Department road plan of C.S.A.H. No. 7 shows an inplace iron rod.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the centerline of C.S.A.H. No. 7 and in line with line fence west. Dug to a depth of 1.5' below road surface and uncovered a Harrison monument. Accepted monument as a perpetuation of the original PLS corner. Placed a cast iron monument above monument found at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh, and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 22, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 00/00/1992 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/06/2003 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT OVER –

SKETCH OF REFERENCE TIES

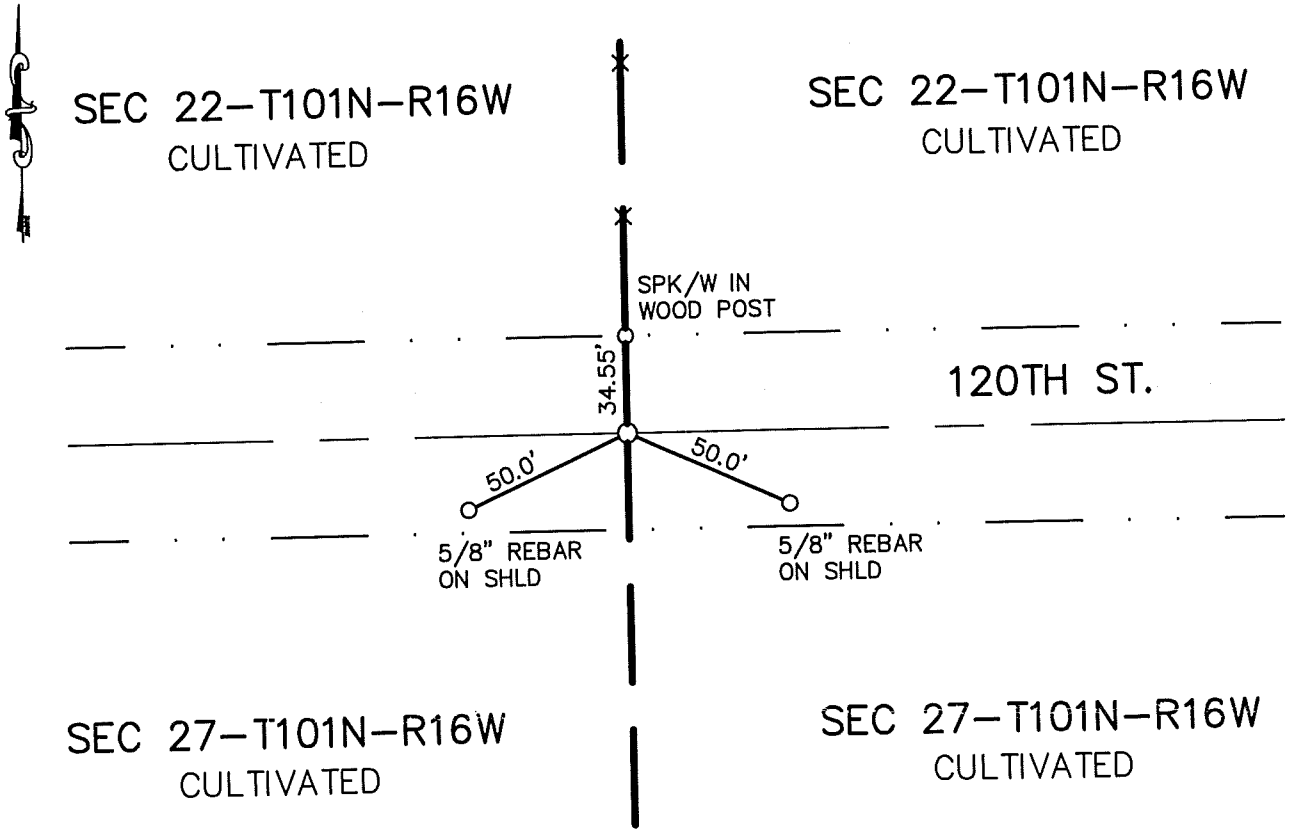

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-21-03

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.L.P. FORM NO. 2105

S 1/4 Corner Section 22-T101N-R16W

Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with backhoe at the centerline of East-West township road and in line with line fence North. Dug a 6'x12' hole down to virgin soil and found no evidence of the original PLS corner. Accepted the centerline of the road and the line fence North as the best evidence of the original corner location. Placed a 5/8"x16" rebar with a cast iron monument at this location 0.60' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 22, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/06/2003 (DATE) placed a 5/8"X16" REBAR WITH CAST IRON MONUMENT OVER –

SKETCH OF REFERENCE TIES

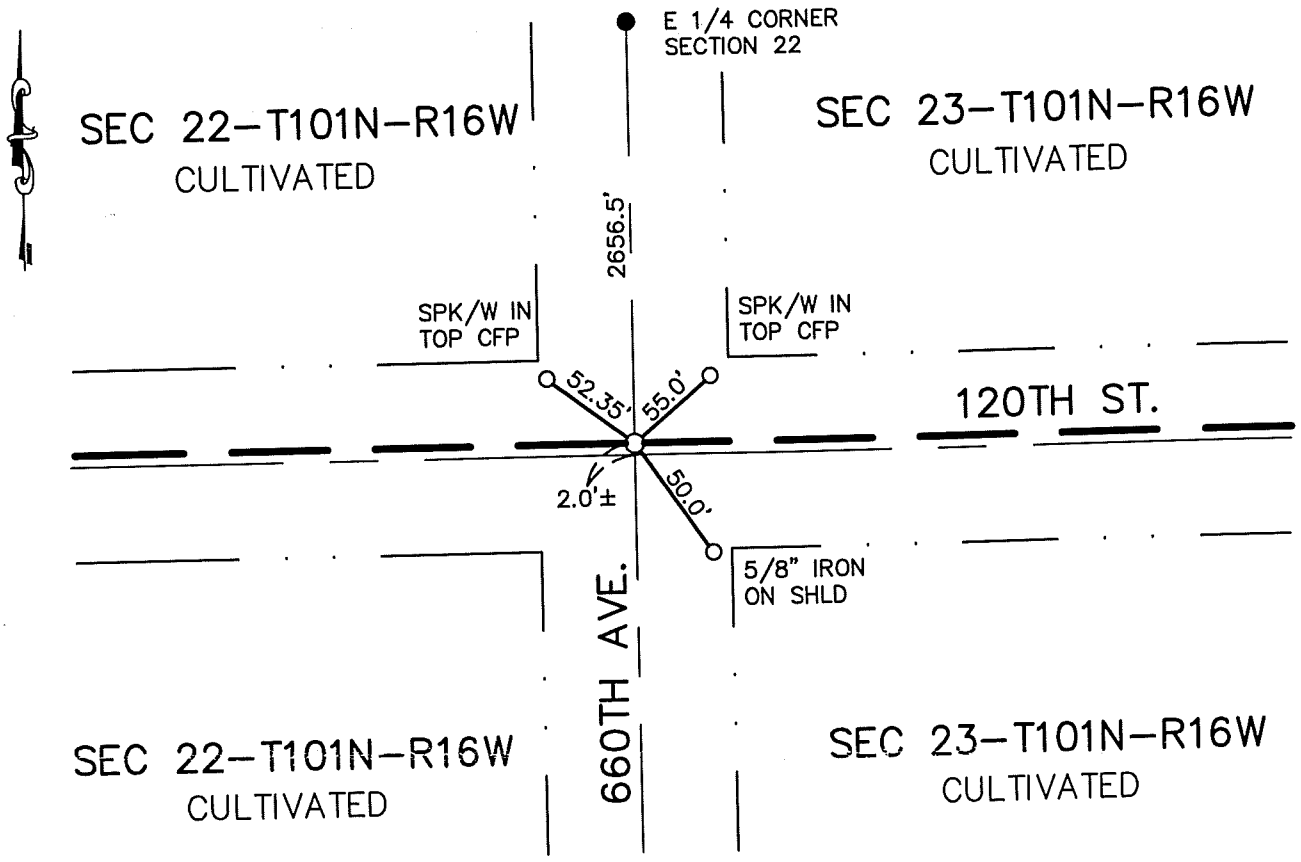

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-21-03

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Corner Section 22-T101N-R16W

Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with backhoe at the centerline of 120th Street and 660th Avenue. Found no evidence of the original PLS corner.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with backhoe at the centerline of 120th Street and 660th Avenue as well as an area North of centerline-centerline. Found no evidence of the original PLS corner. Jones Haugh and Smith crew set a 5/8"x16" rebar with cast iron monument by tying into existing fence lines located North, South, East, and West and computed a location for this corner using obliterated methods.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 22, Township 101N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-22-91 (DATE) found no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-22-91 (DATE) placed a cast iron monument on ℄ of N-S road in line with fence West.

SKETCH OF REFERENCE TIES

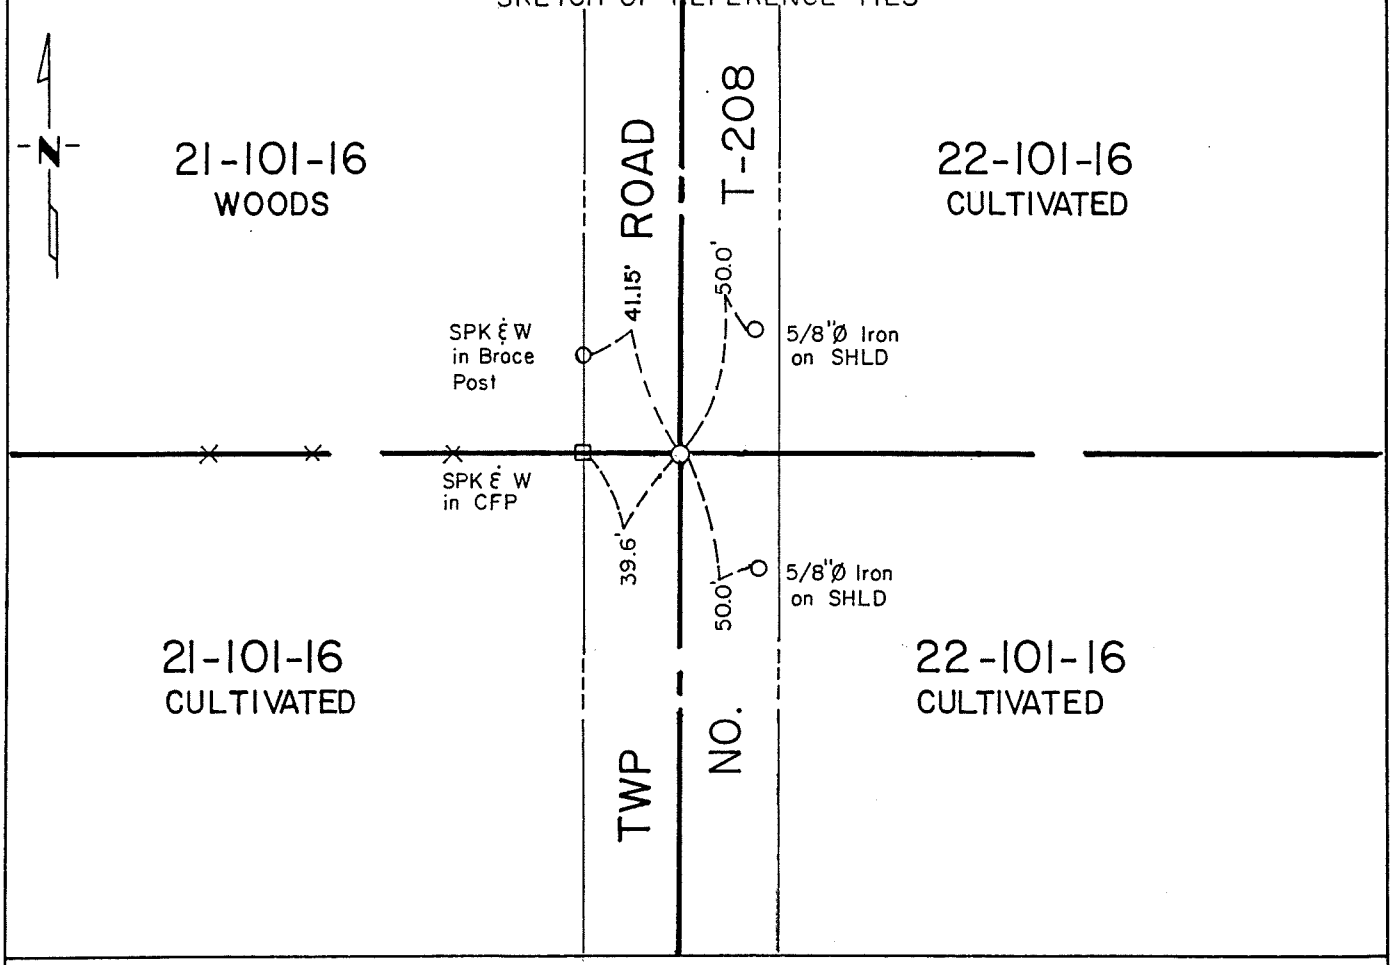

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-6-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 22-101-16

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

5" White Oak	N 85° W	209 links (137.94 ft)
5" White Oak	S 59 1/2° W	278 links (183.48 ft)

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith crew, under the direction of John H. Schulte IV, dug with County backhoe a 4'x12'x4' deep hole for Bridge Survey No. 2614. Found no evidence of public land survey corner or a perpetuation thereof. Mr. Hanson, an area farmer, until approximately 1950, said the existing township road was only a cartway and an east-west fence crossed cartway. Road was graded in and a cut was made at this location removing tree stumps within the right-of-way destroying any evidence of original 1/4 corner. The existing road has a deflection at this point. Therefore used centerline north-south road in line with fence west and placed cast iron monument.

The monument set fits occupation lines, fence lines and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 22, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch


☐ On 07/31/2003 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/31/2003 (DATE) placed a 5/8"X16" REBAR CAPPED #13807

–

SKETCH OF REFERENCE TIES

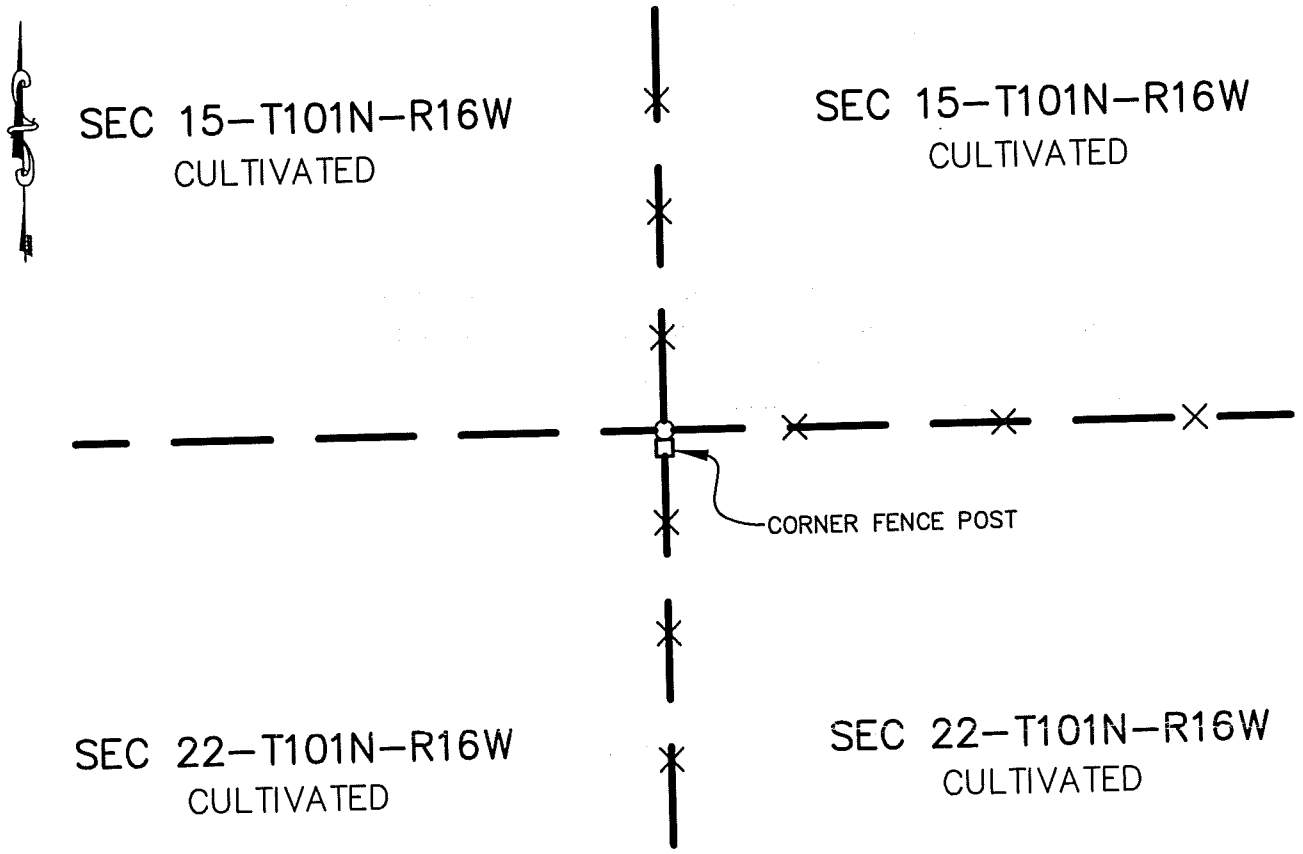

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ SIGNATURE

8-21-03 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

MHD FORM NO. 2105

N 1/4 Corner Section 22 –T101N-R16W

Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug at the intersection of fence line North-South and East. Found nothing. Accepted the fences as the best evidence of the original PLS corner location and placed a 5/8"x16" rebar capped #13807 on the North side 0.4' above ground surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 22, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/20/1996 (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/20/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

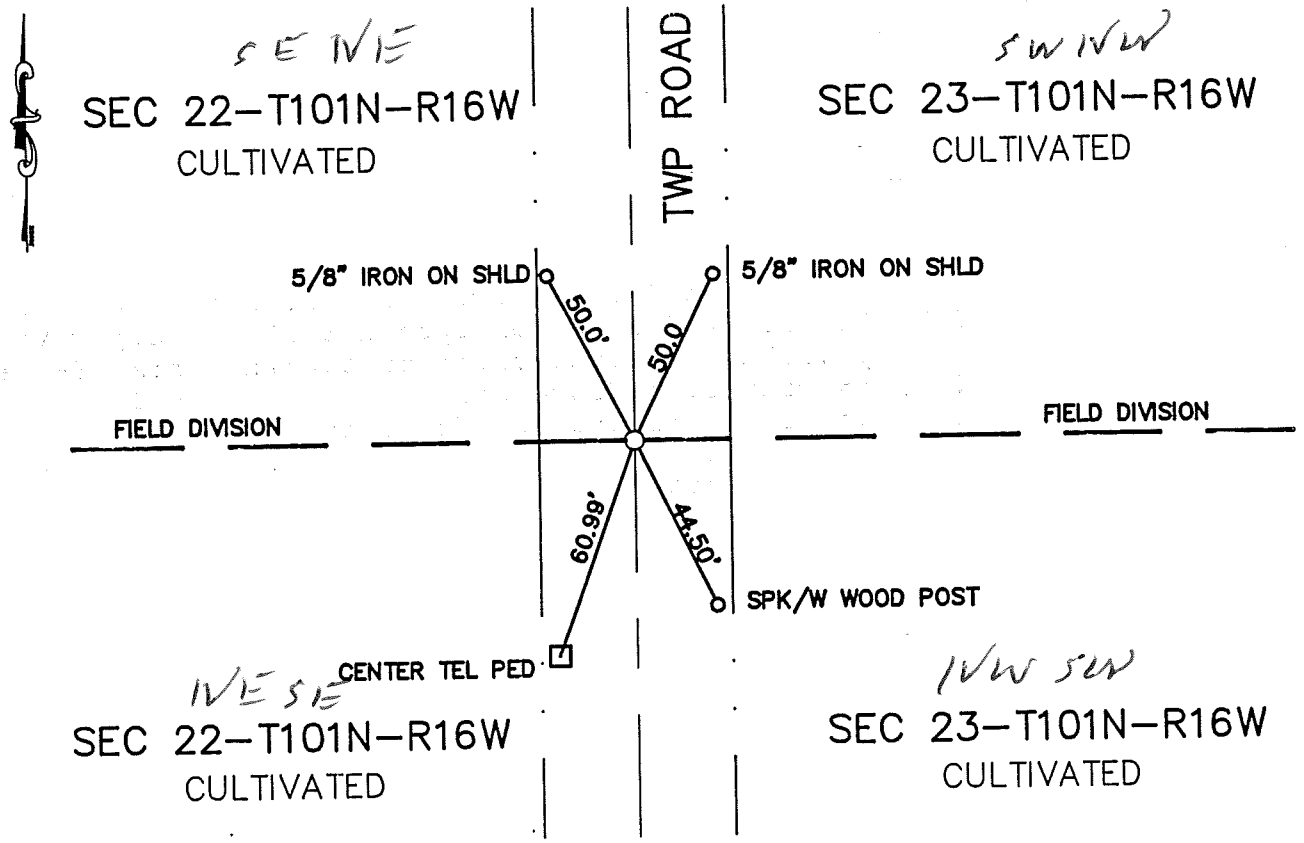

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 95 PAGE 571

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ SIGNATURE

7-10-97 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 15 day of July A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 454660

M.H.D. FORM NO. 2105

Book 95 Misc Page 571

E 1/4 Cor SEC 22-101-16

This corner was originally established by Deputy Surveyors Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on centerline of township road and in line with field divisions E-W. Dug a 3'x12' hole 4.5' deep to virgin soil and found no evidence of PLS corner. Placed a cast iron monument on a straight line between the NE corner of section 22 and the SE corner of section 22. Corner is in line with field division E-W and township road N-S.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 22, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/20/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/20/1996 (DATE) placed a CAPPED 5/8" IRON #22705

SKETCH OF REFERENCE TIES

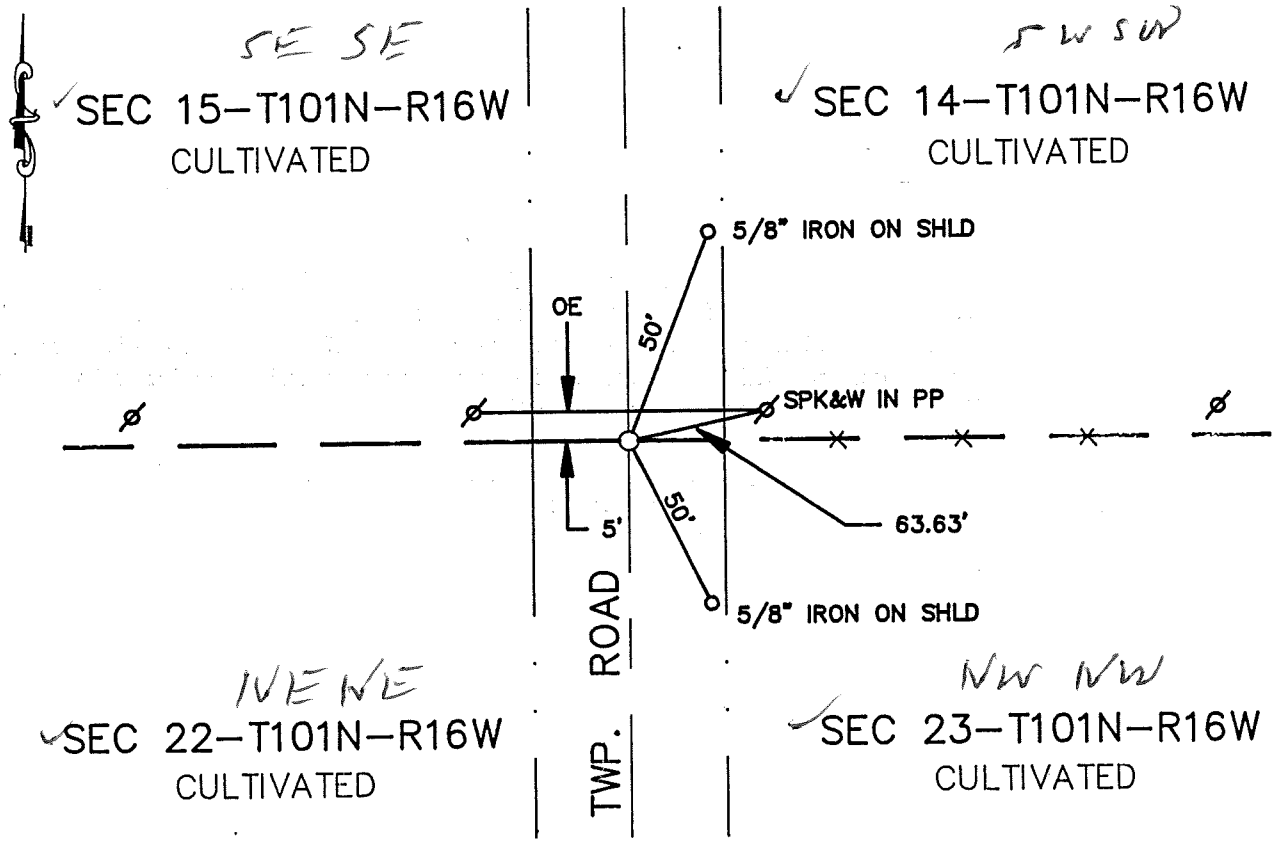

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 95 PAGE 573

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-10-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 15 day of July A.D., 1997

COUNTY RECORDER Charles Enzer

By Susan M. Davis, Deputy

DOCUMENT NO. 454661

M.H.D. FORM NO. 2105

Book 95 Misc Page 573

NE Cor SEC 22-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the centerline of township road N-S and in line with line fence east. Dug to virgin soil and found no evidence of original PLS corner. Accepted centerline of township road and line fences as the best perpetuation of original PLS corner and placed a 5/8" iron capped 22705 at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 23, Township 101N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-3-93 (DATE) found a 3/4"ø x 16" IRON AND A 6"ø x 18 CONC MON. WITH IRON IN CNT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-3-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

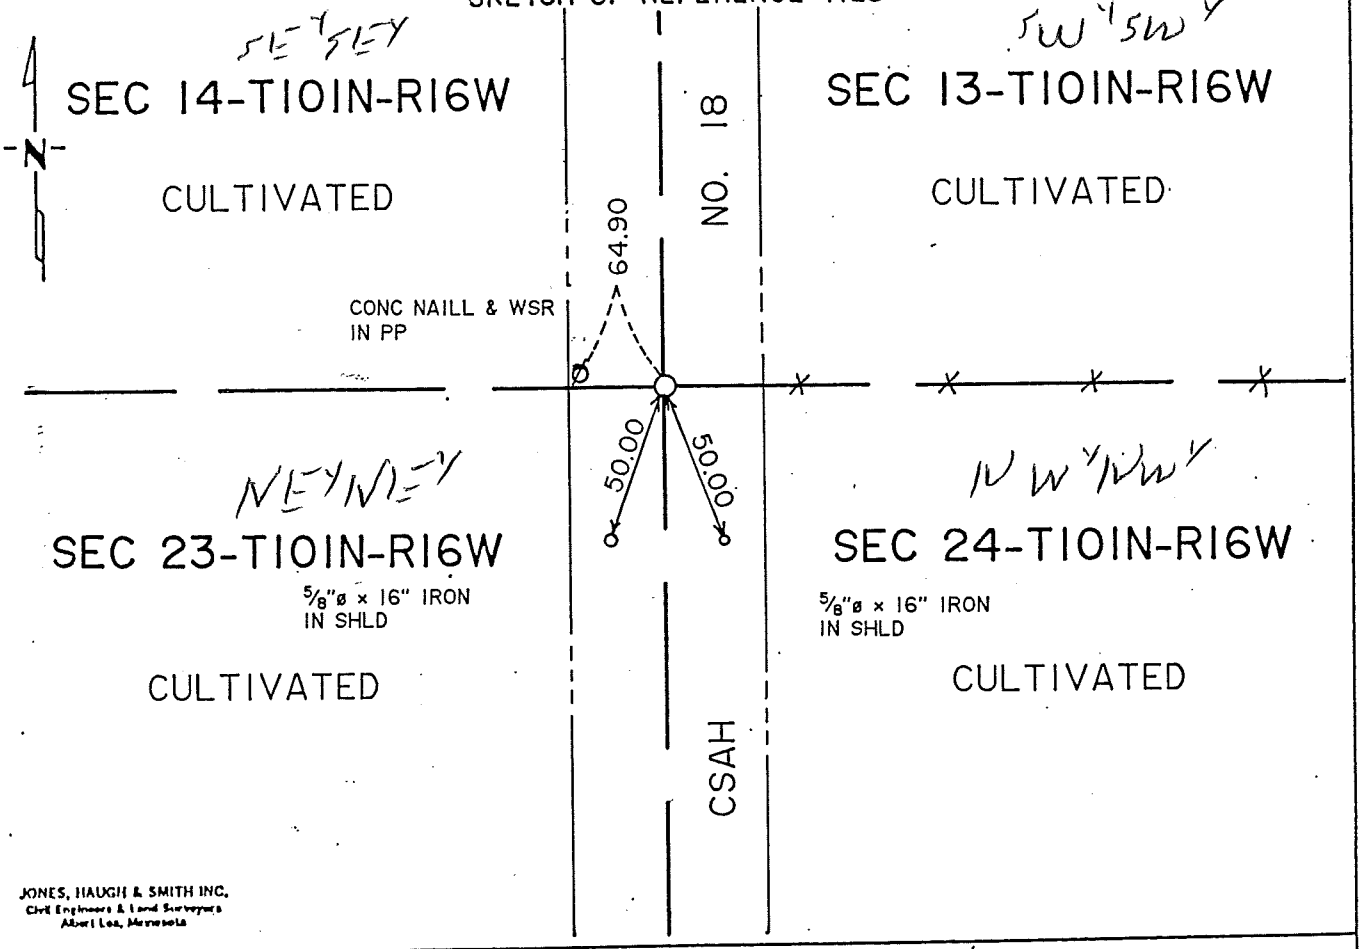

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-14-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 23 day of June A.D., 1993

COUNTY RECORDER Edward Conger

By Marlene Martin, Deputy

DOCUMENT NO. 421628

Bk 80 Misc Pg. 8

BOOK PAGE

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE cor Sec 23-101-16

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1889 Clausen, Mower County Surveyor, notes indicate a government post at this corner which was 40.34 chains south of the W 1/4 of Section 14-101-16.

1958 Mower County Highway Department Book 1 indicates a large pointed rock between two others and also a concrete monument inplace at this corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 3'x3'x8' hole on centerline of County State Aid Highway No. 18 and also in line with line fence running east. We found a 3/4" diameter x 16" iron one foot deep and a 6" diameter x 12" concrete monument one foot below iron found. Monuments found were in line with the fence line running east and also the centerline of County Road. Therefore we accepted monuments found as the perpetuation of the original public land survey and pulled 3/4" diameter iron found and set a cast iron monument near road surface above concrete monument left inplace.

The monuments found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 23, Township 101N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-3-93 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-3-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

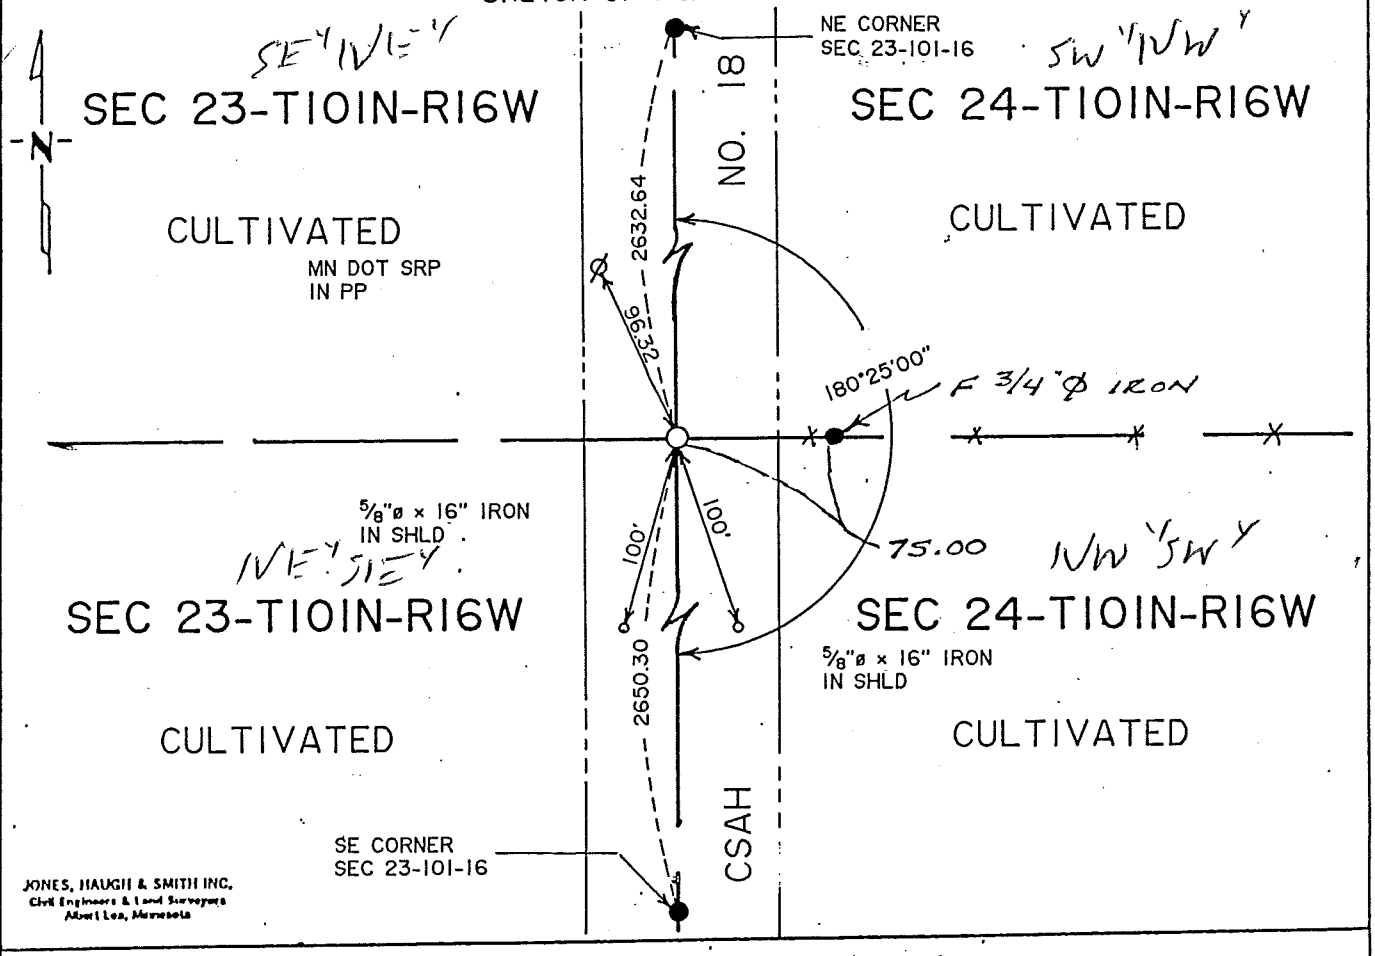

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-14-93

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 23 day of June A.D., 1993

COUNTY RECORDER Charlene Enger

By Marlene Martin, Deputy

DOCUMENT NO. 421679

Bk 80 Misc p. 10

M.H.D. FORM NO. 2105 BOOK 80 PAGE 10

STATEMENT OF EVIDENCE

E 1/4 cor Sec 23-101-16

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1890 Clausen, Mower County Surveyor, notes indicate a government post at this corner.

1958 Mower County Highway Department Book 1 and County State Aid Highway No. 18 Plans indicate a concrete monument inplace at this corner. Road plans show a 3/4" diameter iron 75 feet east of corner on line fence.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 4'x3'x8' hole on the centerline of County State Aid Highway No. 18 and also in line with old line fence running east. We dug to a depth of three feet which is in virgin soil and found no evidence of concrete monument or the original public land survey corner. Therefore we set a cast iron monument near road surface by measuring 75 feet west from 3/4" diameter iron found as noted in 1958 road plans which placed corner on centerline of the County Road and in line with the line fence running east. This location also fits the delta angle shown on the 1958 Road Plan.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 11

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 23, Township 101N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-3-93 (DATE) found a 3/4"ø x 16" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-3-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

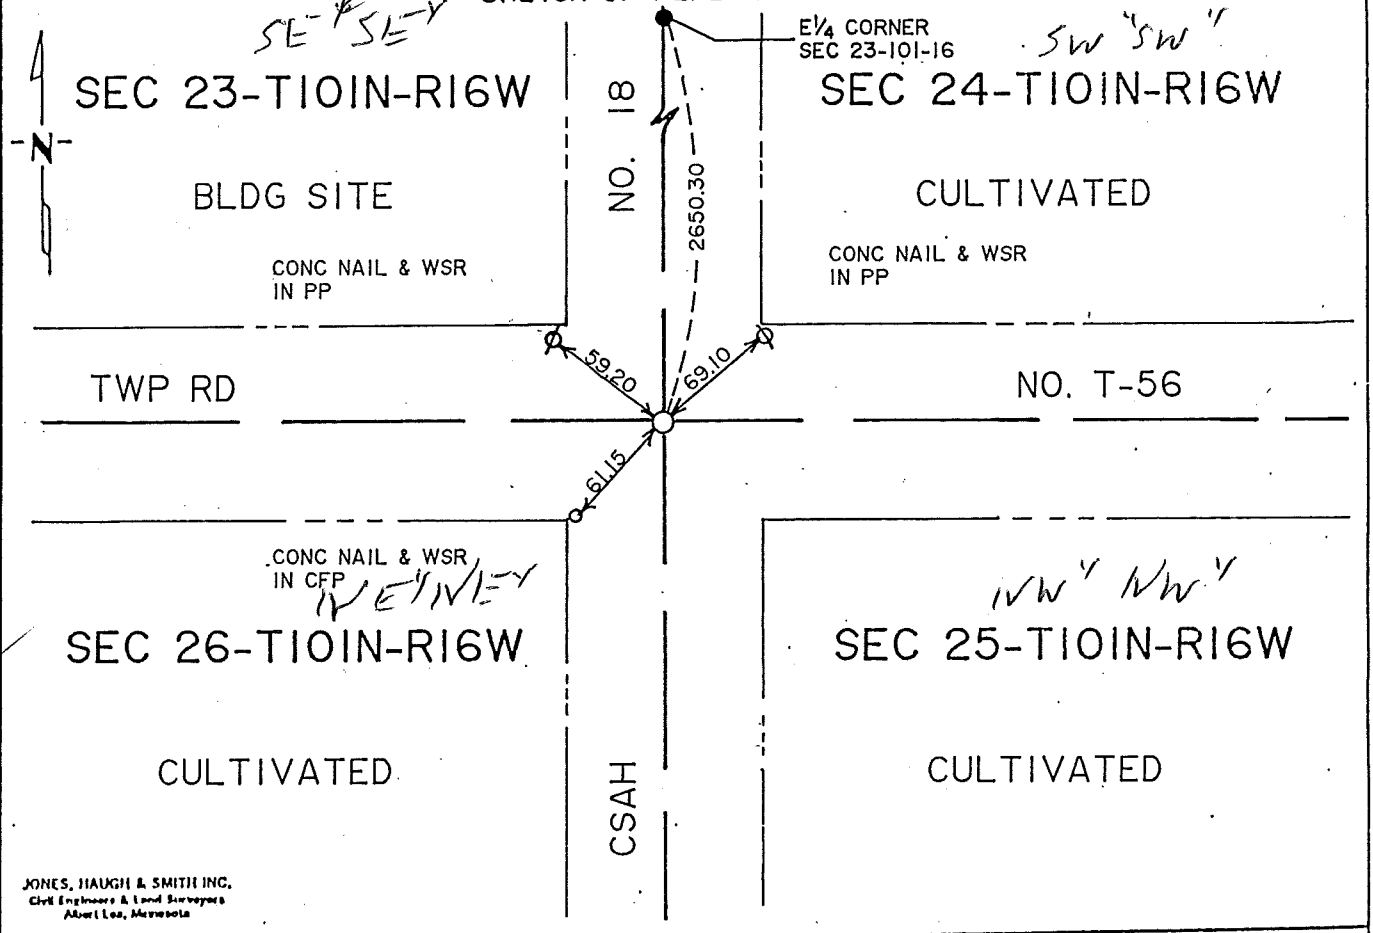

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-14-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 23 day of Misc A.D., 19 93

COUNTY RECORDER Chantel Engen

By Marlene Marten, Deputy

DOCUMENT NO. 421680

Bk 80 Misc Pg. 12

M.H.D. FORM NO. 2105

BOOK 80 PAGE 12

STATEMENT OF EVIDENCE

SE cor Sec 23-101-16

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1890 Clausen, Mower County Surveyor, notes indicate a government post at this corner.

1958 Mower County Highway Department Book 1 indicates a granite rock inplace as set in 1931 and a concrete monument set in 1958. Also County State Aid Highway No. 18 Plans indicates a concrete monument inplace at the centerline centerline intersection of roads.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 5'x5'x3' hole on the centerline centerline of County State Aid Highway No. 18 and Township Road No. T-56. We found a 3/4" diameter x 16" iron at a depth of two feet and pulled said iron. Continued digging to three feet which is into virgin soil. Found no evidence of the concrete monument or granite rock noted in previous information. A County employee said this intersection had been core cut in the late 1970's which would have destroyed monuments inplace at that time. Therefore we accepted iron found as the perpetuation of the public land survey corner and reset iron as found and set a cast iron monument near road surface above iron reset.

The monument found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 25, Township 101 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5/26/04 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

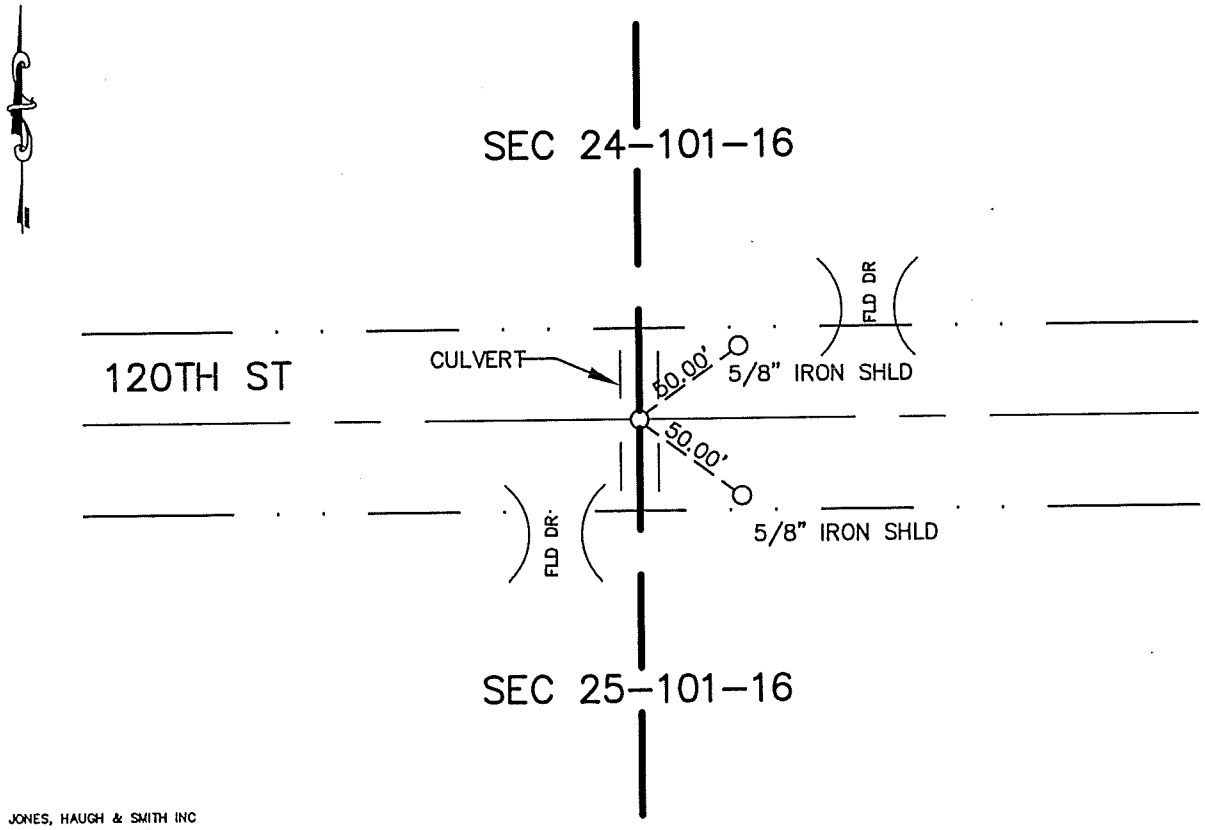

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 6-4-04 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N1/4 Corner Section 25-T101N-R16W

Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

2003 The physical evidence of the corner was destroyed by the construction of a drainage culvert. Set 5/8" x 16" iron capped 22705 over culvert. Which agrees with existing occupation in the section.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 25, Township 101 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5/26/04 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

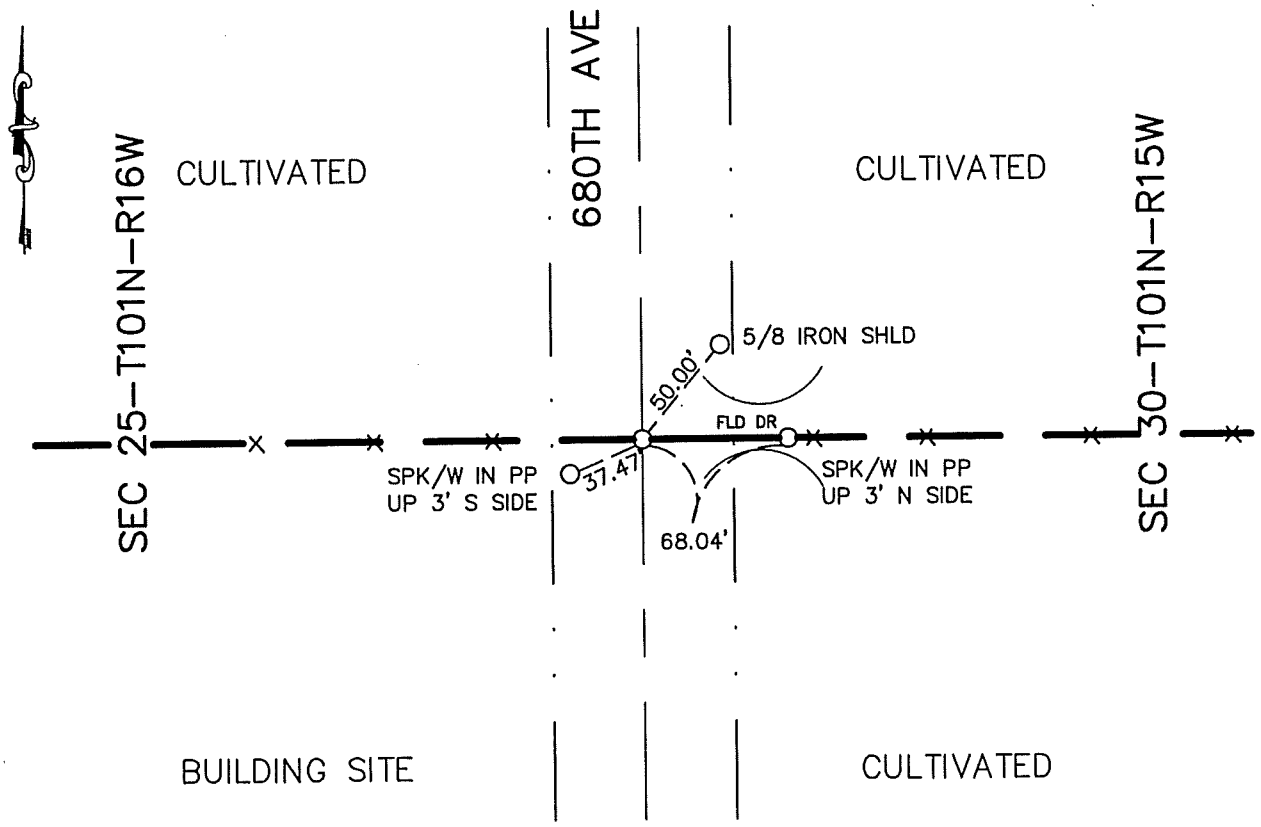

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

6-4-04
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E1/4 Corner Section 25-T101N-R16W

Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug 4.5' E-W X 8' N-S X 3' deep, with county backhoe at centerline fence crossing and found buried wire E-W-N. Used fence lines East and West as best evidence of original PLS corner and set CIM on centerline road in line with fences East and West.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 25, Township 101 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5-26-04 (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-26-04 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

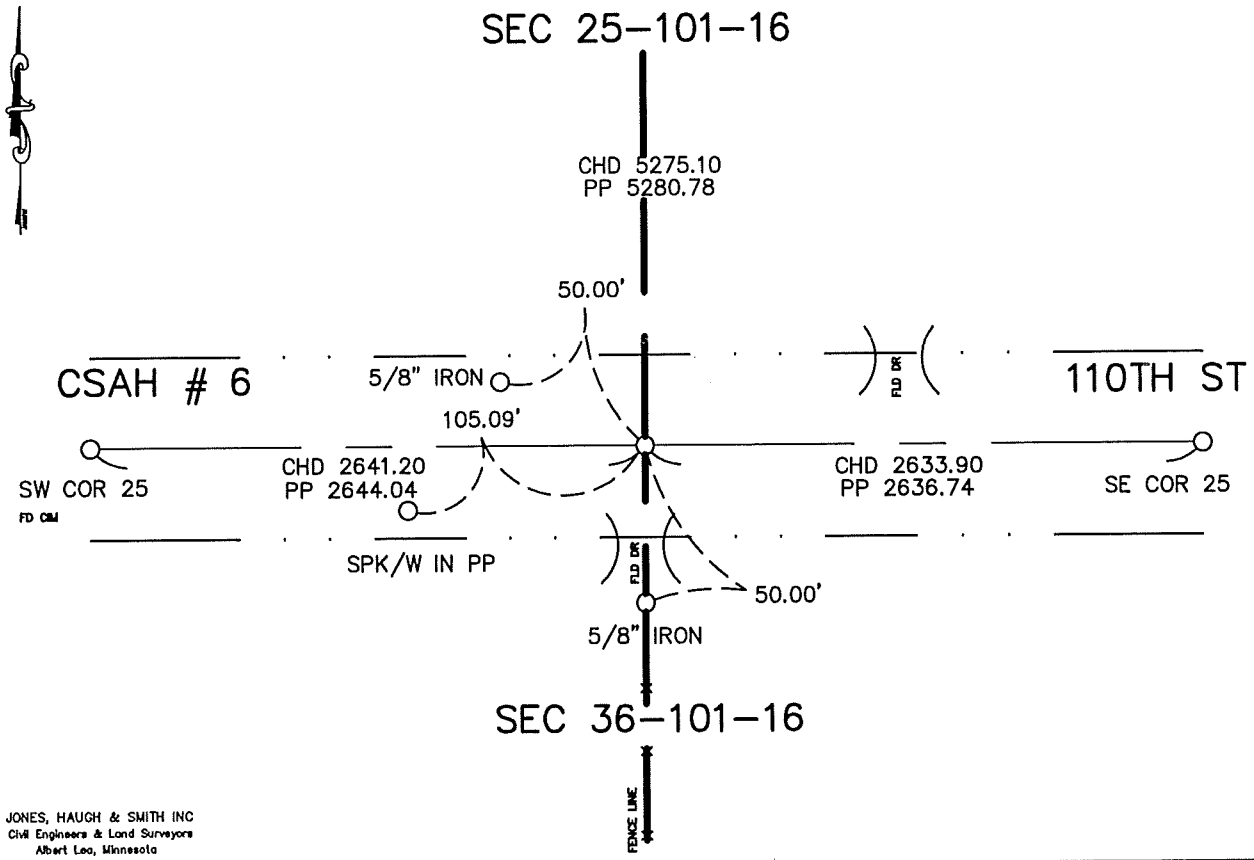

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 6-4-04
SIGNATURE DATE

Registration No. 22705

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S1/4 Corner Section 25-T101N-R16W

Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

1973 Mower county highway plans show ¾" iron rod at corner in line with fences North and South and a distance of 2641.20' west to southwest corner of the section, and a distance of 2633.90' east to the southeast corner of the section.

1889 Clausen field notes show post at corner midway between section corners.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with backhoe at centerline in line with fence south. Dug a 3' N-S x 6' E-W x 4.5' deep, to virgin clay and found nothing. County highway plans show a subcut at corner. Corner evidence is presumed to be destroyed. County plans show corner in line with fences North and South. Measured distance between southwest section corner and southeast section corner and found 5280.78' verses Mower County distance of 5275.10'. Reset corner by proportioning measured distance to county distance, and on centerline of East and West road. Set CIM and made ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 25, Township 101 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 5/26/04 (DATE) found a 10" X 16" STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5/25/04 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

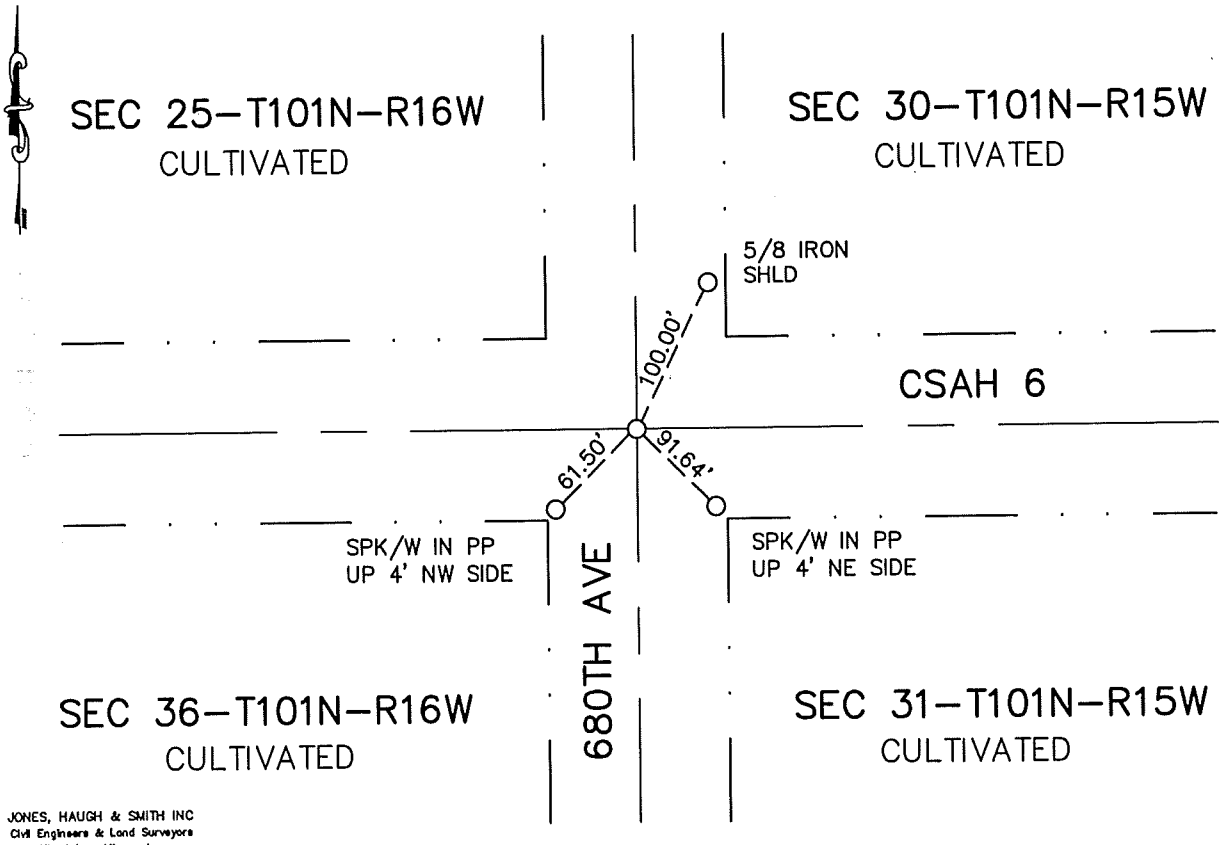

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 6.4.04
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Corner Section 25-T101N-R16W

Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1973 Mower County highway plans show ties to corner.

1989 Clausen field notes show Government post at corner.

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug 7.5' E-W x 2.5' N-S x 7' deep trench with Mower County backhoe at centerline crossing. Found a nail at the surface, then found a 10" x 16" stone six feet deep at original ground. Set 5/8" iron on the North side of stone and CIM over stone at road surface. Accepted stone as marking original PLS corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 26, Township 101N, Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-93 (DATE) found a 12"x12"x18" FIELD STONE WITH 8"ø STONE RESTING ON EAST SIDE WITH SMALL STONES AROUND

■ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

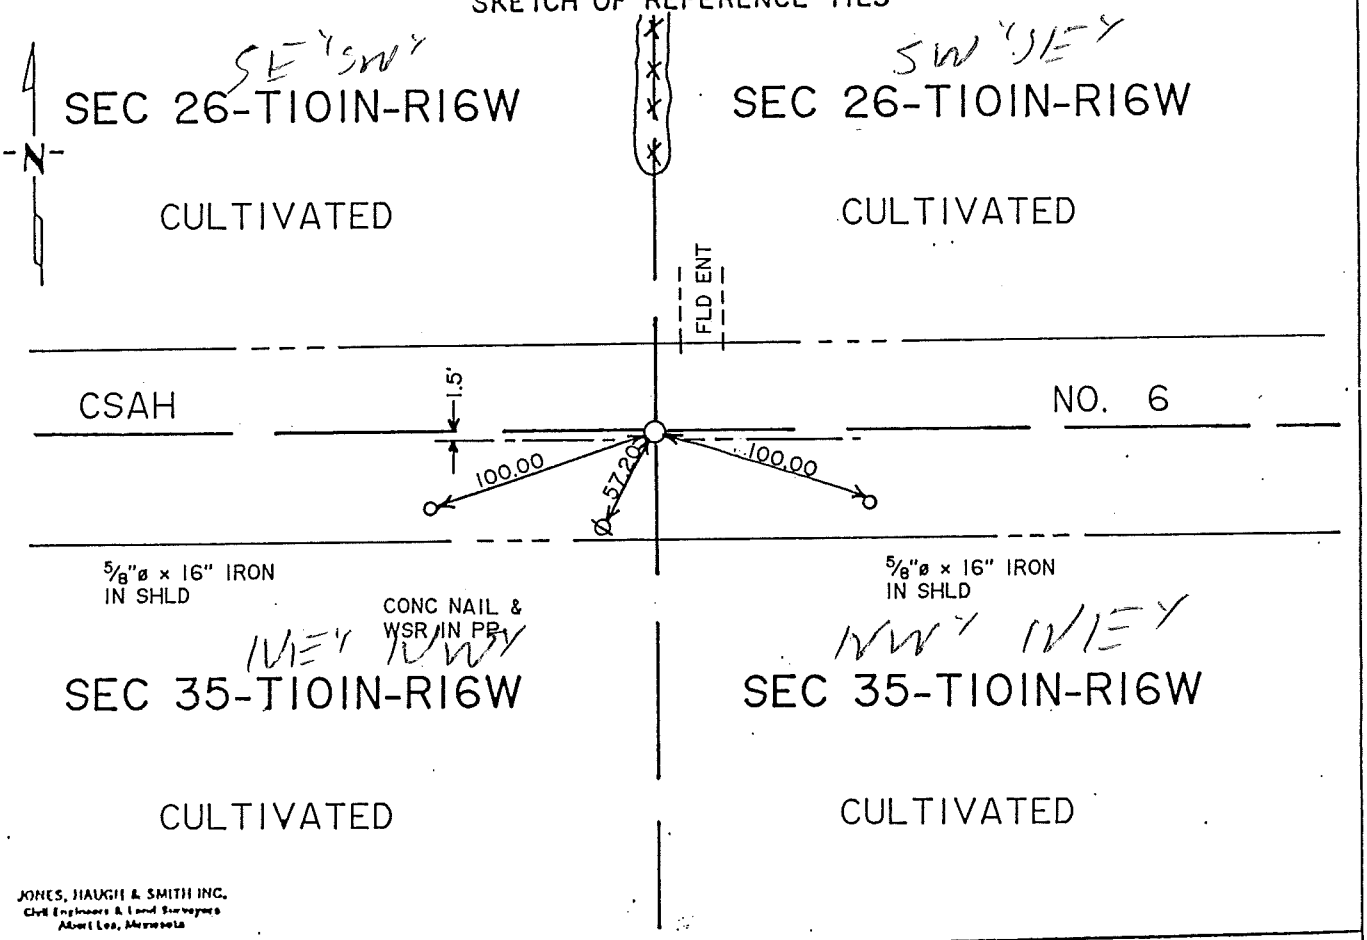

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-10-93

Registration No. 13007

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 P .M. on the 25 day of June A.D., 1993

COUNTY RECORDER Amanda Enger

By Marlene Martin, Deputy

DOCUMENT NO. 421744

Bk 80 Pg. 137

M.H.D. FORM NO. 2105

BOOK 80 PAGE 137

STATEMENT OF EVIDENCE

S 1/4 cor Sec 26-101-16

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1891 Clausen, Mower County Surveyor, notes indicate a stone at this corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 3'x4'x8' hole on the centerline of County State Aid Highway No. 6 and in line with north-south fence running north. We found a 12"x12"x18" field stone with 8" diameter stones resting on the east side and also assorted smaller stones around. Stones found were resting in virgin soil and in line with fence running north. Therefore we accepted stones found as the perpetuation of the public land survey corner and left monuments as found and set a cast iron monument near road surface and above stones found.

The monument found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 26, Township 101N, Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-93 (DATE) found a 6"ø x 18" CONC MONUMENT WITH IRON IN CNT

■ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

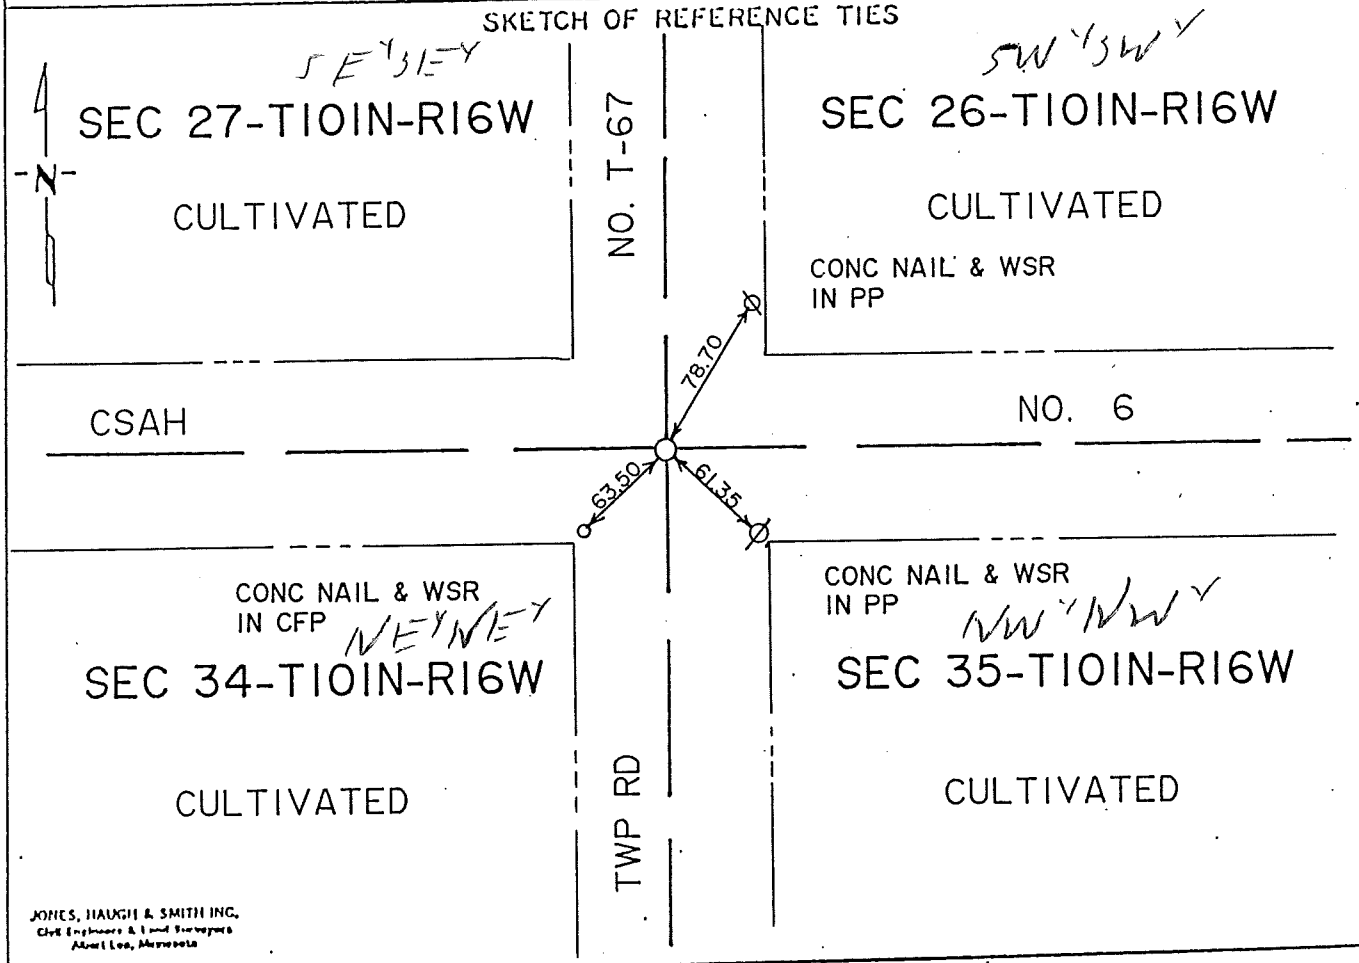

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-18-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 P.M. on the 25 day of June A.D., 1993

COUNTY RECORDER Harold Conger

By Marlene Marten, Deputy

DOCUMENT NO. 421748

Bk 80 Pg. 139

BOOK 80 PAGE 139

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW cor Sec 26-101-16

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1891 Clausen, Mower County Surveyor, notes indicate a stone at this corner.

1956 Mower County Highway Department Book 1 and the County State Aid Highway No. 6 Road Plans indicate a concrete monument inplace.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 3'x2'x8' hole on the centerline centerline of County State Aid Highway No. 6 and Township Road No. T-67. We found a 6" diameter x 18" concrete monument with iron in center as said in County Road Plans. Therefore we accepted concrete monument found as the perpetuation of the public land survey corner and set a cast iron monument near road surface and above concrete monument found.

The monument found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 26, Township 101N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-3-93 (DATE) found a 3" ALUM. DISC AND A HARRISON CIM

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-3-93 (DATE) placed a LEFT MONUMENTS AS FOUND

SKETCH OF REFERENCE TIES

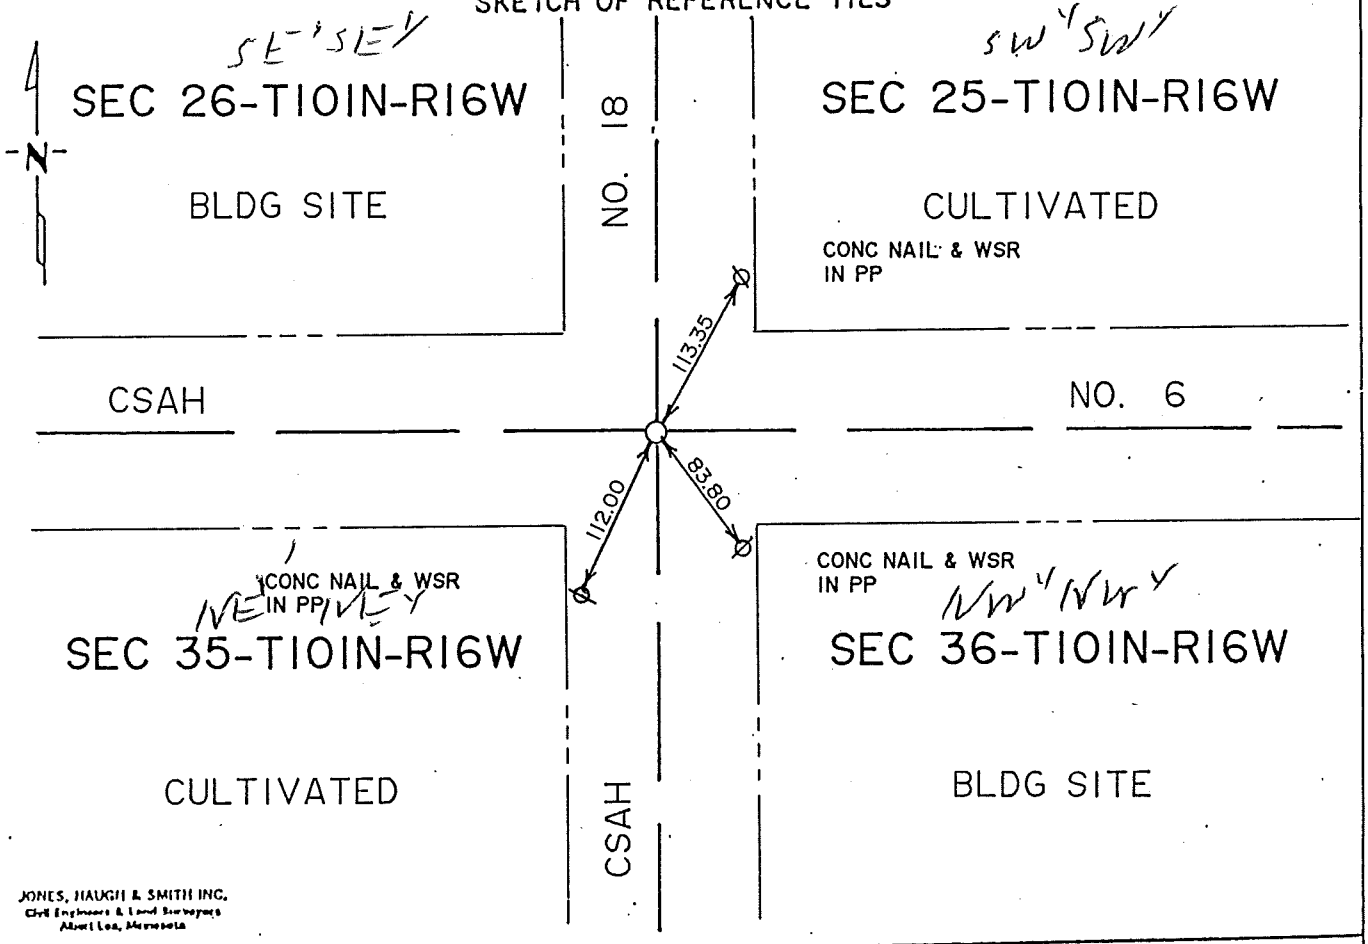

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-14-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 23 day of June A.D. 1993

COUNTY RECORDER Arnold Enger

By Marlene Martin, Deputy

DOCUMENT NO. 421681

BOOK 80 PAGE 14 Bk 80 Misc Pg. 14

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE cor Sec 26-101-16

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1889 Clausen, Mower County Surveyor, notes indicate a government post at this corner.

1931 Mower County Highway Department Book 1 indicates a granite rock inplace.

1958 Mower County Highway Department Book 1 and County State Aid Highway No. 18 Road Plans indicate a concrete monument inplace.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 3'x3'x5' hole on the centerline centerline intersection of County State Aid Highway No. 18 and County State Aid Highway No. 5. We found a 3" aluminum disc on a 3/4" diameter x 16" iron at the road surface. We continued digging to a depth of two feet and found a Harrison cast iron monument which was directly under aluminum disc found at surface. No evidence was found of the concrete monument noted in 1958. However the cast iron monument is in agreement with location of corner on 1931 and 1958 Road Grading Plans. Therefore we accepted monuments found as the perpetuation of the original public land survey corner and reset monuments as found.

The monuments found fit occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 26, Township 101N, Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-3-93 (DATE) found a STRAND OF BARBED WIRE AND A NEST OF LARGE STONES

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-3-93 (DATE) placed a 5/8"ø x 16" IRON CAPPED RLS NO. 13807 IN CNT OF STONES AND A CAST IRON MONUMENT ABOVE STONES

SKETCH OF REFERENCE TIES

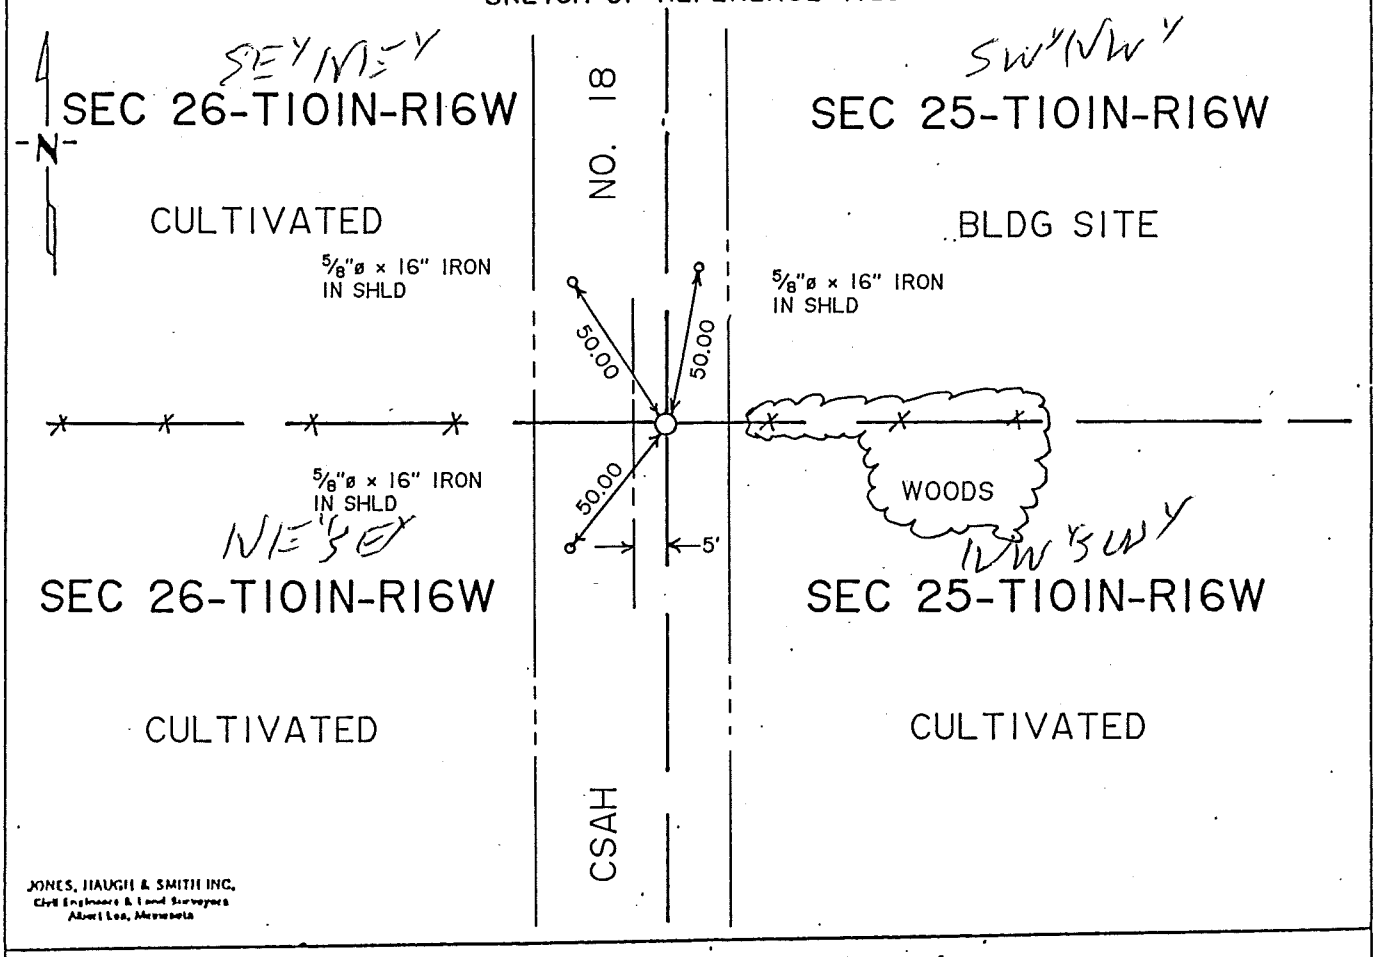

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-14-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 23 day of June A.D., 1993

COUNTY RECORDER Charles Engen

By Marlene Martin, Deputy

DOCUMENT NO. 121682

M.H.D. FORM NO. 2105 BOOK 80 PAGE 16

STATEMENT OF EVIDENCE

E 1/4 cor Sec 26-101-16

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1889 Clausen, Mower County Surveyor, notes indicate a government post at this corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 4'x3'x10' hole five feet east of the centerline County State Aid Highway No. 18 and also in line with the east-west line fences. We dug to a depth of three feet which was into virgin soil and found a strand of barbed wire with a loop at end which ran west to line fence running west. Also there was a nest of large stones around and under barbed wire. County Road Plans show that section line would run five feet east of centerline of road. Therefore we accepted barbed wire and stones found as the perpetuation of the original public land survey and set a 5/8" diameter x 16" iron in center of stones and barbed wire and set a cast iron monument near road surface above barbed wire and stones.

The monument found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 27, Township 101N, Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-93 (DATE) found a HARRISON CIM AND A 3/4"ø x 18" IRON NEXT TO A OLD STAKE

■ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

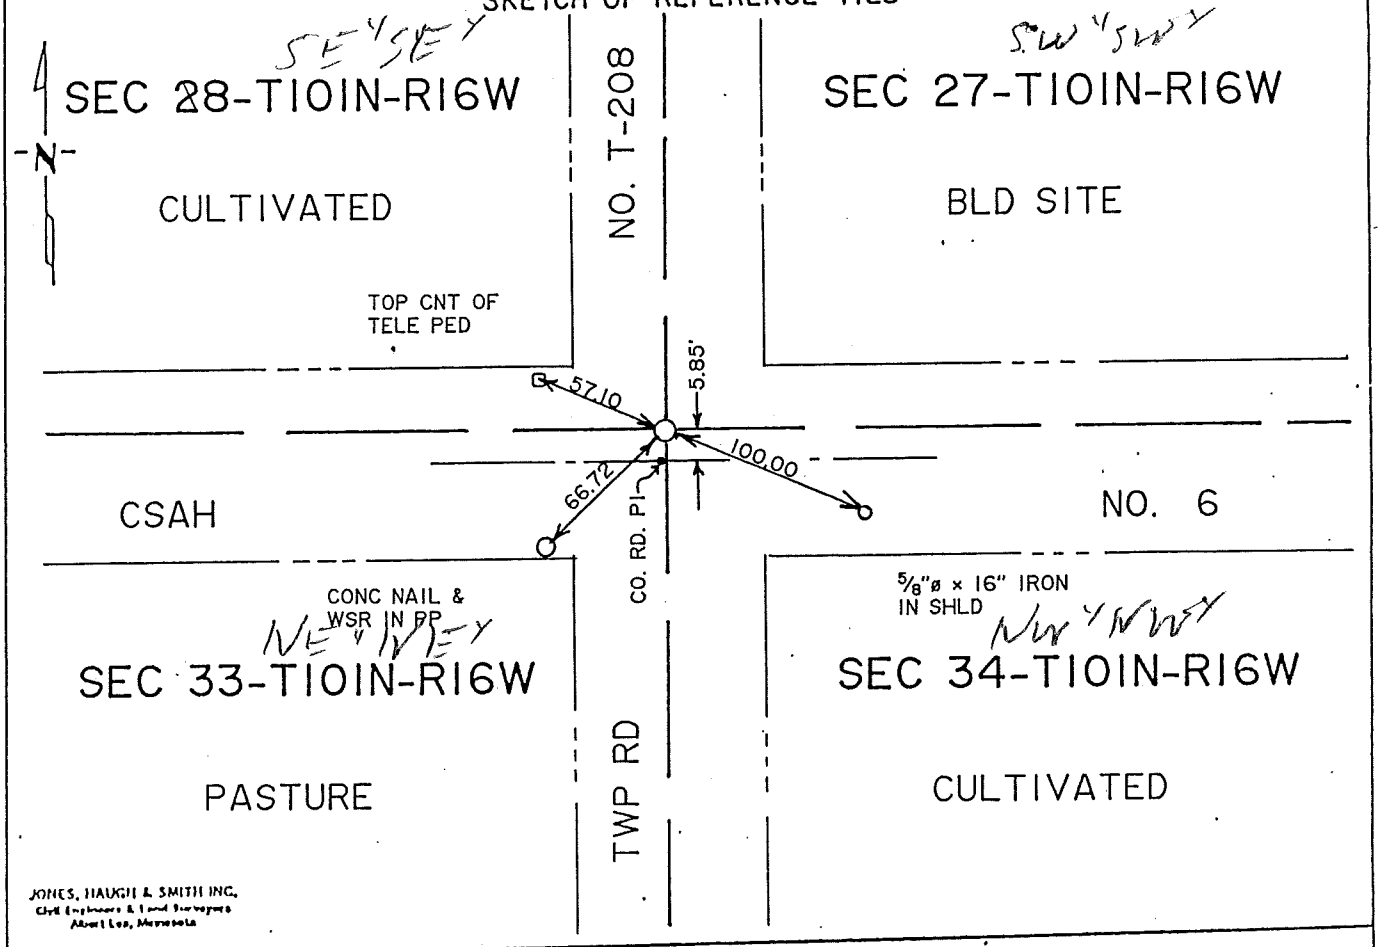

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-18-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 P .M. on the 25 day of June A.D. 19 93

COUNTY RECORDER Charles Engel

By Marlene Martin, Deputy

DOCUMENT NO. A21746

By SD Pg. 135

M.H.D. FORM NO. 2105

BOOK 80 PAGE 135

STATEMENT OF EVIDENCE

SW cor Sec 27-101-16

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1891 Clausen, Mower County Surveyor, notes indicate a government post at this corner.

1956 Mower County Highway Department County Road Plans indicate a magnetic monument inplace 5.85 feet north of County Road PI and centerline.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 3'x3'x8' hole six feet north of County Road PI and centerline of County State Aid Highway No. 6 and also in line with centerline of Township Road No. T-208. Found a Harrison cast iron monument one foot down and a 3/4" diameter x 18" iron next to an old wood stake at a depth of three feet which is at original ground level. The monuments found were 5.85 feet north of County Road PI and centerline of County State Aid Highway No. 6. Therefore we accepted monuments found as the perpetuation of the public land survey corner. Reset monuments as found and set a cast iron monument near road surface above monuments found.

The monument found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 27, Township 101N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-93 (DATE) found a 3/4"ø x 18" IRON AND A BARBED WIRE FENCE

■ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

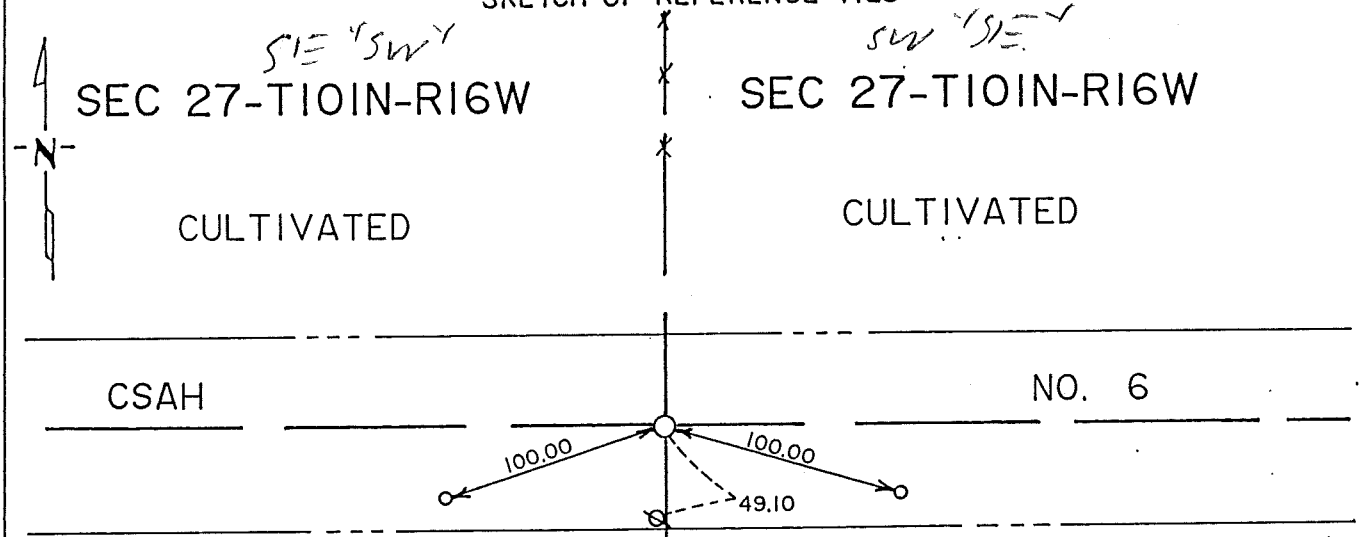

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-10-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 P.M. on the 25 day of June A.D., 1993

COUNTY RECORDER Charles Evans

By Marlene Martin, Deputy

DOCUMENT NO. 421945 Bk 80 Pg. 133

M.H.D. FORM NO. 2105

BOOK 80 PAGE 133

STATEMENT OF EVIDENCE

S 1/4 cor Sec 27-101-16

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

9" Burr Oak	N 54° West	246 links (162.36 ft)
14" Burr Oak	N 50 1/2° E	210 links (128.60 ft)

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1891 Clausen, Mower County Surveyor, notes indicate a stone at this corner.

1956 Mower County Highway Department Book 1 notes indicate a concrete monument inplace.

Mower County Highway County Road Plans indicate a 3/4" diameter iron at this corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 3'x5'x8' hole on the centerline of County State Aid Highway No. 6 and in line with the line fence running north and corner fence post to the south. We found a 3/4" diameter x 18" iron two feet down and an old barbed wire fence which ran north-south under roadbed. Barbed wire fence found was at original ground level and also was .6 feet to 2.5 feet west of iron found. Therefore we accepted 3/4" diameter x 16" iron found as the perpetuation of the public land survey corner and reset as found and place a cast iron monument near road surface above monument found.

The monument found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 28, Township 101N, Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-93 (DATE) found a MAGNETIC DISC AND A 6"ø CLAY TILE FILLED WITH CONC, AND A 3/8"ø IRON IN CNT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

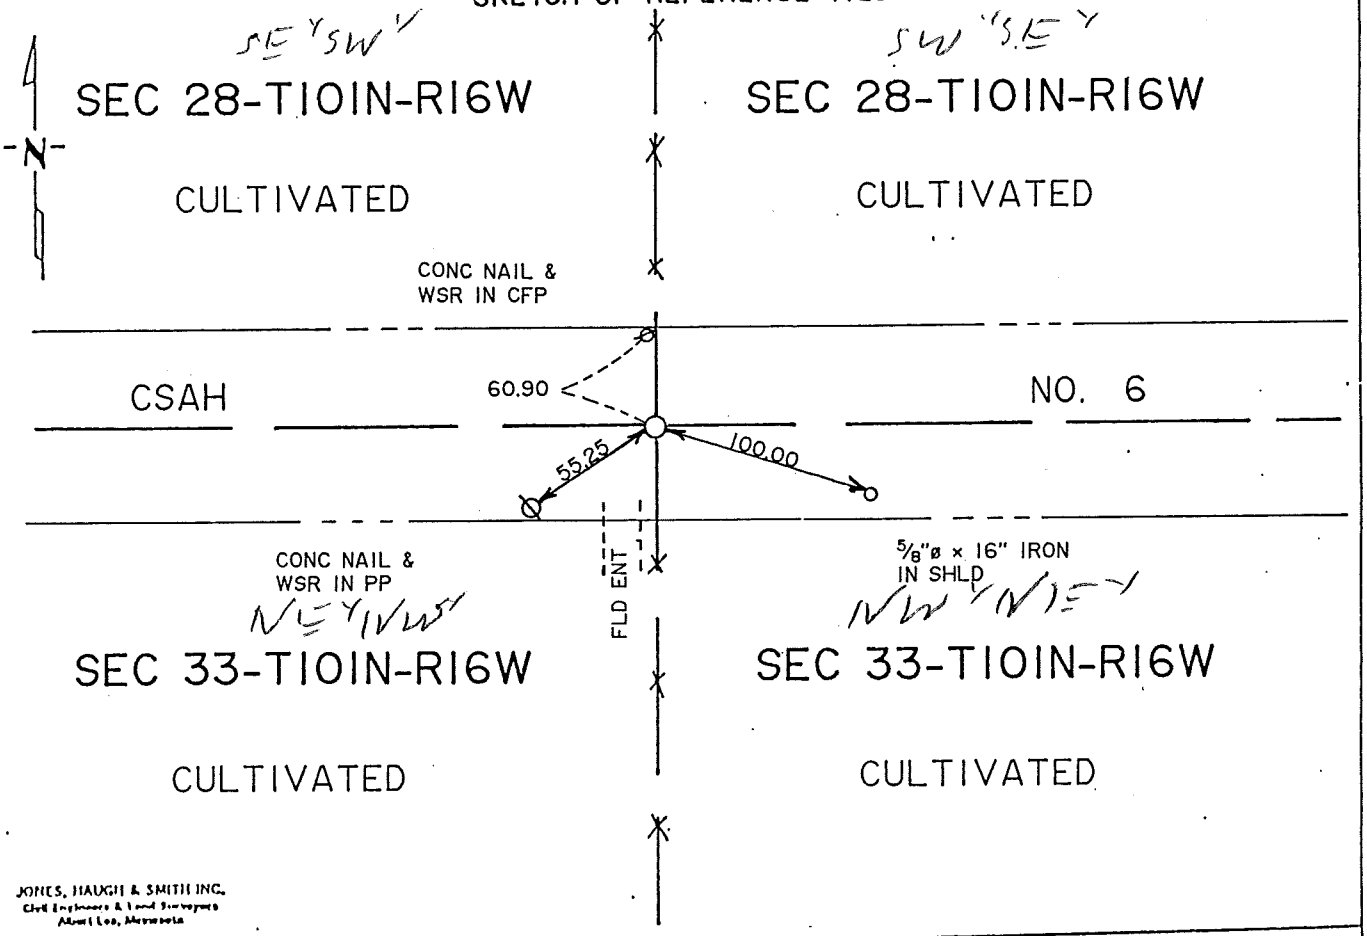

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 6-18-93 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 P.M. on the 25 day of June, A.D., 1993

COUNTY RECORDER Amanda Enger

By Marlene Martin, Deputy

DOCUMENT NO. 121440 Bk 80 Pg. 131

M.H.D. FORM NO. 2105

BOOK 80 PAGE 131

STATEMENT OF EVIDENCE

S 1/4 cor Sec 28-101-16

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a stone was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1891 Clausen, Mower County Surveyor, notes indicate a government post at this corner 40.32 chains west of the southeast corner of Section 28-101-16.

1956 Mower County Highway Department Book 1 notes indicate a concrete monument inplace.

1956 Mower County Highway Plans show a magnetic monument inplace.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 3'x2'x8' hole on the centerline of County State Aid Highway No. 6 and in line with north-south line fences. We found a magnetic disc 6" below road surface and a 6" diameter clay tile filled with concrete and a 3/8" diameter iron in center two feet below road surface. Therefore we accepted clay-concrete monument as the perpetuation of the public land survey corner and left in location found and set a cast iron monument near road surface above clay-concrete monument found.

The monument found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 28, Township 101N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-14-90 (DATE) found a Harrison monument 2.0' below road surface continued digging and found no further evidence

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-14-90 (DATE) ~~placed a~~ reset monument found flush with road surface.

SKETCH OF REFERENCE TIES

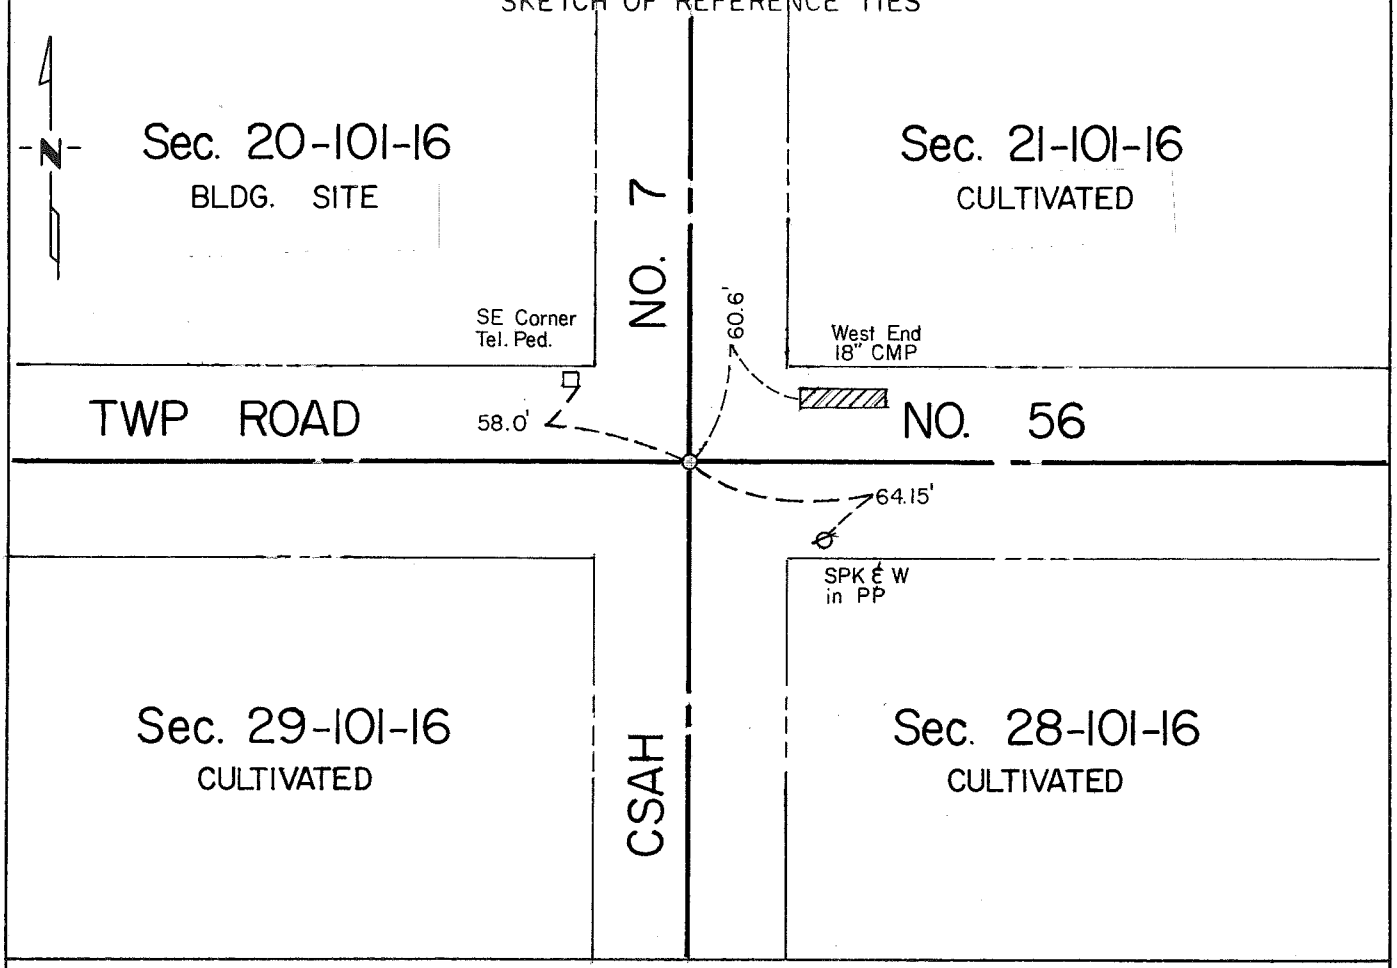

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 1-23-91 (DATE)

Registration No. 13607

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 28-101-16

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a charred stake and a mound of earth with a trench.

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder's Office

1891 Records of Clausen, Mower County Surveyor, show a post in place and chaining notes are shown.

1990 Jones, Haugh & Smith crew dug with County backhoe on centerline centerline of north-south-east-west roads and uncovered a Harrison monument 2.0 feet below road surface. Continued digging and found no further evidence of public land survey corner. Reset cast iron monument flush with road surface.

Corner found fits road centerlines and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 28, Township 101N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 9-14-90 (DATE) found a 3/4"Ø x 15" iron 1.0' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 9-14-90 (DATE) placed a 5/8"Ø capped (13807) iron at location of iron found.

SKETCH OF REFERENCE TIES

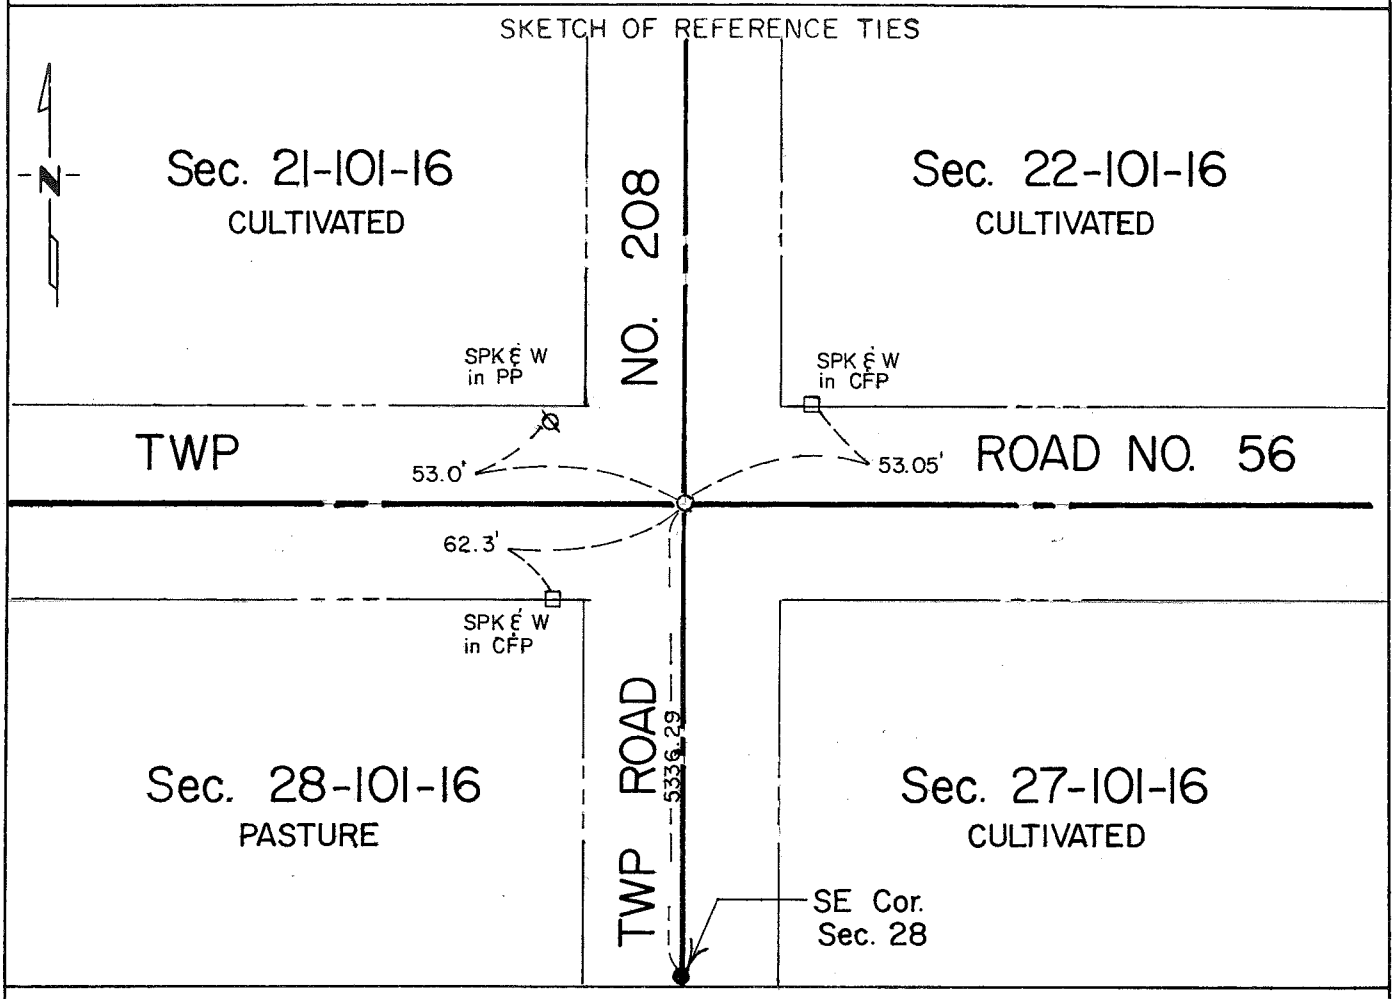

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-23-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec 28-101-16

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a stone 24" long 14" broad 8" thick.

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder's Office

1891 Records of Clausen, Mower County Surveyor, show a stone in place and chaining notes are shown.

1990 Jones, Haugh & Smith crew dug with County backhoe on centerline centerline of north-south-east-west roads and uncovered a 3/4" diameter x 15" iron 1.0 feet below road surface. Continued digging and found no further evidence of public land survey corner on a perpetuation thereof. Placed capped 13807 5/8" diameter iron at location of 3/4" diameter iron found.

Corner found fits road centerlines and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 28, Township 101N Range 16W, 5th P.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7/24/02 (DATE) placed a 5/8" IRON WITH CAST IRON MONUMENT AT ROAD SURFACE

SKETCH OF REFERENCE TIES

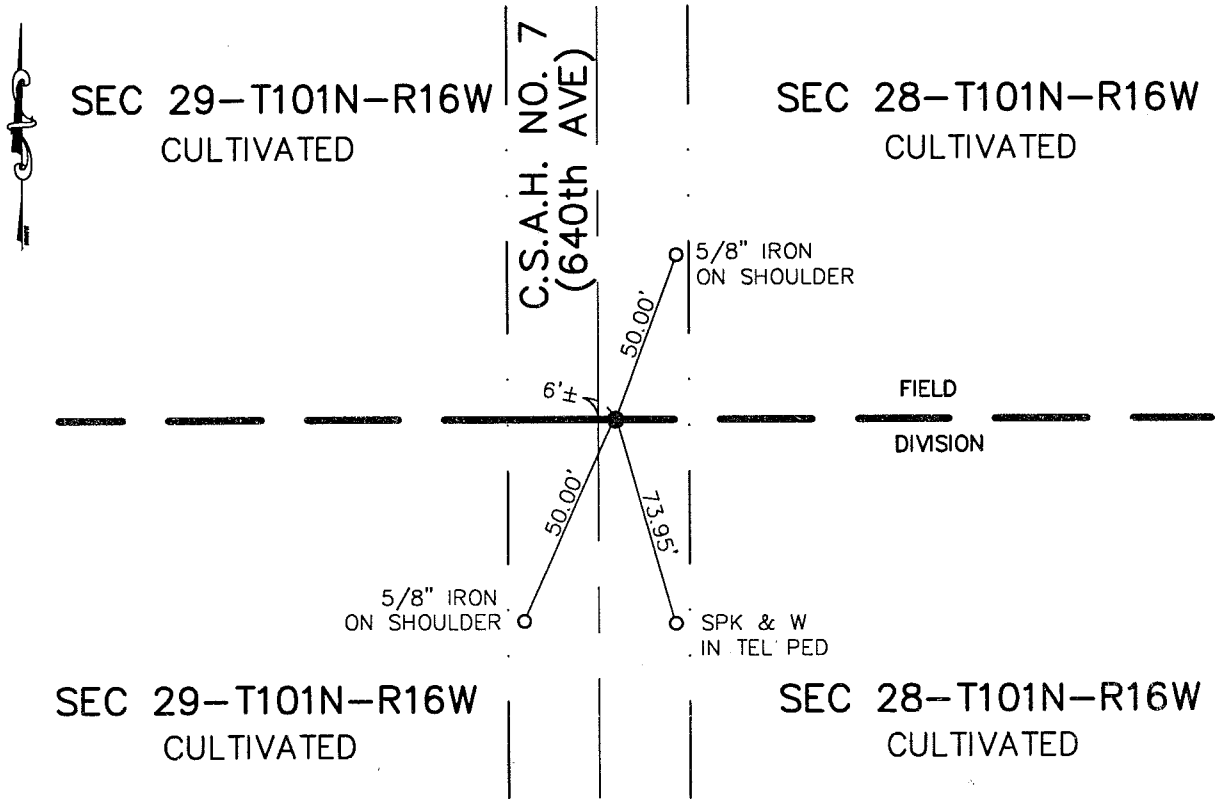

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 7-30-02 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W ¼ Cor Sec 28-101-16

Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No information found in Mower County corner records.

Mower County road plan states inplace ¾ " iron rod.
70.2 feet southeast apple tree
69.5 feet east to 15" ash
52.0 feet west northwest to ¾" iron rod
1.0 feet south of St. Fc post

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found a distance of 5332.18 feet between the NW & SW section corners which is 1.62 feet short of distance shown on County Road Plan. Could not find ¾" iron or any ties. Road was sub cut at this point during construction. Placed corner at a distance of 2661.09 south of the northwest corner on a straight line between section corners. The corner falls east of the centerline of the road. John Jax, a long time resident and land owner, agreed with placement of corner. Set 5/8" X 16" iron with cast iron monument at road surface.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 29, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/19/99 (DATE) found a HARRISON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/19/99 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

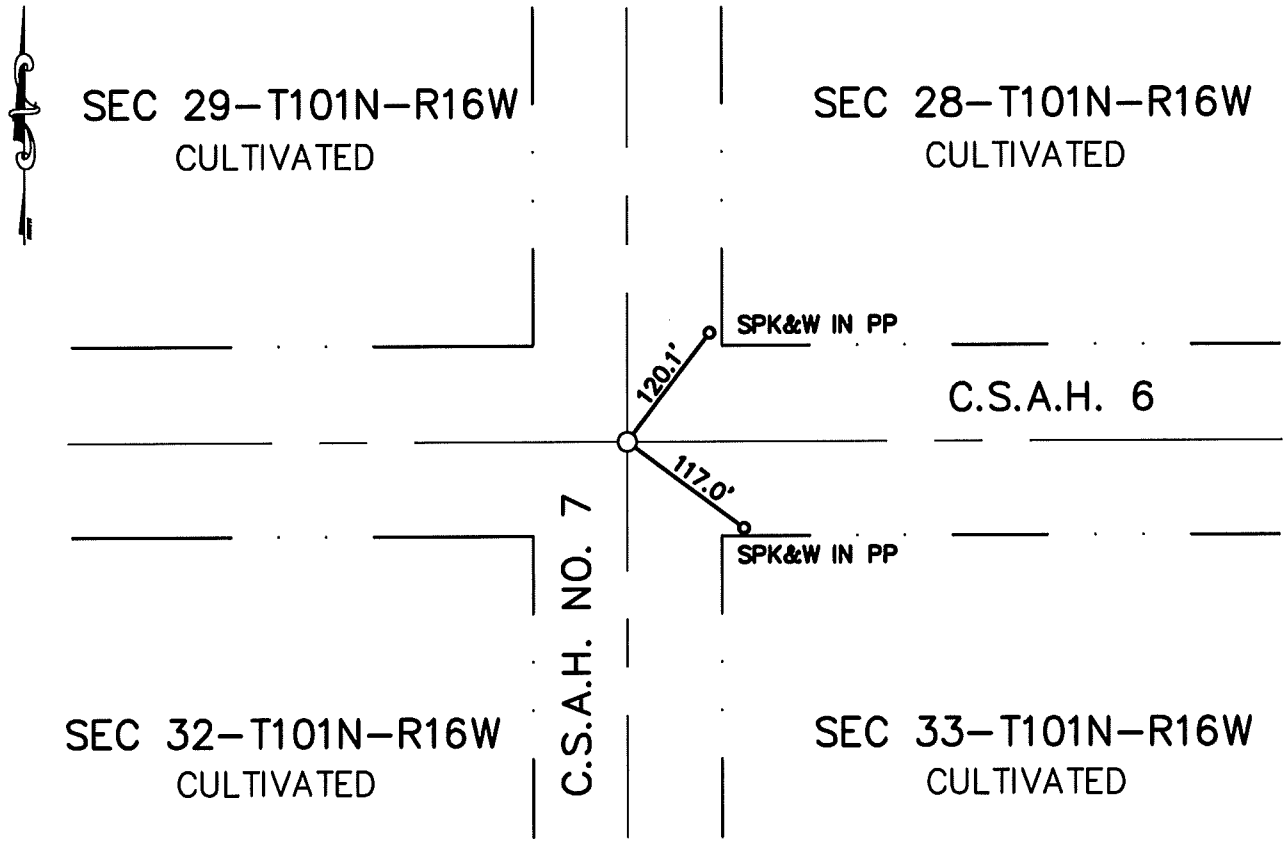

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 8/10/99 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Cor Sec 29-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County Highway Department road plan for C.S.A.H. No. 7 shows an inplace iron rod.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of centerlines of C.S.A.H. No. 7 N-S and C.S.A.H. No. 6. Dug to a depth of 1.7' below road surface and located a Harrison monument. Accepted the monument found as a perpetuation of the original PLS corner. Placed a cast iron monument above monument found at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh, and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 31, Township 101 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-29-02 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

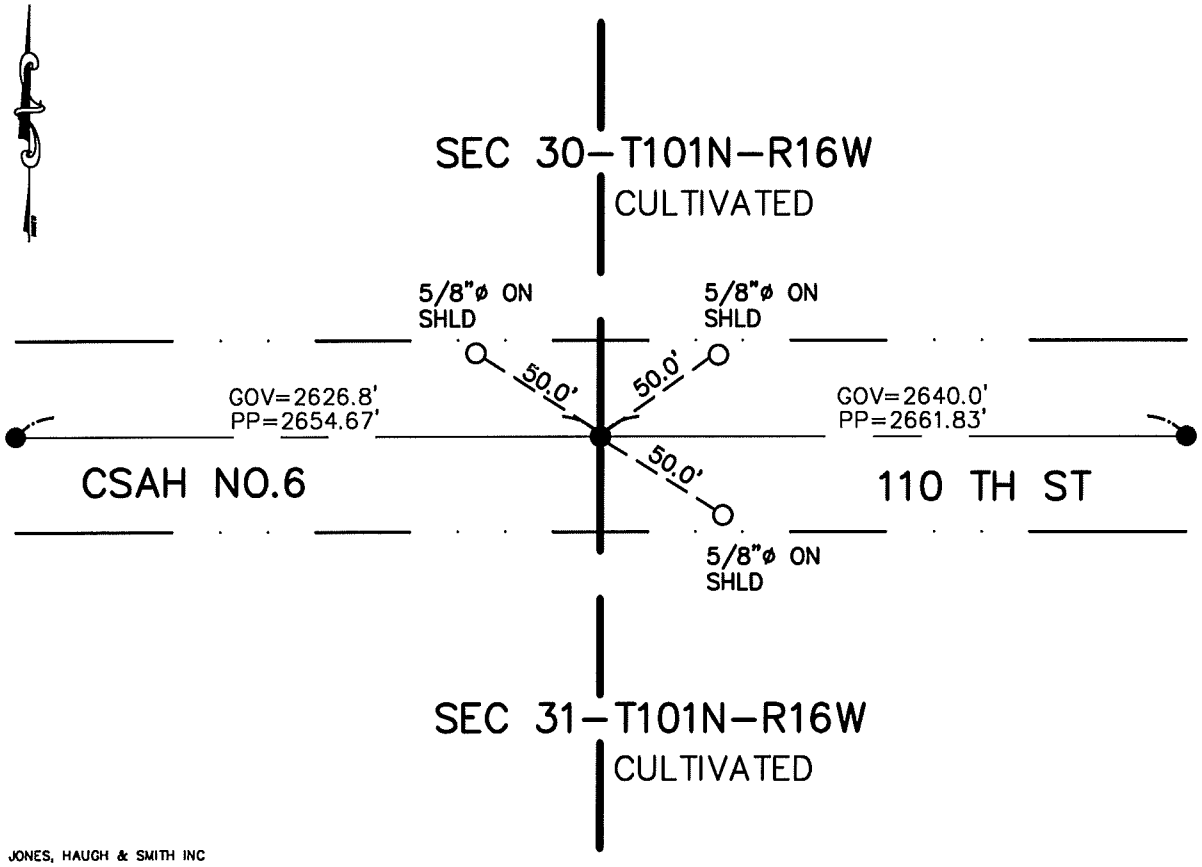

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 9-19-02 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N ¼ Cor Sec 31-101-16

Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No information found in Mower County corner records.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, proportioned the distance from northwest corner to northeast corner to the original Government distance and set a cast iron monument on a straight line between the northeast and the northwest corners of Section 31.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 32, Township 101 Range 16, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 7/29/2002 (DATE) found a 1/2" IRON

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7/29/2002 (DATE) placed a SET CIM

SKETCH OF REFERENCE TIES

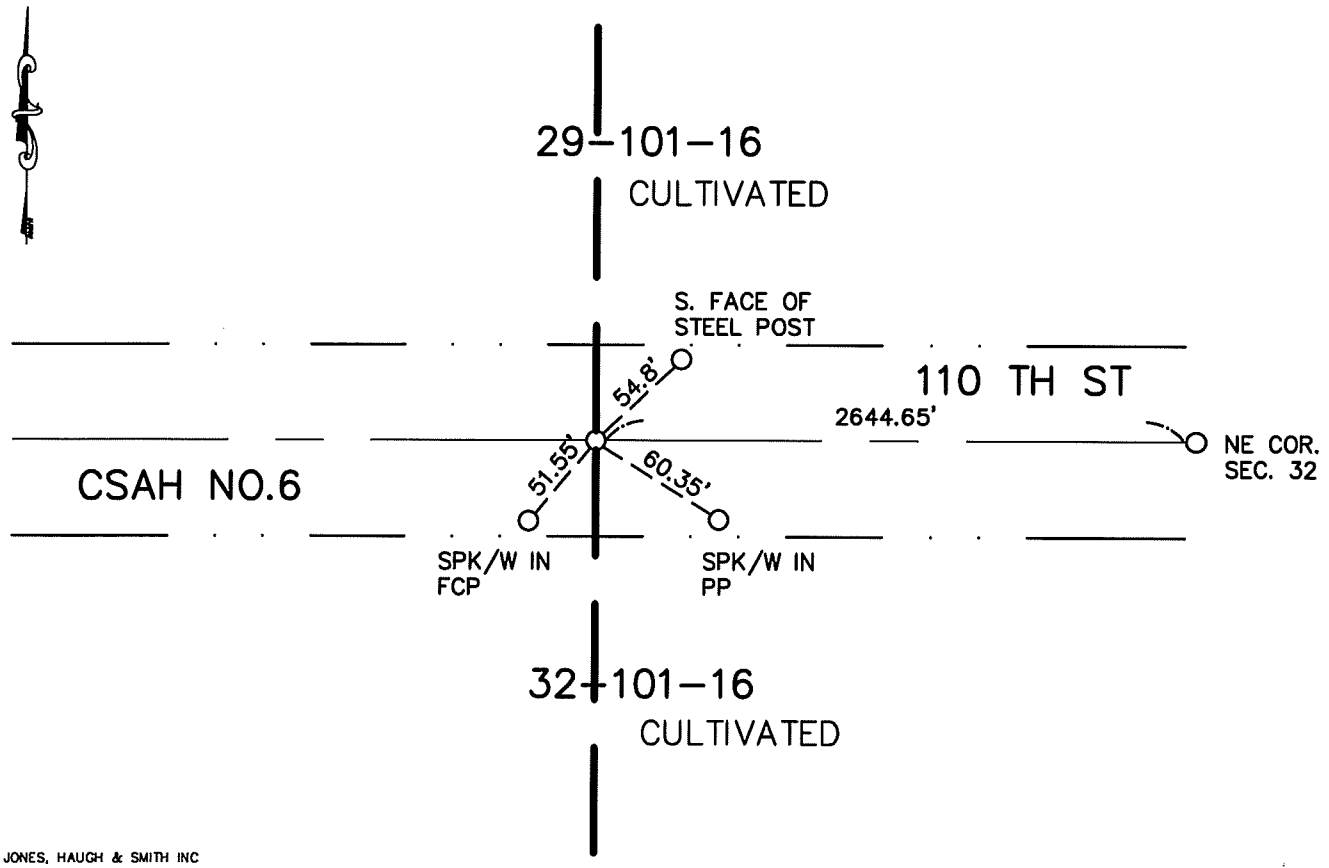

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-8-02

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

N 1/4 Cor. Sec. 32-101-16

Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County CSAH No. 6 road plans show a P.I. at 2644.6' West of NE corner on the section line.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug at location of signal from magnetic locator and found a nail @ distance of 2644.30'. Continued to dig and uncovered a ½" iron 1.50' North of nail and 1.7' deep. JHS crew set 5/8"x 16" with cast iron monument over ½" iron found. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 32, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 02/08/2000 (DATE) found a CAST IRON MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a –

SKETCH OF REFERENCE TIES

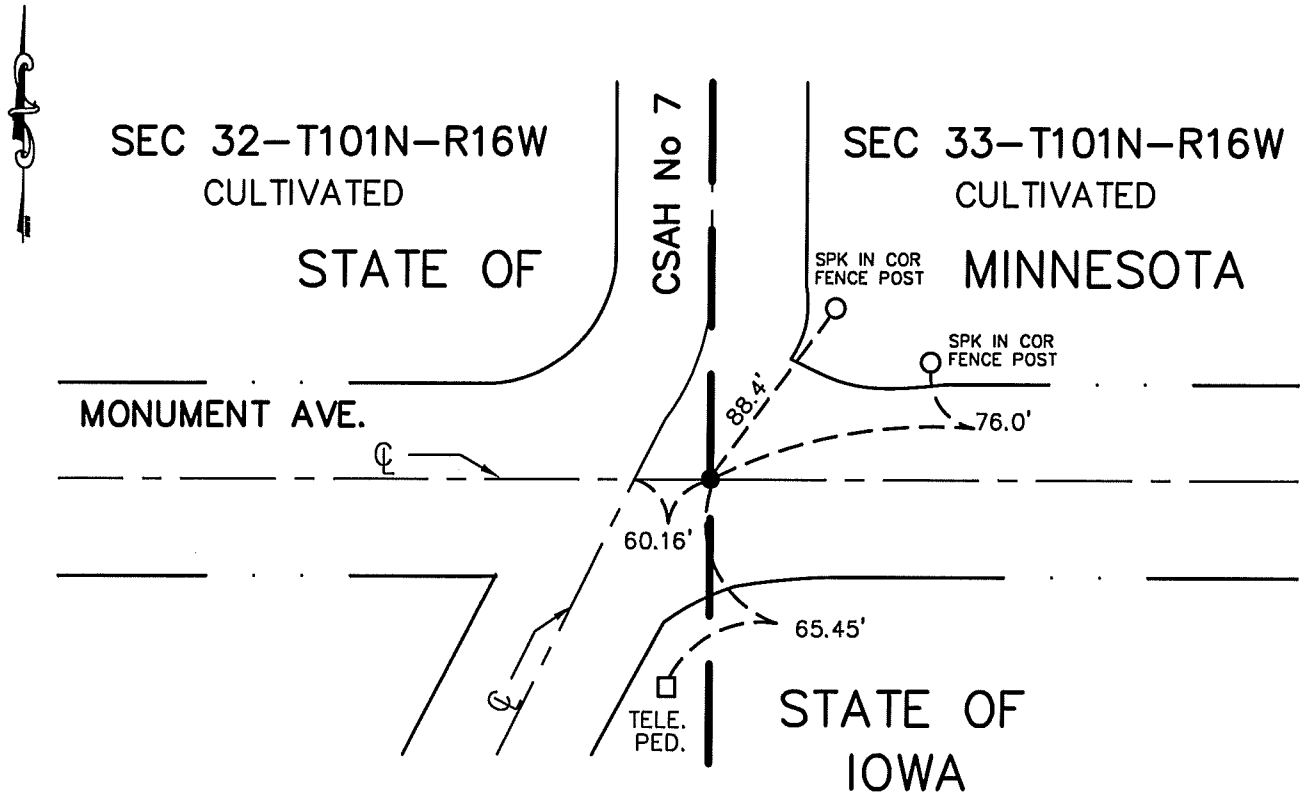

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 4-26-00
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Cor Sec 32-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1887 Clausen's notes show that he surveyed this section.

1936 Mower County records state that there were two corners at this location. A 2½" x 2½" square bar with an H.H. on top and an H.H. on end with a 5/8" iron 0.6' East.

1981 Mower Co. records state that this corner was recovered during the regrading project and a C.I.M was set by County Highway personnel after grading project was completed.

1982 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered a C.I.M.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered a C.I.M. on the centerline of east-west township roads, and inline with centerline of CSAH to the north. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 32, Township 101N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/21/99 (DATE) found a 1" PIPE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/21/99 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

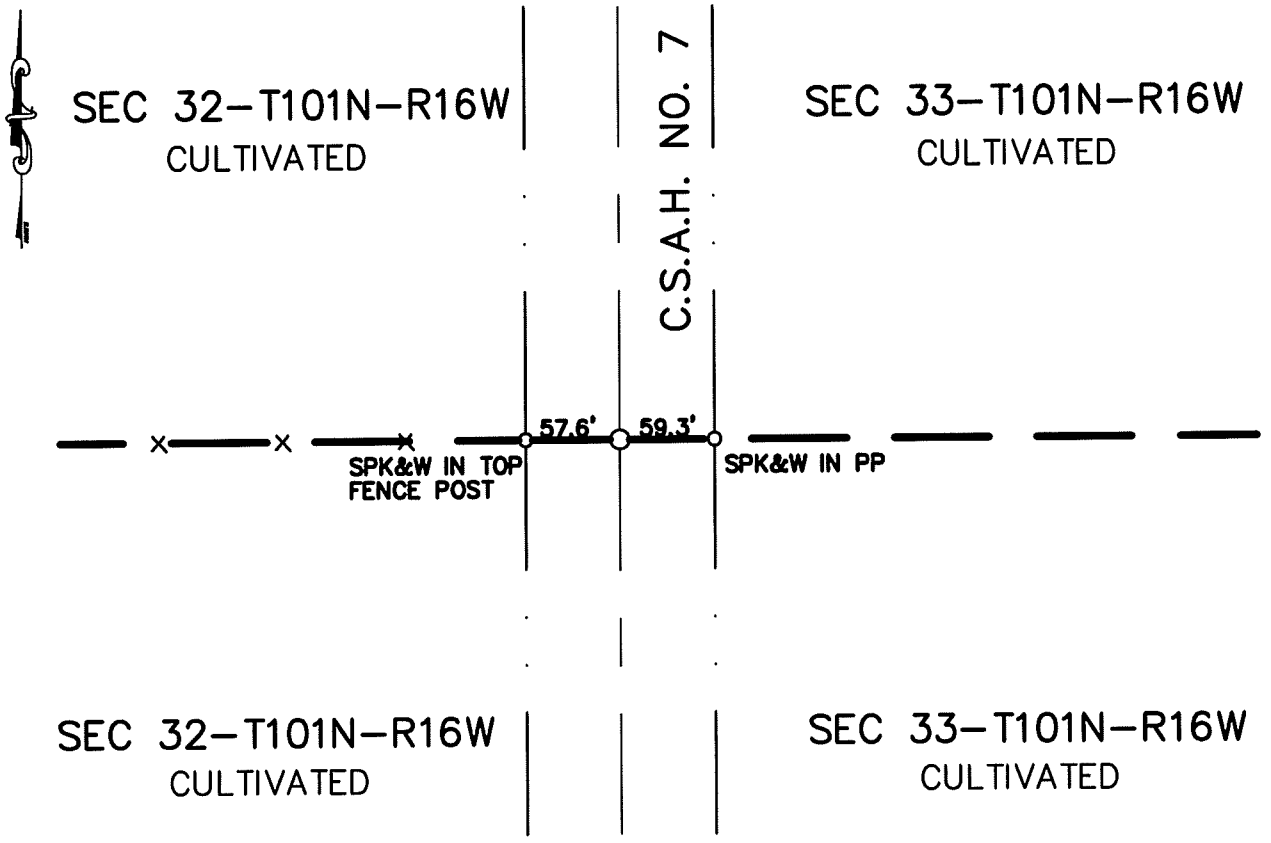

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-10-99

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Cor Sec 32-101-16

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County Highway Department road plan for C.S.A.H. No. 7 shows an iron rod in place.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the centerline of C.S.A.H. No. 7 N-S and in line with line fence west. Dug to a depth of 1.5' below road surface and located a 1" diameter pipe. Accepted pipe as a perpetuation of the original PLS corner and placed a capped 5/8" iron No. 13807 at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh, and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 35, Township 101N, Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-3-93 (DATE) found a NEST OF LARGE STONES

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-3-93 (DATE) placed a 5/8"ø x 16" IRON AND A CIM

SKETCH OF REFERENCE TIES

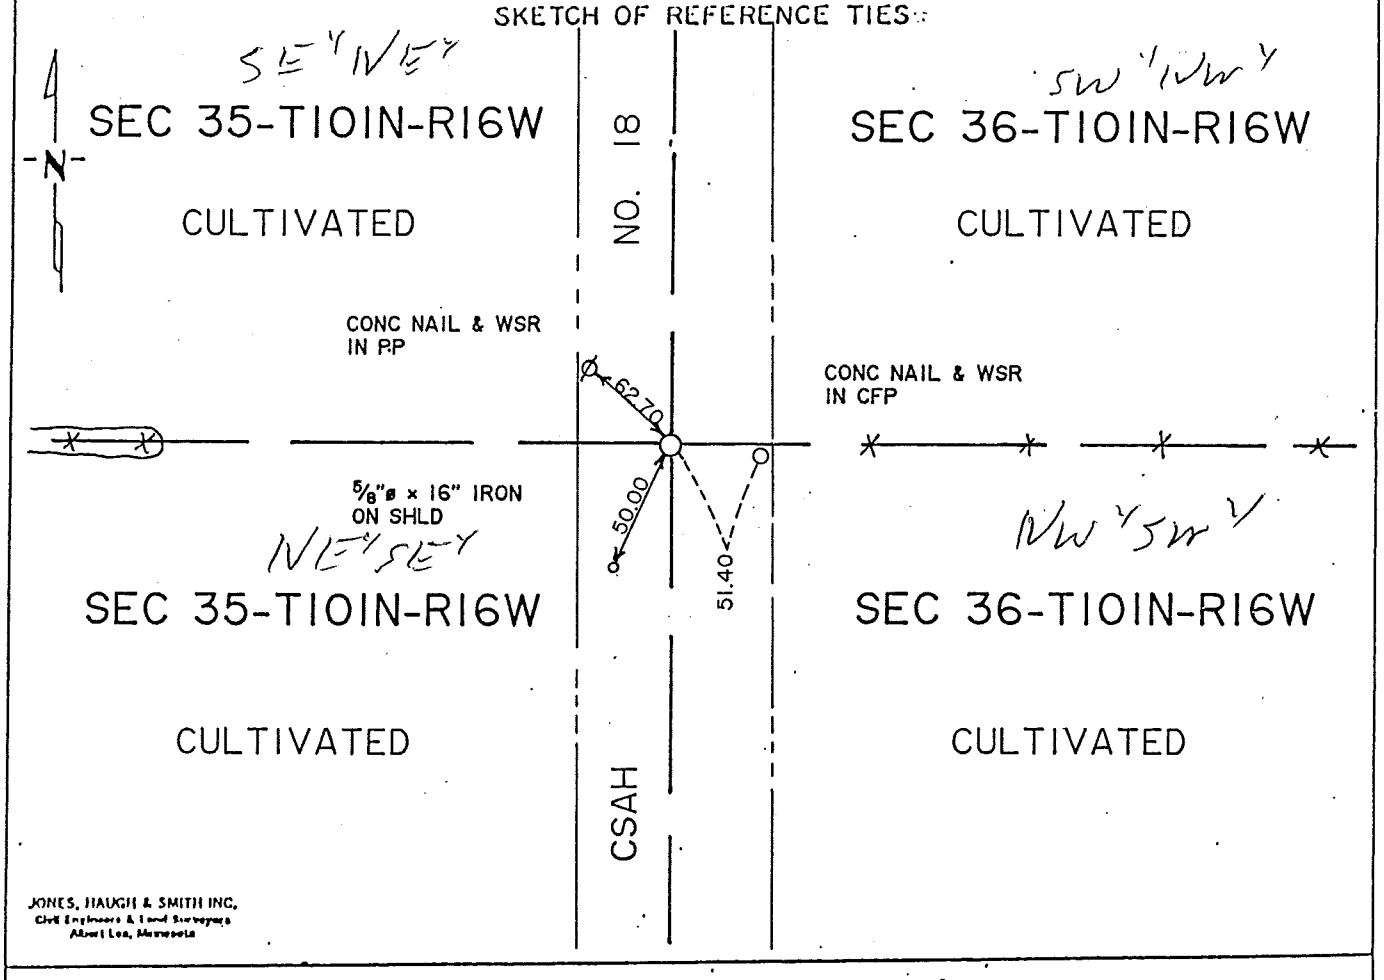

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-14-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 23 day of June A.D., 19 93

COUNTY RECORDER Amanda Enger

By Marlene Marten, Deputy

DOCUMENT NO. 421683

Bk 80 Misc. Pg. 18

M.H.D. FORM NO. 2105

BOOK 80 PAGE 18

STATEMENT OF EVIDENCE

E 1/4 cor Sec 35-101-16

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 3'x4'x10' hole on the centerline of County State Aid Highway No. 18 and in line with the east-west line fences. We found nest of large stones at a depth of four feet which is into virgin soil. The stones found were on centerline of County State Aid Highway No. 18 and also in line with east-west line fences. Therefore we set a 5/8" diameter x 16 iron in center of stones and a cast iron monument near road surface above stones.

The monument found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 19

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 36, Township 101 Range 15, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 7-15-03 (DATE) found a 5/8" IRON OVER CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-15-03 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

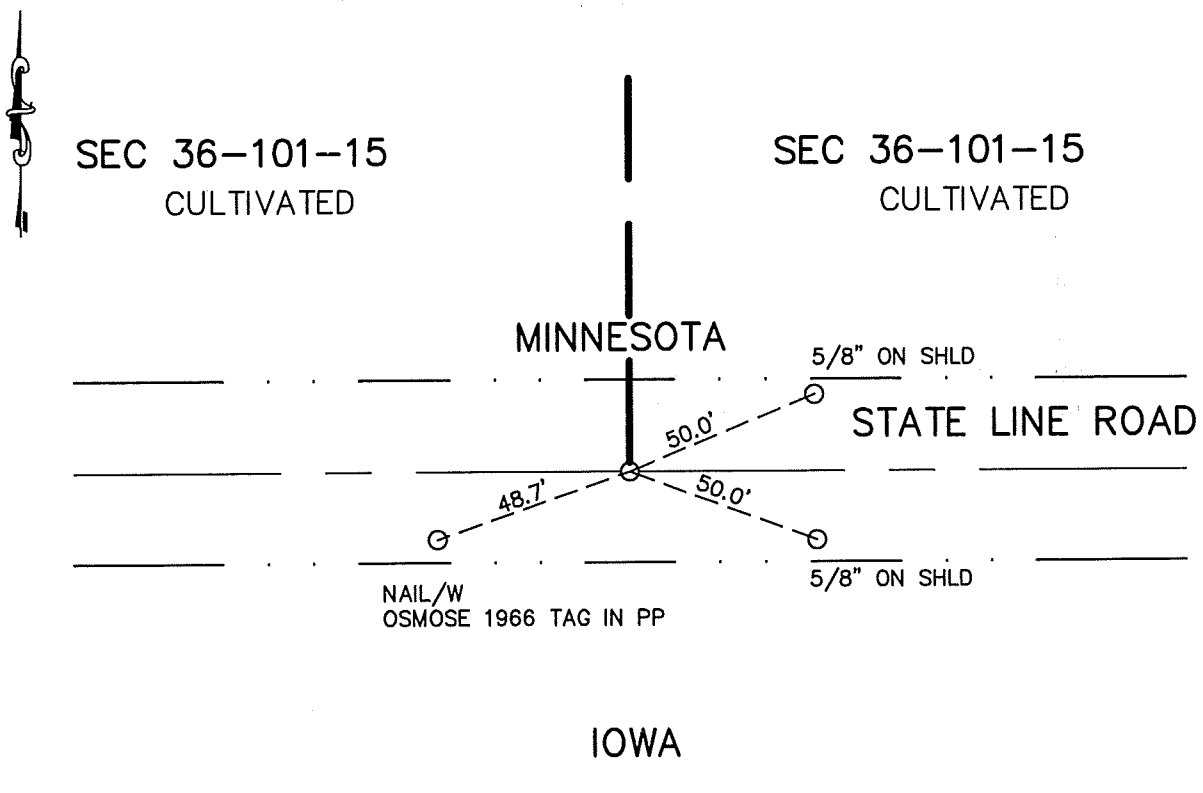

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-13-03

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor Sec 36-101-15

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County records show a monument at this corner. No ties

2003 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and uncovered a 5/8" iron 2' deep over concrete monument. Set 5/8" iron with cast iron monument over 5/8" iron found, 0.60' below road surface. Monument fits the road plan location and is accepted as a perpetuation of the original PLS corner. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 36, Township 101N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/17/1998 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/17/1998 (DATE) placed a 1/2" IRON PIPE

SKETCH OF REFERENCE TIES

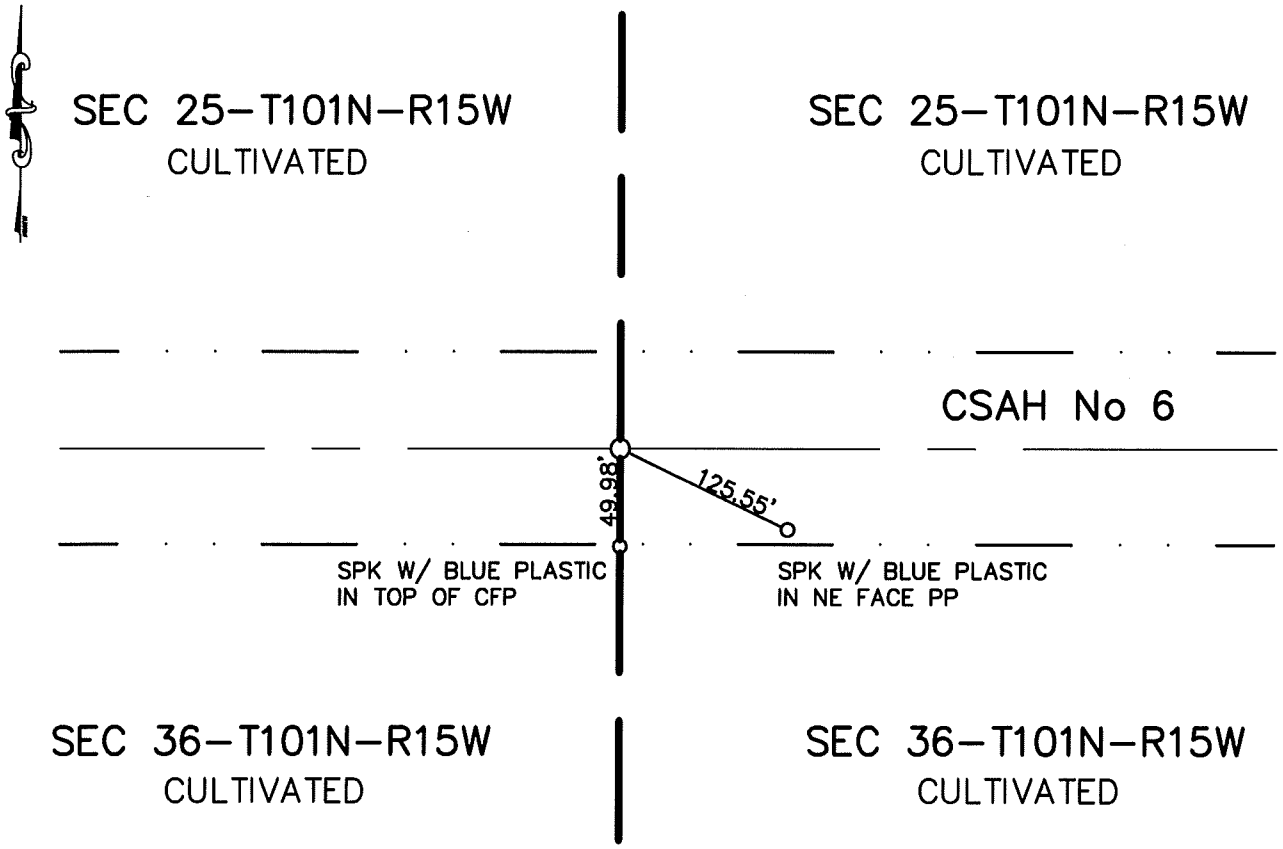

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ SIGNATURE 4-9-03 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Cor Sec 36-101-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1991 Jones Haugh and Smith crew, under direction of John Schulte, Freeborn County Surveyor RLS 13807, dug with the county backhoe at the centerline of CSAH No. 6 E-W and in line with line fence N-S. Located no evidence of the original PLS corner.

1996 Jones Haugh and Smith crew with Greg Schwartz used centerline of E-W CSAH No. 6 and N-S line fences in survey.

1998 Jerome Schwartz set a ½" iron pipe on the centerline of CSAH No. 6 E-W and in line with line fence N-S.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 36, Township 101N, Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-3-93 (DATE) found a 6"ø x 18" CONC MONUMENT

■ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-3-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

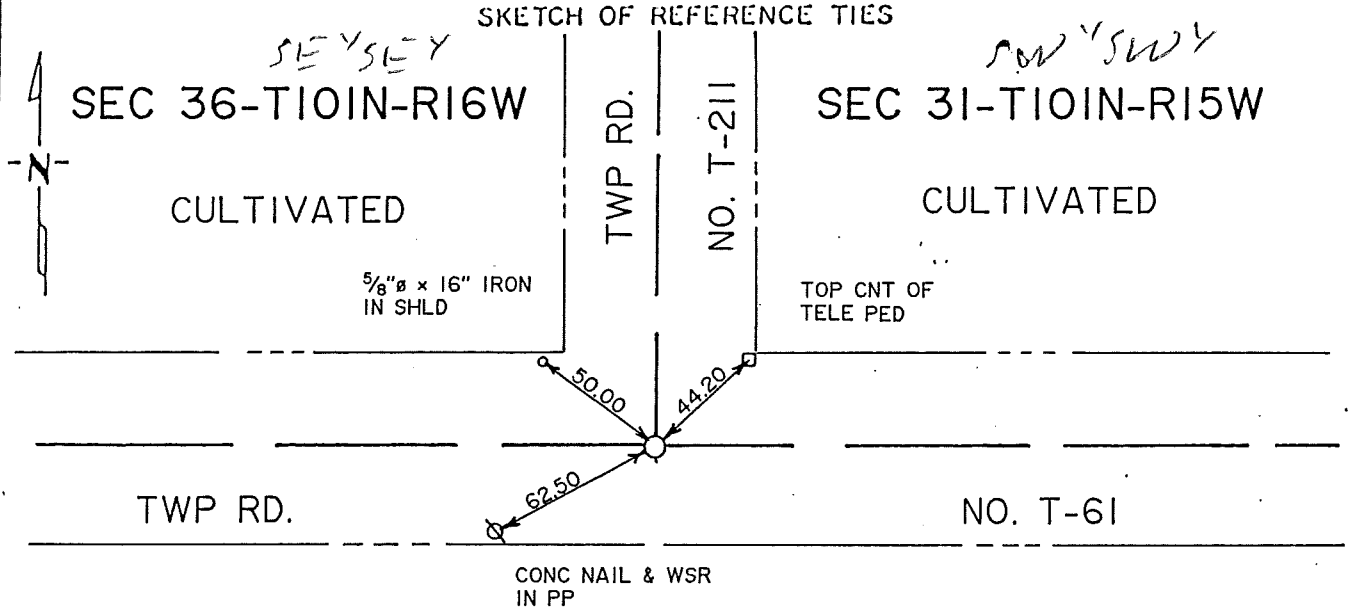

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-18-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 25 day of June A.D., 1993

COUNTY RECORDER Chandra Conger

By Marlene Martin, Deputy

DOCUMENT NO. 421743

Bk 80 Pg. 189

M.H.D. FORM NO. 2105 BOOK 80 PAGE 129

STATEMENT OF EVIDENCE

SE cor Sec 36-101-16

This corner was originally established by Deputy Surveyor Andrew Talcott of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of the perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 3'x6'x6' hole on centerline centerline of Township Roads No. T-61 and T-211. We found a 6" diameter x 18" concrete monument with an iron in center which was in virgin soil. Therefore we accepted concrete monument as the perpetuation of the public land survey corner and set a cast iron monument on iron in center of monument found.

The monument found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 36, Township 101N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-93 (DATE) found a 1/2"ø x 12" IRON 3/8"ø x 18" IRON 3/4"ø x 24" IRON 10"ø STONE AND A 5/8"ø x 18" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

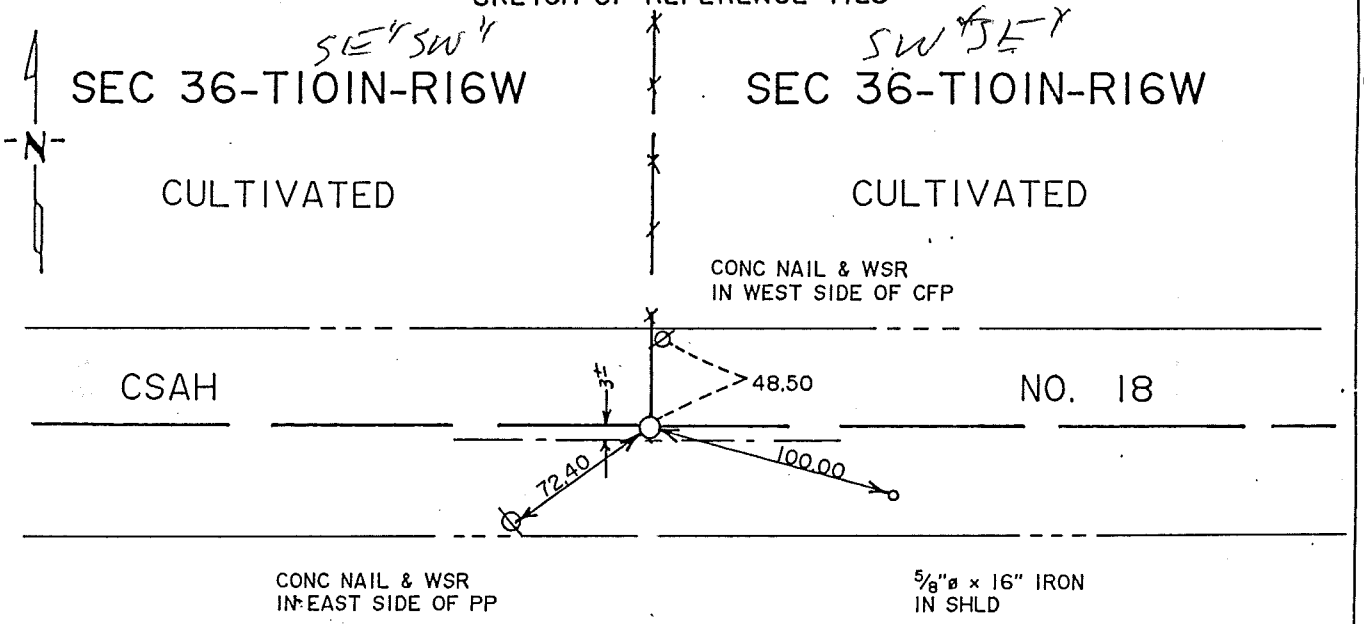

STATE OF IOWA

CULTIVATED

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-10-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 24 day of June A.D., 19 93

COUNTY RECORDER Cynthia Enger

By Marlene Marten, Deputy

DOCUMENT NO. 421723

Pb 80 Mea Pg. 125

M.H.D. FORM NO. 2105 BOOK 80 PAGE 125

STATEMENT OF EVIDENCE

S 1/4 cor Sec 36-101-16

This corner was originally established by Deputy Surveyor Andrew Talcott of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1958 Mower County Highway Department Book 1 and the County Road Plans indicate a concrete monument inplace at this corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 3'x5'x10' hole two feet north of the centerline of County State Aid Highway No. 18 and in line with fence running north. We found a 1/2" diameter x 12" iron at a depth of one foot and a 3/8" diameter x 18" iron two feet below. We continued digging and found a 3/4" diameter x 28" iron three feet down and a 10" diameter stone with a 5/8" diameter x 18" iron on north side of stone which rested at a depth of five feet which was into virgin soil. Pipes found above stone were one foot to 1.2 feet east or south of stone found. Therefore we accepted stone found and 5/8" diameter x 18" iron resting next to stone as the best perpetuation of the public land survey corner and left stone and iron inplace and set a cast iron monument near road surface above stone found.

The monument found and cast iron monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 126

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 36, Township 101N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-5-93 (DATE) found a HARRISON CIM IMBEDDED IN A 6"ø CONC BASE

■ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-5-93 (DATE) placed a LEFT MONUMENT AS FOUND

SKETCH OF REFERENCE TIES

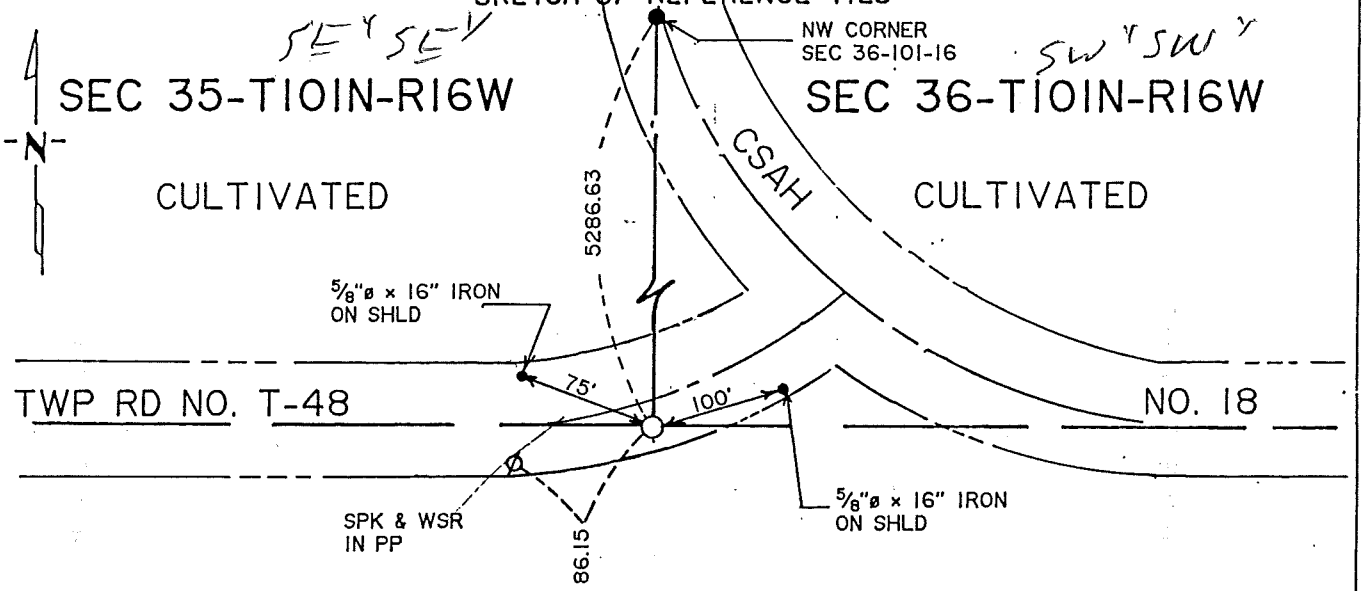

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Mont Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-1893

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 24 day of June A.D., 1993

COUNTY RECORDER Douglas Evans

By Marlene Martin, Deputy

DOCUMENT NO. 121722

By 80 Mon Rg. 123

M.H.D. FORM NO. 2105

BOOK 80 PAGE 123

STATEMENT OF EVIDENCE

SW cor Sec 36-101-16

This corner was originally established by Deputy Surveyor Andrew Talcott of the U.S. General Land Office in 1852. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner.

1931 Mower County Highway Department Book 1 notes indicate a large pointed rock at this location.

1958 Mower County Highway Department Book 1 and the County Road Plans indicate a concrete monument inplace.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, searched area and found a Harrison cast iron monument inbedded in 6" diameter concrete base on the south shoulder of east-west Township Road No. T-48. The measured distance from the northwest corner of Section 36 to the southwest corner of Section 36 was within one foot more or less of the County State Aid Highway No. 18 road plan distance and also the centerline of County State Aid Highway No. 18 running north was on section line as according to said road plan. Therefore we accepted monument found as the perpetuation of the original public land survey corner and left the monument as found.

The monument found fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.