Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 3, Township T10IN Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-20-93 (DATE) found a 10"x10"x18" POINTED FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-20-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

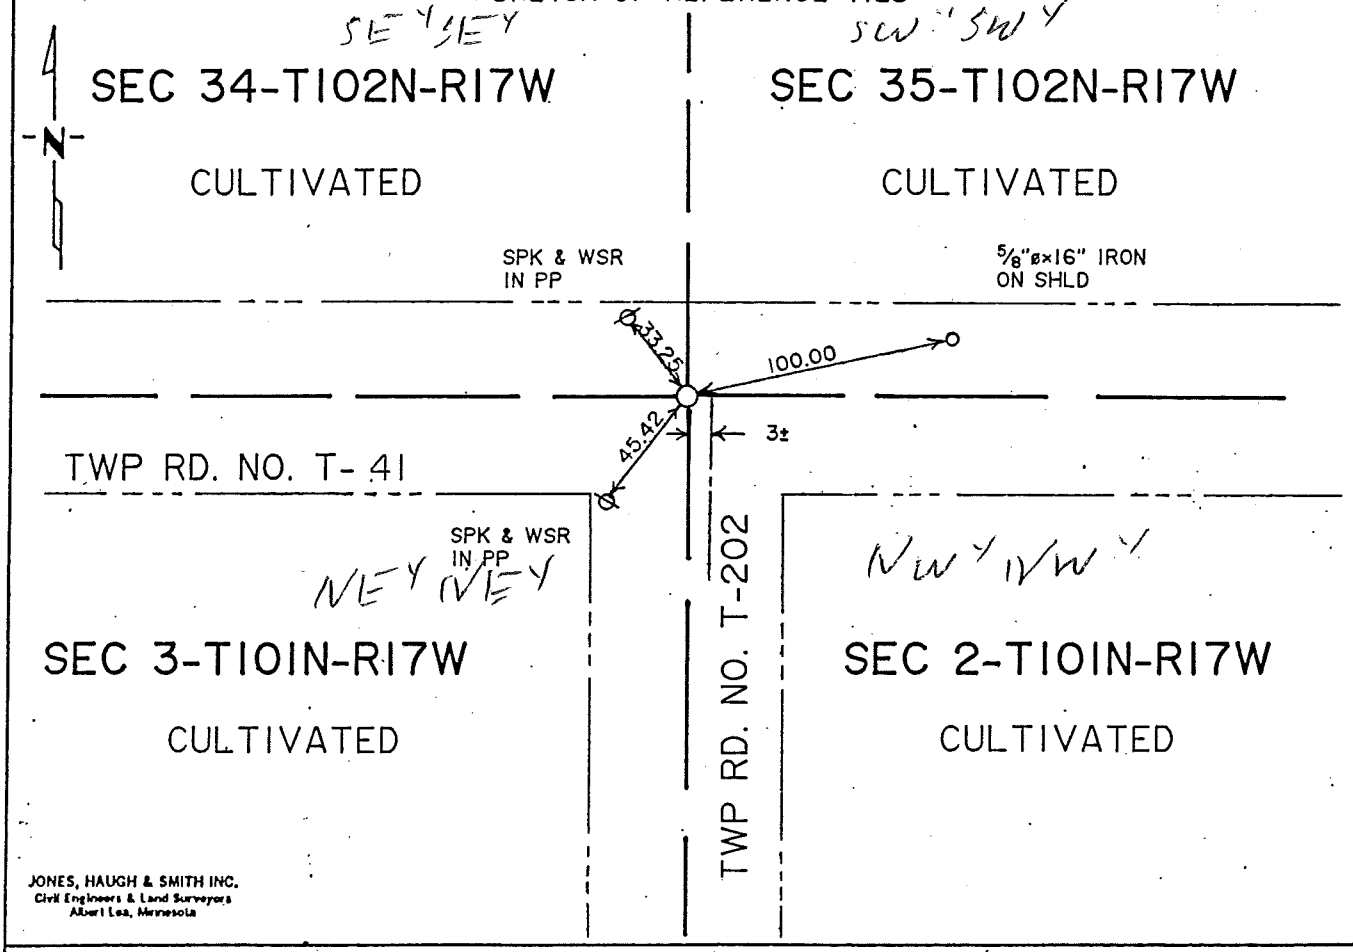

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-9-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 17 day of June A.D., 1993

COUNTY RECORDER Chandler Engen

By Marlene Martin, Deputy

DOCUMENT NO. 421533

Bk 79 Misc Pg. 578

M.H.D. FORM NO. 2105

BOOK 79 PAGE 578

STATEMENT OF EVIDENCE

NE cor Sec 3-101-17

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1890 Clausen, Mower County Surveyor, notes indicate a government post at this corner and a distance of 39.94 chains east of the N 1/4 corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 4'x2'x12' hole on the centerline centerline of the east-west township road and north-south township road. We found a 10"x10"x18" pointed field stone resting in virgin soil at a depth of two feet. The stone found also was in centerline centerline of the intersection. Therefore we accepted the stone found as the perpetuation of the original public land survey corner and set cast iron monument near road surface and above stone found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 579