Index No. P 74 "L"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 3, Township 101N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-24-92 (DATE) found a 3/4"ø x 12" PIPE OVER 6"x12" FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-24-92 (DATE) placed a CAPPED 13807 5/8"ø IRON ON SOUTH SIDE OF STONE SET CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

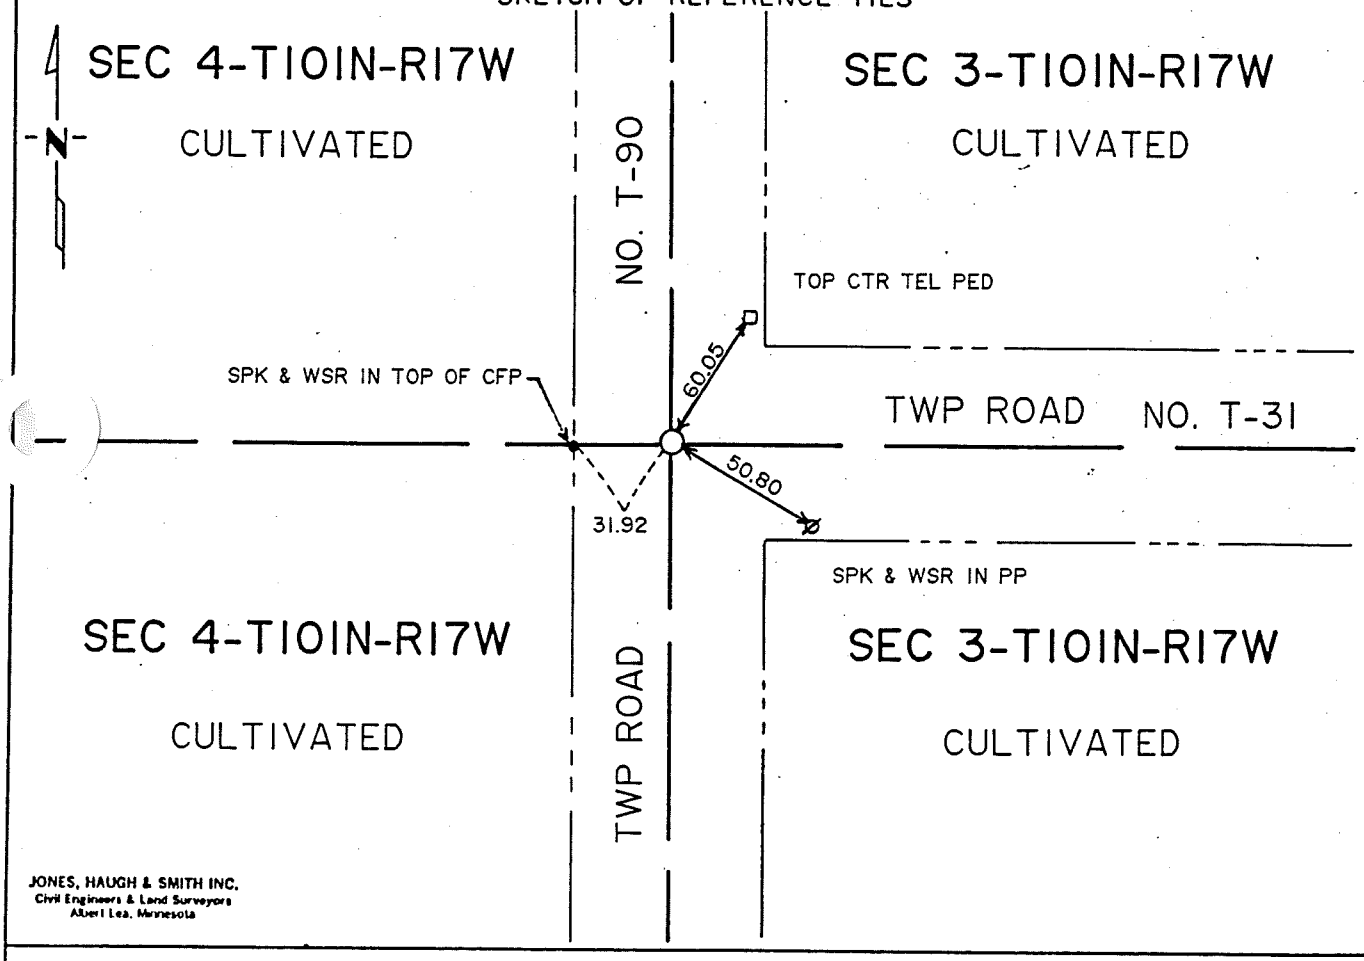

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-15-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 3-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the public land survey corner.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with the county backhoe on centerline centerline of Township Road T-90 and T-31 and uncovered 3/4" diameter x 12" pipe over 6"x15" pointed field stone 2.5 feet deep in virgin soil. Set capped 13807 cast iron monument 5/8" diameter x 16" iron on south side of stone on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.