Index No. "I" P. 74

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 6, Township 101N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 11-12-87 (DATE) found a gray granite pointed field stone

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 11-12-87 (DATE) placed a 5/8"ϕ x 24" iron on east side of stone, set Cast Iron monoment over stone

SKETCH OF REFERENCE TIES

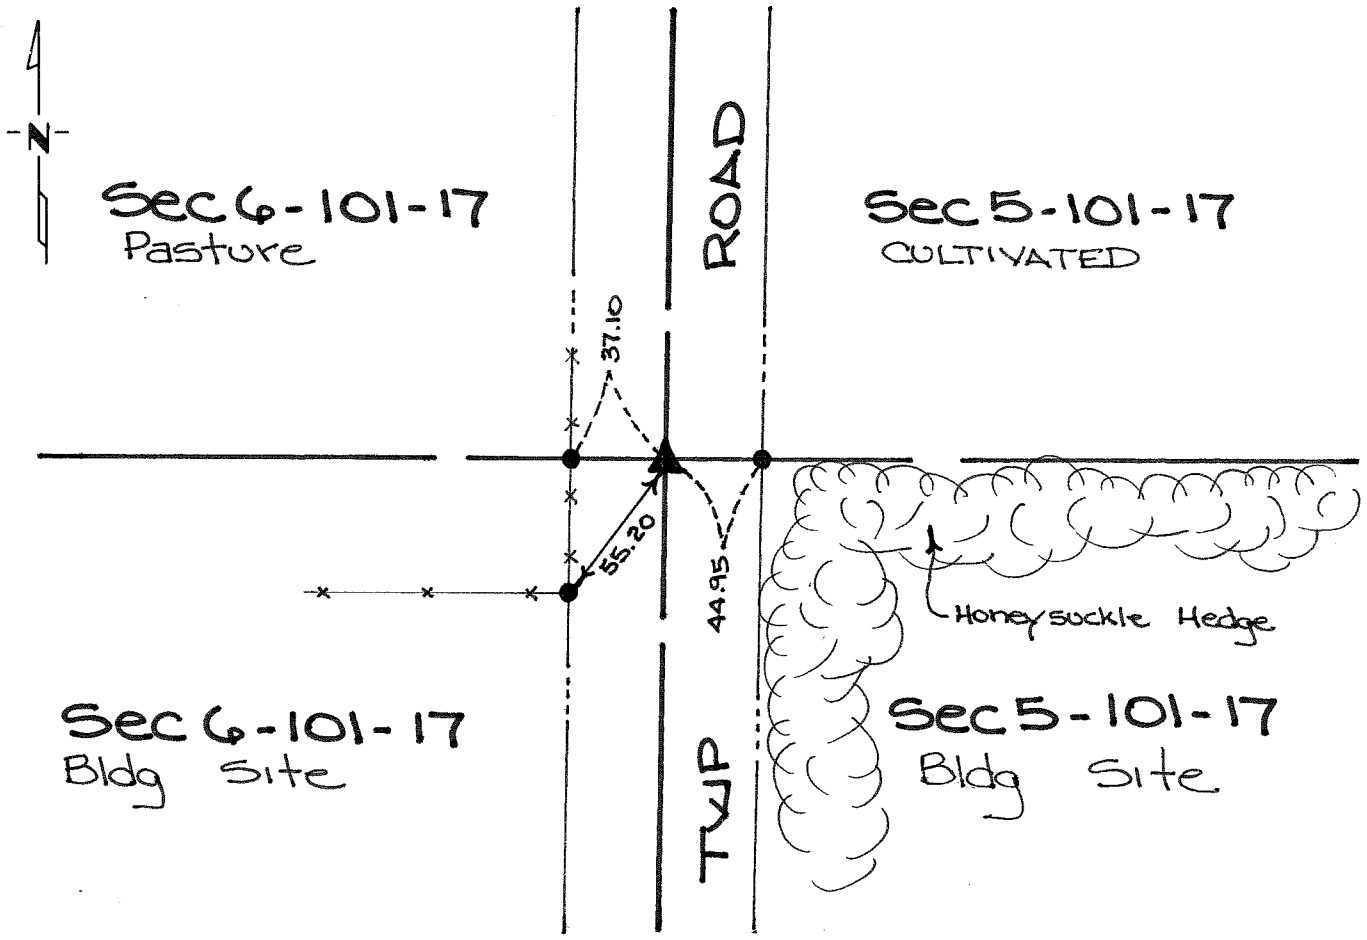

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 11-25-87 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E¼ corner Section 6-101-17

In 1854:
This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office. Government notes show corner was marked with a wood post and charred stake with mound and trench.

November 1987 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Department

During research done on this corner no record could be found of anyone uncovering corner since government survey.

November 1987 Jones, Haugh & Smith Inc crew dug with County backhoe at 2640 feet north of southeast corner of section as per government notes and found nothing. After taking measurements within the section we dug a 20'x5'x5' deep hole at a location determined by doubling over the distance found between occupation lines on the east line of the SE¼ SE¼ and uncovered a large gray pointed granite stone three feet deep in virgin soil. Placed a 5/8"ø iron on the east side of stone and set cast iron monument over stone.

The stone monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.