Index No. "H," p 74 "B" p 130

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 6, Township 101N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 11-12-87 (DATE) found a 5/8"ϕx24" iron over a 2" sq. wood stake in virgin soil

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 11-12-87 (DATE) placed a Cast iron monument stamped "1/4 corner"

SKETCH OF REFERENCE TIES

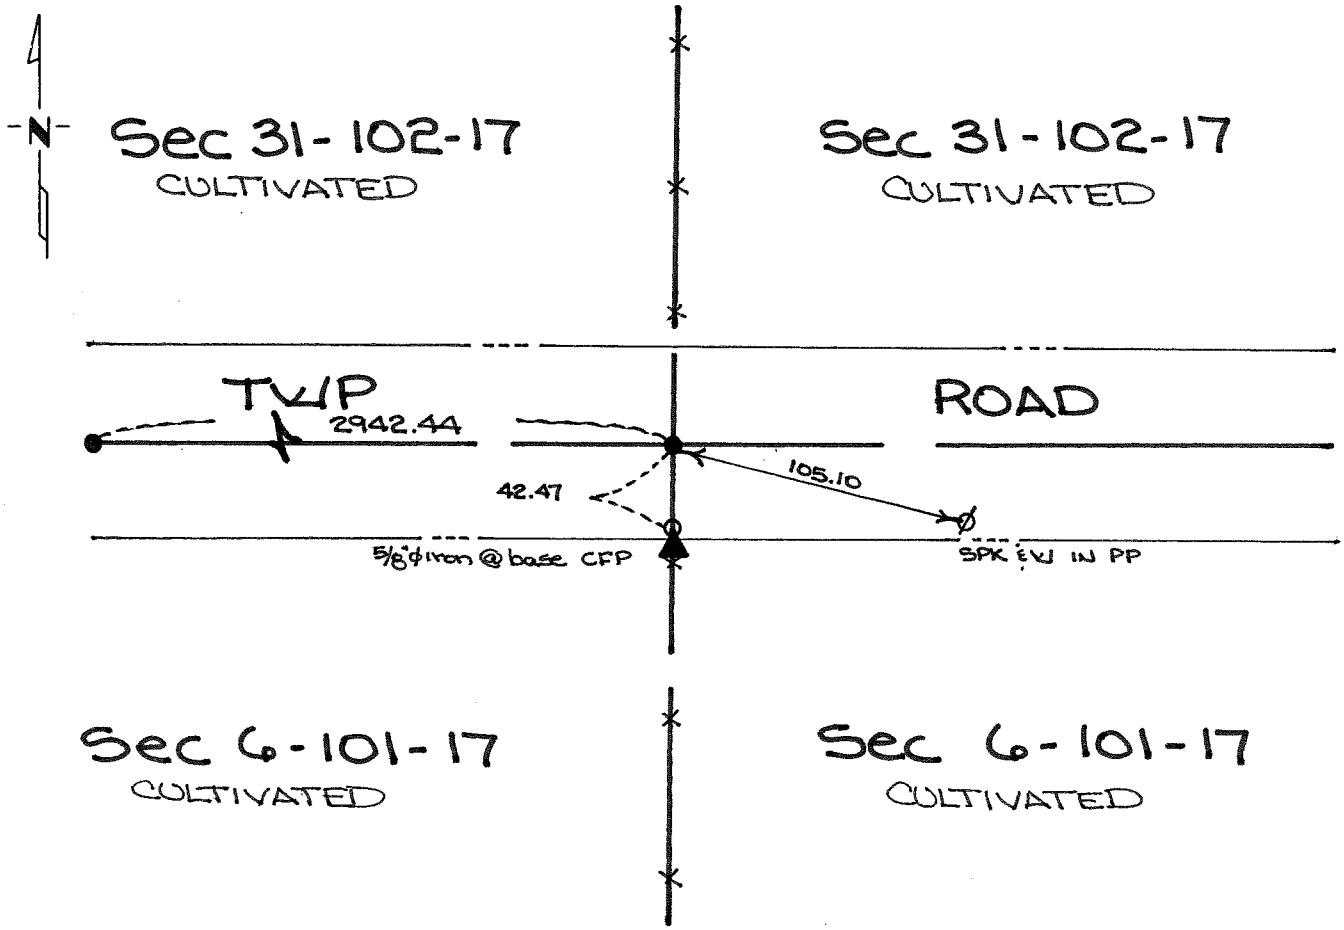

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 11-25-87 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

$N\frac{1}{4}$ corner Section 6-101-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show corner was marked with a wood post and charred stake and made mound of earth with trench.

November 1987 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Department

Records from Clausen in 1888 show he uncovered the original government post during a private land survey.

November 1987 Jones, Haugh & Smith Inc crew dug with County backhoe on the centerline east-west road in line with fences north and south and at a depth of one foot below road surface uncovered a 5/8"ø x 24" iron. Continued digging and at a depth of 3.5 feet more or less, uncovered a 2" square wood stake in virgin soil. Set cast iron monument stamped "$\frac{1}{4}$ corner" over stake.

Monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.