Index No. "B," P. 74

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 6, Township 101N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 11-12-87 (DATE) found a Cast iron monument

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

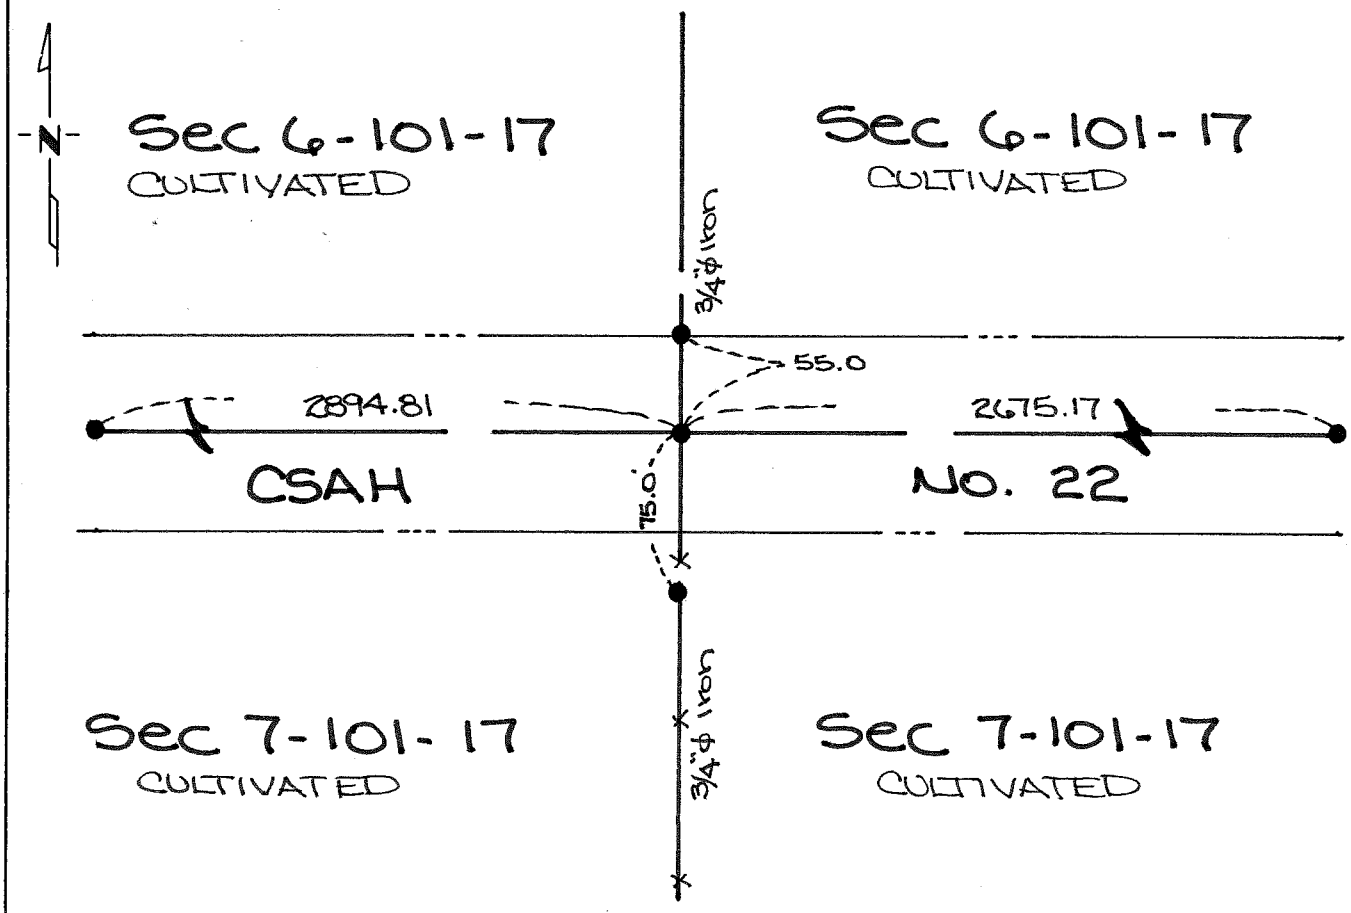

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-25-87

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S¼ corner Section 6-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show corner marked with a wood post and charred stake and made mound and trench.

Nov. 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Highway Department

The following information was obtained:

1936 Grading Plan show a pointed field stone was uncovered during grading project.

1978-1981 County personnel tied of the 1936 corners and regraded the road, a 3 foot more or less, core cut was made the entire length of the project, which would have destroyed the original public land survey corner or any perpetuation thereof.

June 1981 Mower County Highway set cast iron monument using ties and stationing obtained during grading project.

Nov. 1987 Jones, Haugh & Smith Inc crew using County ties uncovered cast iron monument set in 1981.

Monument fits the record, past surveys, occupation lines and road centerlines within the section and agrees with records from past grading projects and is accepted as the best evidence of a perpetuation of the original public land survey corner.