Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 10, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/30/1995 (DATE) found a ROCK 1.5' X 2.8' 6" BELOW ROAD SURFACE

☐ left monument as found, ☒ lowered monument, ☐ removed monument (explain)

☐ On 05/30/1995 (DATE) placed a CAST IRON MONUMENT OVER ROCK FOUND

SKETCH OF REFERENCE TIES

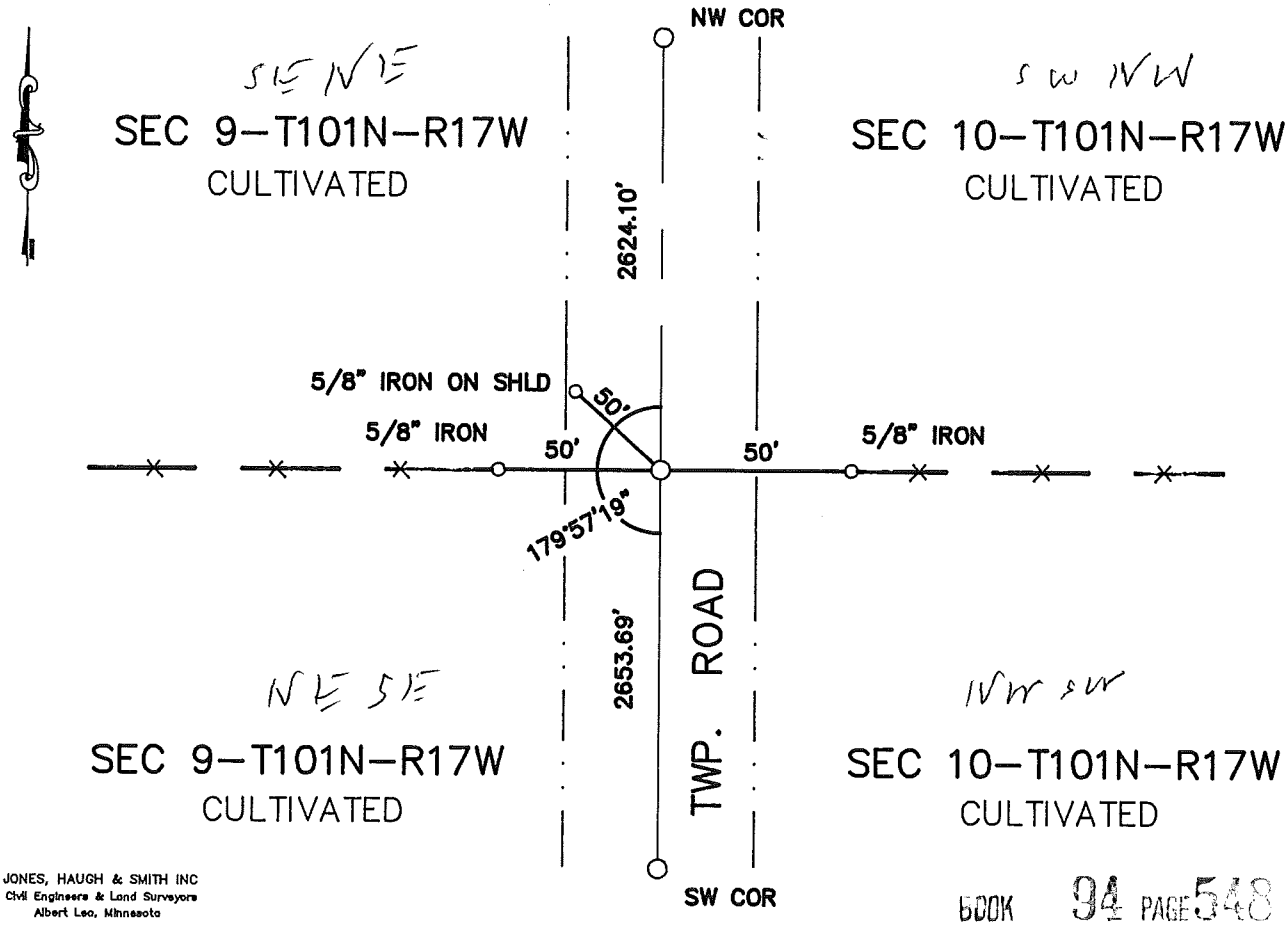


JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 548

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-7-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 8 day of Apr A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 452223

M.H.D. FORM NO. 2105

Book 94 Misc Page 548

W 1/4 Cor SEC 10-101-17

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and in line with line fence E-W. Located a 1.5'x2.8' stone 0.60' below the road surface. Continued digging to virgin soil and found no other evidence of original PLS corner. Lowered stone to 2.0' below road surface. Placed a 5/8" iron capped #13807 next to the stone. Placed a cast iron monument over stone 4" below road surface.

The monument fits occupation and/or road centerlines within the section and/or recorded plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.