Index No. _____ P74 "D"

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 3, Township 101N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-24-92 (DATE) found a HARRISION CAST IRON MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-24-92 (DATE) placed a NOTHING

SKETCH OF REFERENCE TIES

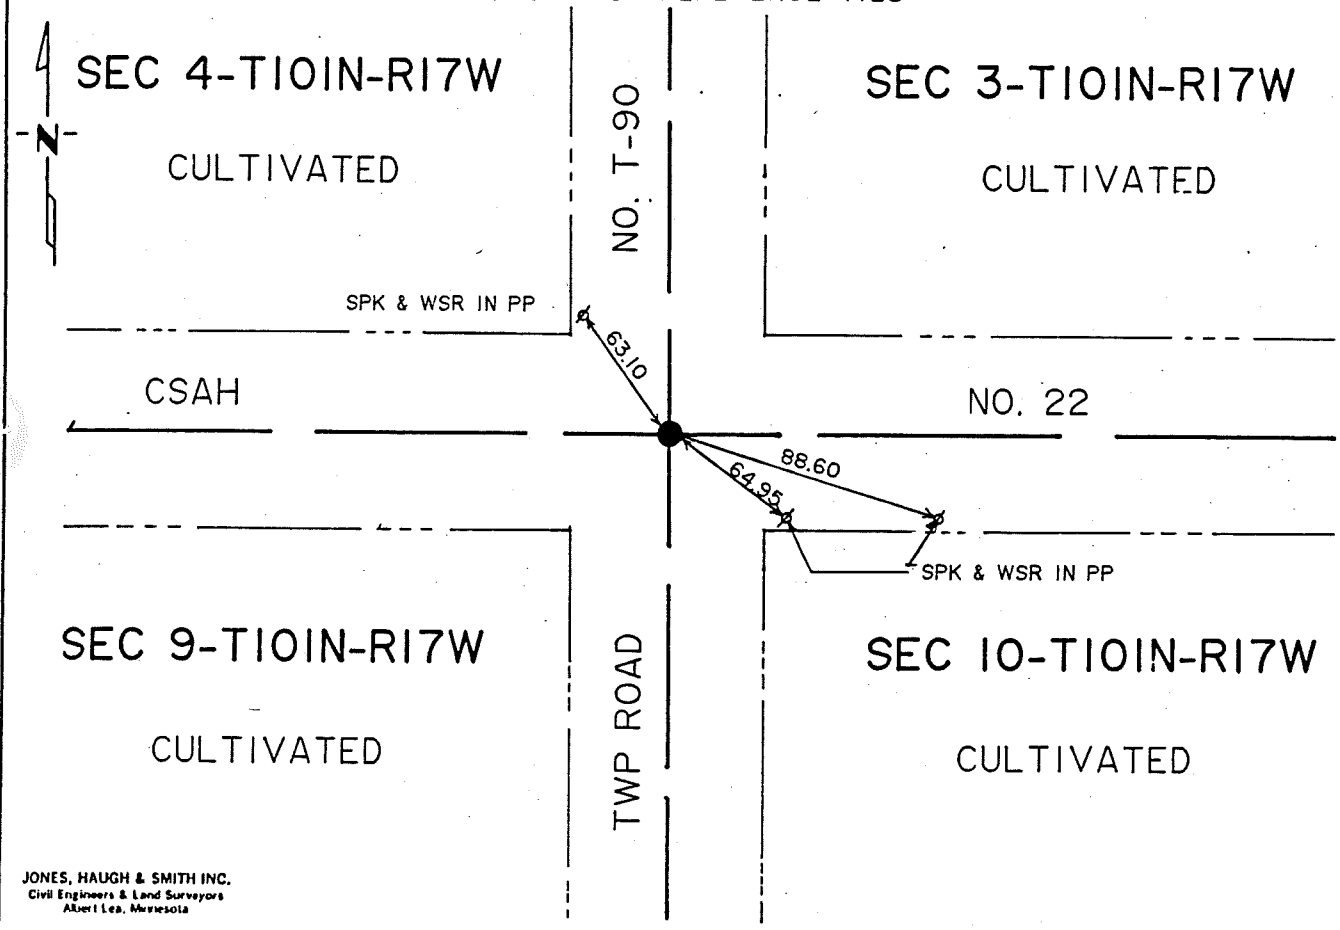


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-15-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 3-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

Recorded in Book A in the Office of Mower County Highway Department shows a stone was inplace at this location and ties were taken as follows:

68.0' NE to corner School House
42.4' SE to corner fence post
36.0' SW to corner fence post
39.5' NW to corner fence post

1980 Book A in the office of Mower County Highway Department indicates a cast iron monument was inplace at Sta 214+56.5 and ties were taken as follows:

41.5' SE to PP
46.0' SW to tele pole

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with County backhoe and uncovered a harrison cast iron monument over wood hub. Continued digging and found no evidence of stone monument or original public land survey corner. In 1980 grading a core cut was made at this location. Accepted cast iron monument as best evidence and reset at same location.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.