p.71 "K"
Index No. p.136 "H"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 16, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 11-21-89 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11-21-89 (DATE) placed a 5/8"Ø x 16" IRON CAPPED RLS 13807 ON THE ROAD SURFACE CENTERLINE IN LINE WITH FIELD DIVISION.

SKETCH OF REFERENCE TIES

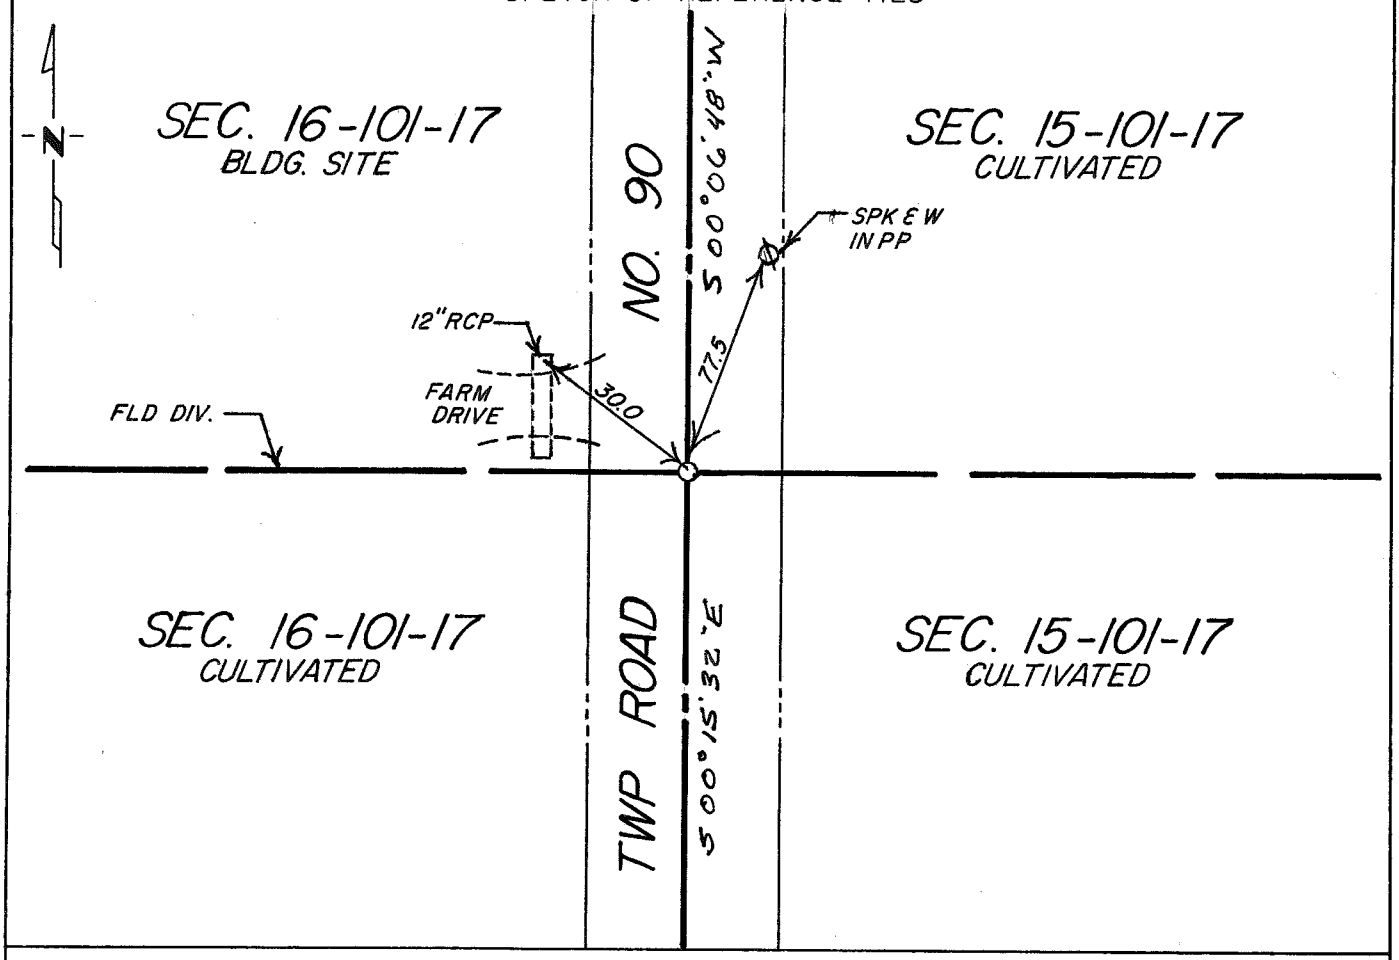

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 12-21-89
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N¼ corner Section 16-101-17

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the United States General Land Office in 1854. The government notes show this corner was marked with a charred stake in a mound of earth with a trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Records Office

1989 Jones, Haugh & Smith together with the Mower County backhoe operator dug a hole 6'x12'x5' deep and found no further evidence of public land survey corner or a perpetuation thereof.

Therefore placed a 5/8"Øx16" iron capped 13807 at the midpoint between the northwest & southwest section corners on the centerline of the existing township road. This location fits occupation and road centerlines within the section.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.