Index No. p136, "I"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 16, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 11-21-89 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11-21-89 (DATE) placed a 5/8"Ø x 16" IRON CAPPED RLS 13807 ON CENTERLINE OF NORTH-SOUTH ROAD AT MIDPOINT BETWEEN NW & SW CORNERS.

SKETCH OF REFERENCE TIES

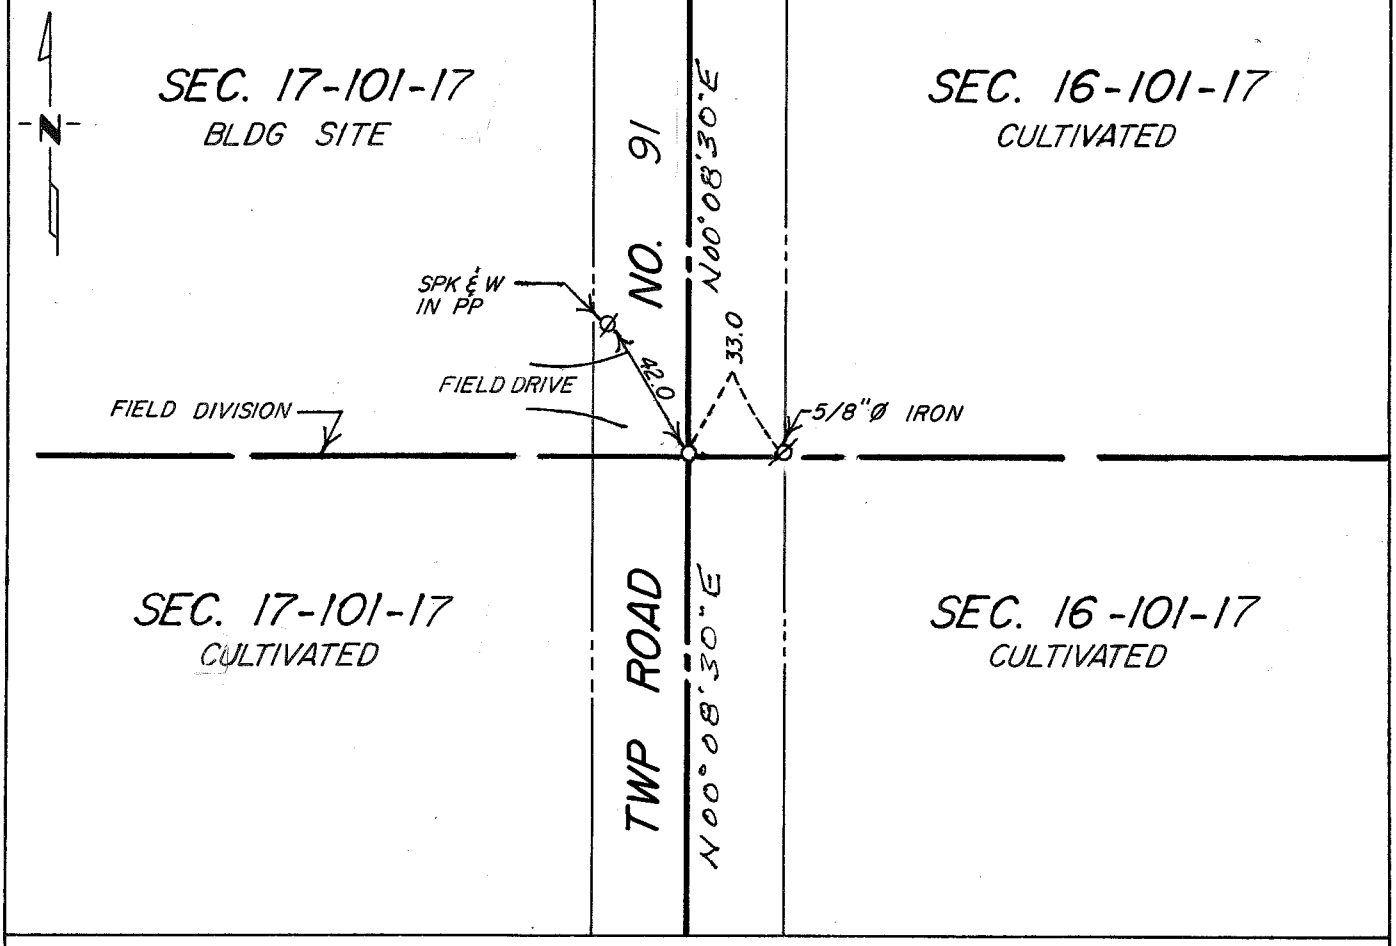

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-21-89 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 16-101-17

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the United States General Land Office in 1854. The government notes show this corner was marked with a charred stake in a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

1989 Jones, Haugh & Smith Inc. crew together with the Mower County backhoe operator dug and found no evidence of public land survey corner or a perpetuation thereof.

Therefore placed a 5/8" diameter x 16" iron capped RLS 13807 at midpoint of a straight line between the southwest & northwest corners. The location fits occupation and road centerlines within the section.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.