Index No. "G" P136

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 22, Township 102N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 1-29-93 (DATE) found a SPIKE IN 3/4"ø PIPE AND A 6"x8" POINTED FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-29-93 (DATE) placed a 5/8"ø x 16" IRON CAPPED NO. 13807 ON NORTH SIDE OF STONE AND A 5/8"ø x 16" IRON CAPPED RLS NO. 13807 OVER STONE

SKETCH OF REFERENCE TIES

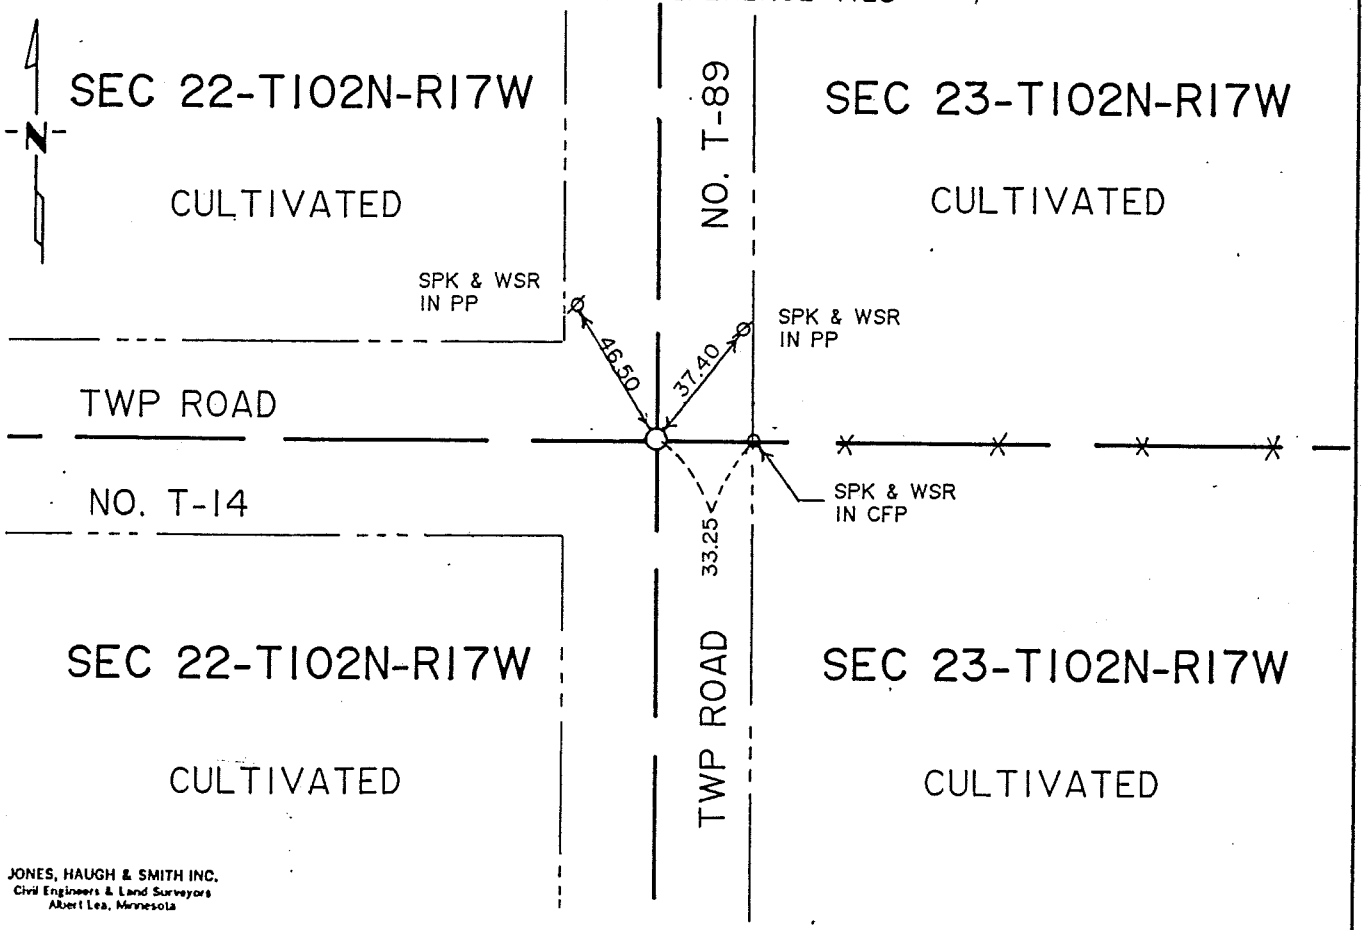

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 2-22-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 cor Sec 22-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner:

1891 M.N. Clausen, Mower County Surveyor, field notes indicate a stone found at this split of the NE and SE cor. Split was measured at 40.12 chains.

1892 M.N. Clausen, Mower County Surveyor, field notes indicate a stone was found at the split between the NW and SW cor. Split was measured at 40.12 chains.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Freeborn County Surveyor, dug a 3'x3'x3' hole on centerline centerline of north, south, west roads and fence running east. Found a spike in 3/4" diameter pipe 0.8 feet deep. Continued digging and uncovered a 6"x8" pointed stone 2.5 feet deep. Therefore we accepted pointed stone as best evidence of the original public land survey corner as the stone found fits road centerlines and occupation of fence running east and also stone found was noted in 1891-1892 Clausen field notes.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic distances, angles and further analysis, contact Jones, Haugh & Smith Inc.