Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 24, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-10-91 (DATE) found a cast iron monument 1.5' below road surface

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

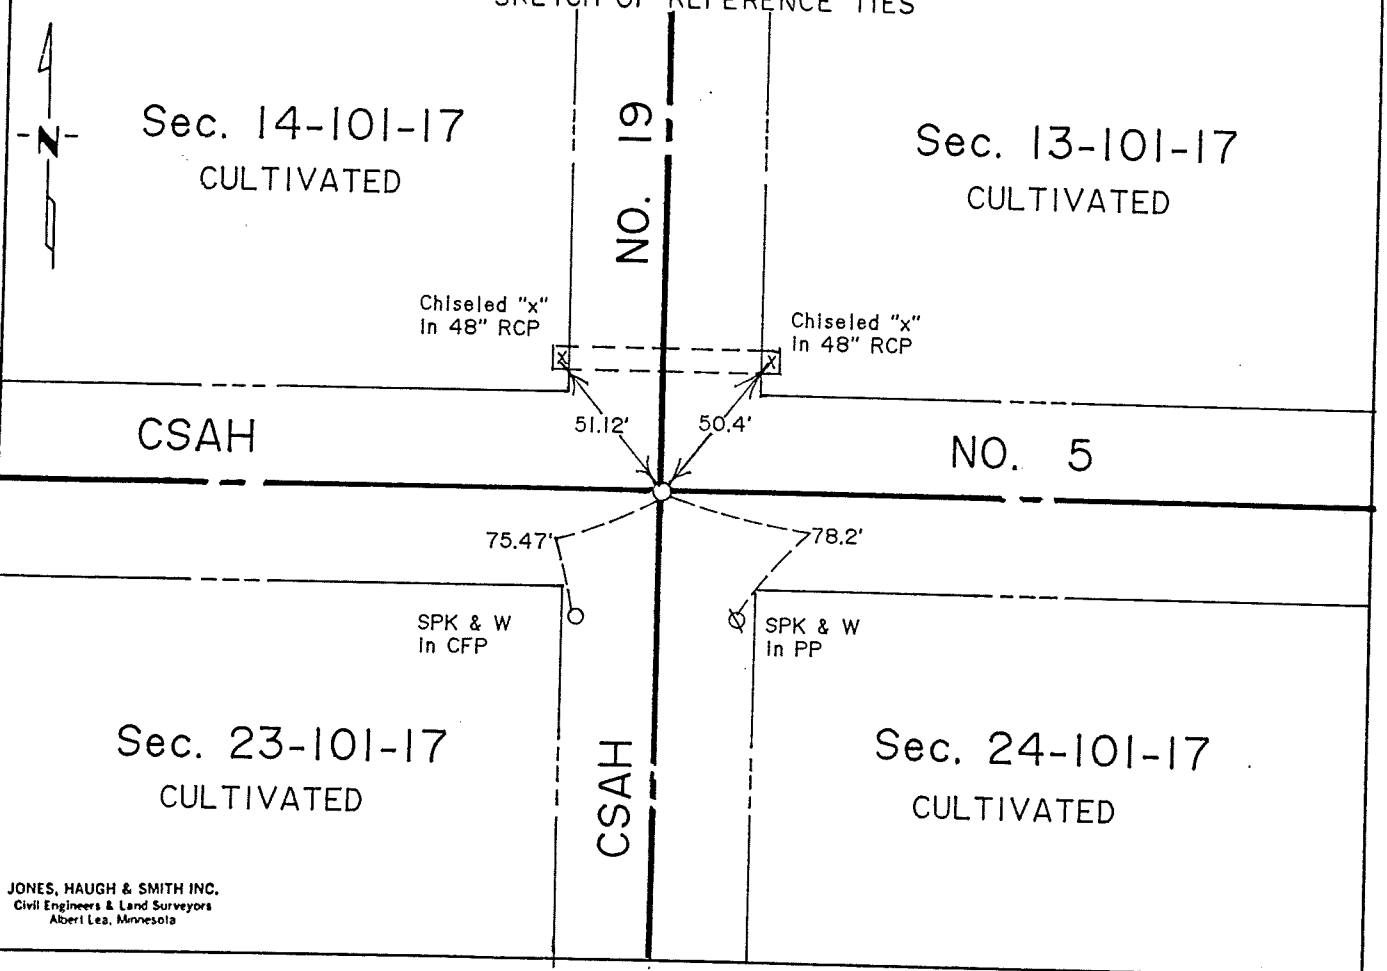

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 5-16-91 (DATE)

Registration No. 13867

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 24-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1887 Clausen, Mower County Surveyor 1880-1892, notes show a government post inplace.

Book "A" in the Mower County Engineering Office shows the corner located. The following ties were taken:

22.6' SW to end culv.
26.5' NE to end culv.
62.6' SE to 3rd F.P.E.
47.0' NE to T.P.

1967 Book "A" notes indicate a 1/2" diameter found on the centerline of north-south road. The following ties were taken:

50.6' NW to PP
62.8' NE to PP

1991 Jones, Haugh & Smith Inc. crew, under the direction of John H. Schulte, dug with the Mower County backhoe on centerline centerline of N-S-E-W roads for bituminous overlay project SAP 50-619-14. Excavated a 6' x 10' x 6' deep hole and uncovered a cast iron monument 1.5' deep. Continued digging and found huge amounts of 4' square x 12' concrete. The concrete appears to be remains of old bridge deck. Accepted cast iron monument found and reset at the same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.