Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 25, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-13-91 (DATE) found a 12"sq.x24" long limestone in virgin soil 2'± of midpoint and 2'± of a straight line.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-13-91 (DATE) placed a 5/8"ø iron on West side of stone, set a cast iron monument over stone on road surface.

SKETCH OF REFERENCE TIES

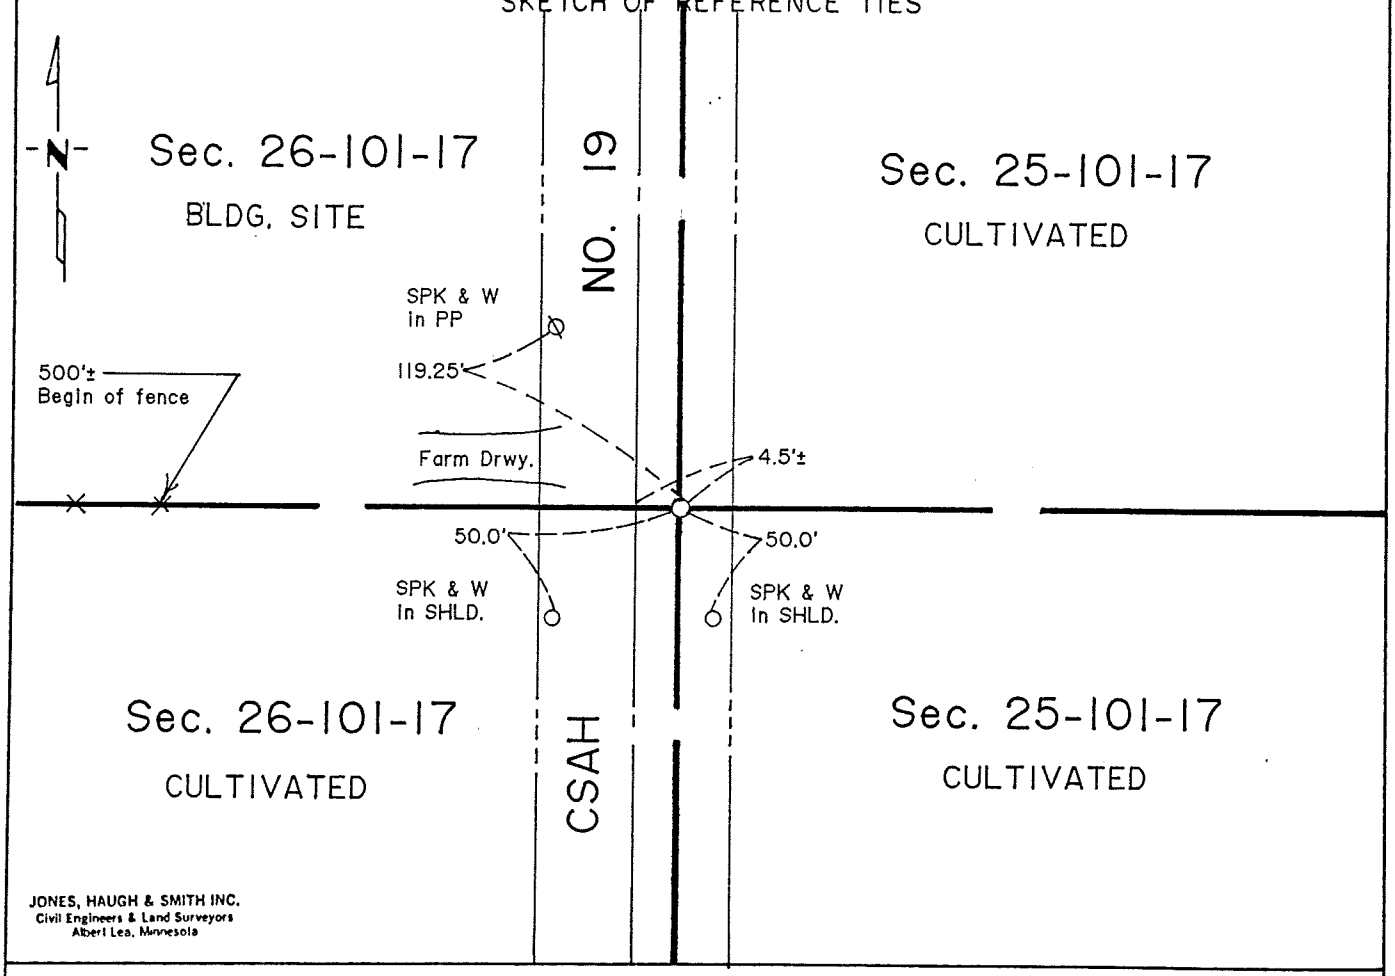


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 5-16-91
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 25-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1888 Clausen, Mower County Surveyor 1880-1892, notes show a government post inplace.

1991 Jones, Haugh and Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe at midpoint on a straight line between Section corners for bituminous overlay project SAP 50-619-14. Excavated a 10' x 10' x 4' deep hole beginning 7' more or less, east of centerline on a straight line digging west towards the centerline. Uncovered a 12" square x 14" long limestone in virgin soil within 2' more or less, of midpoint and 2' more or less of straight line. Placed a 5/8" diameter iron on the west side of the stone and a cast iron monument on the road surface over the stone found.

The monument placed fits occupation is within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.