Index No. P. 41, "J" P. 71, "L"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 26, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-29-89 (DATE) found a 8" x 18" POINTED FIELD STONE IN VIRGIN SOIL.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 8-29-89 (DATE) placed a 5/8"Ø IRON ON WEST SIDE OF STONE, SET 5/8" Ø IRON OVER STONE ON ROAD SURFACE.

SKETCH OF REFERENCE TIES

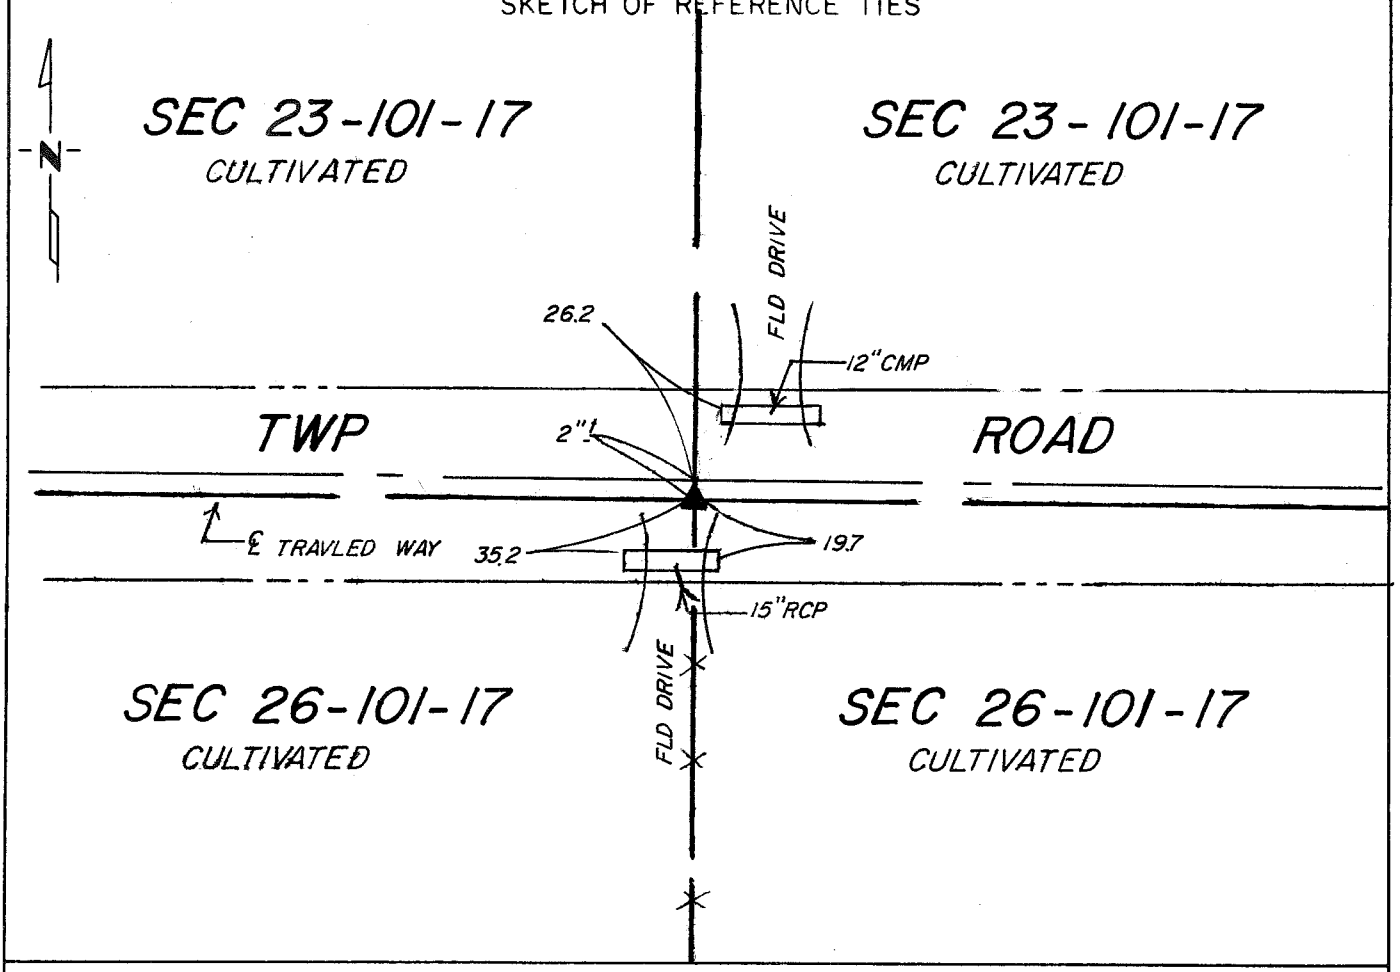

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-22-89 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 26-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the United States General Land Office in 1853. The government notes show this corner was marked with a charred stake set together with a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

No information was obtained to support evidence of the public land survey corner or a perpetuation thereof.

1989 Jones, Haugh & Smith Inc. personnel together with the Mower County backhoe operator dug on the centerline of E-W roads in line with fence south and uncovered an 8"x18" pointed field stone 3' below road surface in virgin soil. Placed a 5/8" diameter iron on west side of field stone, and a 5/8" diameter iron capped RLS 13807 over stone on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.